


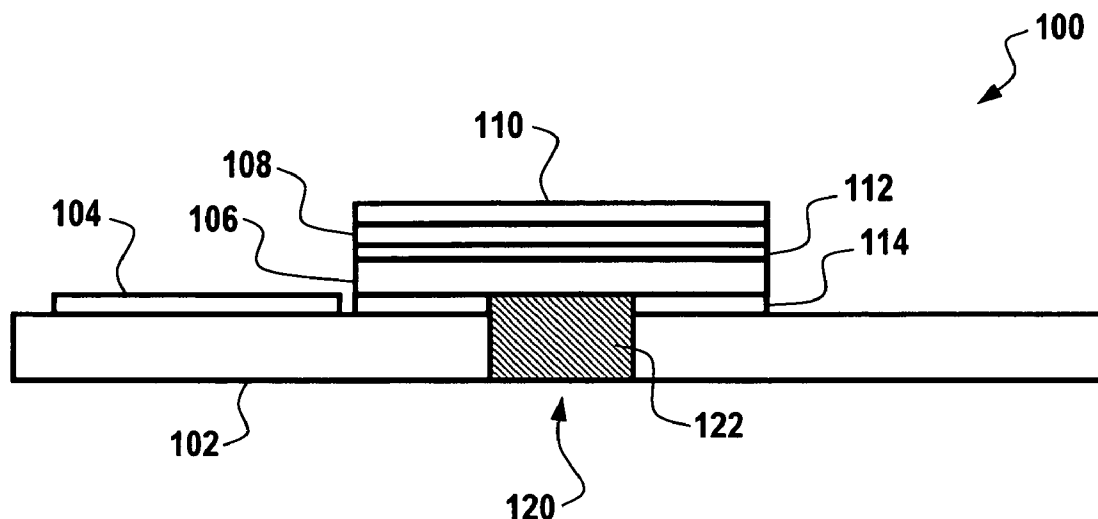

US 20060107749A1

(19) **United States**(12) **Patent Application Publication****Liu et al.**(10) **Pub. No.: US 2006/0107749 A1**(43) **Pub. Date: May 25, 2006**(54) **DISPOSABLE WIRELESS PRESSURE
SENSOR****Publication Classification**(75) Inventors: **James Z. Liu**, Rockford, IL (US);
James D. Cook, Freeport, IL (US);
Peter P. Dierauer, Freeport, IL (US)(51) **Int. Cl.**
G01L 9/00 (2006.01)
(52) **U.S. Cl.** **73/754**Correspondence Address:
Kris T. Fredrick
Honeywell International, Inc.
101 Columbia Rd.
P.O. Box 2245
Morristown, NJ 07962 (US)(57) **ABSTRACT**

In general, a dielectric polymer substrate provided and an antenna formed upon the dielectric polymer substrate. A piezoelectric polymer layer (e.g., a polyvinylidene fluoride (PVDF) piezoelectric film) can be formed above the dielectric polymer substrate. Additionally, an interdigital (IDT) layer can be configured upon the PVDF piezoelectric layer, thereby permitting the piezoelectric polymer layer and the IDT layer to detect pressure data and transmit the data to a receiver via the antenna.

(73) Assignee: **Honeywell International Inc.**(21) Appl. No.: **10/995,460**(22) Filed: **Nov. 22, 2004**

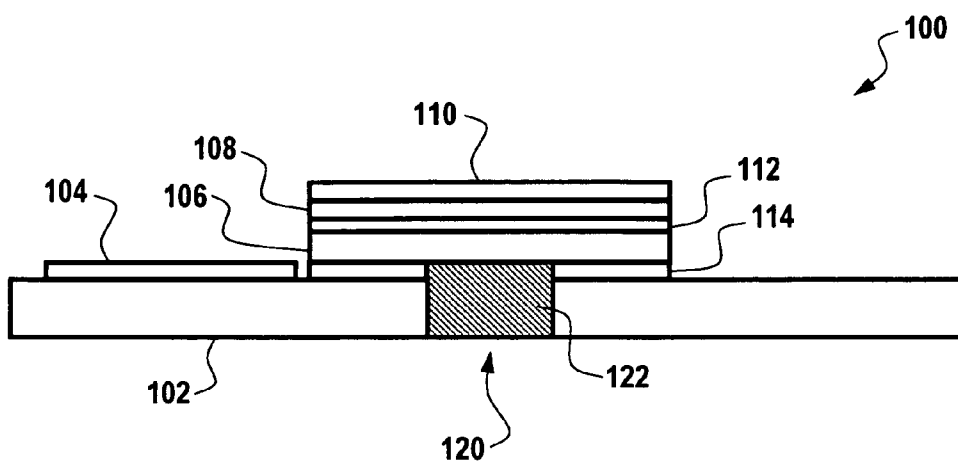


Fig. 1

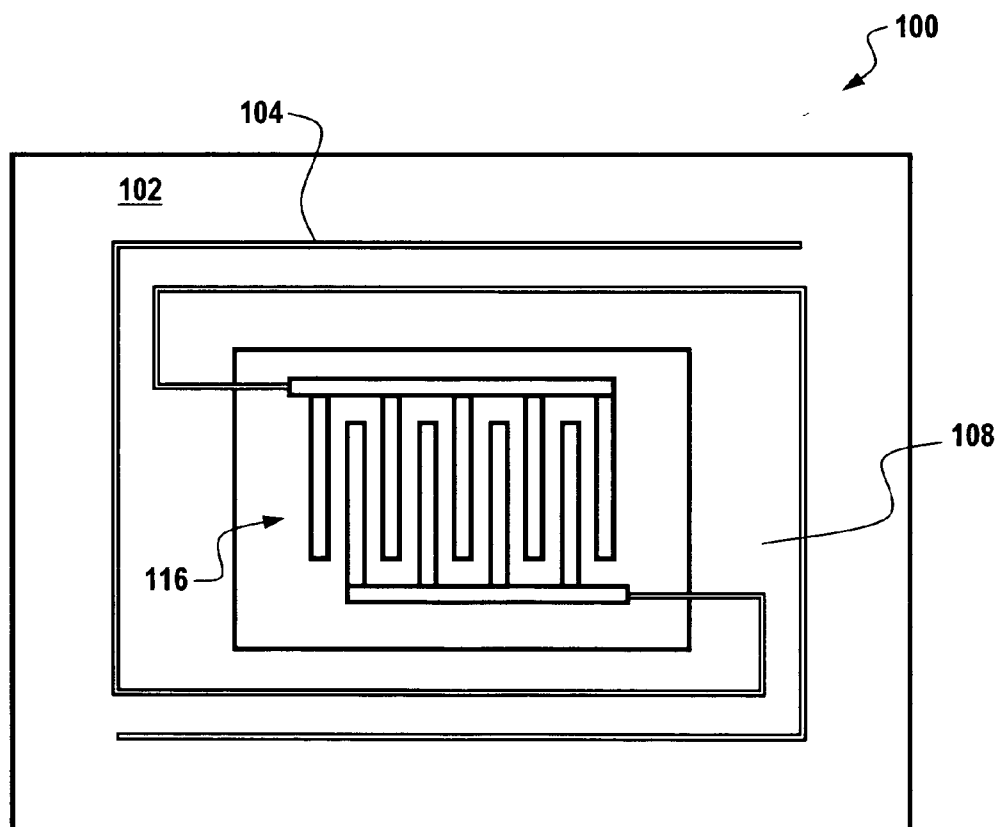


Fig. 2

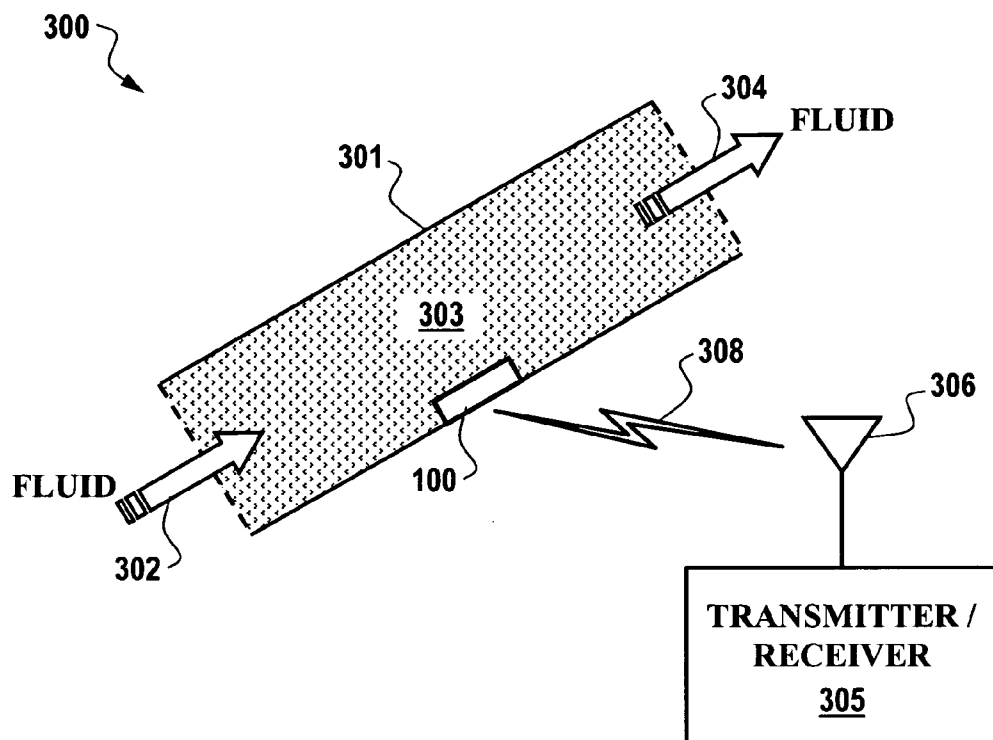


Fig. 3

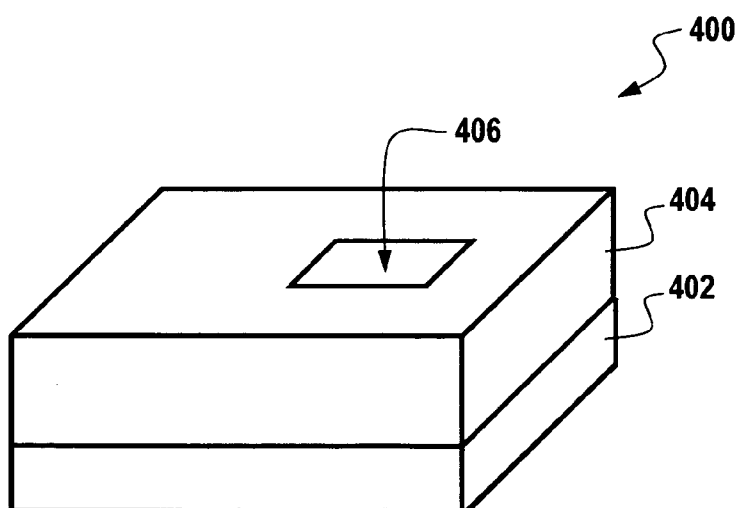


Fig. 4

DISPOSABLE WIRELESS PRESSURE SENSOR**TECHNICAL FIELD**

[0001] Embodiments are generally related to sensing devices and applications. Embodiments are also related to pressure sensor devices, systems and methods thereof. Embodiments are additionally related to disposable sensing devices based on piezoelectric polymer film materials. Embodiments are additionally related to medical devices for sensing bodily pressure based on fluid within a conduit.

BACKGROUND OF THE INVENTION

[0002] A variety of sensors can be utilized to detect conditions, such as pressure and temperature. The ability to detect pressure and/or temperature is an advantage to any device exposed to variable pressure conditions, which can be severely affected by these conditions. An example of such a device is a catheter, which of course, can experience variations in both temperature and pressure. Many different techniques have been proposed for sensing the pressure and/or temperature in catheters, and for delivering this information to an operator so that he or she is aware of pressure and temperature conditions associated with a catheter and any fluid, such as blood flowing therein.

[0003] One type of sensor that has found wide use in pressure and temperature sensing applications is the Surface Acoustic Wave (SAW) sensor, which can be composed of a sense element on a base and pressure transducer sensor diaphragm that is part of the cover. For a SAW sensor to function properly, the sensor diaphragm should generally be located in intimate contact with the sense element at all pressure levels and temperatures.

[0004] One of the problems with current SAW sensor designs, particularly those designs adapted to delicate pressure and temperature sensing applications, is the inability of conventional SAW sensing systems to meet the demand in low pressure applications. (e.g., 0 to 500 mmHg), while doing so in an efficient and low cost manner. Such systems are inherently expensive, awkward, and often are not reliable in accurately sensing air pressure and temperature. There is a continuing need to lower the cost of SAW sensor designs utilized in pressure and/or temperature sensing applications, particularly wireless pressure sensors.

[0005] To lower the cost and raise efficiency, few components, less expensive materials and fewer manufacturing-processing steps are necessary. In order to achieve these goals, it is believed that a disposable SAW pressure sensor made of polymer substrate should be implemented, along with low cost processing steps. To date, such components have not been adequately achieved.

[0006] One area where the ability to detect pressure and/or temperature is critically important is in the field of medical applications. Pressure within a conduit, for example, such as a catheter, can be measured utilizing a number of techniques. Perhaps the most common device for such measurement is a mechanical gauge, which can be coupled through one wall of the conduit to the fluid pressure within the conduit. Inside the gauge, a needle is deflected over a scale in proportion to the pressure within the conduit. In some instances, the standard pressure gauge may be replaced with a transducer, which converts pressure into an electrical signal, which is

then monitored. One important medical application for a pressure sensor involves detecting a patient's blood pressure, and/or intracranial pressure.

[0007] One typical method of monitoring blood pressure is to measure the fluid pressure within an intravenous tube, which is hydraulically coupled to the patient's vein. A catheter is inserted into the patient's vein and a plastic tube or conduit coupled to the catheter. A saline solution can be drip-fed through the plastic tubing or conduit to maintain a pressure balance against the pressure within the patient's vein. The saline fluid acts as a hydraulic fluid to cause the pressure within the plastic tubing to correspond to the pressure within the patient's vein. Hence, by measuring the fluid pressure within the tubing, the patient's blood pressure will be known.

[0008] Various conventional SAW sensing devices are capable of measuring blood pressure. Such devices typically are configured from ceramic materials (like PZT), quartz-type piezoelectric materials or lithium niobate. Such devices are disadvantageous for medical applications, because the above-referenced materials utilized by such devices are inherently self-resonant, having extremely low piezoelectric coupling coefficient, expensive and difficult for micro-machining, and consequently, grossly reduce the possibility of making a low cost pressure sensor for medical applications.

[0009] Conventional quartz-based SAW pressure sensors are also expensive to implement in medical applications, rendering their widespread use limited. Micro-machining in quartz is nothing close to that of silicon. It is therefore believed that a solution to such problems involves a disposable low cost sensor packaging system, particularly one that is suited to medical applications.

BRIEF SUMMARY

[0010] The following summary is provided to facilitate an understanding of some of the innovative features unique to the embodiments disclosed herein and is not intended to be a full description. A full appreciation of the various aspects of the embodiments discussed herein can be gained by taking the entire specification, claims, drawings, and abstract as a whole.

[0011] It is, therefore, one aspect of the present invention to provide for improved sensing devices and applications

[0012] It is another aspect of the present invention to provide for improved pressure sensor devices, systems and methods thereof.

[0013] It is a further aspect of the present invention to provide for an improved disposable wireless pressure sensor.

[0014] It is an additional aspect of the present invention to provide for a pressure sensor system based on interdigital transducer (IDT) and polymer piezoelectric materials.

[0015] The aforementioned aspects of the invention and other objectives and advantages can now be achieved as described herein. Disposable sensor systems and method are disclosed. In general, a dielectric polymer substrate provided and a microstrip antenna formed upon the dielectric polymer substrate. A piezoelectric polymer layer (e.g., a polyvinylidene fluoride (PVDF) piezoelectric film) and the microstrip antenna can be formed flexible in nature, which makes them suitable for conformal wraparound designs and appli-

cations. Additionally, an interdigital (IDT) layer can be configured upon the PVDF piezoelectric layer, thereby permitting the piezoelectric polymer layer and the IDT layer to detect pressure data and transmit the data to a receiver via the antenna.

[0016] A first bonding layer can be formed between the dielectric polymer substrate and the piezoelectric polymer layer. Also, a second bonding layer can be formed between the IDT layer and the piezoelectric polymer layer. A protective cover layer can also be configured above the IDT layer. The IDT layer can be formed as a plurality of IDT finger electrodes, which may be configured from copper. Additionally, the polymer substrate can include a gap formed centrally therein, such that the gap is filled with a gel comprising a low thermal conductivity and bio-compatible material. The polymer substrate is generally formed from a low thermal conductivity dielectric substrate material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The accompanying figures, in which like reference numerals refer to identical or functionally-similar elements throughout the separate views and which are incorporated in and form a part of the specification, further illustrate the present invention and, together with the detailed description of the invention, serve to explain the principles of the present invention.

[0018] **FIG. 1** illustrates a side view of a disposable wireless pressure sensor system, which can be implemented in accordance with a preferred embodiment;

[0019] **FIG. 2** illustrates a top view of the disposable wireless pressure sensor system depicted in **FIG. 1**, in accordance with a preferred embodiment;

[0020] **FIG. 3** illustrates a schematic diagram of a medical pressure sensing system, which can be implemented in accordance with an alternative embodiment; and

[0021] **FIG. 4** illustrates a schematic diagram of a microstrip antenna, which can be implemented in accordance with a preferred embodiment.

DETAILED DESCRIPTION OF THE INVENTION

[0022] The particular values and configurations discussed in these non-limiting examples can be varied and are cited merely to illustrate at least one embodiment of the present invention and are not intended to limit the scope of the invention.

[0023] **FIG. 1** illustrates a side view of a disposable wireless pressure sensor system **100**, which can be implemented in accordance with a preferred embodiment. **FIG. 2** illustrates a top view of the disposable wireless pressure sensor system **100** depicted in **FIG. 1**, in accordance with a preferred embodiment. Note that in **FIGS. 1-2**, identical or similar parts are generally indicated by identical reference numerals. System **100** generally includes a dielectric polymer substrate **102**.

[0024] A microstrip antenna **104** can be formed upon the dielectric polymer substrate **102**. Additionally, a piezoelectric polymer layer **106** can be formed above the dielectric polymer substrate, while an interdigital (IDT) layer **108** can be configured upon the piezoelectric polymer layer **106**,

thereby permitting the piezoelectric polymer layer **106** and the IDT layer **108** to detect pressure data and transmit the data to a receiver utilizing the antenna **104**. The piezoelectric polymer layer **106** can be configured as a thin sheet having a thickness in a range of 10-20 microns, depending upon design considerations.

[0025] Additionally, a first bonding layer **114** can be formed between the dielectric polymer substrate **102** and the piezoelectric polymer layer **106**. A second bonding layer **112** can be formed between the IDT layer **108** and the piezoelectric polymer layer **106**. First and second bonding layers **114** and **112** function as adhesives. The adhesive material for bonding layers **114**, **112** can be, for example, cyano-acrylate or a similar material. The adhesive or bonding layer thickness for layers **114**, **112** can be in a range of approximately 10 to 20 micrometers depending of course upon design considerations.

[0026] A protective cover layer **110** can be formed above the IDT layer. The protective cover layer **110** can be formed as a protective plastic sheet in order to ensure mechanical and chemical protection of system **100** as a whole. The IDT layer **108** can be configured to include IDT finger electrodes **116**, which are depicted in **FIG. 2**. Each of the IDT finger electrodes **116** can be formed from copper. The copper IDT thickness can be for example, in a range of approximately 25 micrometers to 125 micrometers, depending upon design considerations. Note that in order to provide lower frequency capabilities, a wider line width, along with bigger device sizes thereof, the IDT finger electrodes can be printed on the piezoelectric polymer layer **106**, or can be electroplated or etched from a large sheet of IDT finger electrodes thereof.

[0027] The dielectric polymer substrate **102** can also be configured to include a gap **120** filled with a gel **122** formed from a low thermal conductivity and biocompatible material. The piezoelectric polymer layer **106** can be configured as a polyvinylidene fluoride (PVDF) piezoelectric film, while the dielectric polymer substrate **102** can be formed from a low thermal conductivity dielectric substrate material. It is believed that the use of PVDF piezoelectric film in accordance with the preferred embodiment described herein can result in substantial cost-savings and increased sensor efficiency, particularly in medical pressure sensing applications.

[0028] One example where system **100** can be particularly useful is the field of medical applications, such as blood pressure sensing. The PVDF piezoelectric film is therefore formed on the biocompatible low thermal conductivity dielectric polymer substrate **102**. The PVDF piezoelectric film changes with temperature and pressure. Utilizing a low thermal conductivity substrate, for example, the pyroelectric change by blood can be minimized. The antenna **104** can be printed on the dielectric polymer substrate. Thus, in accordance with the preferred embodiment described herein, a number of transceivers can be provided including a piezoelectric polymer sheet material, which is less costly and much easier to work with than conventional pressure sensing devices.

[0029] **FIG. 3** illustrates a schematic diagram of a medical pressure sensing system **300**, which can be implemented in accordance with an alternative embodiment. Note that in **FIGS. 1-3**, identical or similar parts or components are

generally indicated by identical reference numerals. Thus, sensor or system **100** of **FIG. 1** is also depicted in **FIG. 3** at a location relative to a conduit **301**, which can be implemented as, for example, a catheter through which fluid **303** flow, as indicated by arrows **302** and **304**. Fluid **303** can be, for example, blood. System or sensor **100** can therefore transmit and receive data to and from a transmitter/receiver **304**, which includes an antenna **306**. The wireless transmission of such data is indicated in **FIG. 3** by arrows **308**. System **300** can therefore be utilized for measuring bodily fluid pressure within conduit **301**.

[0030] **FIG. 4** illustrates a schematic diagram of a microstrip antenna **400**, which can be implemented in accordance with a preferred embodiment. Microstrip antenna **400** generally includes a dielectric substrate **404** located above a ground plane **402**. A radiating patch **406** is generally disposed on or in substrate **404**. Note that microstrip antenna **400** of **FIG. 4** is analogous to microstrip antenna **104** of **FIG. 1**. For example, microstrip antenna **104** can be formed upon a dielectric polymer substrate **102** as indicated in **FIG. 1**. Thus, substrate **102** of **FIG. 1** is similar to substrate **404** of **FIG. 4**.

[0031] Because a dielectric polymer substrate, such as substrate **404** can be flexible, the configuration of microstrip antenna **400** is suitable for adaptation to conformal wrap-around type designs and applications. Microstrip antennas, such as antenna **400**, offer a number of advantages compared to conventional microwave antennas such as, for example light weight, low volume, and thin profile configurations, which can be made conformal; low fabrication cost; and readily amendable to mass production. Linear and circular polarizations are also possible with simple feed configurations. Additionally, dual-frequency and dual-polarization antennas can be easily constructed; because, no cavity backing is required and such devices can be easily integrated with microwave circuits.

[0032] The embodiments and examples set forth herein are presented to best explain the present invention and its practical application and to thereby enable those skilled in the art to make and utilize the invention. Those skilled in the art, however, will recognize that the foregoing description and examples have been presented for the purpose of illustration and example only. Other variations and modifications of the present invention will be apparent to those of skill in the art, and it is the intent of the appended claims that such variations and modifications be covered.

[0033] The description as set forth is not intended to be exhaustive or to limit the scope of the invention. Many modifications and variations are possible in light of the above teaching without departing from the scope of the following claims. It is contemplated that the use of the present invention can involve components having different characteristics. It is intended that the scope of the present invention be defined by the claims appended hereto, giving full cognizance to equivalents in all respects.

The embodiments of the invention in which an exclusive property or right is claimed are defined as follows. Having thus described the invention what is claimed is:

1. A disposable sensor system, comprising:

a dielectric polymer substrate and an antenna formed upon said dielectric polymer substrate;

a piezoelectric polymer layer formed above said dielectric polymer substrate; and

an interdigital (IDT) layer formed upon said piezoelectric polymer layer, thereby permitting said piezoelectric polymer layer and said IDT layer to detect pressure data and transmit said data to a receiver utilizing said antenna.

2. The system of claim 1 further comprising:

a bonding layer formed between said dielectric polymer substrate and said piezoelectric polymer layer.

3. The system of claim 1 further comprising:

a bonding layer formed between said IDT layer and said piezoelectric polymer layer.

4. The system of claim 1 further comprising a protective cover layer formed above said IDT layer.

5. The system of claim 1 wherein said IDT layer comprises a plurality of IDT finger electrodes.

6. The system of claim 5 wherein each of said IDT finger electrodes among said plurality of IDT finger electrodes comprise copper.

7. The system of claim 1 wherein said dielectric polymer substrate comprises a gap formed centrally therein, wherein said gap is filled with a gel comprising a low thermal conductivity and biocompatible material.

8. The system of claim 1 wherein said piezoelectric polymer layer comprises a polyvinylidene fluoride (PVDF) piezoelectric film.

9. The system of claim 1 wherein said dielectric polymer substrate comprises a low thermal conductivity dielectric substrate material.

10. The system of claim 1 wherein said antenna is printed on said dielectric polymer substrate.

11. A disposable sensor system, comprising:

a dielectric polymer substrate and an antenna formed upon said dielectric polymer substrate, wherein said dielectric polymer substrate comprises a low thermal conductivity dielectric substrate material;

a piezoelectric polymer layer formed above said dielectric polymer substrate, said dielectric polymer substrate comprises a gap formed centrally therein, wherein said gap is filled with a gel comprising a low thermal conductivity and bio-compatible material and wherein said piezoelectric polymer layer comprises a polyvinylidene fluoride (PVDF) piezoelectric film;

an interdigital (IDT) layer formed upon said piezoelectric polymer layer, wherein said IDT layer comprises a plurality of IDT finger electrodes;

a protective cover layer formed above said IDT layer;

a first bonding layer formed between said dielectric polymer substrate and said piezoelectric polymer layer; and

a second bonding layer formed between said IDT layer and said piezoelectric polymer layer, thereby permitting said piezoelectric polymer layer and said IDT layer to detect pressure data and transmit said data to a receiver utilizing said antenna.

12. A disposable sensor method, comprising the steps:
forming an antenna upon a dielectric polymer substrate;
configuring a piezoelectric polymer layer above said
dielectric polymer substrate; and

locating an interdigital (IDT) layer upon said piezoelectric
polymer layer, thereby permitting said piezoelectric
polymer layer and said IDT layer to detect pressure data
and transmit said data to a receiver utilizing said
antenna.

13. The method of claim 12 further comprising the step of
forming a bonding layer between said dielectric polymer
substrate and said piezoelectric polymer layer.

14. The method of claim 12 further comprising the step of
forming a bonding layer between said IDT layer and said
piezoelectric polymer layer.

15. The method of claim 12 further comprising the step of
forming a protective cover layer above said IDT layer.

16. The method of claim 12 further comprising the step of
configuring said IDT layer to comprise a plurality of IDT
finger electrodes comprising copper.

17. The method of claim 12 further comprising the steps
of:

forming a gap from centrally form said dielectric polymer
substrate; and

filling said gap with a gel comprising a low thermal
conductivity and biocompatible material.

18. The method of claim 12 further comprising the step of
configuring said piezoelectric polymer layer as a polyvi-
nylidene fluoride (PVDF) piezoelectric film.

19. The method of claim 12 further comprising the step of
configuring said dielectric polymer substrate from a low
thermal conductivity dielectric substrate material.

20. The method of claim 12 wherein the step of forming
said antenna upon said dielectric polymer substrate further
comprises the step of printing said antenna on said dielectric
polymer substrate.

* * * * *