

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
12 June 2008 (12.06.2008)

PCT

(10) International Publication Number
WO 2008/069994 A2

(51) International Patent Classification: Not classified

05446 (US). STANCAMPANO, Charles V. [US/US];
175 Oakdale Drive, Rochester, New York 14618 (US).(21) International Application Number:
PCT/US2007/024684

(74) Common Representative: EASTMAN KODAK COMPANY; 343 State Street, Rochester, New York 14650-2201 (US).

(22) International Filing Date:
30 November 2007 (30.11.2007)

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English


(30) Priority Data:
11/565,801 1 December 2006 (01.12.2006) US

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, New York 14650-2201 (US).

Published:
— without international search report and to be republished upon receipt of that report

(54) Title: SILICIDE STRAPPING IN IMAGER TRANSFER GATE DEVICE

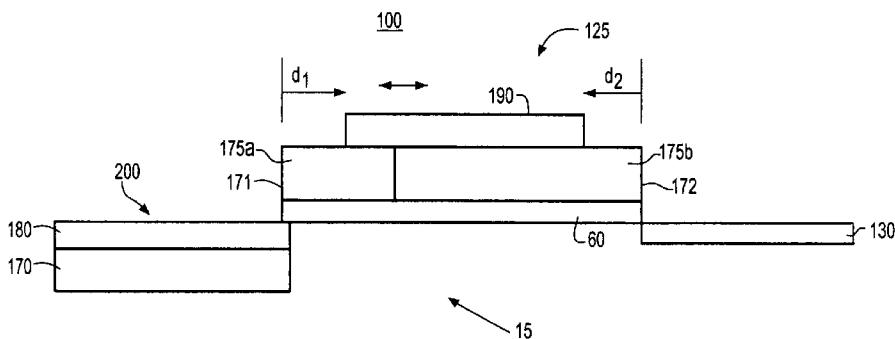

(57) Abstract: A CMOS active pixel sensor (APS) cell structure having dual workfunction transfer gate device and method of fabrication. The transfer gate device comprises a dielectric layer formed on a substrate and a dual workfunction gate conductor layer formed on the dielectric layer comprising a first conductivity type doped region and an abutting second conductivity type doped region. The transfer gate device defines a channel region where charge accumulated by a photosensing device is transferred to a diffusion region. A silicide structure is formed atop the dual workfunction gate conductor layer for electrically coupling the first and second conductivity type doped regions. In one embodiment, the silicide contact is smaller in area dimension than an area dimension of said dual workfunction gate conductor layer. Presence of the silicide strap prevents the diodic behavior from allowing one or the other side of the gate to float to an indeterminate voltage.

WO 2008/069994 A2

SILICIDE STRAPPING IN IMAGER TRANSFER GATE DEVICE

FIELD OF THE INVENTION

The present invention relates to semiconductor optical image sensors, and particularly, to a novel CMOS (complementary metal oxide semiconductor) image sensor cell structure exhibiting reduced lag, higher capacity and lower dark current.

BACKGROUND OF THE INVENTION

CMOS image sensors are beginning to replace conventional CCD sensors for applications requiring image pick-up such as digital cameras, mobile telephones, cellular telephones, pervasive digital devices such as PDA's (personal digital assistant), personal computers, medical devices, and the like.

Advantageously, CMOS image sensors are fabricated by applying present CMOS fabricating process for semiconductor devices such as photodiodes or the like, at low costs. Furthermore, CMOS image sensors can be operated by a single power supply so that the power consumption for that can be restrained lower than that of CCD sensors, and further, CMOS logic circuits and like logic processing devices are easily integrated in the sensor chip and therefore the CMOS image sensors can be miniaturized.

Current CMOS image sensors comprise an array of CMOS Active Pixel Sensor (APS) cells, which are used to collect light energy and convert it into readable electrical signals. Each APS cell comprises a photosensitive element, such as a photodiode, photogate, or photoconductor overlying a doped region of a substrate for accumulating photo-generated charge in an underlying portion thereof. A read-out circuit is connected to each pixel cell and often includes a diffusion region for receiving charge from the photosensitive element, when read-out. Typically, this is accomplished by a transistor device having a gate electrically connected to the floating diffusion region. The imager may also include a transistor, having a transfer gate, for transferring charge from the photosensitive element across a channel to the floating diffusion region, and a

transistor for resetting the floating diffusion region to a predetermined charge level prior to charge transfer.

As shown in Figure 1, a typical CMOS APS cell 10 includes a pinned photodiode 20 having a pinning layer 18 doped p-type and, an underlying 5 lightly doped n-type region 17. Typically, the pinned diode 20 is formed on top of a p-type substrate 15 or a p-type epitaxial layer or p-well surface layer having a lower p-type concentration than the diode pinning layer 18. As known, the surface doped p-type pinning layer 18 is in electrical contact with the substrate 15 (or p-type epitaxial layer or p-well surface layer). The photodiode 20 thus has two 10 p-type regions 18 and 15 having a same potential so that the n-type doped region 17 is fully depleted at a pinning voltage (Vp). That is, the surface pinning layer 18 is in electrical contact to the substrate. The pinned photodiode is termed "pinned" because the potential in the photodiode is pinned to a constant value, Vp, when the photodiode is fully depleted. This pinned photodiode configuration 15 improves the device performance by decreasing dark current (current output by a pixel in a dark environment). However, the pinned photodiode configuration may cause image lag due to the incomplete transfer of charge from the photodiode to the floating node.

As further shown in Figure 1, the n-type doped region 17 and p 20 region 18 of the photodiode 20 are spaced between an isolation region, e.g., a shallow trench isolation (STI) region 40, and a charge transfer transistor gate 25 which is surrounded by thin spacer structures 23a,b. The shallow trench isolation (STI) region 40 is located proximate the pixel image cell for isolating the cell 25 from an adjacent pixel cell. In operation, light coming from the pixel is focused down onto the photodiode through the diode where electrons collect at the n-type region 17. When the transfer gate 25 is operated, i.e., turned on by applying a voltage to the transfer gate 70 comprising, for example, an n-type doped polysilicon layer 70 over a thin dielectric layer 60, the photo-generated charge 24 is transferred from the charge accumulating doped n-type doped region 17 via a 30 transfer device channel 16 to a floating diffusion region 30, e.g., a floating "node" doped n+ type.

Fig. 2 depicts a further prior art CMOS APS cell 10' having incorporated a gate 25' having a portion that is p-type material 70a and a portion that is n-type 70b. The n-type portion 70b of the gate has a lower V_t and the p-type portion 70a of the gate has a higher V_t . By having both present in the gate at 5 the same time, the transfer gate has a built in field pulling electrons from the photodiode to the floating diffusion. Additionally, in the design of the CMOS APS cell 10' it has been noticed that the presence of silicide contact regions (not shown) formed over the floating node diffusions, in the array, causes a bright point defect leakage problem. That is, due to the additional presence of formed 10 silicide contacts over these diffusions, it has been found that occasional pixels see silicide "spikes" which leak current at levels high enough to make that pixel unusable. As a result, silicide has been removed from the arrays of CMOS imagers for bright point yield.

Fig. 3A depicts a CMOS imager 12 having a silicide layer blocked 15 from the photodiode surface since silicide blocks light while a silicide layer 80 formed over the transfer gate polysilicon and floating diffusion remain. Fig. 3B illustrates the CMOS imager 12 of Fig. 3A having silicide layers 80 removed from the gate poly and floating diffusion for even lower leakage behavior.

Fig. 3C illustrates a top plan view of the CMOS imager 10' of Fig. 20 2 having silicide surface layers removed from the photodiode 20, gate poly regions 70a, 70b and floating diffusion node 30.

Unfortunately, however, with the absence of the silicide from 25 imagers with a transfer gate with n and p regions, each CMOS APS cell gate polysilicon formed with the built-in diode within the gate prevents the entire gate from being contacted. That is, a contact which only connects either the n-type or p-type side of the polysilicon gate will not be adequately connected to the other polarity of the gate poly layer. This results in a time dependent voltage on the uncontacted portion of the gate. That is, if a contact is made to the n-type part of 30 the gate, the p-type part floats; likewise, if contact is made to the p-type side of the gate, the n-type part floats. If a contact is formed directly over the boundary edge, contact overlay allows it to contact only one side statistically.

It would thus be highly desirable to provide a CMOS image sensor array including a novel APS cell structure that exhibits reduced (low) lag and dark current and, that eliminates bright spikes leakage phenomena.

5

SUMMARY OF THE INVENTION

The invention relates generally to improved semiconductor imaging devices and in particular to an imaging device which can be fabricated using a standard CMOS process.

The present invention is directed to a CMOS image sensor wherein 10 the sensor comprises a photodetecting region (e.g. photodiode); a floating diffusion; a transfer gate located between the photodetecting region and the floating diffusion, the transfer gate comprising n and p type doped regions to form a diode; and, an interconnect layer (e.g. a silicide structure) electrically coupling the n-type and p-type doped regions of the transfer gate.

15 In an embodiment of the invention, the interconnect layer comprises a silicide and is formed in physical contact with at least a portion of the p-type region and a portion of the n-type region of a polysilicon transfer gate. The silicide layer may be over all or just a portion of the poly gate width and silicide is not formed on the diffusions (i.e. photodiode and floating diffusion).

20 Preferably, the CMOS imager of the invention including a transfer gate device having two workfunctions (n-type and p-type gate poly) and a silicide strap cooperatively exhibit a high barrier at the photodiode for dark current while a low barrier is provided at the floating diffusion for low lag performance. The silicide strap prevents the diodic behavior from allowing one or the other side of 25 the gate to float to an indeterminate voltage.

Thus, according to one aspect of the invention, there is provided an active pixel sensor (APS) cell structure and method of manufacture. The active pixel sensor (APS) cell structure comprises: a substrate of a first conductivity type material; a transfer gate device comprising a gate dielectric layer formed on 30 the substrate and a dual workfunction gate conductor layer formed on the gate dielectric layer, the dual workfunction gate conductor layer comprising a first

doped region of first conductivity type material and a second doped region of a second conductivity type material; a photosensing device formed at or below a substrate surface adjacent the first doped region of the transfer gate device for collecting charge carriers in response to light incident thereto; a diffusion region 5 of a second conductivity type material formed at the substrate surface adjacent the second doped region of the transfer gate device, the transfer gate device forming a channel region enabling charge transfer between the photosensing device and the diffusion region; and, a silicide structure formed atop the dual workfunction gate conductor layer for electrically coupling the first doped region of first conductivity type material of the transfer gate device and the second doped region 10 of second conductivity type material of the transfer gate device.

In one embodiment, the photosensing device comprises a photodiode comprising: a collection well of a second conductivity type material formed below the substrate surface; and, a pinning layer of the first conductivity 15 type material formed atop the collection well at the substrate surface.

In one embodiment, the substrate, pinning layer of the first conductivity type material, and the first doped region of the dual workfunction gate conductor layer of the transfer gate device includes p-type dopant material, e.g., Boron or Indium. The collection well of the second conductivity type 20 material, the floating diffusion region of second conductivity type material, and the second doped region of the dual workfunction gate conductor layer of the transfer gate includes n-type dopant material, e.g., Phosphorus, Arsenic or Antimony.

Moreover, the silicide structure comprises a silicide of Ti, Ta, W, 25 Co, Ni, Pt, Pd or alloys thereof.

In one embodiment, the silicide structure formed over the dual workfunction gate conductor layer for electrically coupling the first doped region of first conductivity type material and the second doped region of second conductivity type material of the transfer gate device is smaller in area dimension 30 than an area dimension of the dual workfunction gate conductor layer.

Alternately, the silicide structure formed over the dual workfunction gate conductor layer for electrically coupling the first doped region of first conductivity type material and the second doped region of second conductivity type material of the transfer gate device is reduced only in length 5 dimension than a length of the dual workfunction gate conductor layer.

Given that the transfer gate device defines a conducting channel region where charge transfer is enabled between the collection well and the floating diffusion region underneath the transfer gate device, in a further alternate embodiment, the silicide structure is formed atop the dual workfunction gate 10 conductor layer for electrically coupling the first doped region of first conductivity type material and the second doped region of second conductivity type material of the transfer gate device outside of the area defining the conducting channel region.

Advantageously, the teachings of the invention may be applicable 15 for devices of both polarities, i.e., n type photodiodes and p type pinning layers and nFETs, as well as to p type photodiodes, and n type pinning layers with pFETs.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The objects, features and advantages of the present invention will become apparent to one skilled in the art, in view of the following detailed description taken in combination with the attached drawings, in which:

Fig. 1 depicts a CMOS Active Pixel Sensor (APS) cell 10 for an image sensor according to the prior art;

25 Fig. 2 illustrates, through a cross-sectional view, a CMOS Active Pixel Sensor (APS) cell 10' according to the prior art having a gate polysilicon layer with a built in diode, e.g., a pn junction;

30 Figs. 3A and 3B illustrate, through cross-sectional views, the CMOS Active Pixel Sensor (APS) cell 12 having silicide contacts regions removed from the photodiode (Fig. 3A) and having silicide surface layer contact regions removed from the gate poly layer and floating diffusion layer in accordance with the prior art (Fig. 3B);

Fig. 3C illustrates a top plan view of the CMOS imager 10' of Fig. 2 having silicide surface layers removed from the photodiode 20, gate poly regions 70a, 70b and floating diffusion node 30.

Fig. 4 illustrates, through a cross-sectional view, a CMOS APS cell 5 100 having silicide contacts regions removed from the photodiode and floating node diffusion regions and, having a partial conductive strap formed on the gate polysilicon for improved gate barrier ac characteristics according to a first embodiment of the invention;

Fig. 5A illustrates, through a top plan view, the CMOS APS cell 10 100 formed in accordance with the embodiment of the invention shown in Fig. 4;

Fig. 5B illustrates, through a top plan view, the CMOS APS cell 100' formed in accordance with a first variation of the embodiment of the invention shown in Fig. 4;

Fig. 5C illustrates, through a top plan view, the CMOS APS cell 15 100" formed in accordance with a second variation of the embodiment of the invention shown in Fig. 4;

Fig. 5D illustrates, through a top plan view, the CMOS APS cell 100"" formed in accordance with a third variation of the embodiment of the invention shown in Fig. 4; and,

20 Fig. 6 is a side view of a camera device implementing an image sensor having the CMOS Active Pixel Sensor (APS) cells formed in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

25 Prior to describing the present invention in detail, it is instructive to note that the present invention is preferably used in, but not limited to, a CMOS active pixel sensor. Active pixel sensor (APS) refers to an active electrical element within the pixel, other than transistors functioning as switches. For example, the floating diffusion or amplifier are active elements. CMOS refers to 30 complementary metal oxide silicon type electrical components such as transistors which are associated with the pixel, but typically not in the pixel, and which are

formed when the source/drain of a transistor is of one dopant type and its mated transistor is of the opposite dopant type. CMOS devices include some advantages one of which is it consumes less power.

Fig. 4 illustrates, through a cross-sectional view, a back end of line 5 CMOS imager APS 100 including photosensing device, e.g., photodiode 200, and silicon-containing, e.g., polysilicon, transfer gate 125 according to a first embodiment of the invention. The polysilicon transfer gate 125 includes an anodic (p-type doped) region and abutting cathodic (n-type doped) region forming a diode. In one non-limiting example, the polysilicon transfer gate 125 comprises 10 a Schottky diode. Further, as shown in Fig. 4, a conductive structure, e.g., a partial silicide “strap” 190, is formed on the surface of the poly gate having p-type 175a and n-type 175b portions for improved gate barrier ac characteristics as will be described in greater detail herein below.

As shown in Fig. 4, the partial silicide strap layer 190 electrically 15 connects the p-type doped 175a and n-type doped 175b portions of the polysilicon gate 125. Moreover, as shown in Fig. 4, the partial silicide “strap” layer 190 has edges formed at a distance from the boundary of the gate, i.e., the silicide strap 190 is inset a distance, e.g., distances d_1 and d_2 , from respective edges 171, 172 of the poly gate layer. The inset distances d_1 and d_2 of the formed silicide strap are 20 not required to be equal, i.e., the strap is formed to lie over just a portion of the poly width, as long as the silicide strap 190 electrically shorts the p-type portion 175a to the n-type portion 175b. Thus, as shown in the top view of Fig. 5A, the silicide strap 190 is formed atop a portion of the poly width. It is understood that in preferred embodiments, the silicide strap 190 is kept off the diffusion 130.

25 Although not shown, one example methodology for producing the CMOS imager APS 100 structure shown in Fig. 4 is now described. It is understood that other techniques may be used for forming the transfer gate having the diode structure, i.e., abutting p-type and n-type gate poly regions, as known in the art. The device 100 is formed on a substrate 15 which may be a bulk 30 semiconductor including, for example, Si, SiGe, SiC, SiGeC, GaAs, InP, InAs and other semiconductors, or layered semiconductors such as silicon-on-insulators

(SOI), SiC-on-insulator (SiCOI) or silicon germanium-on-insulators (SGOI). For purposes of description, substrate 15 is a Si-containing semiconductor substrate of a first conductivity type, e.g., lightly doped with p-type dopant material such as boron or indium (beryllium or magnesium for a III-V semiconductor), to a 5 standard concentration ranging between, e.g., 1×10^{14} to 1×10^{16} cm⁻³. Next a dielectric material layer 60 is formed by standard deposition/growth techniques atop the substrate 15 that will form the eventual transfer gate dielectric. The dielectric layer may be formed to a thickness ranging between 40 Å to 100 Å, for example, and may comprise suitable gate dielectric materials including but not 10 limited to: an oxide (e.g., SiO₂), a nitride (e.g., silicon nitride) an oxynitride (e.g., Si oxynitride), N₂O, NO, ZrO₂, or other like materials. In one embodiment, the gate dielectric 60 is comprised of an oxide such as, for example, SiO₂, HfO₂, ZrO₂, Al₂O₃, TiO₂, La₂O₃, SrTiO₃, LaAlO₃, and mixtures thereof. The dielectric layer 60 is formed on the surface of the Si-containing semiconductor substrate 15 using 15 conventional thermal oxidation or by a suitable deposition process such as chemical vapor deposition, plasma-assisted chemical vapor deposition, atomic layer deposition (ALD), evaporation, reactive sputtering, chemical solution deposition and other like deposition processes. The gate dielectric 16 may also be formed utilizing any combination of the above processes. Although it is not 20 shown, it is understood that the dielectric layer may comprise a stack of dielectric materials.

Next, a Silicon-containing layer, e.g., polycrystalline silicon, is formed atop the dielectric layer 60 using conventional deposition processes including, but not limited to: CVD, plasma-assisted CVD, sputtering, plating, 25 evaporation and other like deposition processes (e.g., a low pressure CVD). The polysilicon layer may be formed to a thickness ranging between about 1k Å to 2k Å but may be outside this range. Alternatively, the Silicon-containing layer may comprise a stack of polysilicon layers. The transfer gate 125 is then formed by a photolithographic process, e.g., applying a mask, e.g., a photoresist layer, over the 30 polysilicon layer and applying a mask patterned to define the gate region, e.g., length determining an effective channel length of the transfer gate to be formed,

and then developing the resist and performing an etch process. Basically, an etch window is provided in a resist mask, the size and shape of which approximately defining the lateral size and shape of the gate region to be formed. Then, one or more etch processes are performed, e.g., a reactive ion etch (RIE) process, that is 5 optimized to ensure proper etching of the polysilicon layer and dielectric layer 60 or dielectric layer stack to result in the transfer gate structure.

After forming the transfer gate structure including the intrinsic polysilicon layer on the gate dielectric layer, a subsequent mask deposition process that covers a portion of the transfer gate structure and ion implantation 10 process is performed to implant dopant material of a second conductivity type, e.g., n -type dopant material, such as phosphorus, arsenic or antimony, into the polysilicon layer to form n -type doped gate poly portion 175b. The n-type dopant material may be implanted to achieve a dosing concentration ranging between $1 \times 10^{17} \text{ cm}^{-3}$ to $1 \times 10^{20} \text{ cm}^{-3}$. Similarly, using a subsequent mask deposition 15 process that covers the remaining portion, i.e., the other side of the transfer gate structure, an ion implantation process is performed to implant dopant material of a first conductivity type, e.g., p -type dopant material, such as boron or gallium or indium into the polysilicon layer to form p -type doped gate poly portion 175a as shown in Fig. 4. The p-type dopant material may be implanted to achieve a 20 dosing concentration ranging between $1 \times 10^{17} \text{ cm}^{-3}$ to $1 \times 10^{20} \text{ cm}^{-3}$ in the gate poly. Alternately, the doping of the polysilicon may be achieved using implants already present in the process by appropriate use of those implant masks at the same time those implants are being performed elsewhere in the chip. (One example would be the source drain implants and masks, but others are also possible.)

25 It should be noted that in a variation of the method described, in-situ n-type, p-type doped, or both n-type and p-type polysilicon material may be deposited on top of the gate dielectric layer 60 according to an in-situ doping deposition process or deposition (e.g., CVD, plasma-assisted, etc.). The in-situ doping deposition process, for example, may be employed when the gate 30 dielectric cannot withstand a subsequent high temperature annealing, whereas ion

implantation and annealing can be employed when the gate dielectric is a material that can withstand such high temperature annealing.

In a further optional step, gate sidewall spacers (not shown) may be formed at either side of the transfer gate by conventional deposition processes 5 well known in the art, and may comprise any conventional oxide or nitride (e.g., Si_3N_4) or oxide/nitride which are then etched by RIE or another like etch process. The thickness of spacers may vary, but typically they have a thickness of from about 5 nm to about 150 nm.

After optionally forming transfer gate sidewall spacers, a next step 10 is performed to provide the photodiode pinning region 180. This step comprises forming a photoresist layer (not shown) patterning, and creating an ion implantation mask according to techniques known in the art to form a mask edge approximately coincident with the gate edge or as close as possible given alignment tolerances, to provide an opening to an area between an edge of the gate 15 and a formed isolation region, e.g., STI region (not shown), where the charge accumulation region of the photodiode is to be formed. This opening permits the implantation of ions of p-type dopant material, e.g., such as boron, at a concentration sufficient to form the p -type dopant pinning region 180 as shown in Figure 4. This pinning region 180 may be formed up to the edge of a spacer (not 20 shown). The active p -type dopant material is then ion implanted at dosing concentrations ranging between 1×10^{17} and $1 \times 10^{19} \text{ cm}^{-3}$. It should be understood that, alternatively, the p-type pinning photodiode surface layer 180 may be formed by other known techniques. For example, the p-type surface layer 180 may be formed by a gas source plasma doping process, or by diffusing a p-type dopant 25 from the in-situ doped layer or a doped oxide layer deposited over the area where photodiode is to be formed.

A further step is then performed to ion implant the n-type dopant underneath the p -type doped region 180 of the substrate surface of the photodiode element 200. Potentially, the same ion implantation mask could be used as when 30 implanting the p -type material to form pinning region, an ion implantation process is performed to implant dopant material of the second conductivity type,

e.g., n -type dopant material, such as phosphorus, arsenic or antimony, to form the charge collection layer beneath the ion implanted p-type pinning layer 180. The n-type dopant material is implanted at higher energy levels to form the n-type doped region 170 of the photodiode 190 as shown in Figure 4. The active n-type 5 dopant material may be ion implanted at dosing concentrations ranging between 1×10^{16} and 1×10^{18} cm⁻³. As shown in Figure 4, the photosensitive charge storage region 170 for collecting photo-generated electrons may be formed by multiple implants to tailor the profile of the n-type region 170.

In addition to the forming of the photodiode 200, an additional step 10 of forming an n-type floating diffusion region 130 at the other side of the transfer gate is performed. This step comprises forming a photoresist layer and patterning and etching an ion implantation mask according to techniques known in the art to form a mask edge approximately coincident with the gate edge or as close as possible given alignment tolerances, to provide an opening allowing the 15 implantation of n -type dopant material, such as phosphorus, arsenic or antimony, at a concentration sufficient to form the n+ -type doped floating diffusion region 130 as shown in Figure 4 or, up to the edge of a gate sidewall spacer (not shown). The active n+ -type dopant material is ion implanted at the floating diffusion region at dosing concentrations ranging between 1×10^{18} and 1×10^{20} . As a result of 20 this ion implantation step, n-type dopant materials may be additionally implanted at the doped transfer gate polysilicon layer 175b portion as well.

A salicide process is then performed to consume the polysilicon gate 125 to form the metal silicide strap 190 according to the invention, as shown in Figs.5A-5D.

25 The first step of the salicide process includes first forming on the p-type doped 175a and n-type doped 175b polysilicon gate layer, a blanket insulative cap using well known deposition techniques. For example, a dielectric cap layer is formed atop the polysilicon gate layer 175a,b utilizing a deposition process such as, for example, physical vapor deposition or chemical vapor 30 deposition. The dielectric cap layer may be an oxide, nitride, oxynitride or any combination thereof. In one embodiment, a nitride such as, for example, Si₃N₄, is

employed as the dielectric cap layer. The thickness, i.e., height, of the dielectric cap layer may range from about 20 nm to about 180 nm.

Then, using typical lithographic steps, i.e., forming a patterned resist mask over the cap (e.g., nitride) dielectric layer, an area is etched that 5 outlines the silicide strap to be formed. The lithography step includes applying a photoresist to the upper surface of the dielectric cap layer, exposing the photoresist to a desired pattern of radiation and developing the exposed photoresist utilizing a conventional resist developer. The pattern in the photoresist is then transferred to the dielectric cap layer utilizing one or more dry etching 10 steps leaving exposed the underlying polysilicon gate layer and, particularly, opening up a window in the dielectric cap layer to expose adjacent portions of both doped regions 175a,b in the exposed underlying polysilicon layer. In accordance with the present invention, the desired pattern is the area and dimension of the silicide strap to be formed such as shown in Figures 5A-5D.

15 Thus, for example, as shown in the top plan view of the invention as shown in Fig. 5A, the photolithographic mask, develop and etch process applied to the overlying cap dielectric (e.g., nitride) layer (not shown) will result in the exposure region 195 of the underlying polysilicon layer that is inset a distance d1 and d2 from each of the respective gate edges 171, 172 along the length of the gate that will be 20 subject to formation of the silicide contact. In some embodiments, the patterned photoresist may be removed after the pattern has been transferred into the dielectric cap layer.

Suitable dry etching processes that can be used in the present invention in forming the patterned gate include, but are not limited to: reactive ion 25 etching, ion beam etching, plasma etching or laser ablation.

Then there is next performed the step of depositing a silicide metal (not shown) in the etched out patterned nitride layer such that the exposed underlying polysilicon layer becomes filled with the silicide metal. The metal used in forming the silicide strap comprises any metal that is capable of reacting 30 with silicon to form a metal silicide. Examples of such metals include, but are not limited to: Ti, Ta, W, Co, Mo, Ni, Pt, Pd or alloys thereof. The metal may be

deposited using any conventional deposition process including, for example, sputtering, chemical vapor deposition, a physical vapor deposition (PVD) of the silicide evaporation, chemical solution deposition, plating and the like.

After deposition of the silicide metal on the exposed polysilicon 5 region defining dimensions of the silicide strap 190, a thermal anneal process is employed to form a silicide phase in the structure; preferably, the silicide representing the lowest resistivity phase of a metal silicide. The anneal is performed utilizing the ambients and temperatures well known in the art that cause the silicide metal to react with the underlying polysilicon to form the metal 10 silicide layer 190 as shown in Fig. 4. In one embodiment, the silicide metal may comprise Co noting that CoSi_2 forms using a two step annealing process as known in the art. In another embodiment of the present invention, the silicide metal is Ni or Pt; NiSi and PtSi being formed using a single annealing step. Then, a selective wet etch step may be employed to remove any non-reactive silicide metal from the 15 structure.

In one embodiment, the wafer is then annealed at approximately 500° C to about 800 ° C for approximately 30 seconds in a nitrogen environment to react with the portions of the polysilicon layer 175a,b to form the conductive silicide strap 190.

20 After completion of the inventive metal silicide gate processing mentioned above, the conventional approach for building an interconnect structure for transistor to transistor and transistor to external contacts can be employed.

Figure 5B illustrates, through a top plan view, the CMOS APS cell 100' formed in accordance with a first variation of the embodiment of the 25 invention shown in Fig. 5A, where a silicide strap 191 is formed utilizing the process described herein that has edges formed an inset distance d_1, d_2 from edges of the boundary gate, however, is formed to extend substantially over the whole width of the poly. Thus, for example, referring to the salicide process described herein with respect to Fig. 5A, as shown in Fig. 5B, the photolithographic mask, 30 develop and etch process applied to the overlying cap dielectric (e.g., nitride) layer (not shown) will result in formation of the exposure region 196 of the

underlying polysilicon layer that is inset a distance d1 and d2 from each of the respective gate edges 171, 172 along the length of the gate, however extends to both edges of the poly layer width a distance, dw, for example.

Figure 5C illustrates, through a top plan view, the CMOS APS cell 5 100" formed in accordance with a second variation of the embodiment of the invention shown in Fig. 5A, where a silicide strap 192 is formed utilizing the process described herein that has edges formed an inset distance d₁,d₂ from edges of the boundary gate, however, extends a short distance of the poly gate. Thus, for example, referring to the salicide process described herein with respect to Fig. 10 5A, as shown in Fig. 5C, the photolithographic mask, develop and etch process applied to the overlying cap dielectric (e.g., nitride) layer (not shown) will result in formation of the exposure region 197 of the underlying polysilicon layer that is inset a distance d1 and d2 from each of the respective gate edges 171, 172 along the length of the gate, however extends for only a short distance of the poly gate, 15 for example.

In accordance with a further embodiment of the invention, the silicide strap for the CMOS imager APS transfer gate may be made on a portion of the polysilicon gate that is not directly over the conducting channel (i.e., as long as the n and p regions are shorted by the strap somewhere). Figure 5D 20 illustrates, through a top plan view, the CMOS APS cell 100" formed in accordance with a third variation of the embodiment of the invention shown in Fig. 5A, where a silicide strap 193 is formed utilizing the process described herein that has edges formed an inset distance from edges of the boundary gate, and that extends a short distance of the poly gate. However, the strap 193 is offset from 25 that portion of the gate 175a,b that defines the channel region for the transfer device. That is, the silicide strap 193 is formed on a portion of the polysilicon gate that is not directly over the conducting channel. Thus, for example, referring to the salicide process described herein with respect to Fig. 5A, as shown in Fig. 5D, the photolithographic mask, develop and etch process applied to the overlying 30 cap dielectric (e.g., nitride) layer (not shown) will result in formation of the exposure region 198 of the underlying polysilicon layer that is inset a distance

from each of the respective gate edges 171, 172 along the length of the gate, and extends for only a short distance of the poly gate, for example, in a region that does not directly overly the device channel region.

It is understood that any conductive structure for electrically
5 shorting the anode 175a and cathode 175b portions of the transfer gate poly may be implemented besides the silicide contact structure as described. However, it is imperative that the photodetection region and the floating diffusion regions be silicide-free.

Benefits of the structures shown and described herein with respect
10 to Figs. 5A-5D are that a high barrier exists at the photodiode for reducing the dark current leakage, and that a low barrier is present at the floating diffusion for lower lag. The silicide strap prevents diodic behavior from allowing one or the other side of the gate to float to an indeterminate voltage.

Referring to Fig. 6, there is shown a side view of a camera device
15 300 implementing an image sensor 302 having the CMOS Active Pixel Sensor (APS) cells 100-100''' formed in accordance with the respective embodiments of the invention depicted in Figs. 5A-5D.

While there has been shown and described what is considered to be preferred embodiments of the invention, it will, of course, be understood that
20 various modifications and changes in form or detail could readily be made without departing from the spirit of the invention. For example, while the preferred embodiments described herein were directed to n type photodiodes and p type pinning layers and nFETs, the principles of the present invention may advantageously be applied to p type photodiodes, and n type pinning layers with
25 pFETs. It is therefore intended that the invention be not limited to the exact forms described and illustrated, but should be constructed to cover all modifications that may fall within the scope of the appended claims.

CLAIMS:

1. An active pixel sensor (APS) cell structure comprising:
 - a substrate of a first conductivity type material;
 - 5 a transfer gate device comprising a gate dielectric layer formed on the substrate and a dual workfunction gate conductor layer formed on the gate dielectric layer, said dual workfunction gate conductor layer comprising a first doped region of first conductivity type material and a second doped region of a second conductivity type material;
 - 10 a photosensing device formed at or below a substrate surface adjacent said first doped region of said transfer gate device for collecting charge carriers in response to light incident thereto;
 - 15 a diffusion region of a second conductivity type material formed at said substrate surface adjacent said second doped region of said transfer gate device, said transfer gate device forming a channel region enabling charge transfer between said photosensing device and said diffusion region; and,
 - 20 a silicide structure formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material of said transfer gate device and said second doped region of second conductivity type material of said transfer gate device.
2. The APS cell structure as claimed in Claim 1, wherein said photosensing device comprises a photodiode comprising:
 - a collection well of a second conductivity type material formed below said substrate surface; and,
 - 25 a pinning layer of said first conductivity type material formed atop the collection well at said substrate surface.
3. The APS cell structure as claimed in Claim 1, further comprising an isolation region formed adjacent to said pinning layer and collection well.

4. The APS cell structure as claimed in Claim 2, wherein said substrate, said pinning layer of said first conductivity type material, and said first doped region of said dual workfunction gate conductor layer of said transfer gate 5 includes p-type dopant material.

5. The APS cell structure as claimed in Claim 4, wherein said p-type dopant material comprises one of Boron or Indium.

10 6. The APS cell structure as claimed in Claim 2, wherein said collection well of said second conductivity type material, said diffusion region of second conductivity type material, and said second doped region of said dual workfunction gate conductor layer of said transfer gate includes n-type dopant material.

15 7. The APS cell structure as claimed in Claim 6, wherein said n-type dopant material comprises one of Phosphorus, Arsenic or Antimony.

20 8. The APS cell structure as claimed in Claim 6, wherein said dual workfunction gate conductor layer of said gate transfer device comprises a diode.

9. The APS cell structure as claimed in Claim 1, wherein said silicide structure comprises a silicide of Ti, Ta, W, Co, Ni, Pt, Pd or alloys thereof.

25 10. The APS cell structure as claimed in Claim 1, wherein said silicide structure formed over said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material and said second doped region of second conductivity type material of said transfer gate device is smaller in area dimension than an area dimension of said dual 30 workfunction gate conductor layer.

11. The APS cell structure as claimed in Claim 1, wherein said silicide structure formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material and said second doped region of second conductivity type material of said transfer 5 gate device is reduced in length dimension than a length of said dual workfunction gate conductor layer.

12. The APS cell structure as claimed in Claim 1, wherein said transfer gate device defines a conducting channel region where charge transfer is 10 enabled between said collection well and said diffusion region underneath said transfer gate device, said silicide structure being formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material and said second doped region of second conductivity type material of said transfer gate device outside of said area defining 15 said conducting channel region.

13. A method for forming an active pixel sensor (APS) cell structure comprising the steps of:

20 providing a substrate of a first conductivity type material;
forming a transfer gate device comprising a gate dielectric layer formed on the substrate and a dual workfunction gate conductor layer formed on the gate dielectric layer, said dual workfunction gate conductor layer comprising a first doped region of first conductivity type material and a second doped region of a second conductivity type material;
25 forming a photosensing device at or below a substrate surface adjacent said first doped side region of said transfer gate device for collecting charge carriers in response to light incident thereto;
forming a diffusion region of a second conductivity type material at said substrate surface adjacent said second doped region of said transfer gate 30 device, said transfer gate device forming a channel region enabling charge transfer between said photosensing device and said diffusion region; and,

forming a silicide structure atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material of said transfer gate device and said second doped region of second conductivity type material of said transfer gate device.

5

14. The method of forming an APS cell structure as claimed in Claim 13, wherein said photosensing device comprises a photodiode, said forming a photosensing device comprising:

implanting second conductivity type material formed below said 10 substrate surface to form a collection well including said second conductivity type material; and,

forming a photodiode pinning layer of said first conductivity type material atop the collection well at said substrate surface.

15

15. The method of forming an APS cell structure as claimed in Claim 14, further comprising forming an isolation region adjacent to said photodiode pinning layer and collection well.

20

16. The method of forming an APS cell structure as claimed in Claim 14, wherein said substrate, said pinning layer of said first conductivity type material, and said first doped region of said dual workfunction gate conductor layer of said transfer gate includes p-type dopant material.

25

17. The method of forming an APS cell structure as claimed in Claim 16, wherein said p-type dopant material comprises one of Boron or Indium.

30

18. The method of forming an APS cell structure as claimed in Claim 14, wherein said collection well of said second conductivity type material, said diffusion region of second conductivity type material, and said second doped region of said dual workfunction gate conductor layer of said transfer gate includes n-type dopant material.

19. The method of forming an APS cell structure as claimed in
Claim 18, wherein said n-type dopant material comprises one of Phosphorus,
Arsenic or Antimony.

5

20. The method of forming an APS cell structure as claimed in
Claim 13, wherein said silicide structure formed over said dual workfunction gate
conductor layer for electrically coupling said first doped region of first
conductivity type material and said second doped region of second conductivity
10 type material of said transfer gate device is smaller in area dimension than an area
dimension of said dual workfunction gate conductor layer.

21. The method of forming an APS cell structure as claimed in
Claim 13, wherein said silicide structure formed atop said dual workfunction gate
15 conductor layer for electrically coupling said first doped region of first
conductivity type material and said second doped region of second conductivity
type material of said transfer gate device is reduced in length dimension than a
length of said dual workfunction gate conductor layer.

20

22. The method of forming an APS cell structure as claimed in
Claim 13, wherein said transfer gate device defines a conducting channel region
where charge transfer is enabled between said collection well and said diffusion
region underneath said transfer gate device, said silicide structure being formed
atop said dual workfunction gate conductor layer for electrically coupling said
25 first doped region of first conductivity type material and said second doped region
of second conductivity type material of said transfer gate device outside of said
area defining said conducting channel region

23. The method of forming an APS cell structure as claimed in
30 Claim 13, wherein said forming a silicide structure atop said dual workfunction
gate conductor layer comprises:

forming an insulative capping layer on said dual workfunction gate conductor;

opening an area in said insulative capping layer to expose a surface of said dual workfunction gate conductor layer including both said first doped 5 region of first conductivity type material and said second doped region of second conductivity type material;

depositing a metal capable of forming a silicide on an exposed surface portions of said dual workfunction gate conductor layer; and, annealing said metal material to form said silicide structure.

10

24. The method of forming an APS cell structure as claimed in Claim 23 wherein said metal comprises Ti, Ta, W, Co, Ni, Pt, Pd or alloys thereof.

15 25. The method of forming an APS cell structure as claimed in Claim 23 wherein said first annealing is performed at a temperature from about 500°C to about 800°C.

26. A CMOS image sensor array of pixels, each pixel including an active pixel sensor (APS) cell structure comprising:

20 a substrate of a first conductivity type material;
a transfer gate device comprising a gate dielectric layer formed on the substrate and a dual workfunction gate conductor layer formed on the gate dielectric layer, said dual workfunction gate conductor layer comprising a first doped region of first conductivity type material and a second doped region of a 25 second conductivity type material;

a photosensing device formed at or below a substrate surface adjacent said first doped side region of said transfer gate device for collecting charge carriers in response to light incident thereto;

30 a diffusion region of a second conductivity type material formed at said substrate surface adjacent said second doped region of said transfer gate

device, said transfer gate device forming a channel region enabling charge transfer between said photosensing device and said diffusion region; and,

5 a silicide structure formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material of said transfer gate device and said second doped region of second conductivity type material of said transfer gate device.

27. A camera device comprising:

10 an image sensor array of pixels, each pixel including an active pixel sensor (APS) cell structure, each said APS cell structure comprising:
a substrate of a first conductivity type material;
a transfer gate device comprising a gate dielectric layer formed on the substrate and a dual workfunction gate conductor layer formed on the gate dielectric layer, said dual workfunction gate conductor layer comprising a first 15 doped region of first conductivity type material and a second doped region of a second conductivity type material;
a photosensing device formed at or below a substrate surface adjacent said first doped region of said transfer gate device for collecting charge carriers in response to light incident thereto;
20 a diffusion region of a second conductivity type material formed at said substrate surface adjacent said second doped region of said transfer gate device, said transfer gate device forming a channel region enabling charge transfer between said photosensing device and said diffusion region; and,
a silicide structure formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material of said transfer gate device and said second doped region of second conductivity type material of said transfer gate device.

25 30 28. The camera device as claimed in Claim 27, wherein said photosensing device comprises a photodiode comprising:

a collection well of a second conductivity type material formed below said substrate surface; and,

a pinning layer of said first conductivity type material formed atop the collection well at said substrate surface.

5

29. The camera device as claimed in Claim 27, further comprising an isolation region formed adjacent to said pinning layer and collection well.

10 30. The camera device as claimed in Claim 28, wherein said substrate, said pinning layer of said first conductivity type material, and said first doped region of said dual workfunction gate conductor layer of said transfer gate includes p-type dopant material.

15 31. The camera device as claimed in Claim 30, wherein said p-type dopant material comprises one of Boron or Indium.

20 32. The camera device as claimed in Claim 28, wherein said collection well of said second conductivity type material, said diffusion region of second conductivity type material, and said second doped region of said dual workfunction gate conductor layer of said transfer gate includes n-type dopant material.

33. The camera device as claimed in Claim 32, wherein said n-type dopant material comprises one of Phosphorus, Arsenic or Antimony.

25

34. The camera device as claimed in Claim 32, wherein said dual workfunction gate conductor layer of said gate transfer device comprises a diode.

30 35. The camera device as claimed in Claim 27, wherein said silicide structure comprises a silicide of Ti, Ta, W, Co, Ni, Pt, Pd or alloys thereof.

36. The camera device as claimed in Claim 27, wherein said silicide structure formed over said dual workfunction gate conductor layer for electrically coupling said first doped region of first conductivity type material and said second doped region of second conductivity type material of said transfer 5 gate device is smaller in area dimension than an area dimension of said dual workfunction gate conductor layer.

37. The camera device as claimed in Claim 27, wherein said silicide structure formed atop said dual workfunction gate conductor layer for 10 electrically coupling said first doped region of first conductivity type material and said second doped region of second conductivity type material of said transfer gate device is reduced in length dimension than a length of said dual workfunction gate conductor layer.

15 38. The camera device as claimed in Claim 27, wherein said transfer gate device defines a conducting channel region where charge transfer is enabled between said collection well and said diffusion region underneath said transfer gate device, said silicide structure being formed atop said dual workfunction gate conductor layer for electrically coupling said first doped region 20 of first conductivity type material and said second doped region of second conductivity type material of said transfer gate device outside of said area defining said conducting channel region.

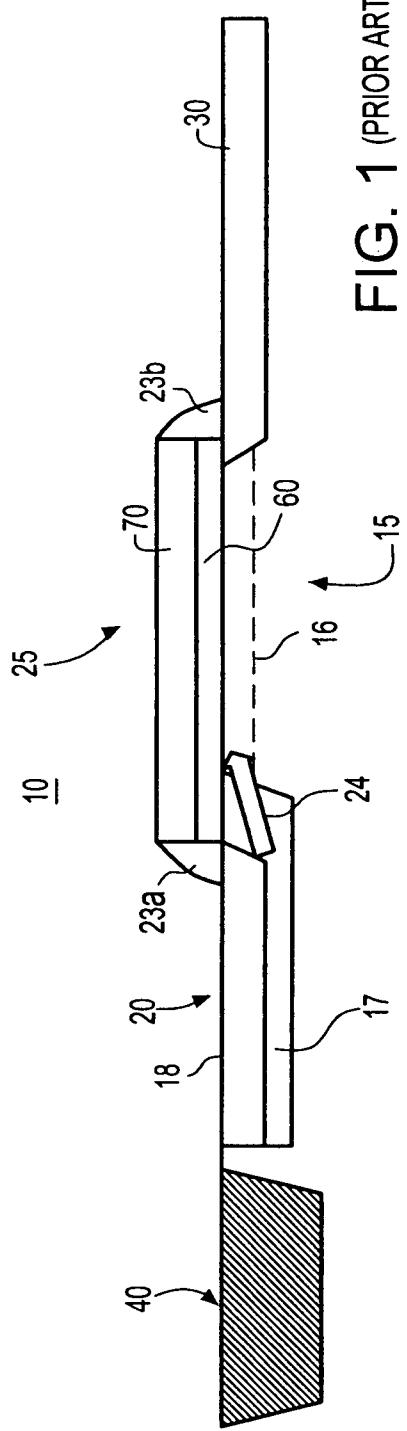


FIG. 1 (PRIOR ART)

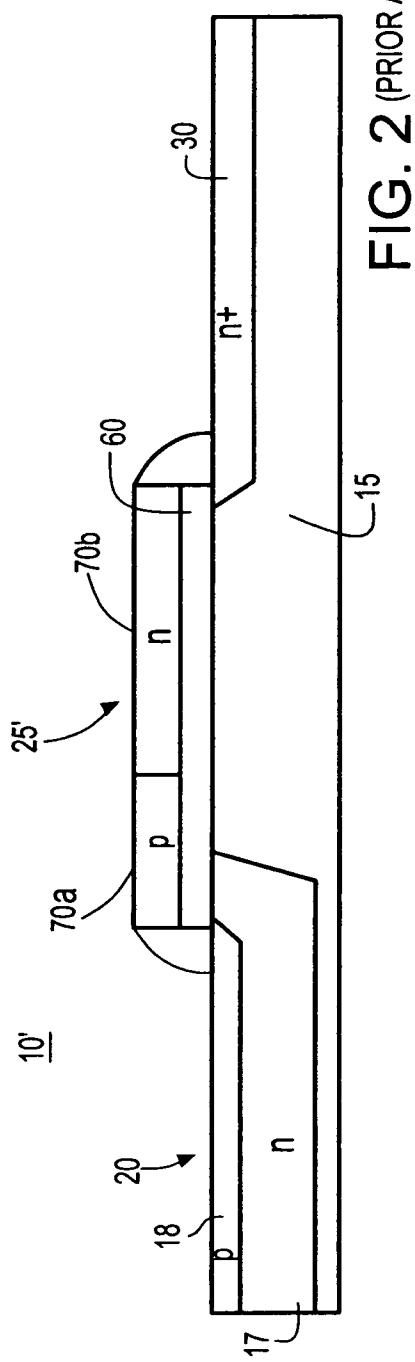


FIG. 2 (PRIOR ART)

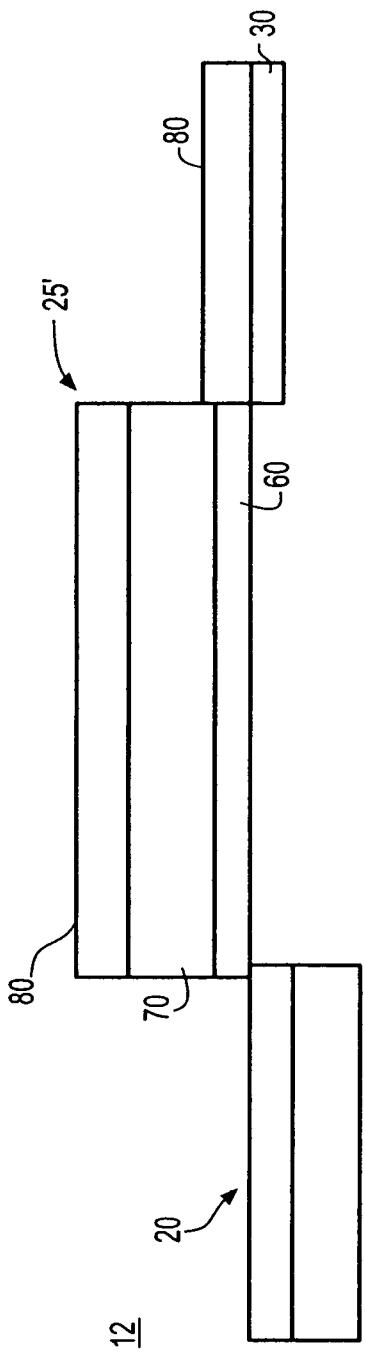


FIG. 3A (PRIOR ART)

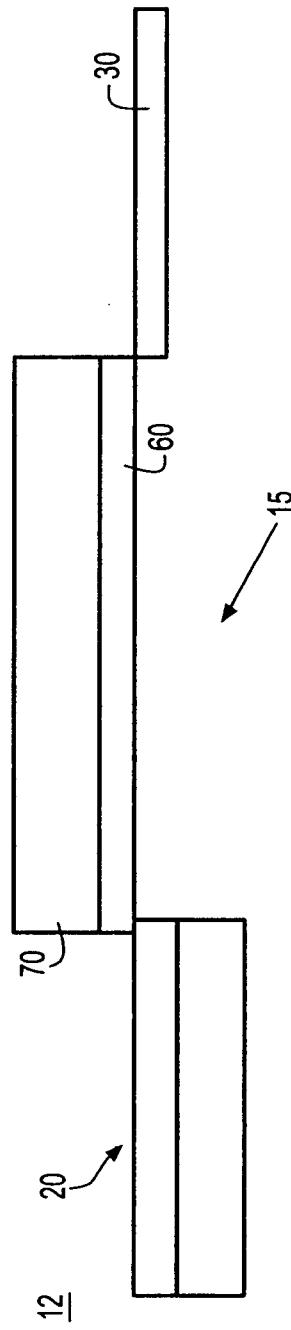


FIG. 3B (PRIOR ART)

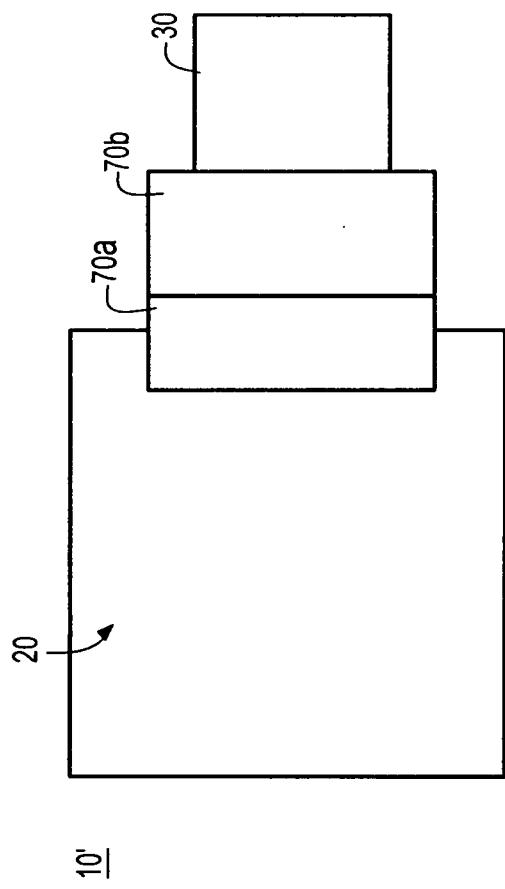


FIG. 3C
(PRIOR ART)

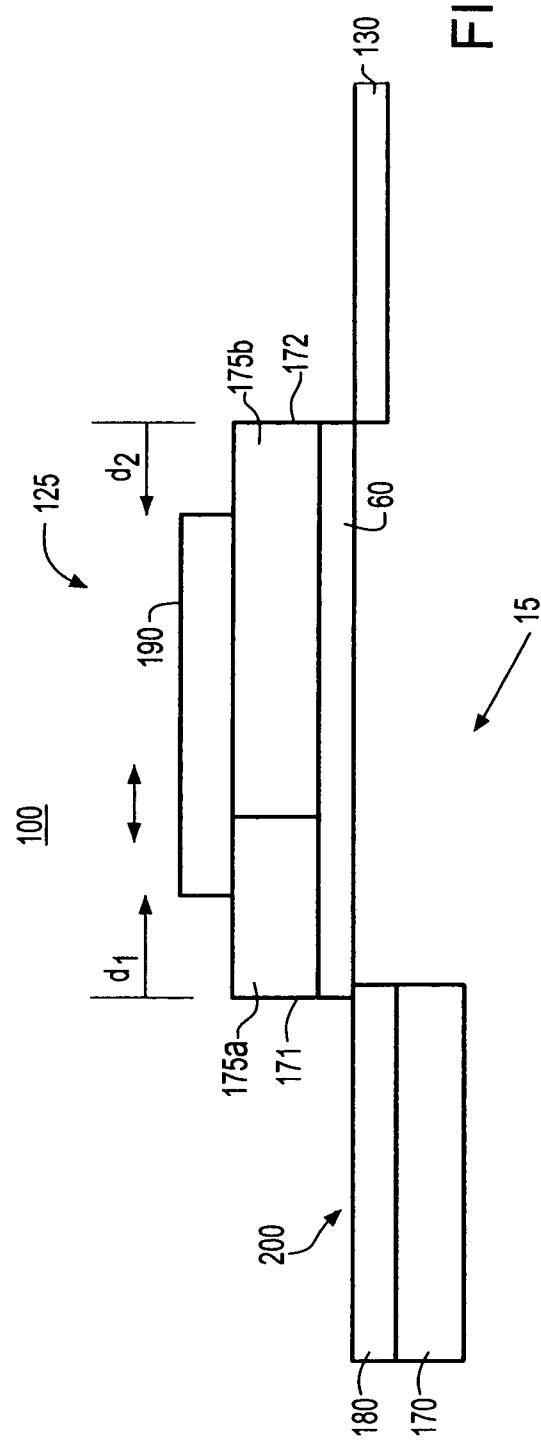


FIG. 4

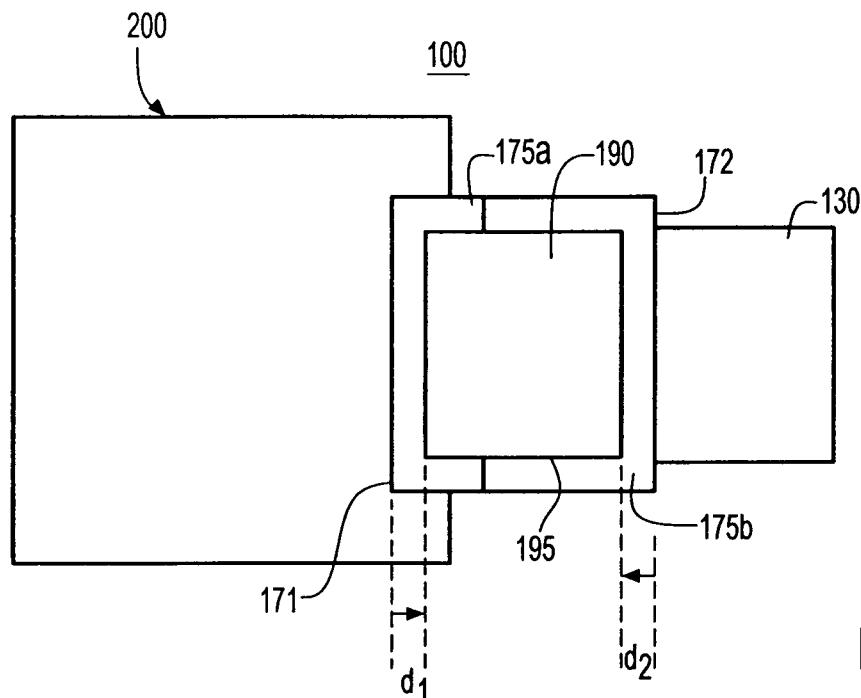


FIG. 5A

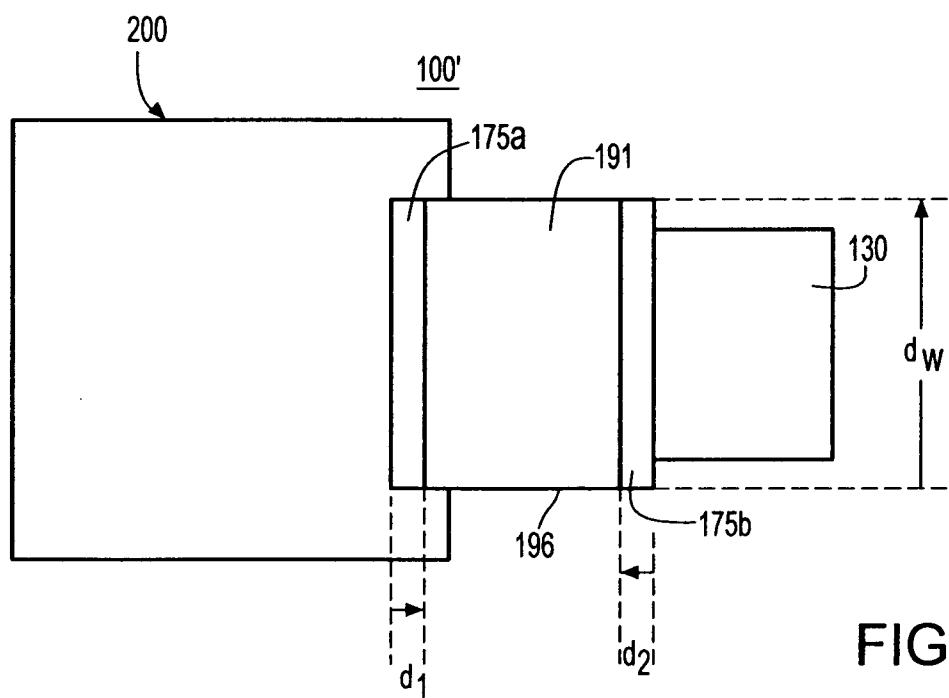


FIG. 5B

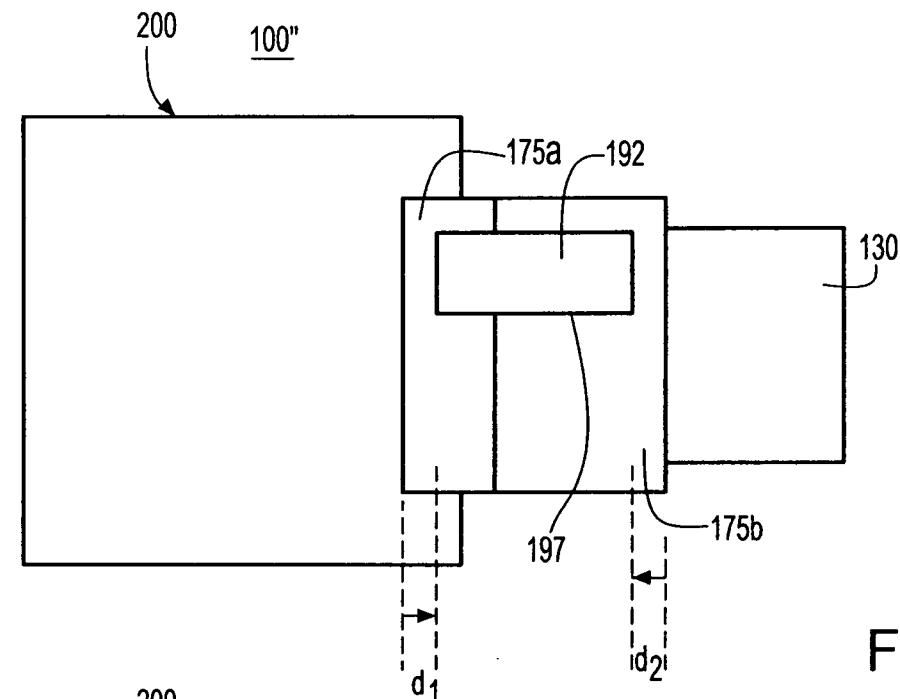


FIG. 5C

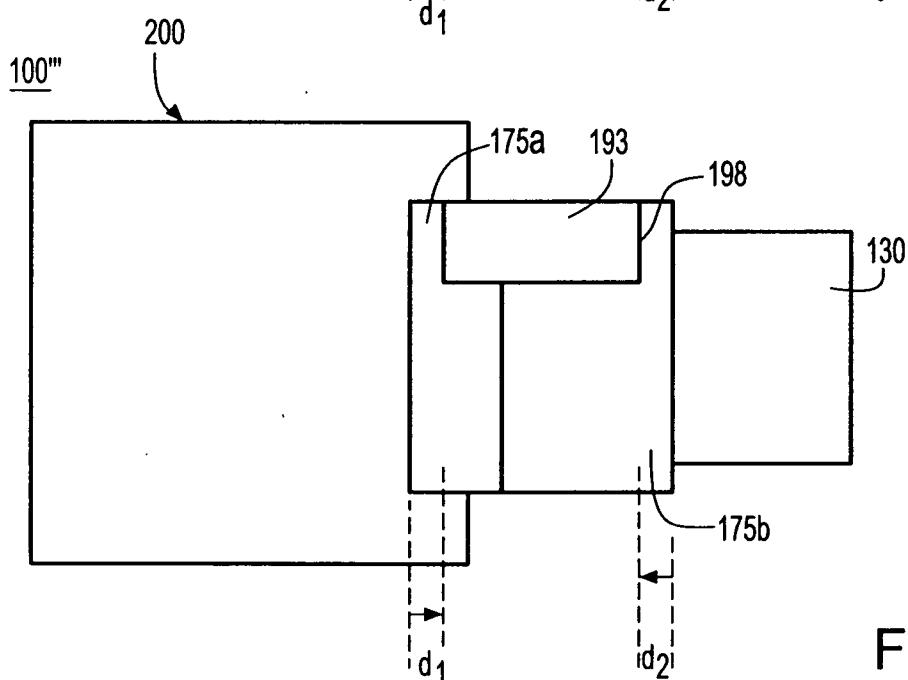


FIG. 5D

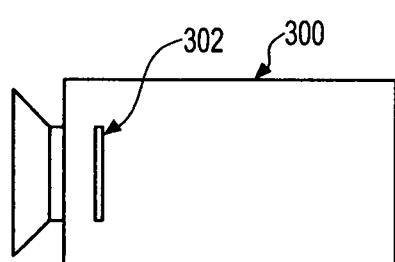


FIG. 6