




(86) Date de dépôt PCT/PCT Filing Date: 2003/05/30
(87) Date publication PCT/PCT Publication Date: 2003/12/11
(45) Date de délivrance/Issue Date: 2013/05/21
(85) Entrée phase nationale/National Entry: 2004/11/12
(86) N° demande PCT/PCT Application No.: US 2003/017167
(87) N° publication PCT/PCT Publication No.: 2003/101306
(30) Priorité/Priority: 2002/05/31 (US60/384,756)

(51) Cl.Int./Int.Cl. *A61B 10/00* (2006.01),
A61B 17/32 (2006.01), *A61B 17/34* (2006.01),
A61B 17/00 (2006.01), *A61B 17/16* (2006.01),
A61B 19/00 (2006.01), *A61M 1/00* (2006.01)
(72) Inventeur/Inventor:
MILLER, LARRY J., US
(73) Propriétaire/Owner:
VIDACARE CORPORATION, US
(74) Agent: KIRBY EADES GALE BAKER

(54) Titre : DISPOSITIF ET PROCEDE PERMETTANT D'ACCEDER A LA MOELLE OSSEUSE
(54) Title: APPARATUS AND METHOD TO ACCESS THE BONE MARROW

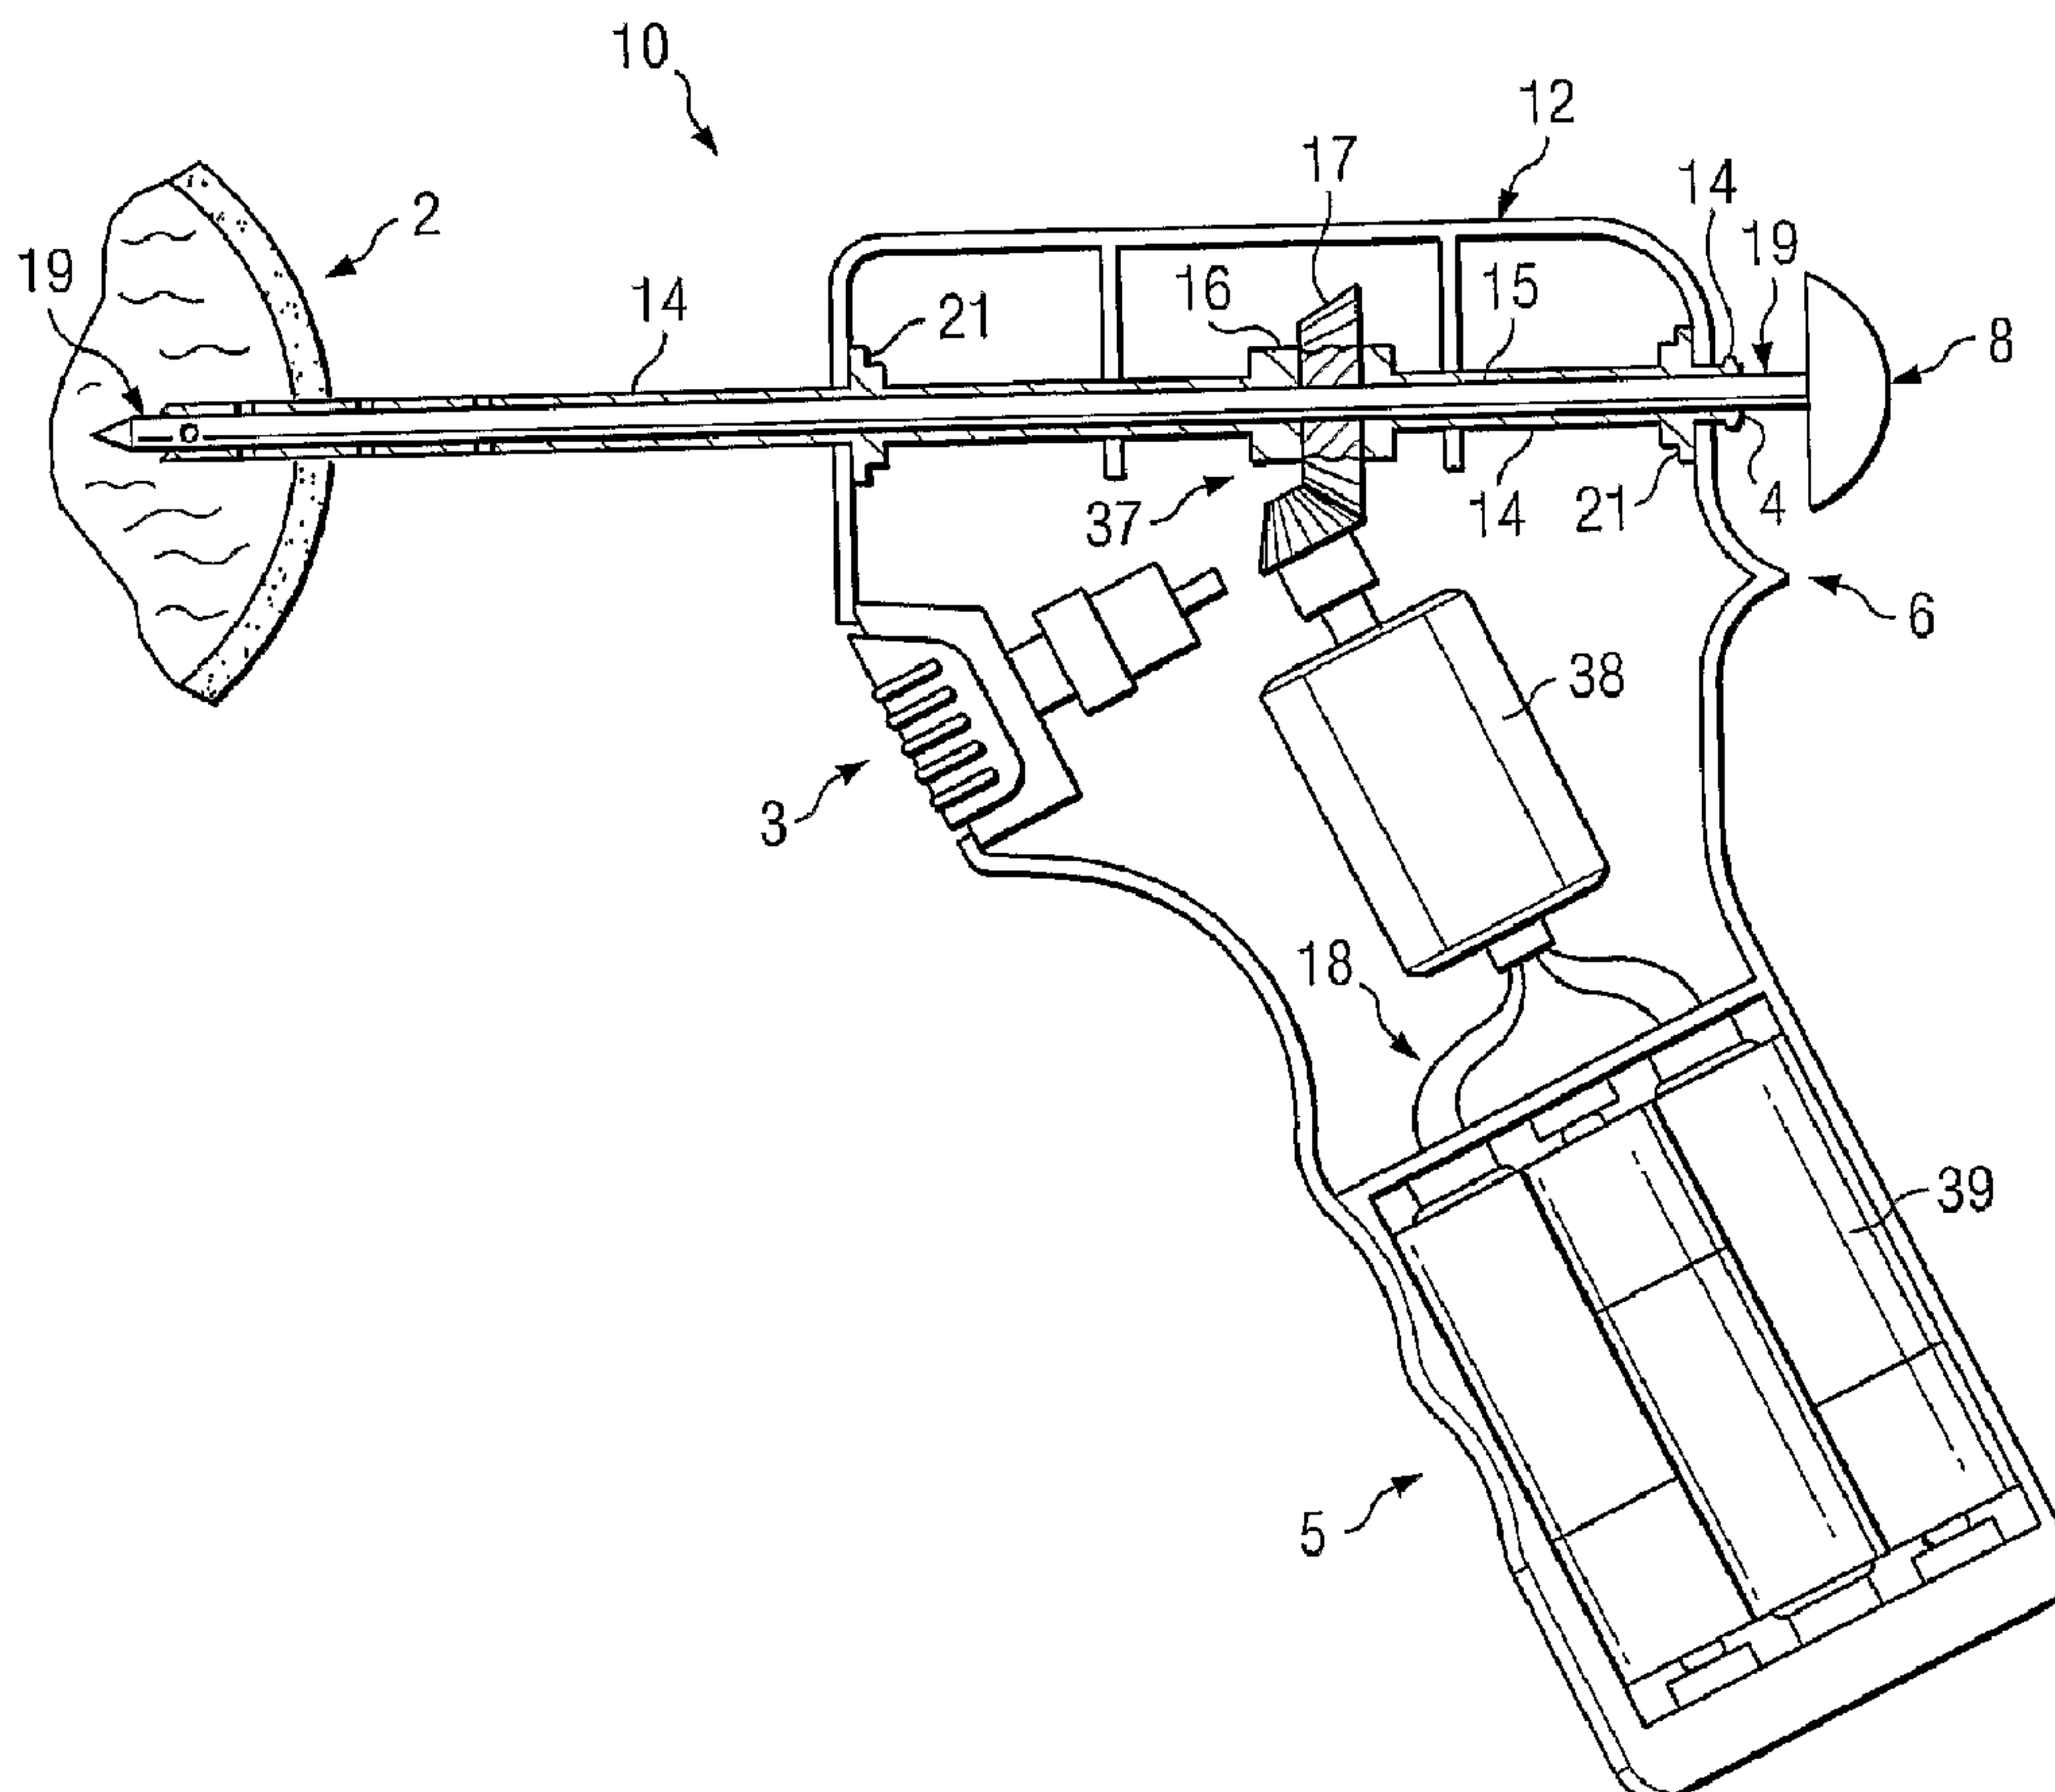

(57) Abrégé/Abstract:

An apparatus for removing portions of bone marrow from a bone is provided. The apparatus includes a housing and a hollow drive shaft operable to engage a gear assembly. The hollow drive shaft includes a first end operable to penetrate the bone and a second



(57) **Abrégé(suite)/Abstract(continued):**

end operable to allow retrieval of portions of bone and bone marrow. The apparatus also includes a removable trocar. The removable trocar includes an inner channel operable to convey portions of bone and bone marrow. The gear assembly is able to engage and rotate the hollow drive shaft. A motor operable to drive the hollow drive shaft into the bone marrow by rotation of the hollow drive shaft and a power supply and associated circuitry operable to power the motor are also included.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/101306 A1(51) International Patent Classification⁷: **A61B 10/00**,
17/34

(21) International Application Number: PCT/US03/17167



(22) International Filing Date: 30 May 2003 (30.05.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/384,756 31 May 2002 (31.05.2002) US(71) Applicant: **VIDACARE CORPORATION** [US/US];
722 'A' Isom Road, San Antonio, TX 78216 (US).(72) Inventor: **MILLER, Larry, J.**; 16260 Highway 46,
Spring Branch, TX 78070 (US).(74) Agent: **FELGER, Thomas, R.**; Baker Botts L.L.P., 1500
San Jacinto Center, 98 San Jacinto Blvd., Austin, TX
78701-4039 (US).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ,
VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**Declarations under Rule 4.17:**— *as to applicant's entitlement to apply for and be granted
a patent (Rule 4.17(ii)) for the following designations AE,
AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,**[Continued on next page]*

(54) Title: APPARATUS AND METHOD TO ACCESS THE BONE MARROW

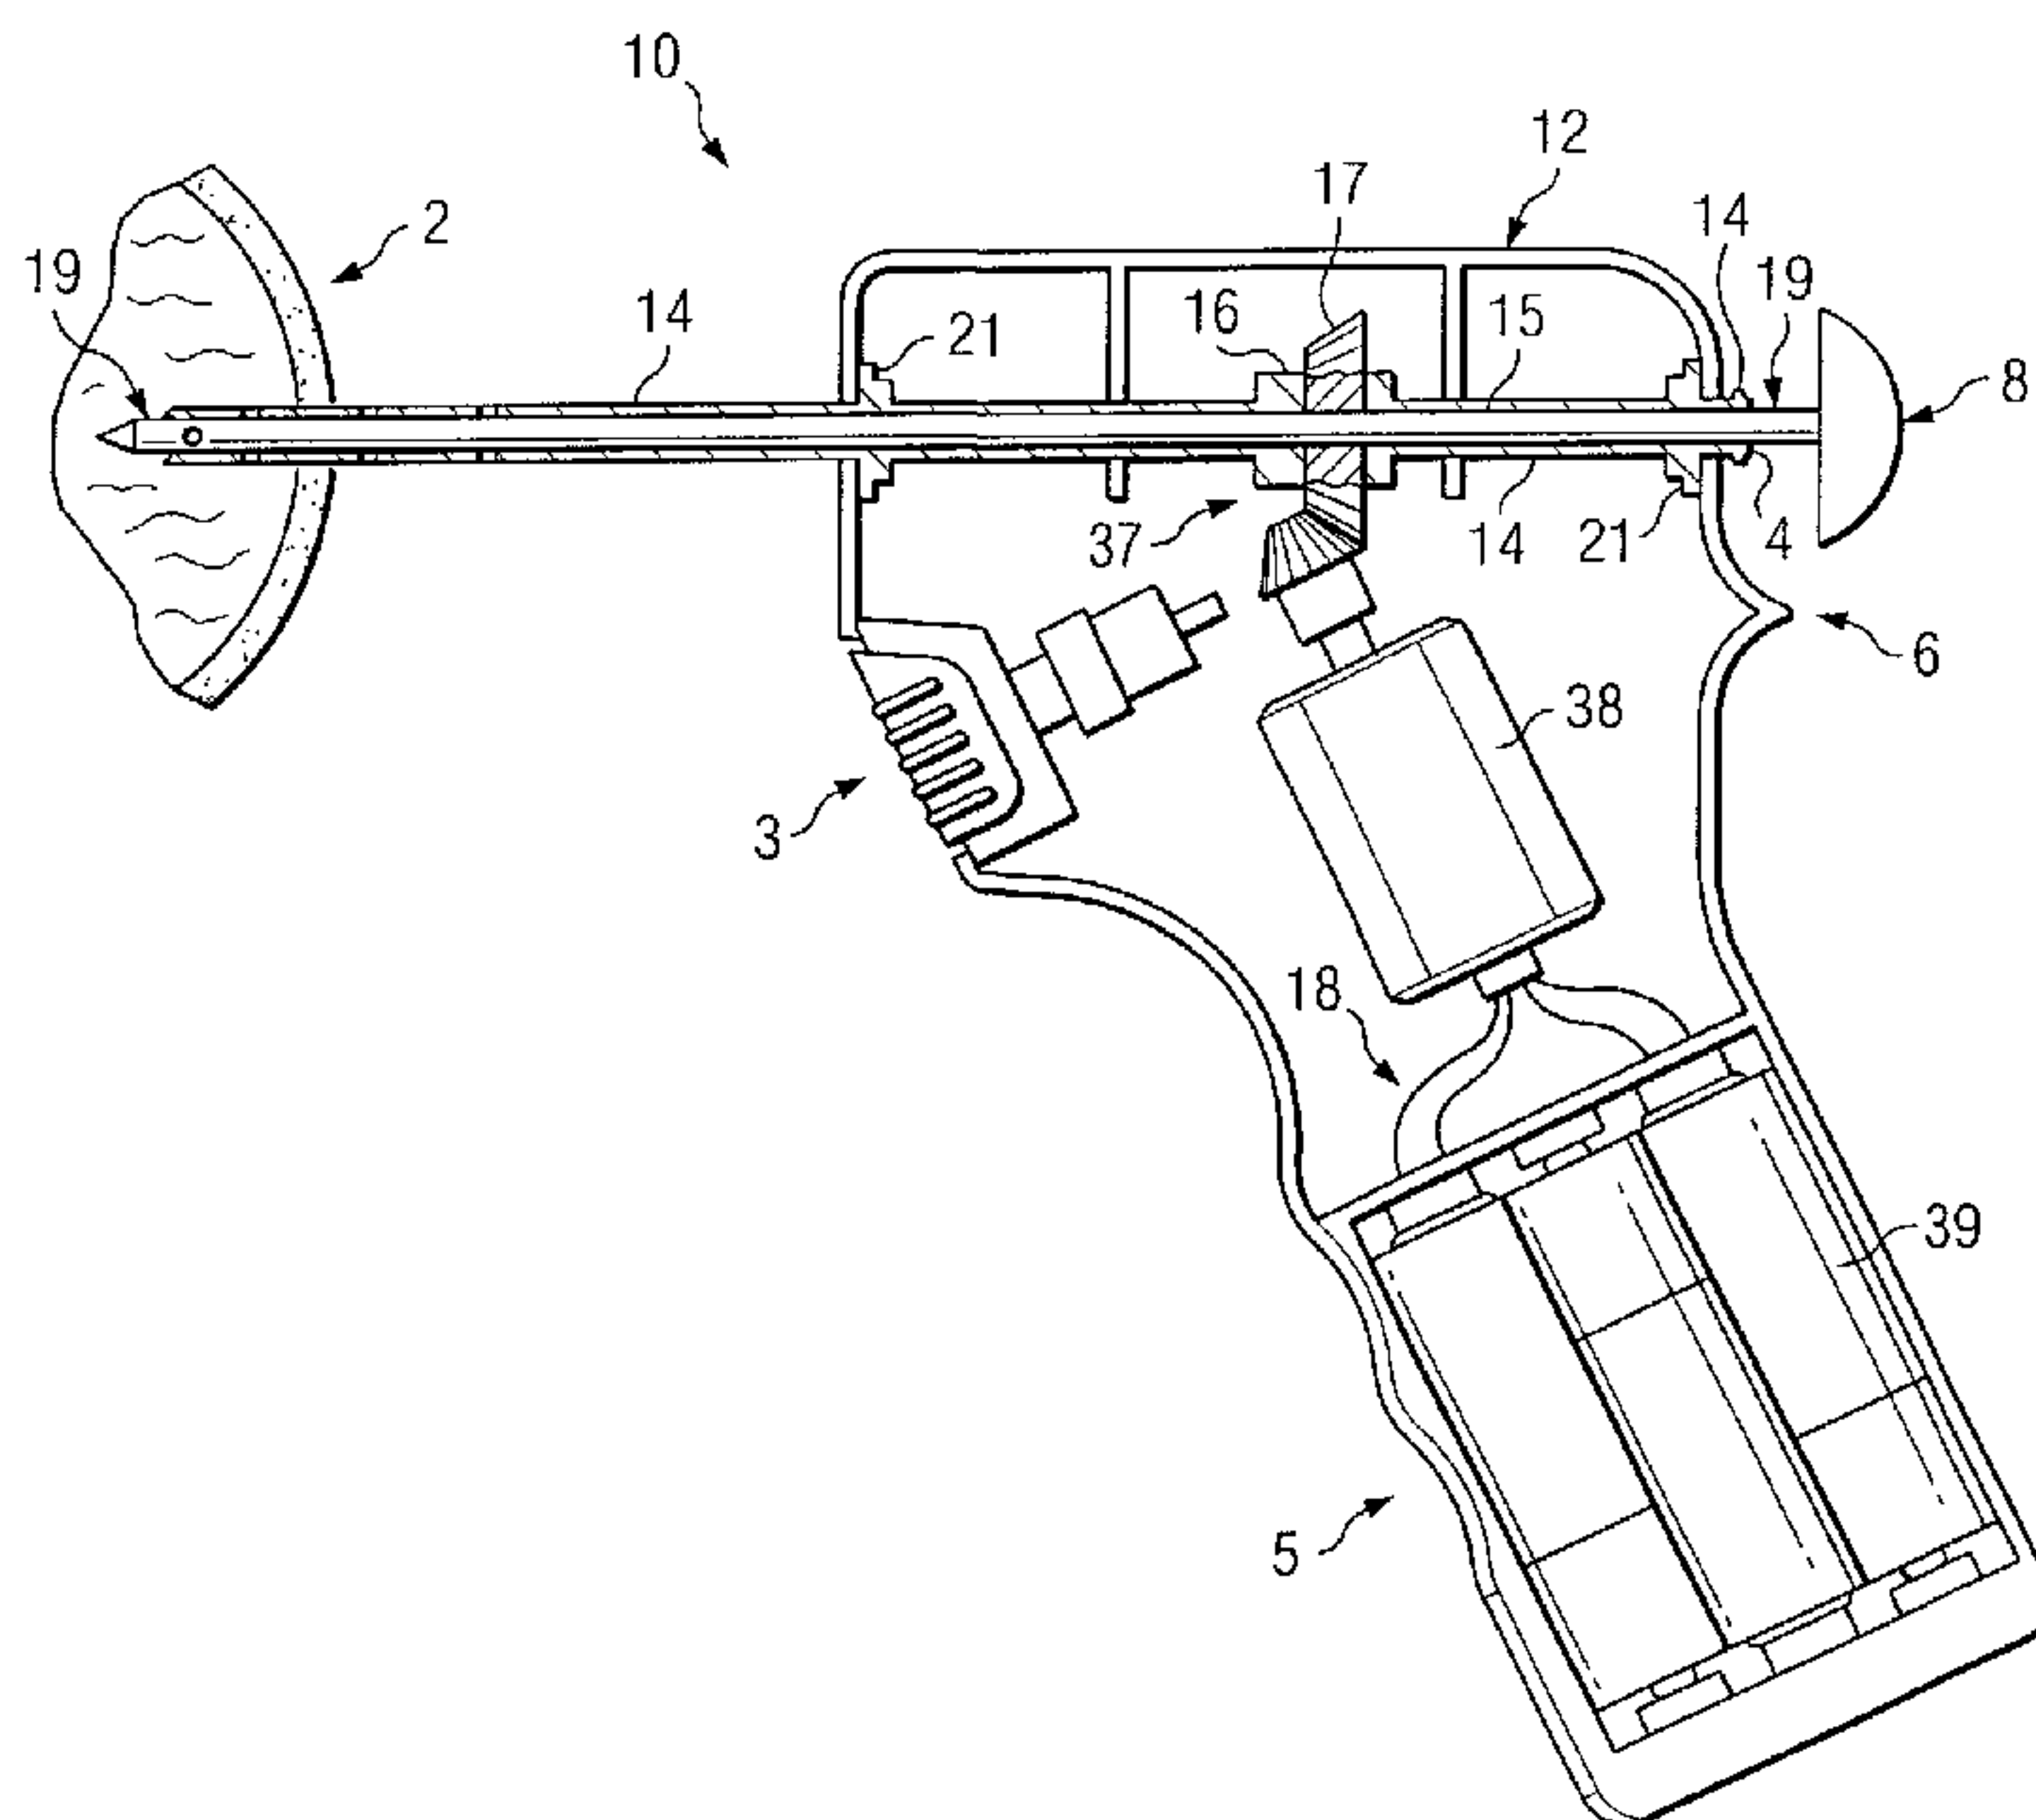(57) **Abstract:** An apparatus for removing portions of bone marrow from a bone is provided. The apparatus includes a housing and a hollow drive shaft operable to engage a gear assembly. The hollow drive shaft includes a first end operable to penetrate the bone and a second end operable to allow retrieval of portions of bone and bone marrow. The apparatus also includes a removable trocar. The removable trocar includes an inner channel operable to convey portions of bone and bone marrow. The gear assembly is able to engage and rotate the hollow drive shaft. A motor operable to drive the hollow drive shaft into the bone marrow by rotation of the hollow drive shaft and a power supply and associated circuitry operable to power the motor are also included.**WO 03/101306 A1**

WO 03/101306 A1

UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD TO ACCESS THE BONE MARROW

TECHNICAL FIELD

The present invention is related to an apparatus and method for withdrawing specimens from the bone or bone marrow. The apparatus and method can be used to extract
5 stem cells or bone marrow for transplantation or diagnostic purposes.

BACKGROUND OF THE INVENTION

There are many clinical conditions where it is important to be able to access and retrieve bone marrow.
10 In some cases it may be necessary to treat diseases with a bone marrow or stem cell transplant to restore functioning blood cells in the body after high-dose chemotherapy. Such conditions may include acute leukemias, brain tumors, breast cancer, Hodgkin's
15 disease, multiple myeloma, neuroblastoma, non-Hodgkin's lymphomas, ovarian cancer, sarcoma and testicular cancer. In other cases it is necessary to access the bone marrow to obtain a sample of the marrow for diagnostic testing. These conditions may include cancer of any type and
20 hematologic disease of any origin.

Current techniques for gaining access to bone marrow can be difficult, traumatic and occasionally dangerous, depending on the site selected for harvest, the operator's expertise and the patient's anatomy. In
25 general, the devices available for gaining access to the medullary cavity of the bone, where the bone marrow is located, include a trocar-fitted needle, with handles to facilitate application of pressure and rotation. These types of devices require substantial force to break

through the outer cortex of the bone by a fracturing technique. The exertion of high pressure upon the needle causes pain for the patient and often damages the tip of the needle. This is particularly a problem when

5 harvesting from the sternum of a patient because the excess force can cause penetration through the sternum and can damage underlying structures such as the heart and great vessels.

Another disadvantage of current techniques to access
10 the bone marrow is that frequently more than one penetration site into the bone is required to retrieve enough bone marrow to either perform diagnostic tests or for transplantation purposes. To retrieve an adequate sample of bone marrow for either a bone marrow or stem
15 cell transplant, a physician may need to put the needle into several different parts of the pelvis which may require up to six needle puncture sites or more. This multiple-pass requirement can be extremely painful for a patient and may deter people from donating bone marrow.
20 This technique of using multiple passes can also cause fatigue in smaller operators who may lack strength to complete multiple-pass procedures.

Retrieving bone samples for diagnostic purposes is likewise difficult. Occasionally the core sample of bone
25 is not retrieved because it is not extracted successfully with a standard biopsy needle. Thus, multiple attempts may be necessary to obtain a satisfactory bone or bone marrow biopsy.

Current techniques require that biopsy needles be
30 forced by manual pressure into bone. These techniques may have undesirable side effects such as damaging a

needle tip or having the needle slide off the proposed bone target and into organs or soft tissues.

SUMMARY OF THE INVENTION

There is a need for an apparatus and method to
5 access the bone marrow that is minimally traumatic to the patient and that allows a sufficient amount of bone marrow to be removed the first time the bone is penetrated. In accordance with teachings of the present invention, an apparatus and method for the removal of
10 portions of bone marrow from a bone are provided.

Certain exemplary embodiments can provide a hollow drive shaft assembly operable to remove bone marrow from a bone for diagnostic or therapeutic purposes comprising: an outer hollow drive shaft operable to penetrate the
15 bone and associated bone marrow; a gear attached to the outer hollow drive shaft and operable to couple the outer hollow drive shaft to a motor such that the motor can rotate the outer hollow drive shaft; the outer hollow drive shaft having an inner channel operable to convey
20 bone marrow specimens therethrough for the diagnostic or therapeutic purposes; the hollow drive shaft having a first end operable to penetrate the bone in response to rotation of the hollow drive shaft; and the hollow drive shaft having a second end through which bone marrow
25 specimens can be removed while the outer hollow drive shaft is coupled to the motor.

3a

Certain exemplary embodiments can provide a hollow drive shaft assembly operable to remove bone marrow from a bone for transplantation purposes comprising: an outer hollow drive shaft operable to penetrate the bone and
5 associated bone marrow; a gear attached to the outer hollow drive shaft and operable to couple the outer hollow drive shaft to a motor such that the motor can rotate the outer hollow drive shaft; the outer hollow drive shaft having an inner channel operable to convey
10 bone marrow specimens therethrough for the transplantation purpose; the hollow drive shaft having a first end operable to penetrate the bone in response to rotation of the hollow drive shaft; and the hollow drive shaft having a second end through which bone marrow
15 specimens can be removed while the outer hollow drive shaft is coupled to the motor.

In one embodiment the apparatus includes a housing and a hollow drive shaft operable to engage a gear assembly. The hollow drive shaft includes a first end
20 operable to penetrate the bone and a second end operable to allow retrieval of portions of bone and bone marrow. The hollow drive shaft also includes an inner channel operable to convey portions of bone and bone marrow. The apparatus also includes a removable trocar with a first
25 end operable to penetrate the bone and a second end. The removable trocar includes an inner channel operable to convey portions of bone and bone marrow. The gear assembly is able to engage and rotate the hollow drive shaft. A motor operable to engage the gear assembly and
30 drive the hollow drive shaft into the bone marrow by rotation of the hollow drive shaft and a power supply and associated circuitry operable to power the motor are also included.

3b

In another embodiment, an apparatus for removing portions of bone and bone marrow from a bone for diagnostic or therapeutic purposes is provided that includes a housing and a hollow drive shaft operable to
5 engage a gear assembly. The hollow drive shaft includes

a first end operable to attach to a penetrator and a second end operable to allow retrieval of portions of bone marrow. The hollow drive shaft also includes an inner channel operable to convey portions of bone marrow to an operator. The detachable penetrator is able to penetrate the bone marrow and collect specimens of bone marrow. Also included is a trocar having a first end operable to penetrate the bone marrow and a second end. The trocar can be removably inserted into the inner channel of the hollow drive shaft. A connector operable to releasably attach the penetrator to a hollow drive shaft is also included. A gear assembly operable to engage and rotate the hollow drive shaft is provided. A motor operable to engage the reduction gear assembly and drive the penetrator into the bone marrow by rotation of the hollow drive shaft and a power supply and associated circuitry operable to power the motor are also provided.

In a further embodiment of the invention a hollow drive shaft assembly operable to remove bone or tissue from a bone marrow is provided. An outer hollow drive shaft and a removable inner trocar operable to penetrate the bone marrow are included. The outer hollow drive shaft is removably coupled to a gear assembly and the outer hollow drive shaft includes an inner channel operable to convey portions of bone and bone marrow.

In a further embodiment of the invention a method for performing a bone marrow biopsy is provided that includes inserting a hollow drive shaft and trocar into the bone marrow by means of a powered apparatus. The trocar may be removed from the hollow drive shaft and suction may be applied to an inner channel of the hollow drive shaft so that portions of bone and bone marrow may

be retrieved from the inner channel of the hollow drive shaft.

An alternative method of performing a bone marrow biopsy is provided that includes attaching a penetrator to a hollow drive shaft and inserting an inner trocar into the hollow drive shaft and penetrator. The penetrator is then inserted into the bone marrow by a powered apparatus. The inner trocar is removed from the hollow drive shaft and penetrator, and suction may be applied to the inner channel of the hollow drive shaft to retrieve portions of bone marrow. In a particular embodiment of the invention the site of bone marrow biopsy is controlled by a second end of the trocar comprising a ratcheted gear operable to control the depth of sampling from the bone marrow.

In a further embodiment of the invention, a method of harvesting bone marrow for transplantation is provided that includes inserting a hollow drive shaft and inner trocar into the bone marrow by means of a powered apparatus coupled with the hollow drive shaft. The inner trocar is removed from the hollow drive shaft. A suction is then applied to the inner channel of the hollow drive shaft to retrieve portions of bone marrow. The inner trocar may be replaced into the hollow drive shaft. The steps of removing the inner trocar from the hollow drive shaft and applying suction to the inner channel of the hollow drive shaft to retrieve portions of bone marrow may be repeated until a sufficient quantity of bone marrow has been harvested for bone marrow transplantation.

In a particular embodiment of the invention, the site of harvest within the bone marrow may be changed by

a ratcheted gear attached to the second end of the trocar. The gear may be used to change the depth of sampling from the bone marrow.

BRIEF DESCRIPTION OF THE DRAWINGS

5 A more complete and thorough understanding of the present embodiments and advantages thereof may be acquired by referring to the following description taken in conjunction with the accompanying drawings, in which like reference numbers indicate like features, and
10 wherein:

FIGURE 1A illustrates an embodiment of an apparatus for removing a bone marrow sample shown in longitudinal cross section.

15 FIGURE 1B illustrates an embodiment of a hollow drive shaft of the current invention.

FIGURE 1C illustrates an embodiment of a trocar of the current invention.

FIGURE 1D illustrates an embodiment of an apparatus of the current invention.

20 FIGURE 1E illustrates an embodiment of an apparatus for removing a bone marrow sample shown in longitudinal cross section.

FIGURE 2A illustrates an example of a hollow drive shaft or penetrator of the current invention.

25 FIGURE 2B illustrates an example of a hollow drive shaft or penetrator of the current invention.

FIGURE 2C illustrates an example of an inner trocar of the current invention.

30 FIGURE 2D illustrates an example of a hollow drive shaft or penetrator of the current invention.

FIGURE 3A illustrates an example of an attachment of the current invention.

FIGURE 3B is an illustration of an attachment of the current invention.

FIGURE 4A is an illustration of a hollow drive shaft and trocar of the current invention.

5 FIGURE 4B is an illustration of a hollow drive shaft and trocar of the current invention.

FIGURE 4C is an illustration of a hollow drive shaft and trocar of the current invention in cross section.

10 FIGURE 4D is an illustration of a hollow drive shaft and trocar of the current invention in cross section.

FIGURE 5A-C illustrates example gear assemblies of the current invention.

DETAILED DESCRIPTION OF THE INVENTION

Preferred embodiments of the invention and its
15 advantages are best understood by reference to FIGURES 1A-5C herein like numbers refer to same and like parts.

FIGURE 1A, illustrates an example of an apparatus for removing bone marrow from a bone. Apparatus 10 may be used to obtain a sample of bone marrow from any
20 suitable bone in the body such as the iliac crest or the sternum. In one embodiment, apparatus 10 includes housing 12, a hollow drive shaft 14, removable trocar 19, gear assembly 37, motor 38 and power supply 39. Housing 12 may include on/off switch 3 handle 5 and guard 6.
25 Handle 5 may be angled downward to allow ease of operation and also to allow end of hollow drive shaft 14 to turn without obstruction from a hand. Housing 12 encompasses power source 39, motor 38 and associated circuitry 18, hollow drive shaft 14 and gear assembly 37.
30 Hollow drive shaft 14 includes inner channel 15 and collar 16. Gear 17 of gear assembly 37 engages collar 16

of hollow drill shaft 14 and thereby rotates hollow drive shaft 14.

Removable trocar 19 may be inserted into inner channel 15 of hollow drive shaft 14. Trocar 19 is hollow and has an inner channel operable to convey bone and bone marrow samples. Trocar 19 may have a handle 8 that can be used to tighten trocar 19 in place or to remove it from inner channel 15 of hollow drive shaft 14. Hollow drive shaft 14 may include luer lock connector 4 at the point where it exits housing 12. A luer lock connector may allow hollow drive shaft to connect to a suction apparatus such as a tubing or syringe or to any other suitable apparatus that would assist in obtaining a bone or bone marrow biopsy specimen. An access port, such as a suction port may also releasably attach to an end of hollow drive shaft where it exits housing 12, for example to a luer lock connector. Such an attachment may be a plug, a port, a suction apparatus, swivel port or other adapter.

FIGURE 1B shows hollow drive shaft 14 removed from apparatus 10. In one embodiment, hollow drive shaft 14 may include one or more thrust bearings 21. Thrust bearings may absorb pressure from the thrust of a drive shaft into bone during drilling. Also included in hollow drive shaft are side ports shown in further detail in FIGURE 2. FIGURE 1C illustrates removable trocar 19 which includes handle 8. Handle 8 may be formed into a shape that is easily grasped and turned during the process of obtaining a biopsy. Removable trocar 19 may include one or more side ports operable to access a bone marrow specimen shown in greater detail in FIGURE 2.

In one embodiment, shown in FIGURE 1D, housing 12 may include a releasable hatch or door 12a that may be opened to allow hollow drive shaft and attached gear 17 to be removed after use of apparatus 10. This may be desirable where apparatus 10 is reusable and hollow drill shaft 14 and removable trocar 19 are disposable. A releasable hatch or door may also be desirable to clean the inside of apparatus 10.

In another embodiment of the current invention, shown in FIGURE 1E, detachable penetrator 20 may be attached to hollow drive shaft 14 by means of connector 36 and drilled into bone 2. In this embodiment, removable trocar 19 may be inserted into inner channel 15 of hollow drive shaft 14 and into the hollow channel of penetrator 20. Penetrator 20 may include side ports to permit access to bone and bone marrow samples during a biopsy or bone marrow harvest procedure. One advantage of an embodiment that includes a detachable penetrator is it allows penetrators of various sizes and configurations to be attached to hollow drive shaft 14. In this embodiment, connector 36 includes an inner channel operable to allow retrieval of bone and bone marrow specimens.

FIGURES 2A-D show an end 22 of either a hollow drive shaft or a penetrator that is suitable to penetrate a bone. FIGURE 2A, illustrates hollow drive shaft or penetrator end 22 which may include multiple sampling ports 23 through which bone marrow or other biopsy material may be aspirated. Sampling ports 23a, 23b and 23c are each operable to retrieve a portion of bone marrow. When removable trocar end 24 is in position within inner channel of hollow drive shaft end 22

sampling port 13 of removable trocar end 24 may align with sampling port 23a, 23b, or 23c. An operator may determine the level in the bone marrow where a specimen is taken or which sampling port (23a, 23b or 23c) to align with trocar sampling port 13. Hollow drive shaft or penetrator end 22 may include serrated tip 25 as shown in FIGURE 2B or any other suitable configuration for sampling bone or bone marrow.

FIGURE 2C shows removable trocar end 24 having a sampling port 23 near tip 27 through which a sample of bone or bone marrow can be retrieved as well as through a sampling port 23a, 23b or 23c. When sampling port 23a, 23b or 23c of hollow drive shaft or penetrator 22 is aligned with sampling port 13 of removable trocar 24, a portion of bone marrow may be suctioned out of the bone. Removable trocar 24 may be removed allowing bone marrow to be suctioned through one or more sampling ports 23 of hollow drive shaft or penetrator 22 at different sites in a bone marrow cavity sequentially. FIGURE 2D shows another example of tip 25 of hollow drive shaft or penetrator end 22 having internal threads 26 that are able to engage a specimen of bone and core it out as hollow drive shaft or penetrator 22 is drilled into bone. Threads 26 may engage and adhere to a portion of bone or to a semisolid substance such as bone marrow and maintain contact with the specimen so it may be successfully retrieved.

FIGURE 3A shows operating mechanism 32 that may be included in some embodiments of the invention and may be attached to hollow drive shaft 14 and manipulated to change the depth in a bone marrow where sampling occurs. Operating mechanism 32 includes handle 35 and gear 33.

Gear 33 engages gear 34 attached to trocar 19. Suction port 28, shown attached to trocar 19, may be used to retrieve portions of bone marrow from inner channel 15 of hollow drive shaft 14.

5 FIGURE 3B shows an example suction port 28 that may be connected to trocar 19 where it exits housing 12. In one embodiment of the invention a suction port or suction swivel apparatus may also be connected to the hollow drive shaft 14. This feature allows a suction apparatus
10 of the type well known to one skilled in the art to be used to obtain bone marrow samples. Suction port 28 may also be configured to attach directly to a penetrator for example in an embodiment of the invention where the penetrator is detached from the housing before it is
15 accessed for bone marrow retrieval. Also shown in FIGURE 3B is a suction swivel apparatus 45 that allows a suction tube 41 to attach to suction port 28. Suction swivel apparatus 45 allows suction port 28 to remain attached to suction tube 41 while an attached drilling apparatus is
20 drilling into bone marrow without kinking or twisting suction tube 41. Also shown in FIGURE 3B is receptacle 43 that is interposed between suction tube 41 and a source of suction such that a bone marrow specimen may be successfully retrieved into receptacle 43 and not lost
25 into a suction machine.

FIGURE 4A-D shows an example hollow drive shaft end or penetrator end 44 and inner trocar 42 having a split-needle configuration. An inner trocar 42 is inserted into a hollow drive shaft or penetrator end 44. Inner
30 trocar 42 shown in the open position in FIGURE 4A is advanced past the end of hollow drive shaft end or penetrator end 44 where it may be opened and inserted

into bone, bone marrow or other tissue. Inner trocar 42 may be closed, shown in FIGURE 4B, so that a specimen is retained in its grasp as it is withdrawn from the body. FIGURE 4C shows a cross section of the split-needle inner
5 trocar 42 where the tip of the inner trocar 42 is in the open position. FIGURE 4D shows a cross section of the trocar 42 is shown in the closed position.

The apparatus may or may not include a reduction gear assembly. A reduction gear assembly may include a
10 worm gear assembly shown in more detail in FIGURE 5A and may include first connector 50 that connects shaft 52 of motor 38 to worm gear 54. A reduction gear assembly may be used to decrease the RPMs between the motor and
15 penetrator assembly to provide an optimum RPM at the point of insertion of penetrator assembly into bone. FIGURE 5B illustrates a further embodiment of a reduction gear assembly wherein a first spur gear 57 engages a second spur gear 58. FIGURE 5C illustrates an alternate
20 embodiment of a reduction gear assembly wherein spur gear 56 is offset forty-five degrees relative to hollow drive shaft 14 which may be preferable in some embodiments of the present invention. In this embodiment spur gear 58 may be offset at any angle and is not limited to forty-five degrees. Other gears may be used in a reduction
25 gear assembly, for example a planetary gear (not expressly shown) may be used alone or in combination with a worm gear or a spur gear.

CLAIMS

1. A hollow drive shaft assembly operable to remove bone marrow from a bone for diagnostic or therapeutic purposes comprising:

5 an outer hollow drive shaft operable to penetrate the bone and associated bone marrow;

a gear attached to the outer hollow drive shaft and operable to couple the outer hollow drive shaft to a motor such that the motor can rotate the outer hollow
10 drive shaft;

the outer hollow drive shaft having an inner channel operable to convey bone marrow specimens therethrough for the diagnostic or therapeutic purposes;

the hollow drive shaft having a first end operable
15 to penetrate the bone in response to rotation of the hollow drive shaft; and

the hollow drive shaft having a second end through which bone marrow specimens can be removed while the outer hollow drive shaft is coupled to the motor.

20 2. The hollow drive shaft assembly of Claim 1 wherein the hollow drive shaft further comprises a body having at least one side port operable to obtain portions of the associated bone marrow.

3. The hollow drive shaft assembly of Claim 1 further
25 comprising a removable trocar having a tip with a cutting edge.

4. The hollow drive shaft assembly of Claim 3 wherein the removable trocar further comprises at least one side port operable to obtain specimens of the associated bone
30 marrow.

5. The hollow drive shaft assembly of Claim 1 wherein the one end of the hollow drive shaft further comprises serrated teeth.

6. A hollow drive shaft assembly operable to remove
5 bone marrow from a bone for transplantation purposes comprising:

an outer hollow drive shaft operable to penetrate the bone and associated bone marrow;

a gear attached to the outer hollow drive shaft and
10 operable to couple the outer hollow drive shaft to a motor such that the motor can rotate the outer hollow drive shaft;

the outer hollow drive shaft having an inner channel operable to convey bone marrow specimens therethrough for
15 the transplantation purpose;

the hollow drive shaft having a first end operable to penetrate the bone in response to rotation of the hollow drive shaft; and

the hollow drive shaft having a second end through
20 which bone marrow specimens can be removed while the outer hollow drive shaft is coupled to the motor.

7. The hollow drive shaft assembly of Claim 6 wherein the hollow drive shaft further comprises a body having at least one side port operable to obtain portions of the
25 associated bone marrow.

8. The hollow drive shaft assembly of Claim 6 further comprising a removable trocar having a tip with a cutting edge.

9. The hollow drive shaft assembly of Claim 8 wherein the removable trocar further comprises at least one side port operable to obtain specimens of the associated bone marrow.

5 10. The hollow drive shaft assembly of Claim 6 wherein the one end of the hollow drive shaft further comprises serrated teeth.

11. The hollow drive shaft assembly of Claim 1 or 6, further comprising:

10 a first gear attached to the outer hollow drive shaft;

the first gear engaged with a second gear attached to the motor to rotate the outer hollow drive shaft; and

15 a plurality of sampling ports formed in the outer hollow drive shaft spaced from the first end; and

the sampling ports operable to provide access to the associated bone marrow.

12. The hollow drive shaft assembly of Claim 11 further comprising:

20 a threaded portion formed adjacent to the first end of the outer hollow drive shaft; and

the threaded portion operable to retrieve a bone biopsy specimen.

13. The hollow drive shaft assembly of Claim 11 further comprising:

a removable inner trocar disposed in the inner channel of the outer hollow drive shaft;

a sampling port formed in the removable inner trocar spaced from a first end of the inner trocar; and

the sampling port of the removable inner trocar operable to be aligned with respective sampling ports of the outer hollow drive shaft.

14. The hollow drive shaft of Claim 11 further
5 comprising:

a ratcheted gear attached to the trocar; and
the ratcheted gear operable to change the depth of sampling from the bone marrow.

15. The hollow drive shaft assembly of Claim 11 further
10 comprising:

a first thrust bearing and a second thrust bearing disposed on exterior portions of the outer hollow drive shaft;

the first and second thrust bearings spaced from
15 each other; and

the first and second thrust bearings operable to absorb pressure from the outer hollow drive shaft drilling into the bone.

16. The hollow drive shaft assembly of Claim 11 further
20 comprising:

a trocar disposed in the inner channel of the outer hollow drive shaft; and

an operating mechanism operable to manipulate the trocar and change the depth of taking specimens in
25 associated bone marrow.



17. The hollow drive shaft assembly of Claim 1 or 6, further comprising:

a threaded portion formed adjacent to the first end of the outer hollow drive shaft; and

17

the threaded portion operable to retrieve a bone specimen and/or a bone marrow specimen.

18. The hollow drive shaft assembly of Claim 17 wherein the first end further comprises serrated teeth.

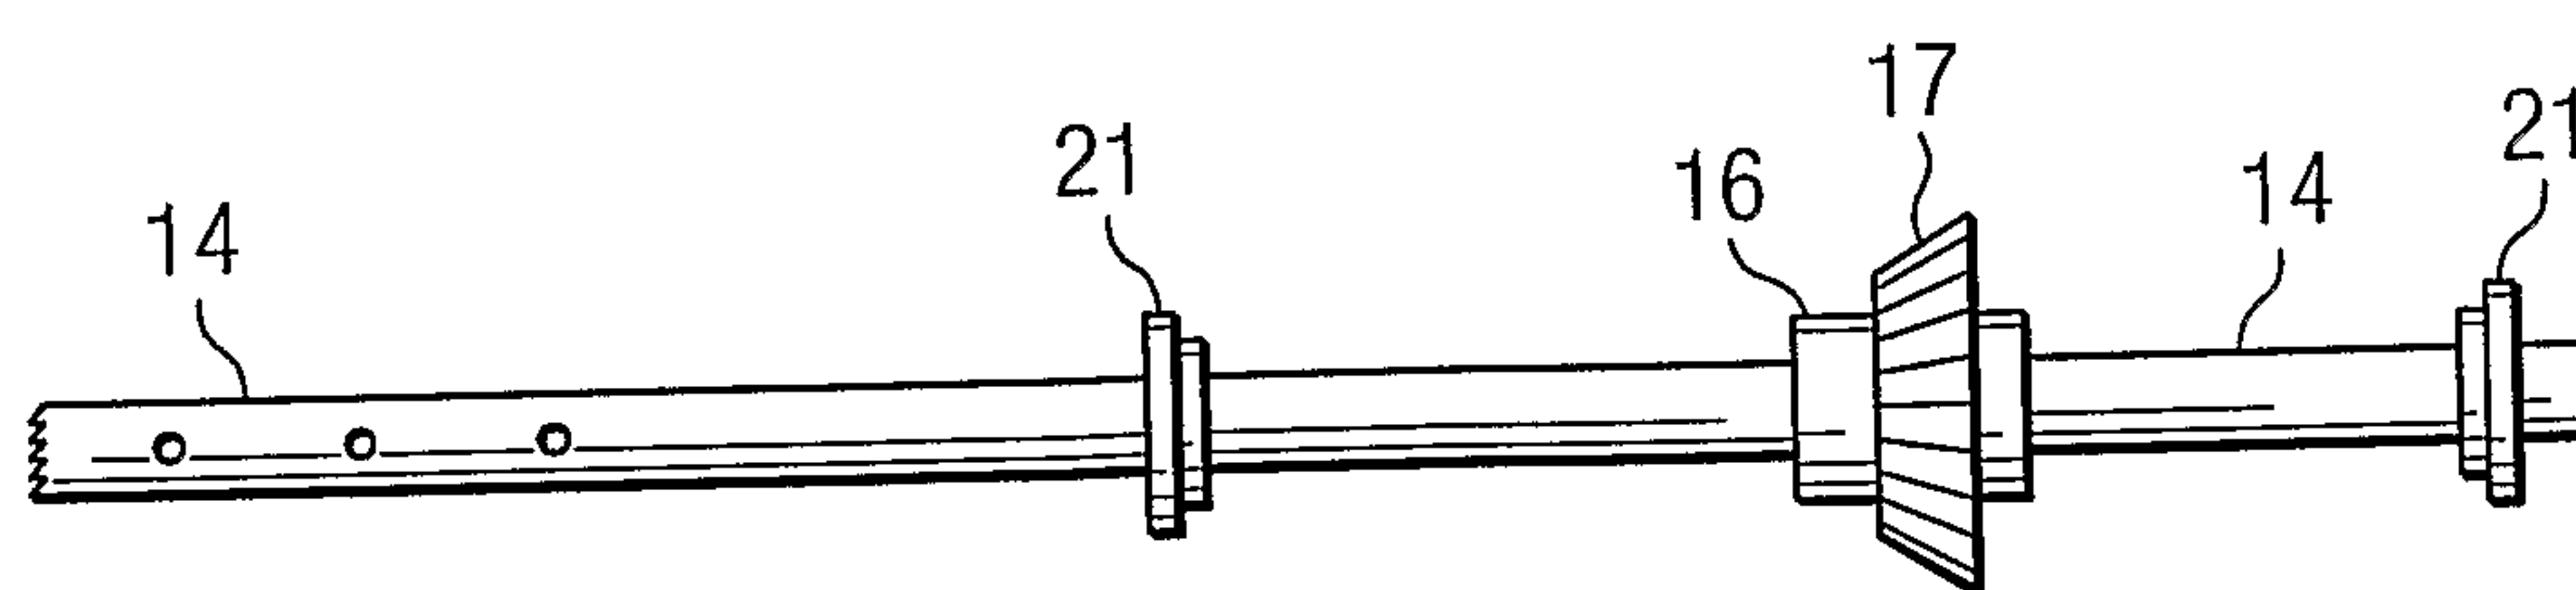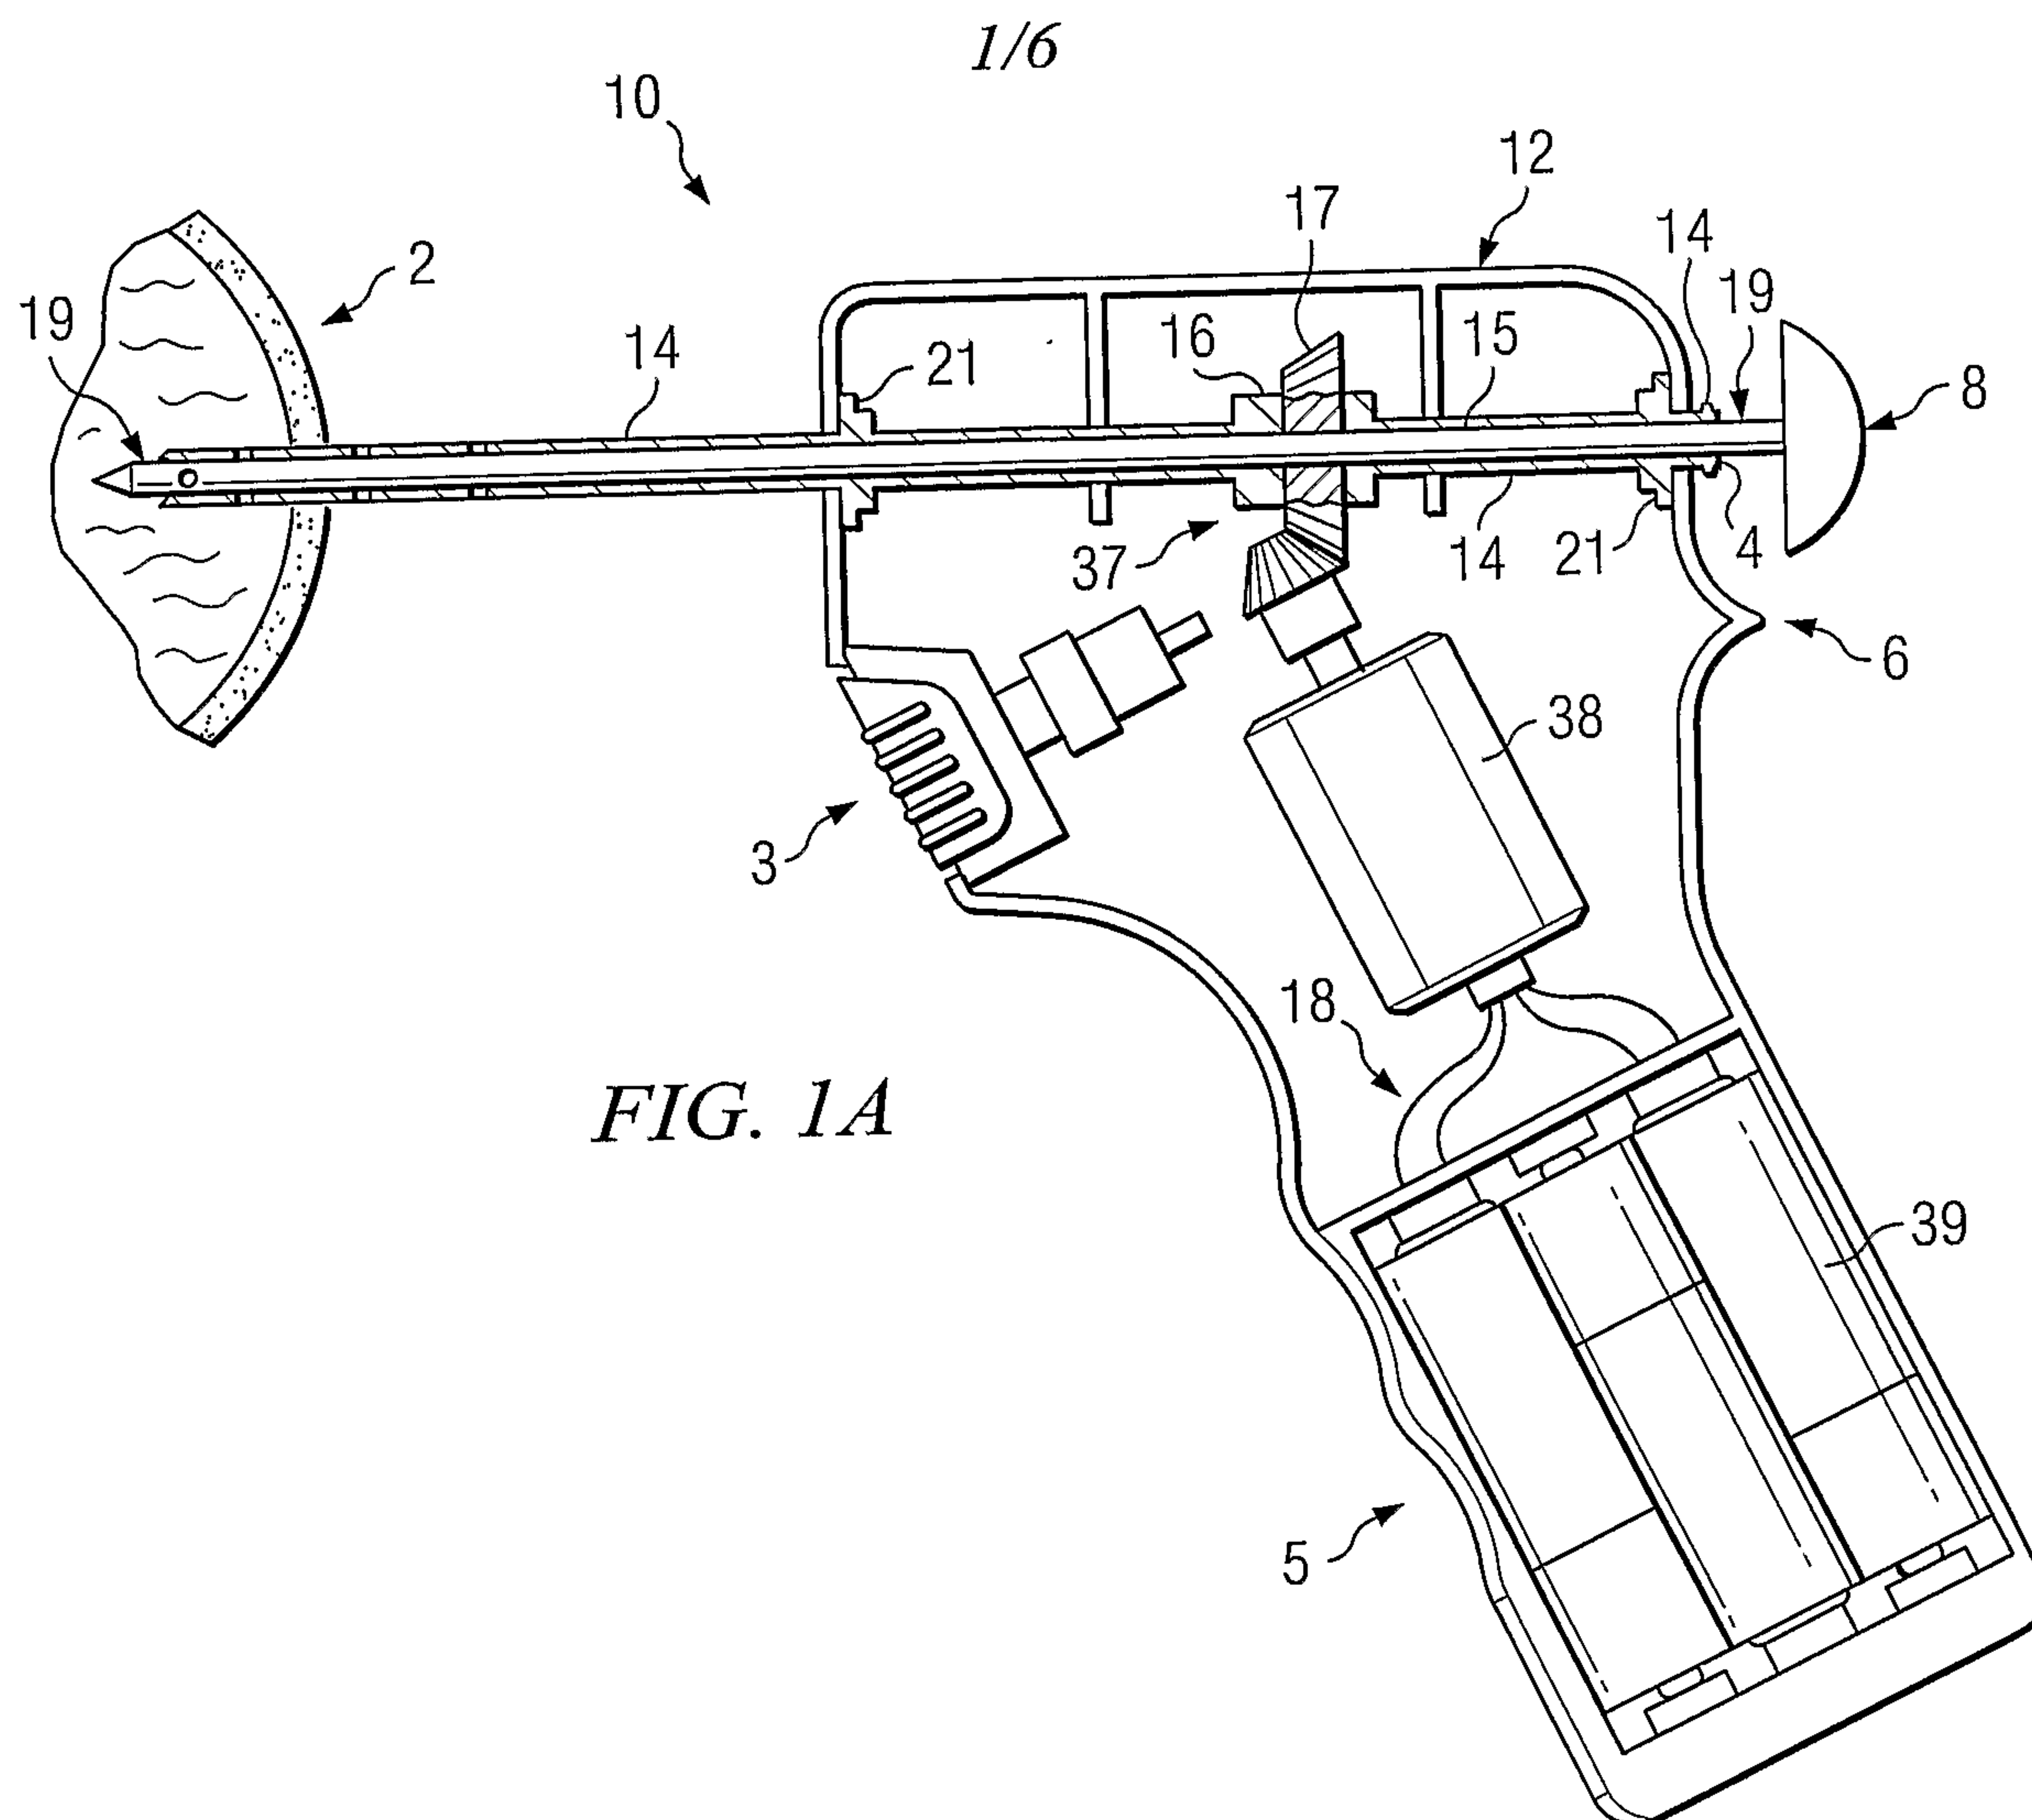

2/6

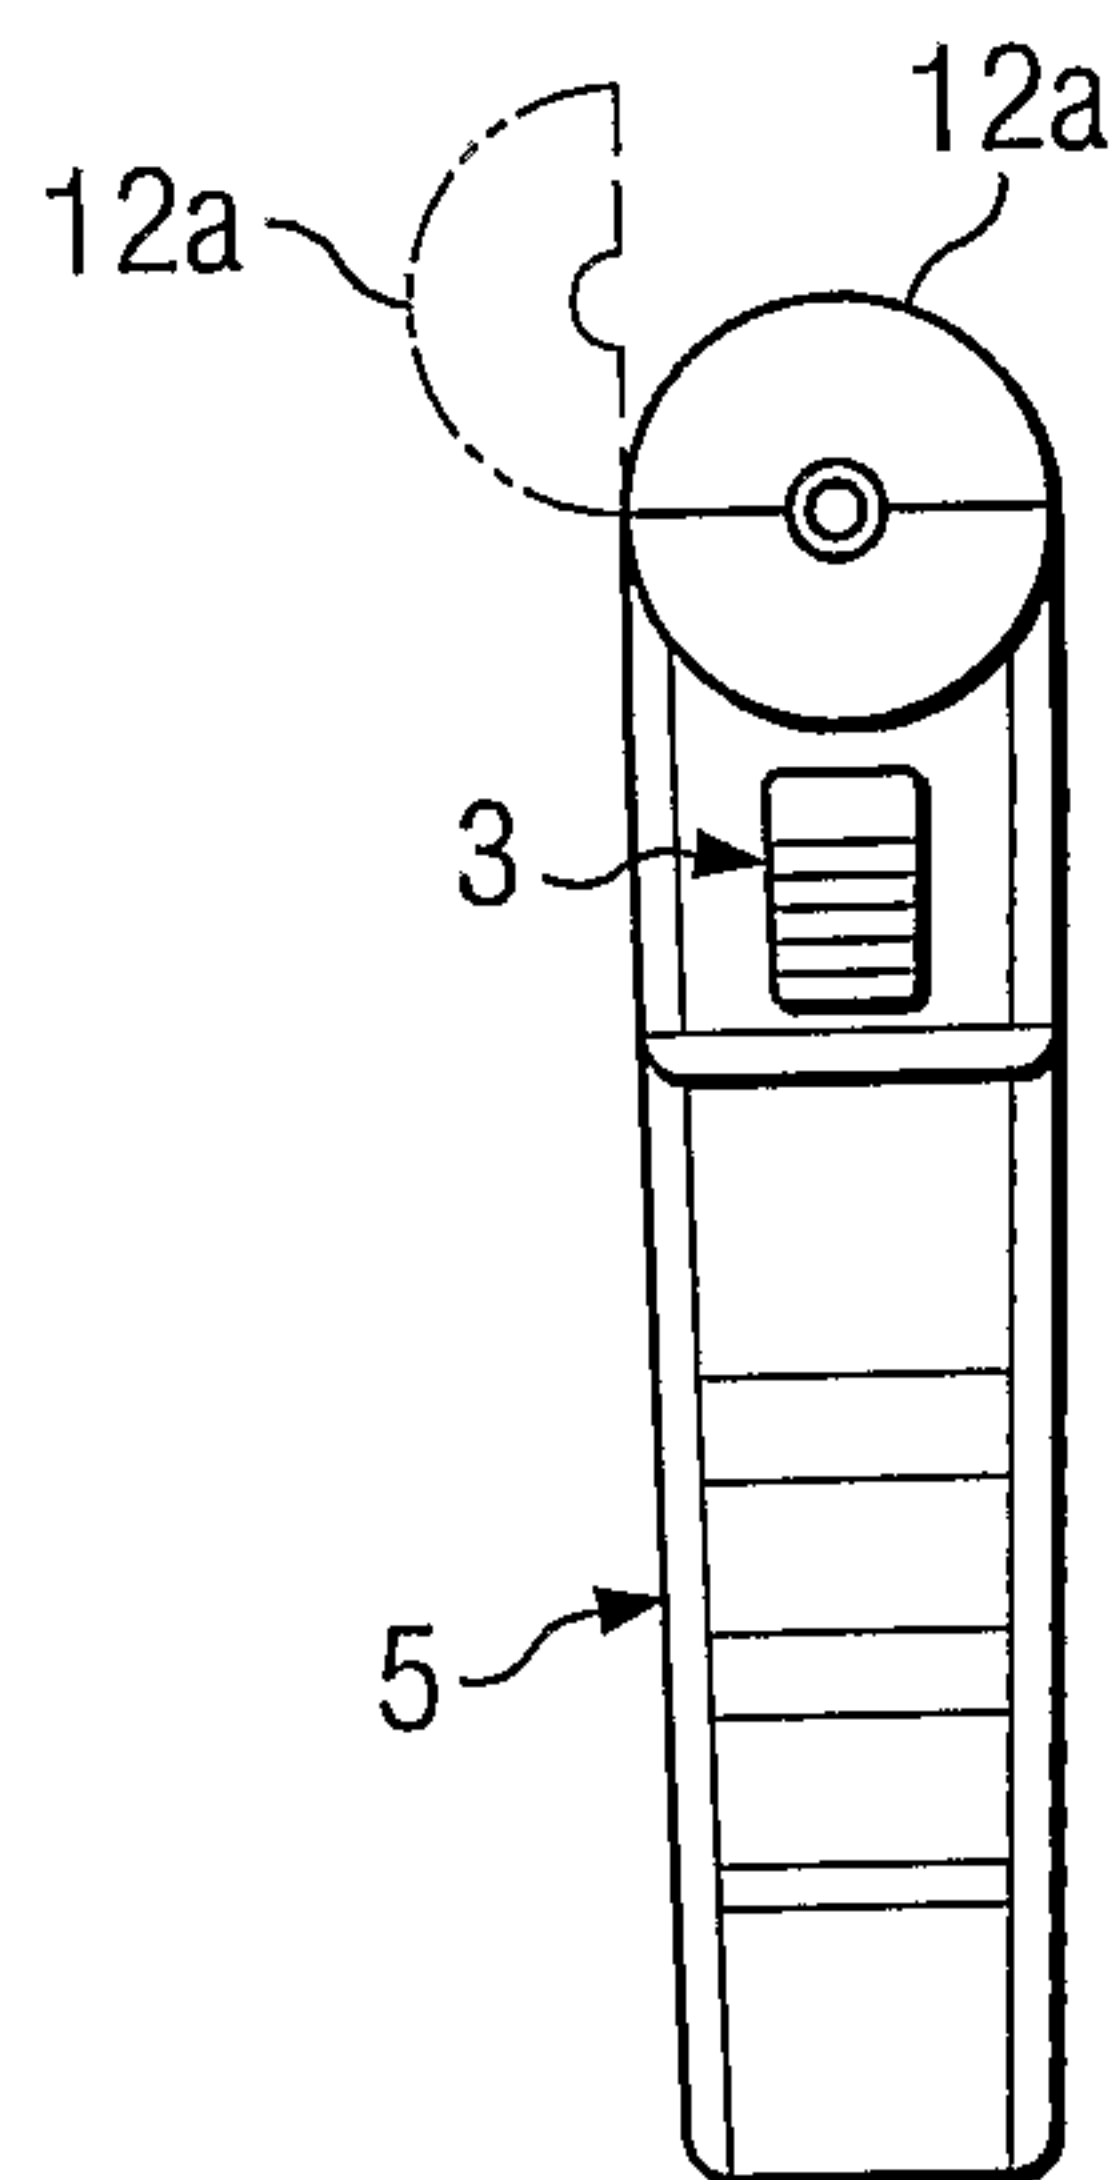


FIG. 1D

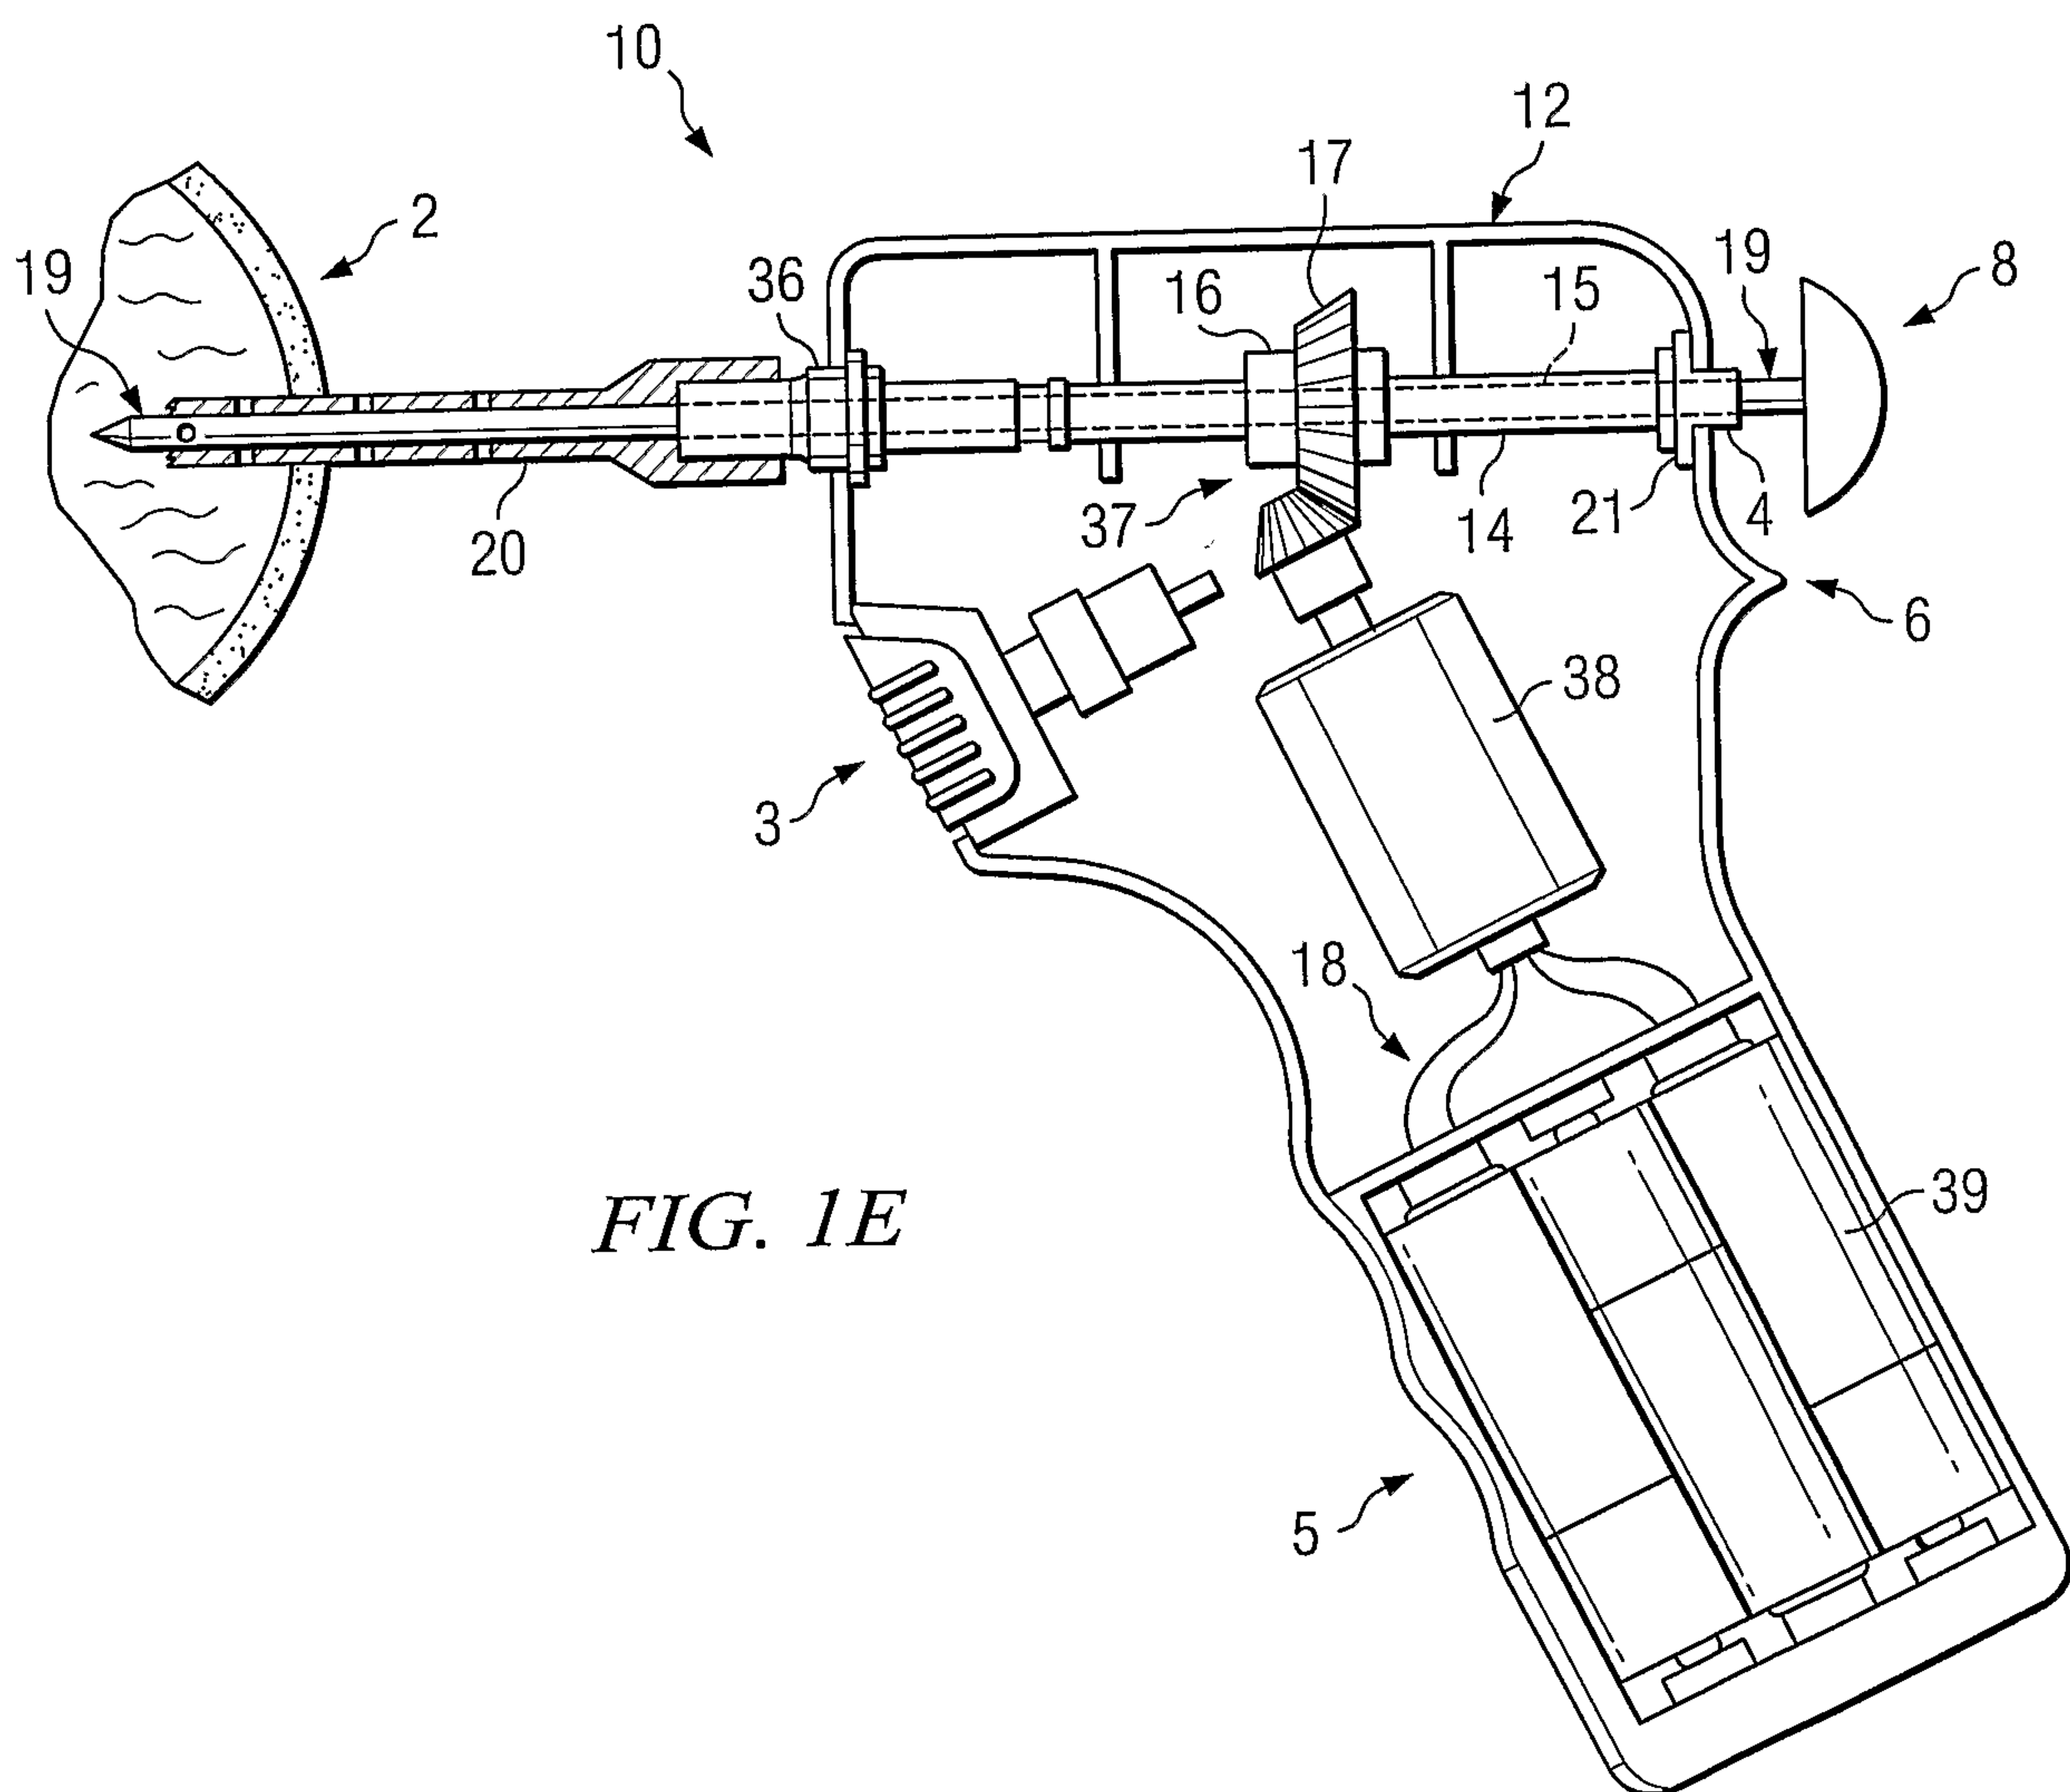


FIG. 1E

3/6

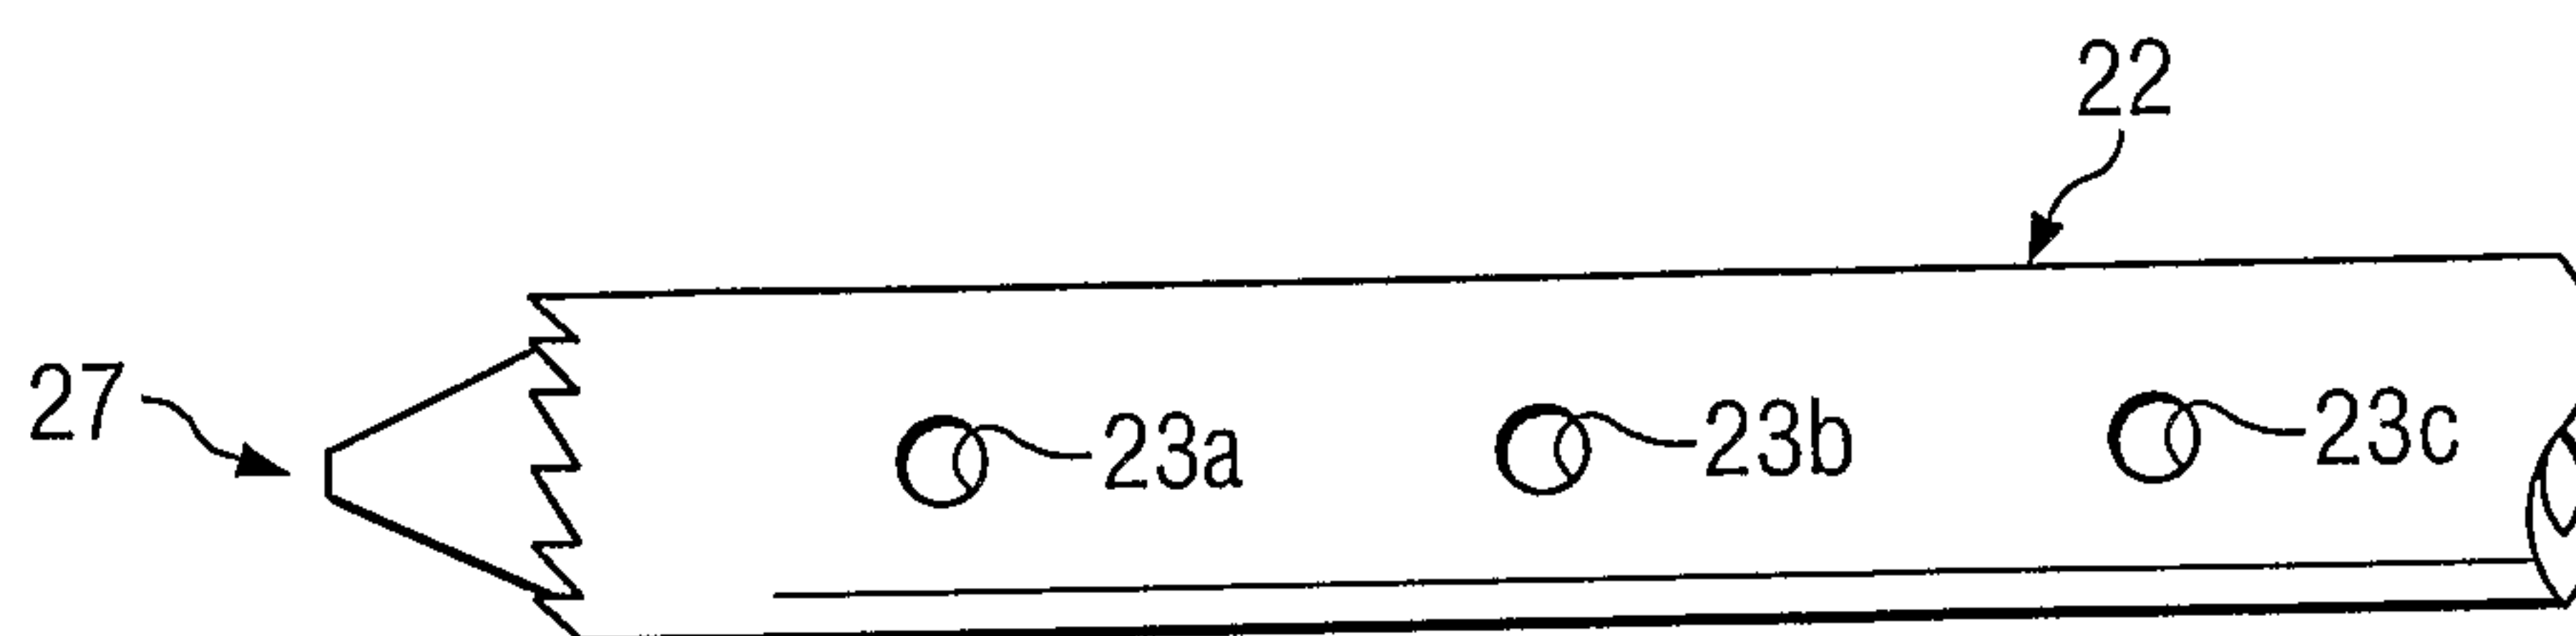


FIG. 2A

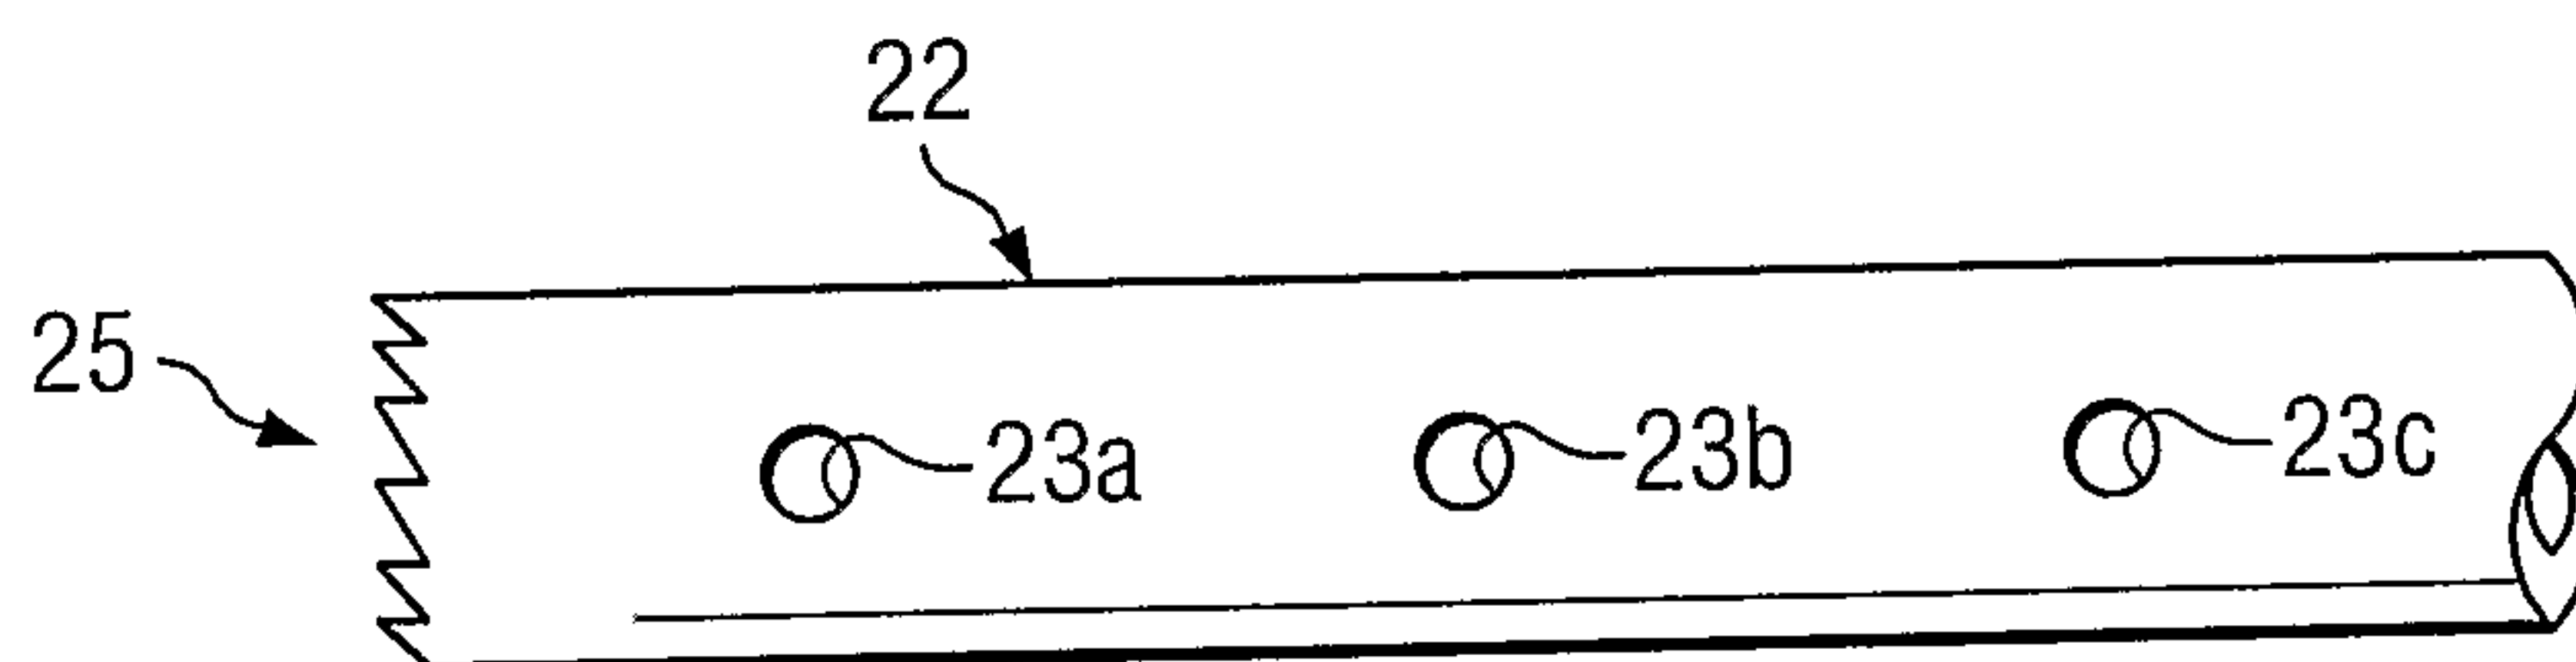


FIG. 2B

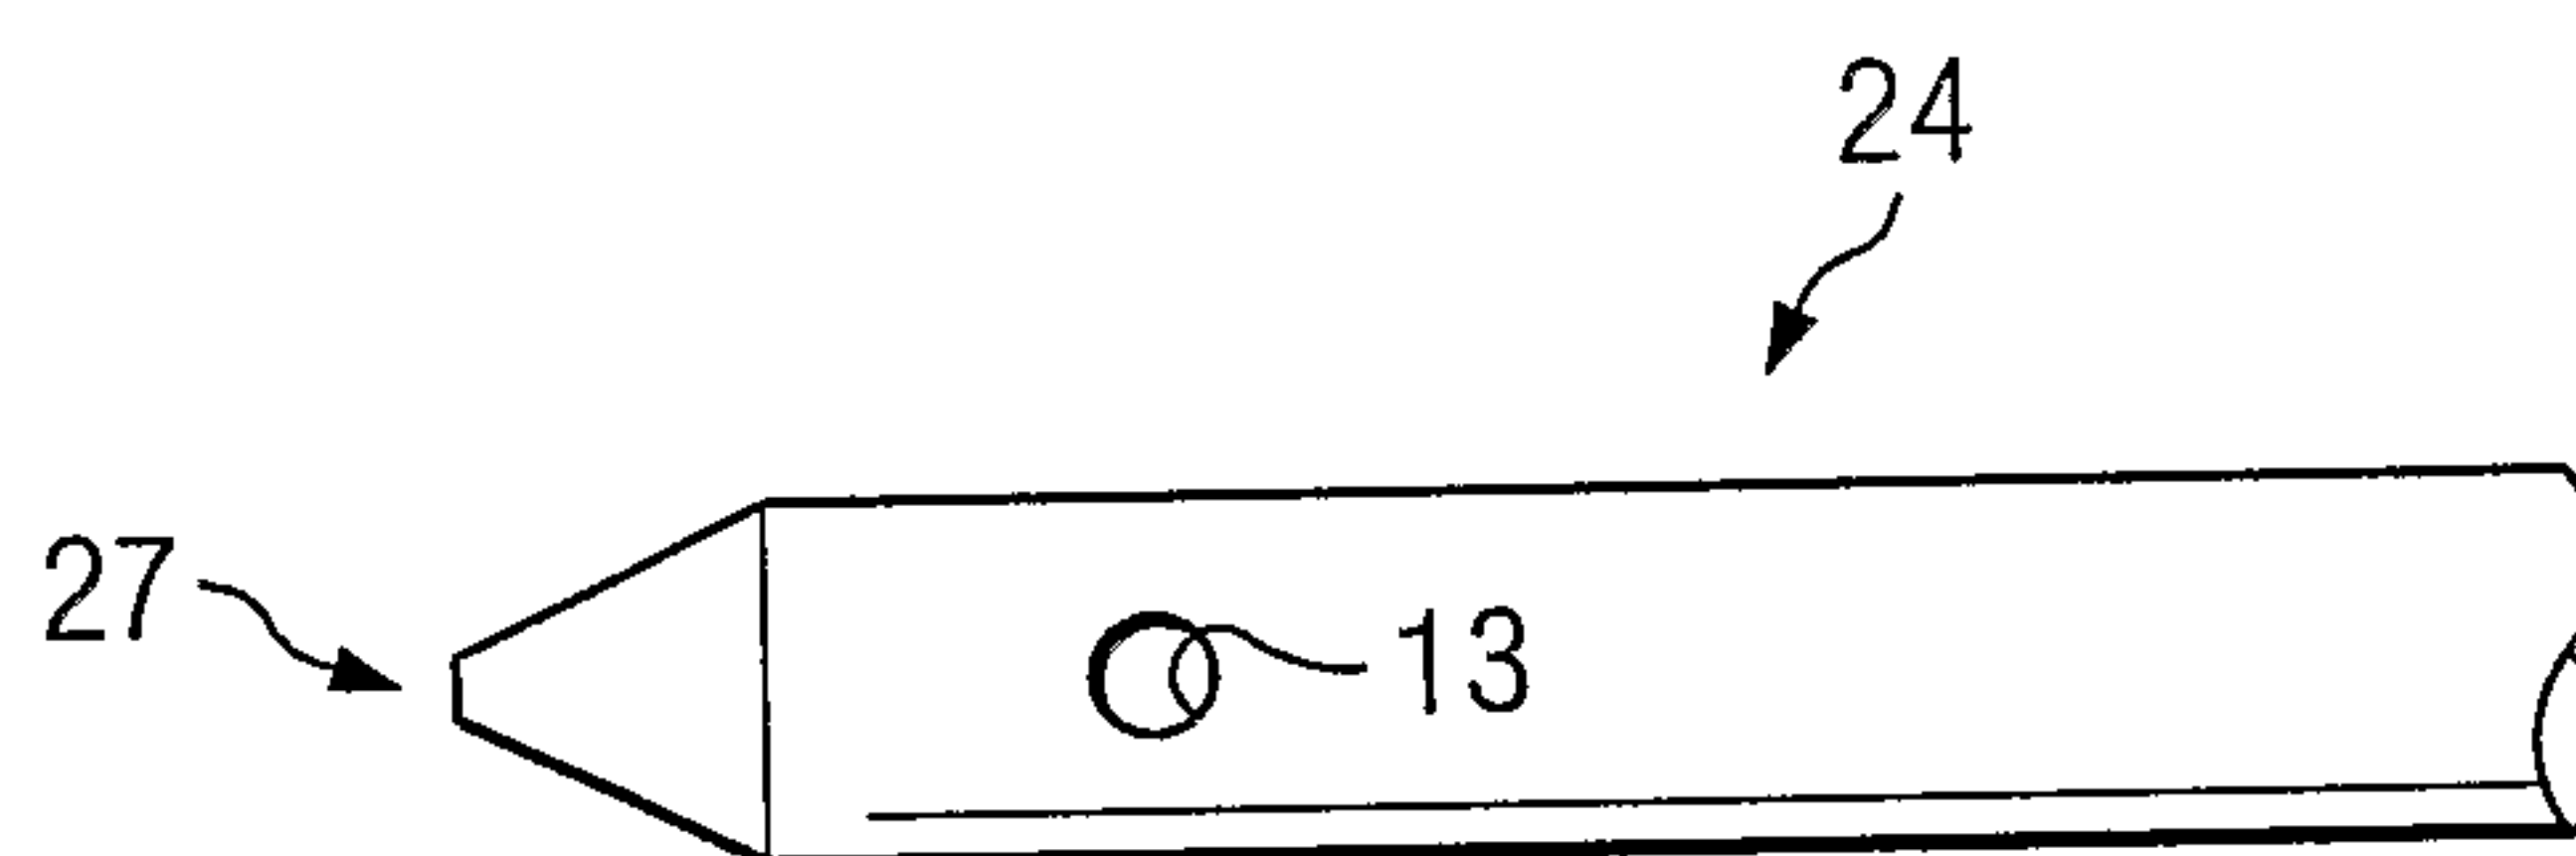


FIG. 2C

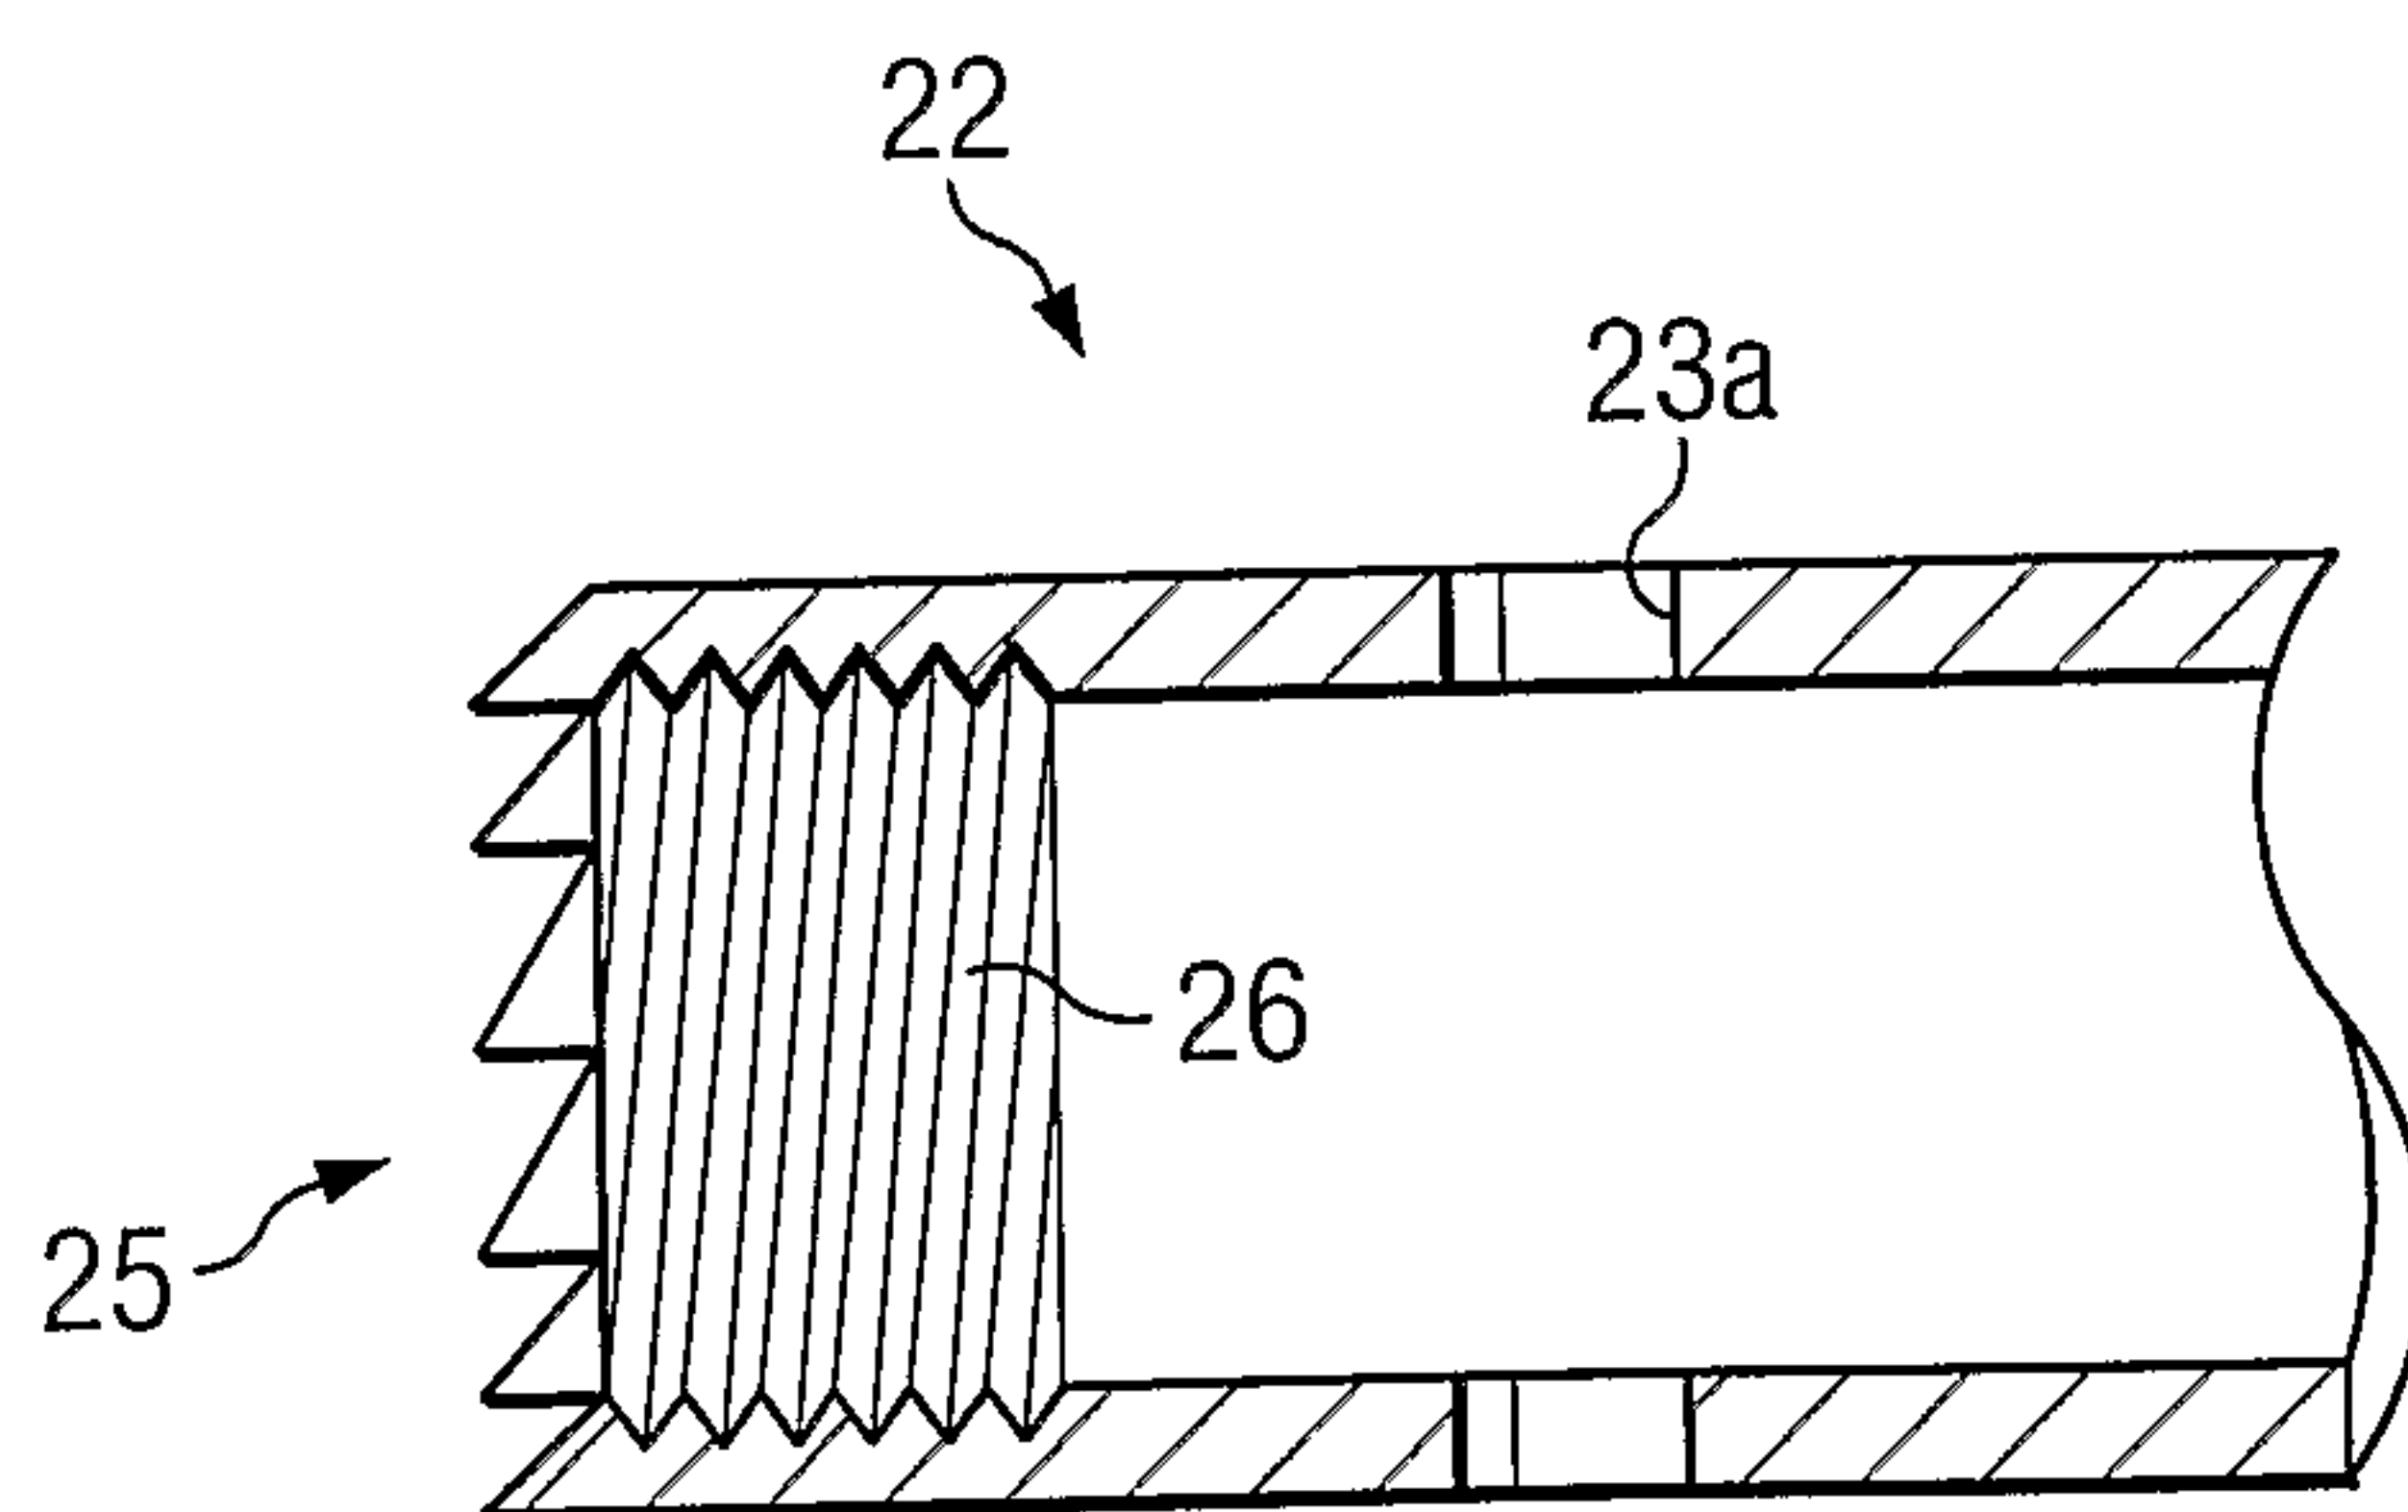


FIG. 2D






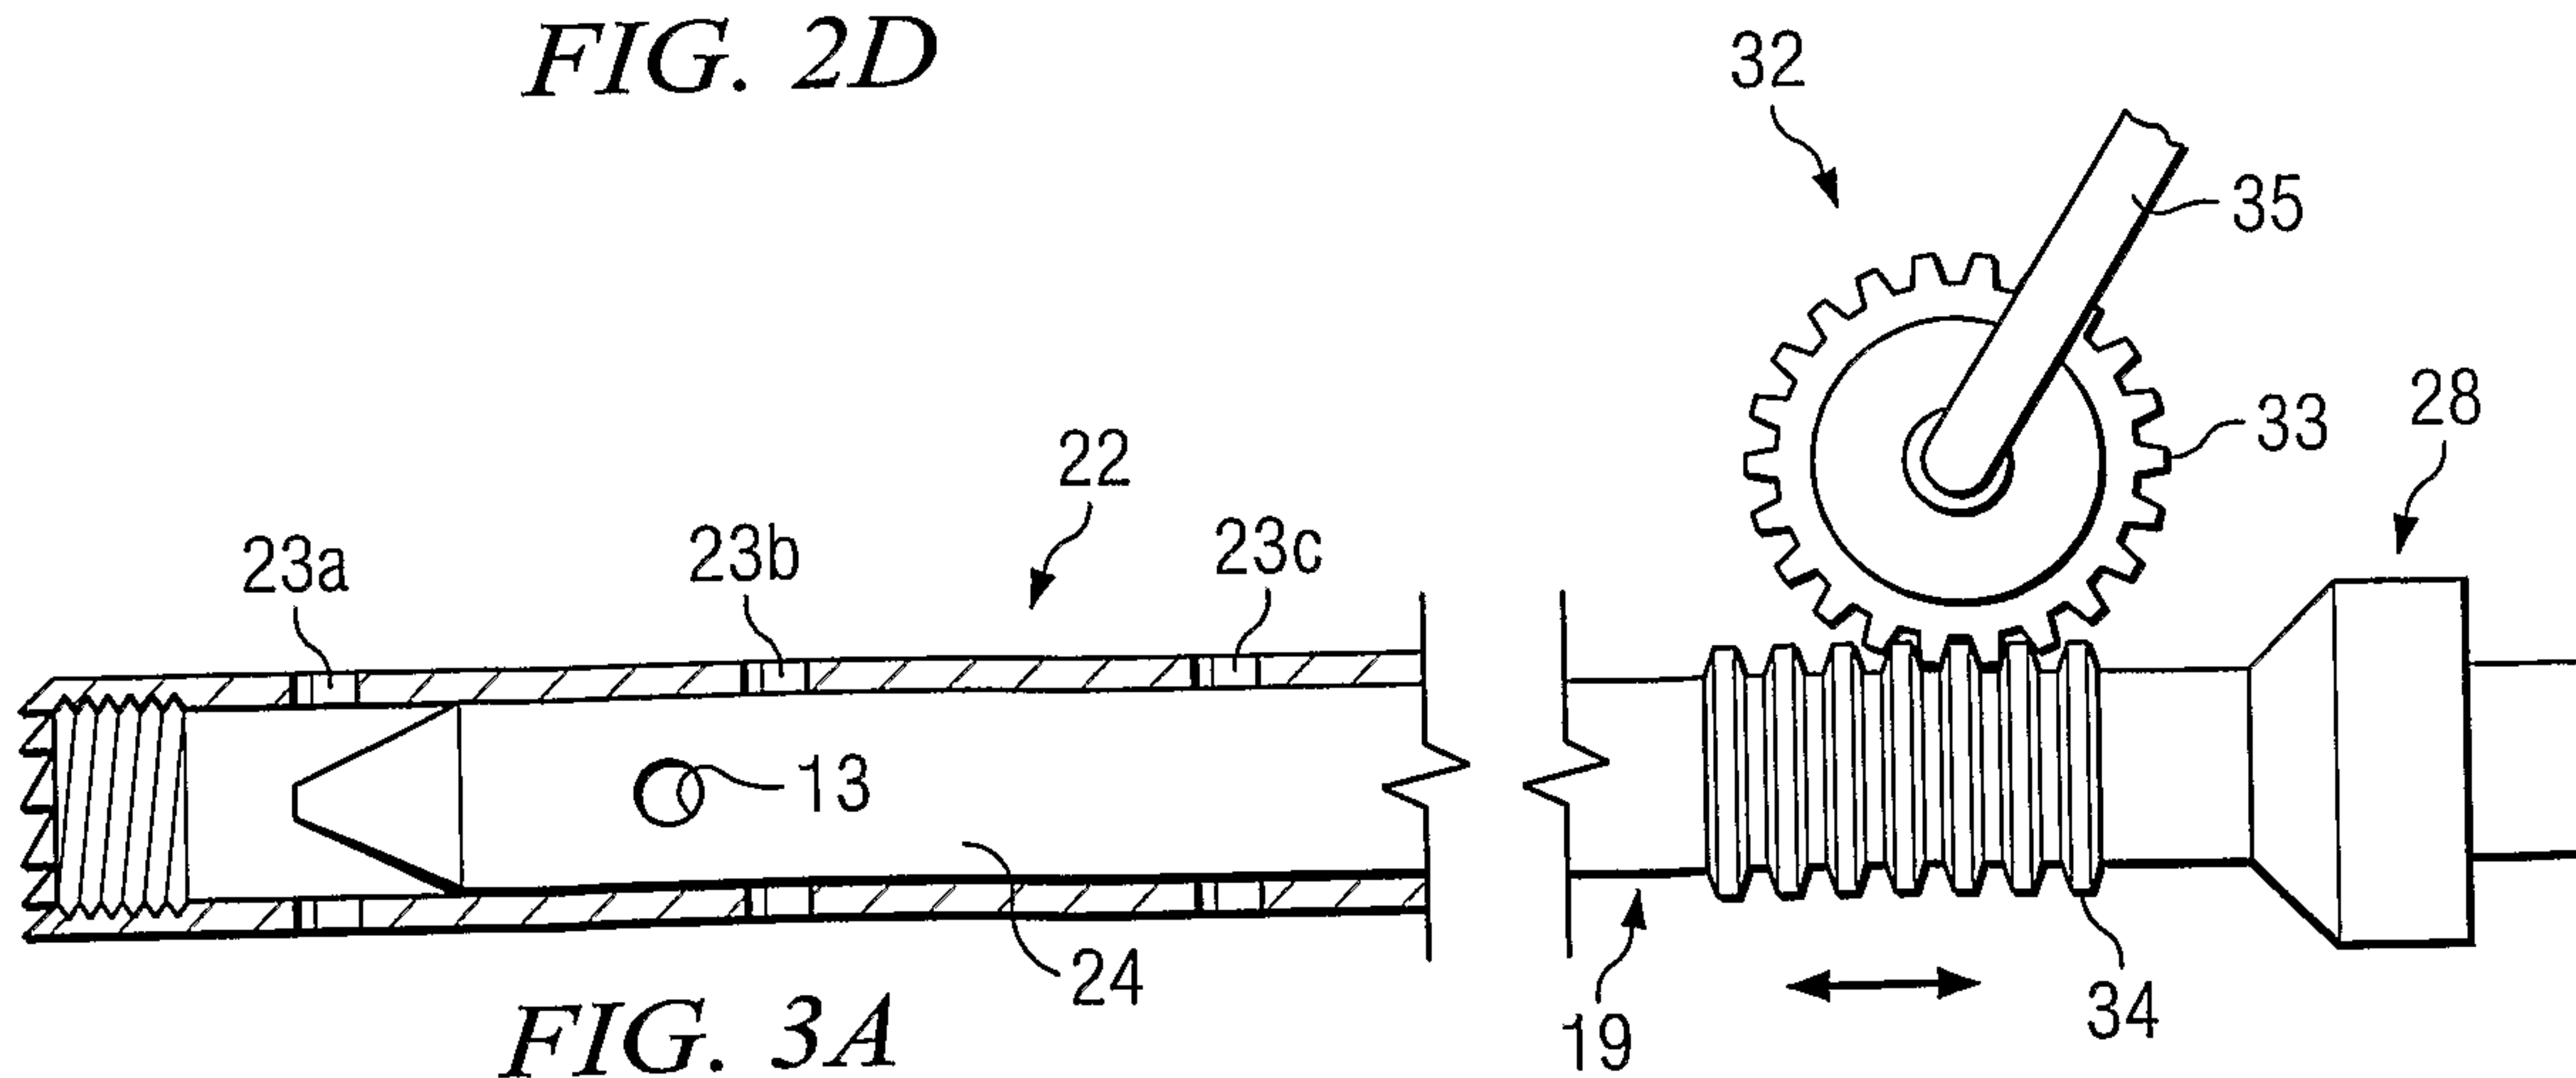


FIG. 3A




4/6

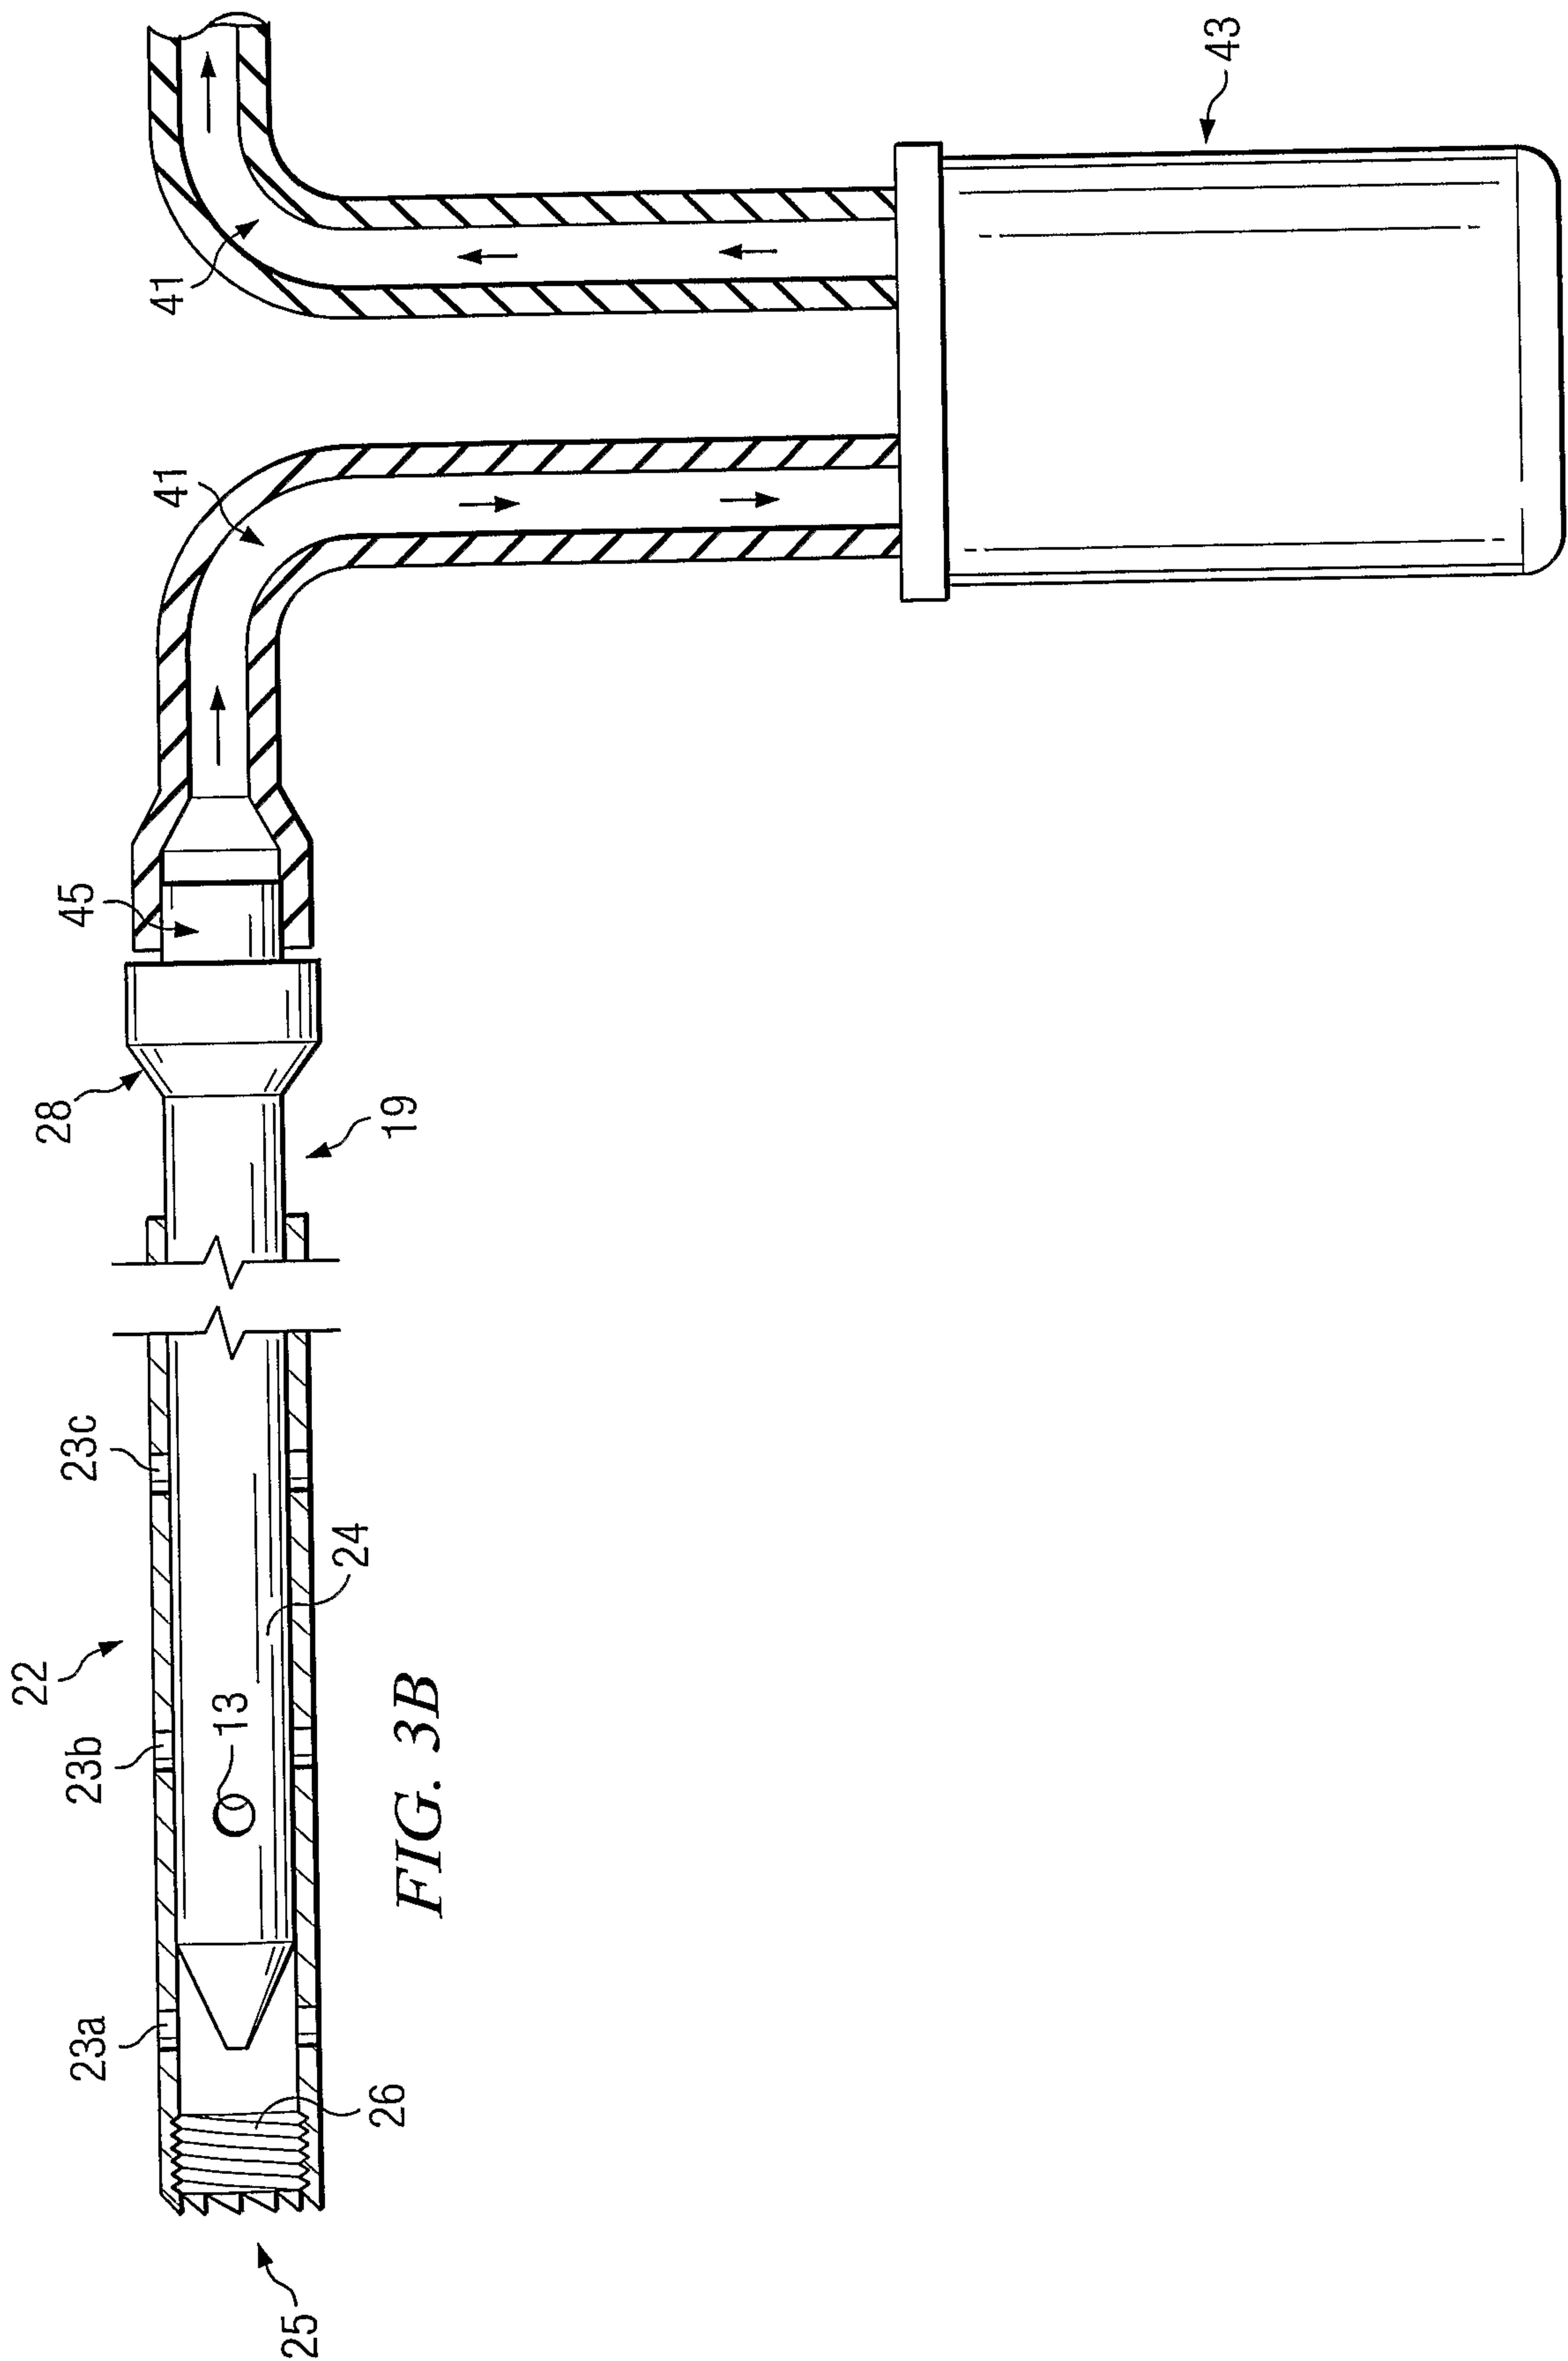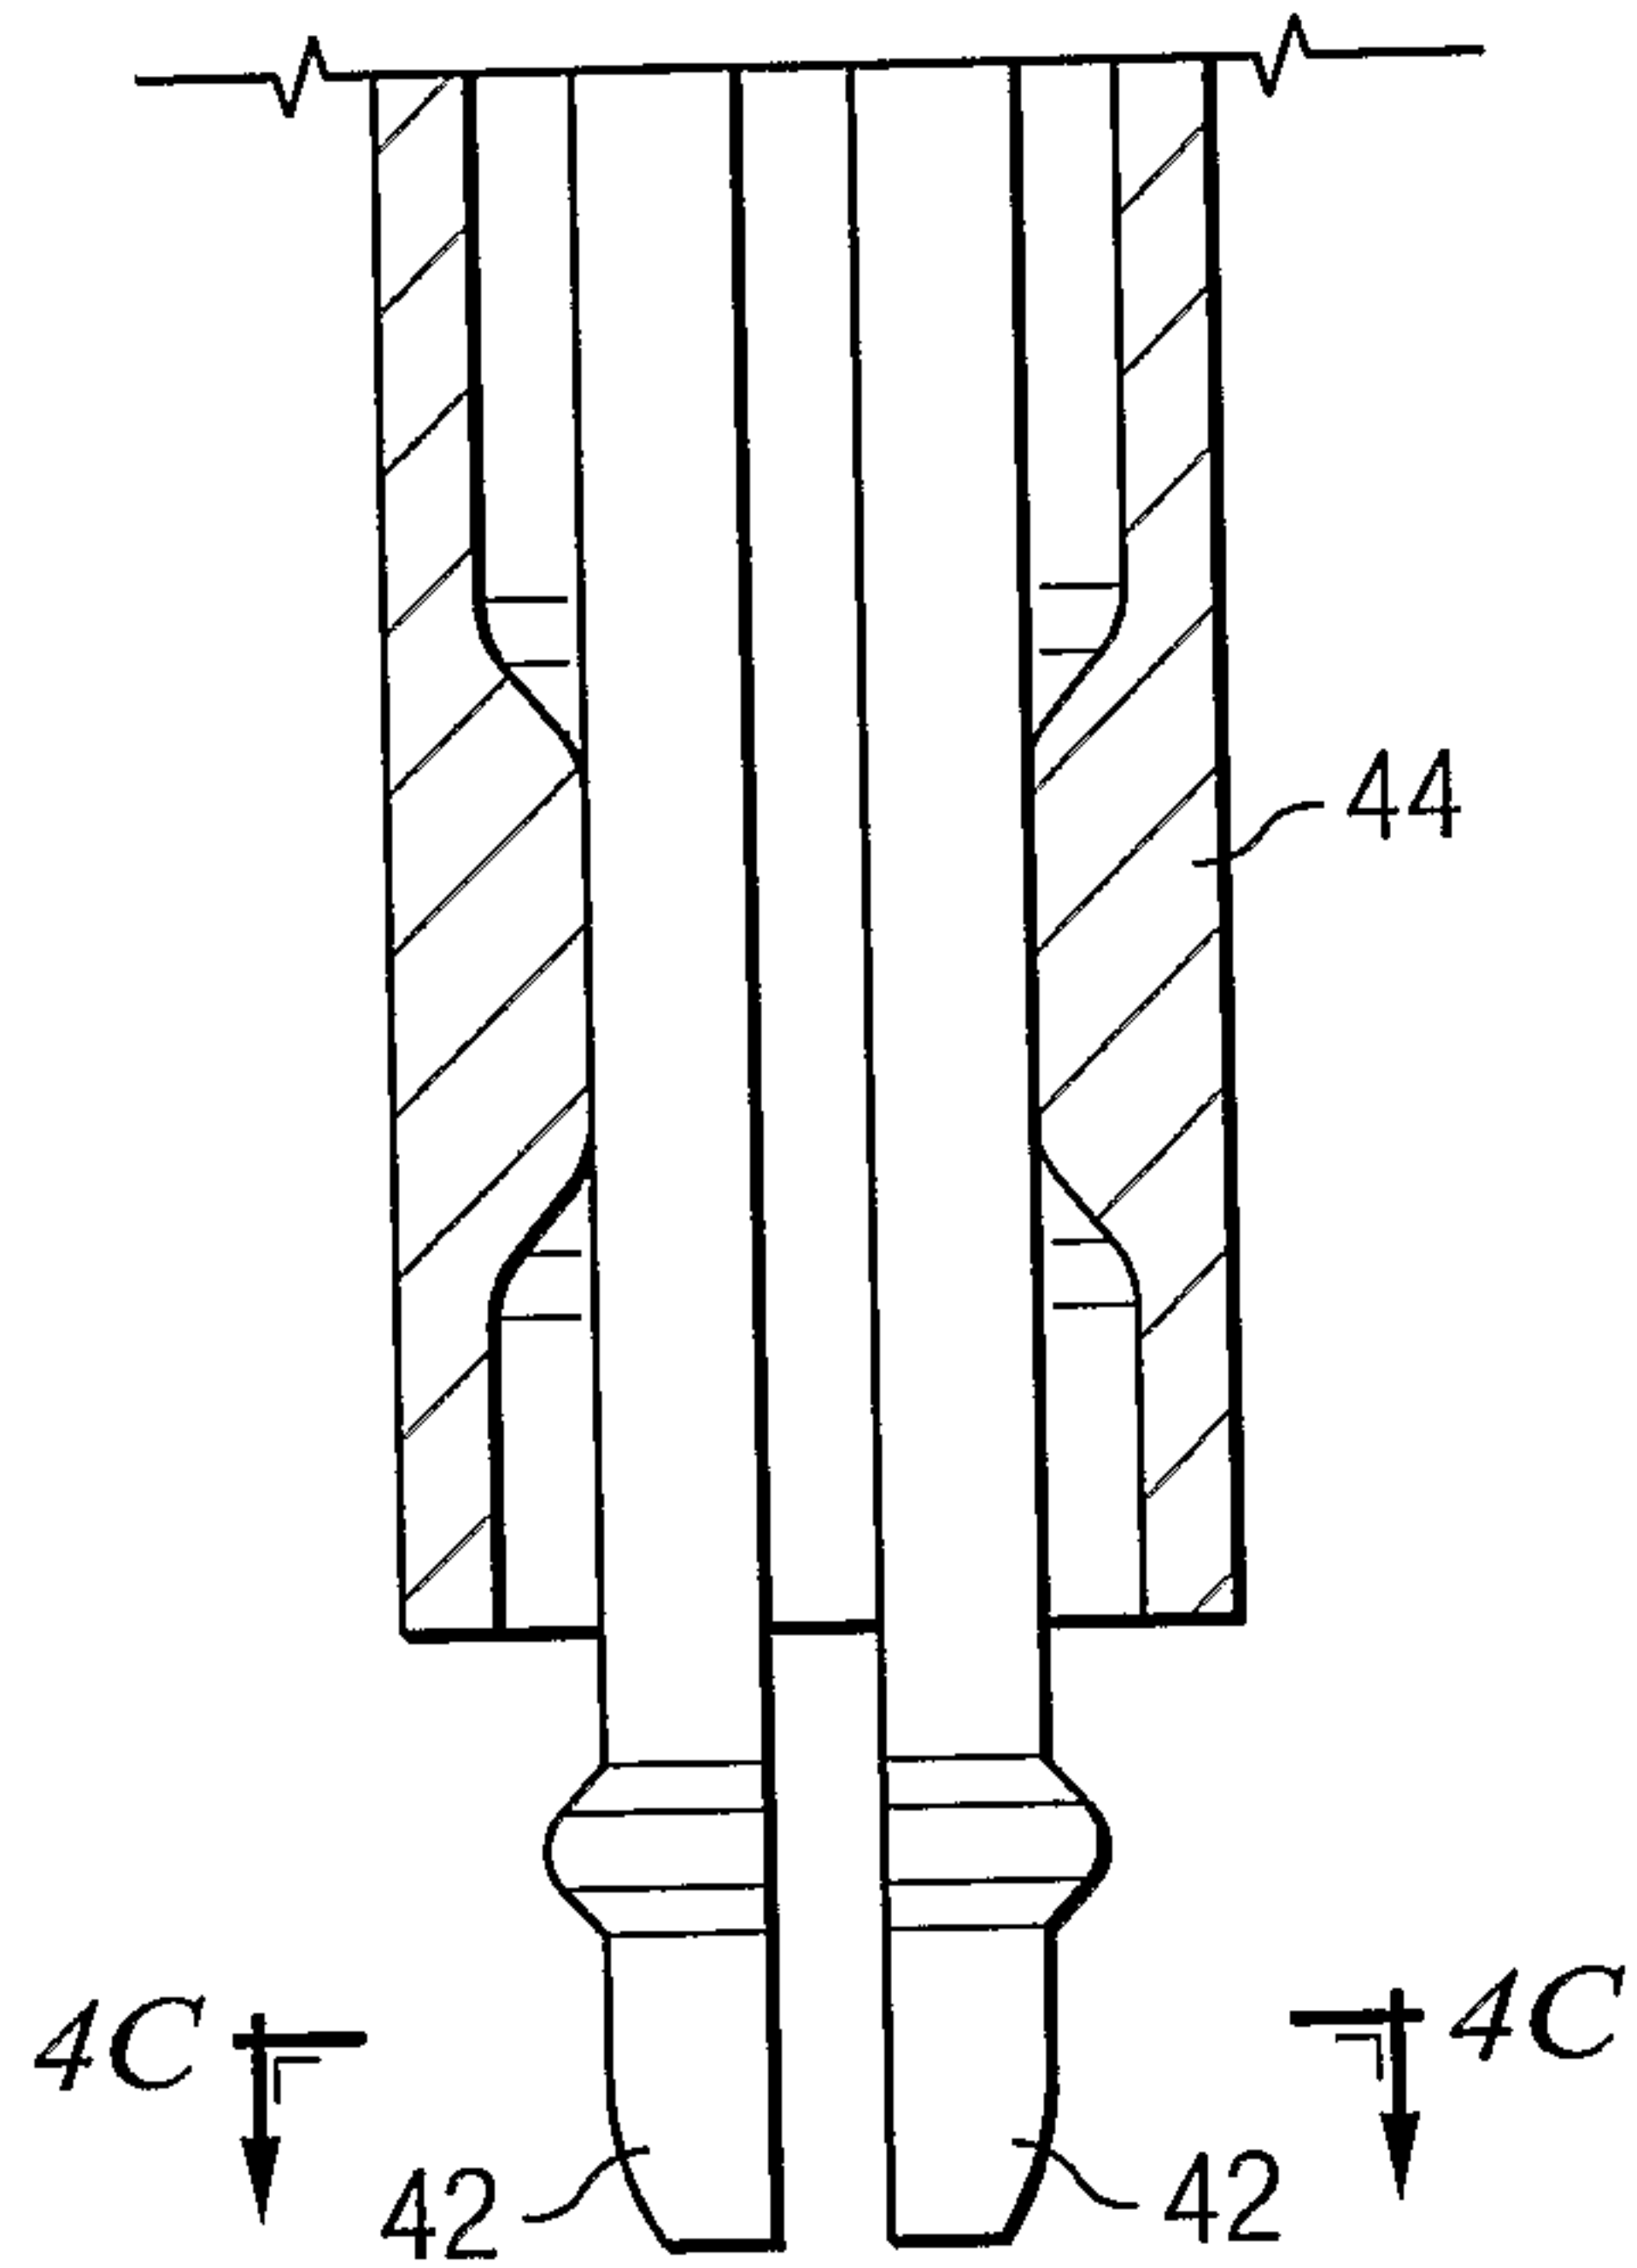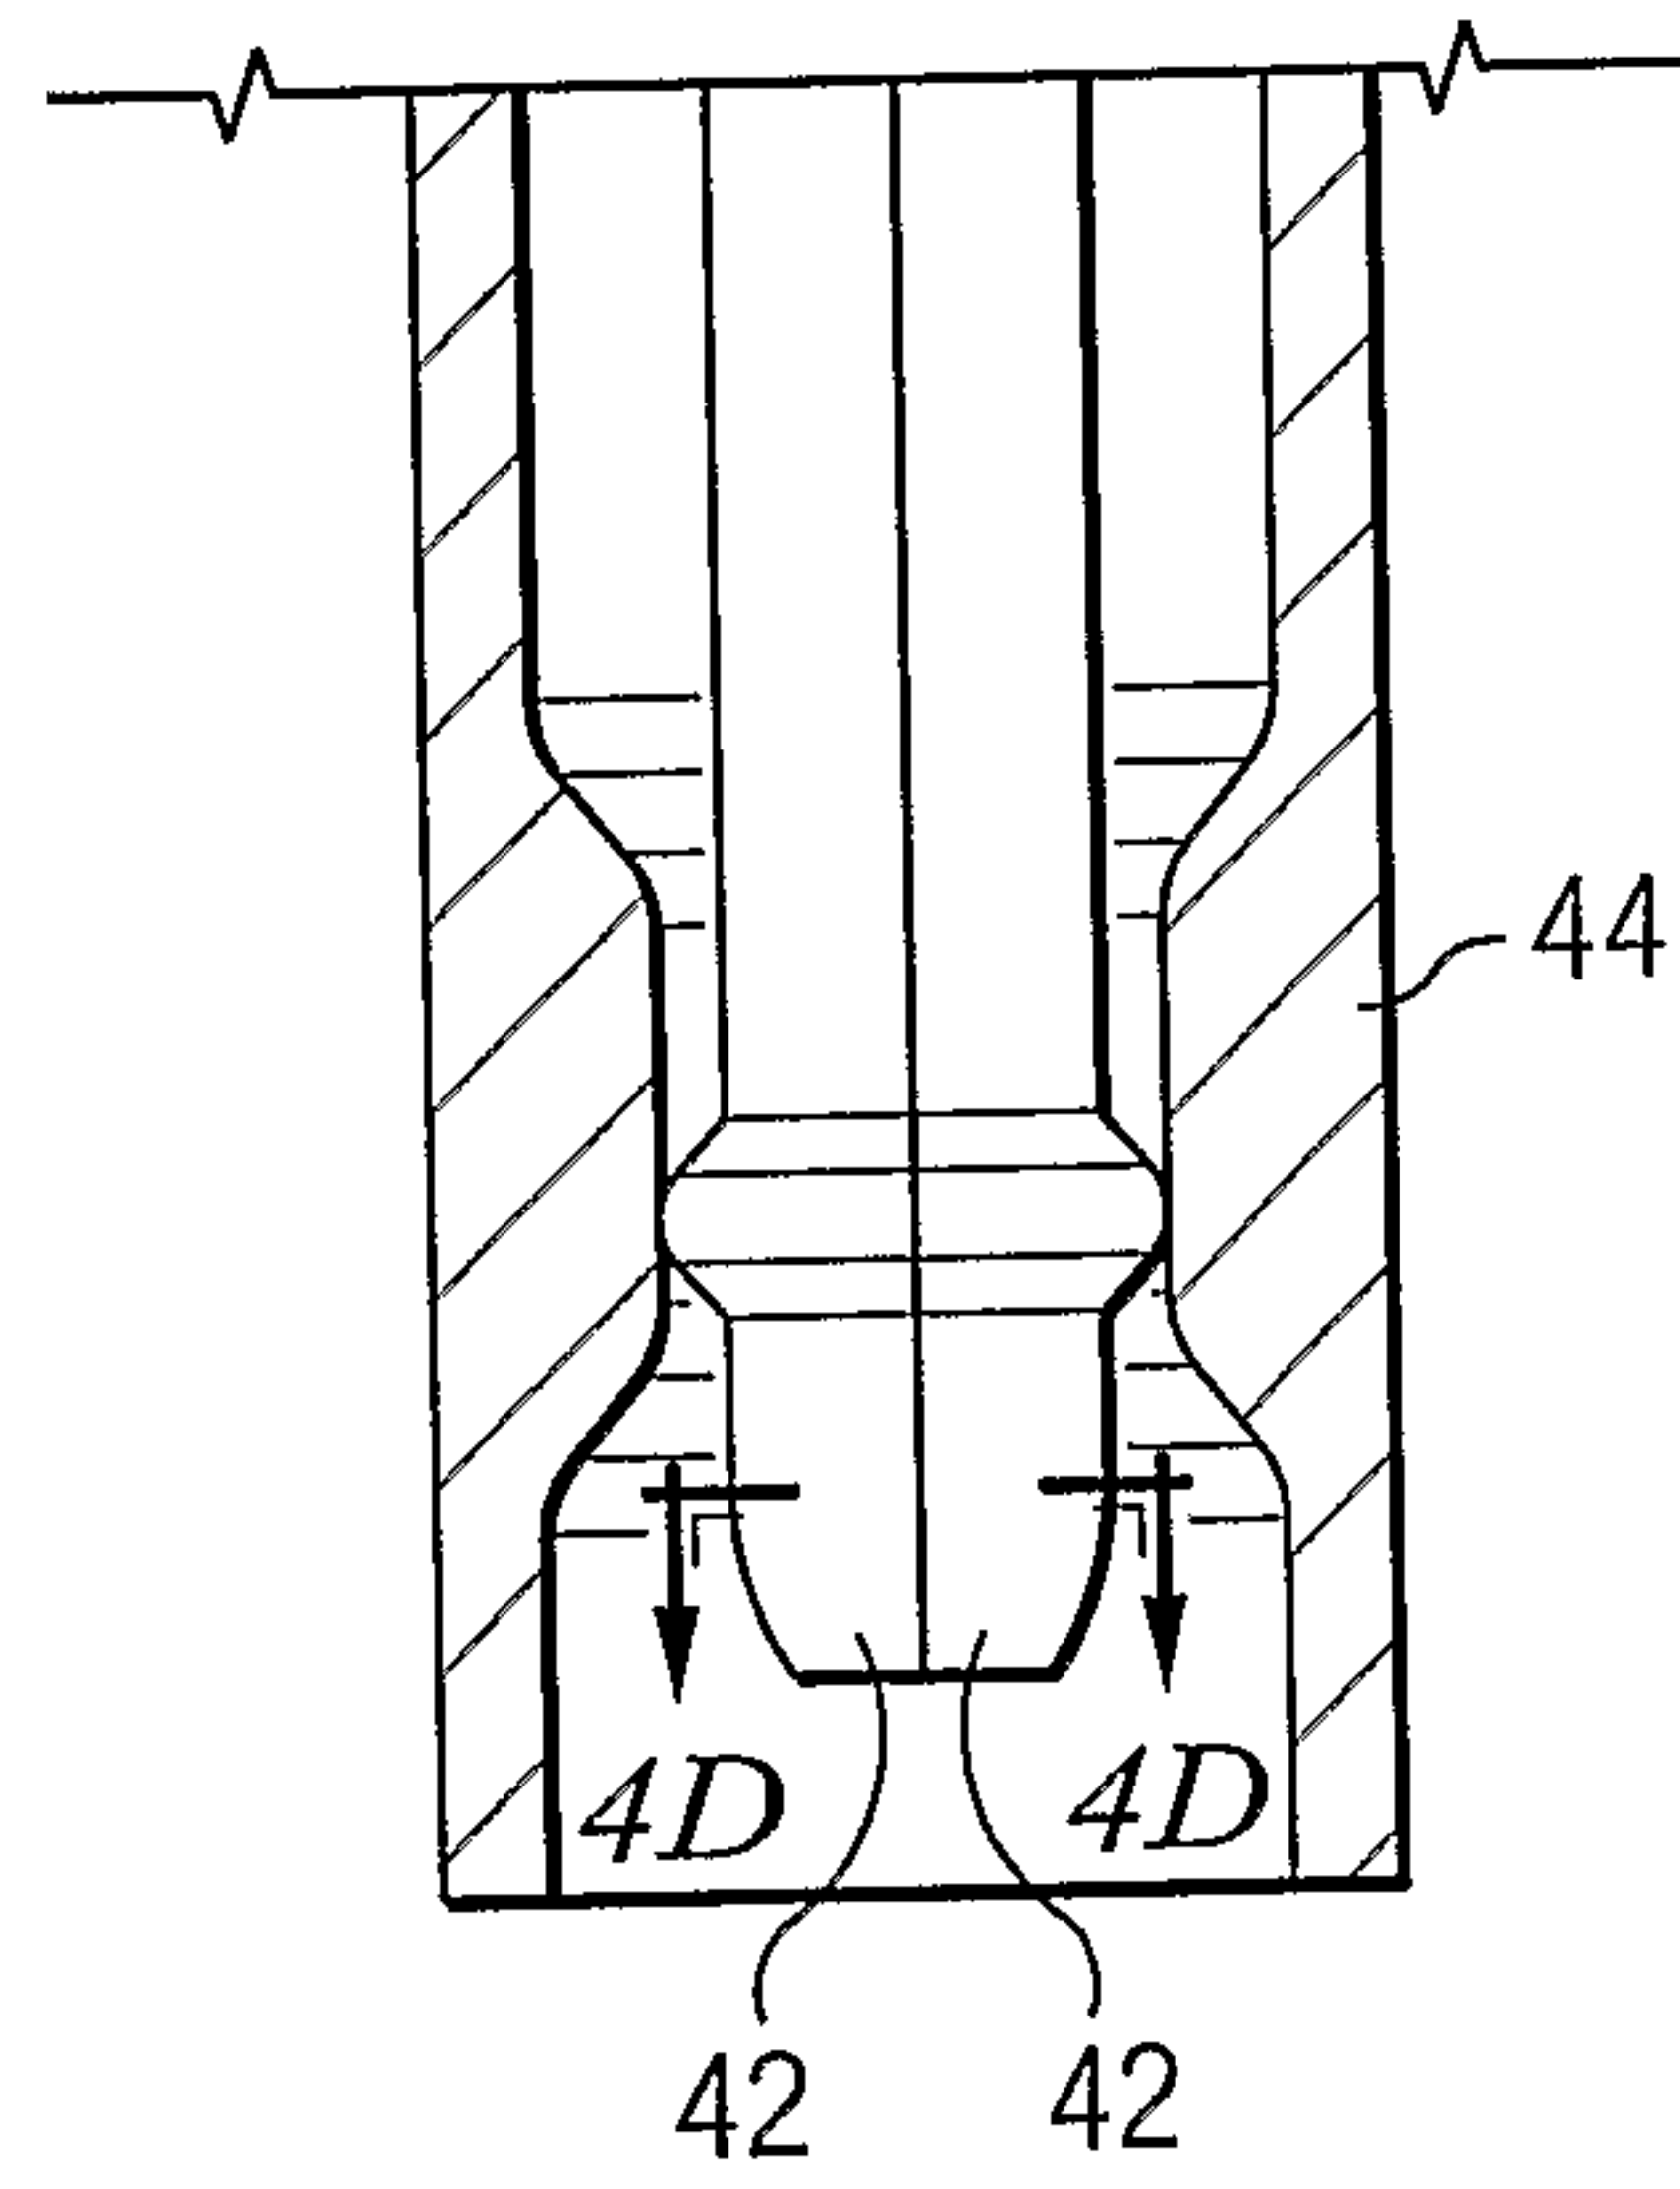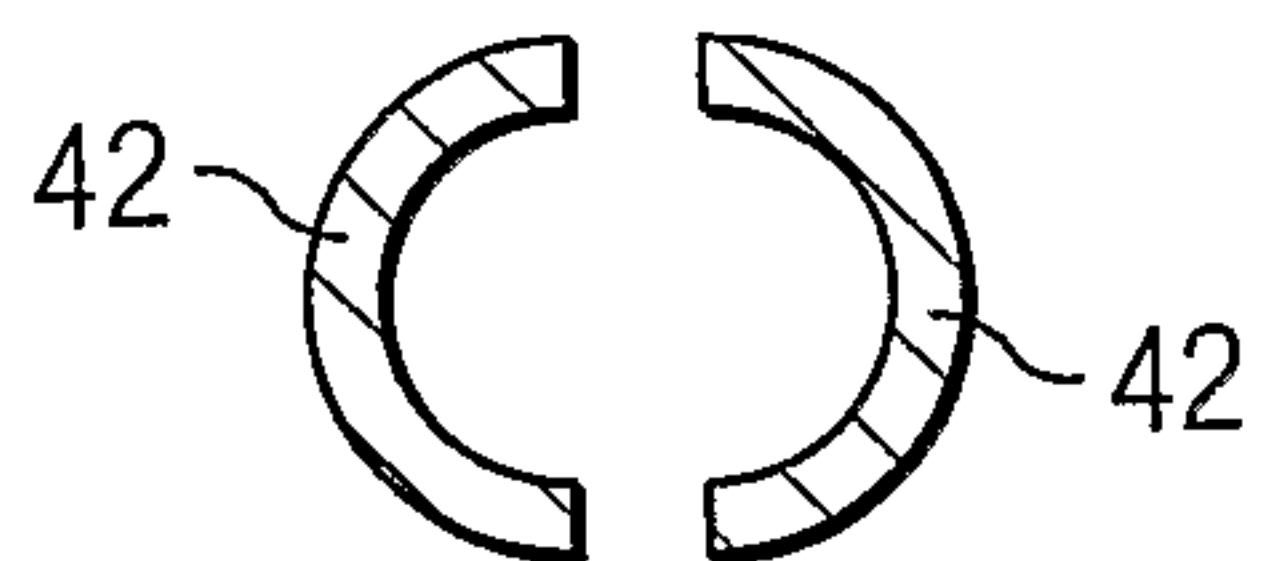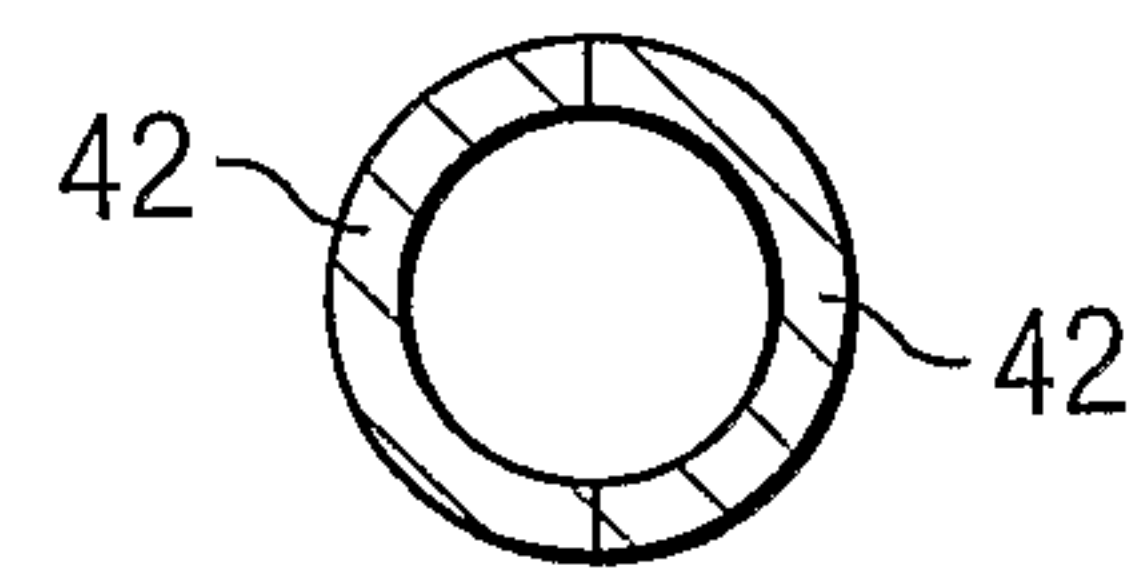

5/6

*FIG. 4A**FIG. 4B**FIG. 4C**FIG. 4D*

6/6

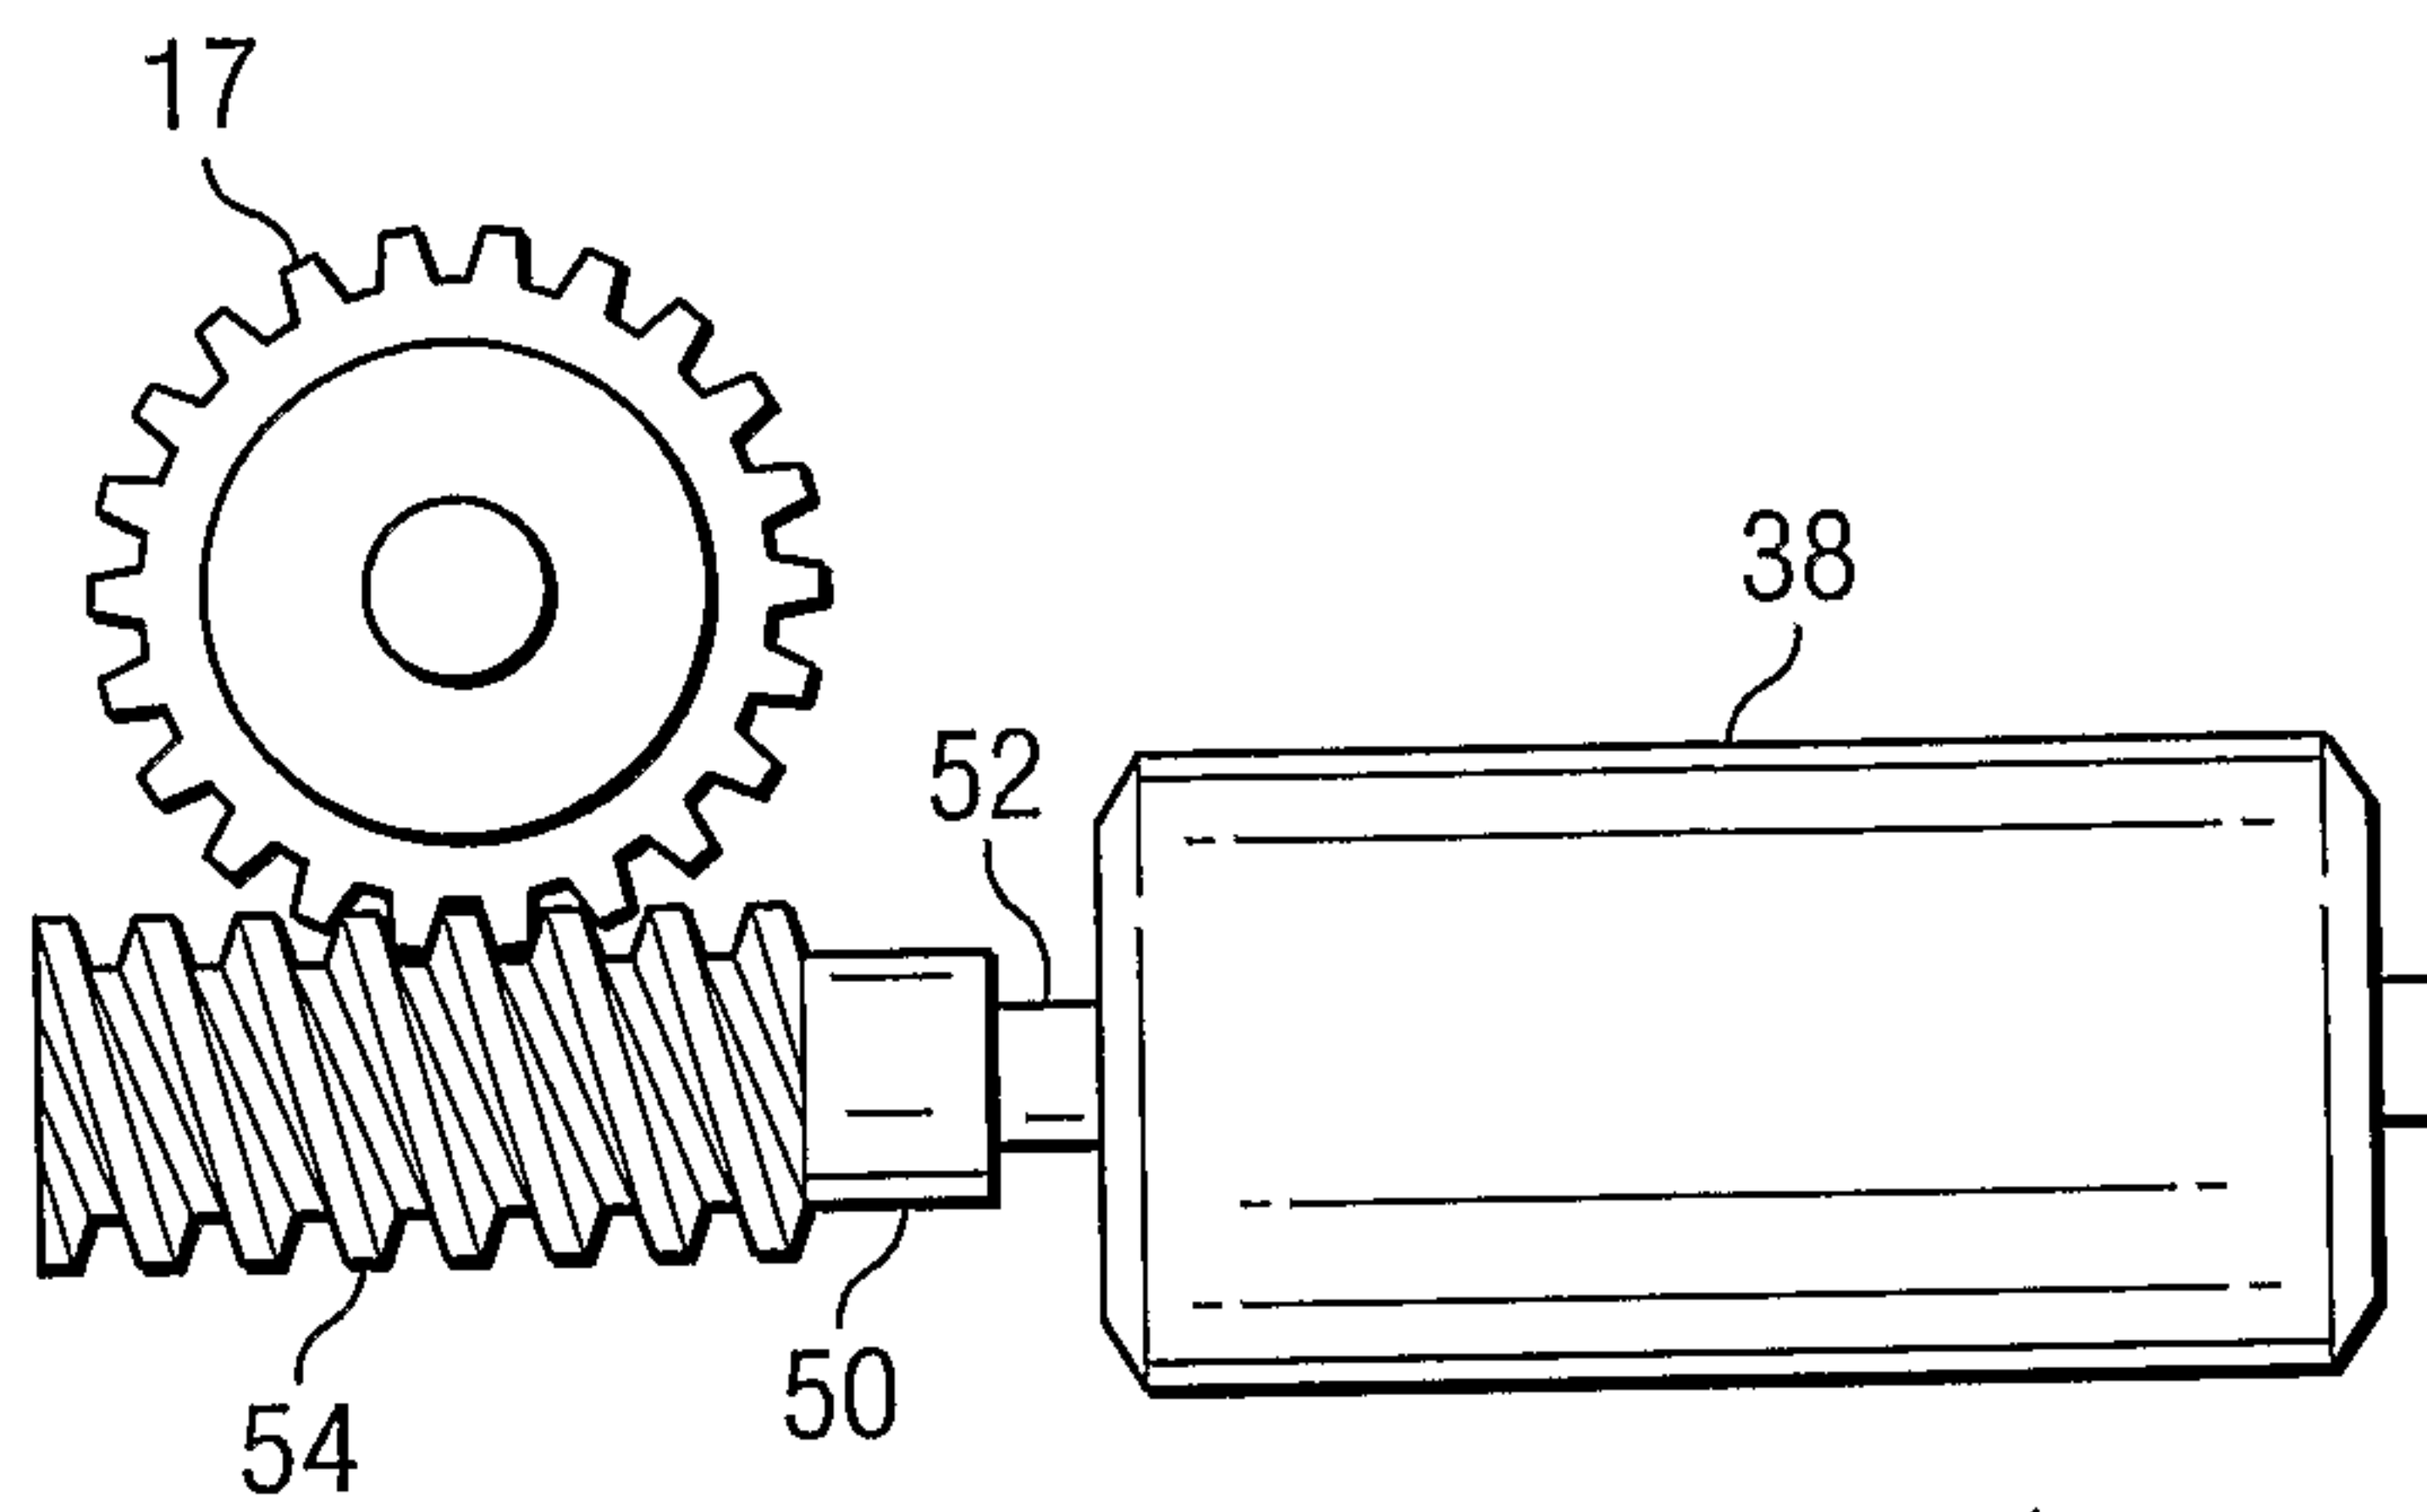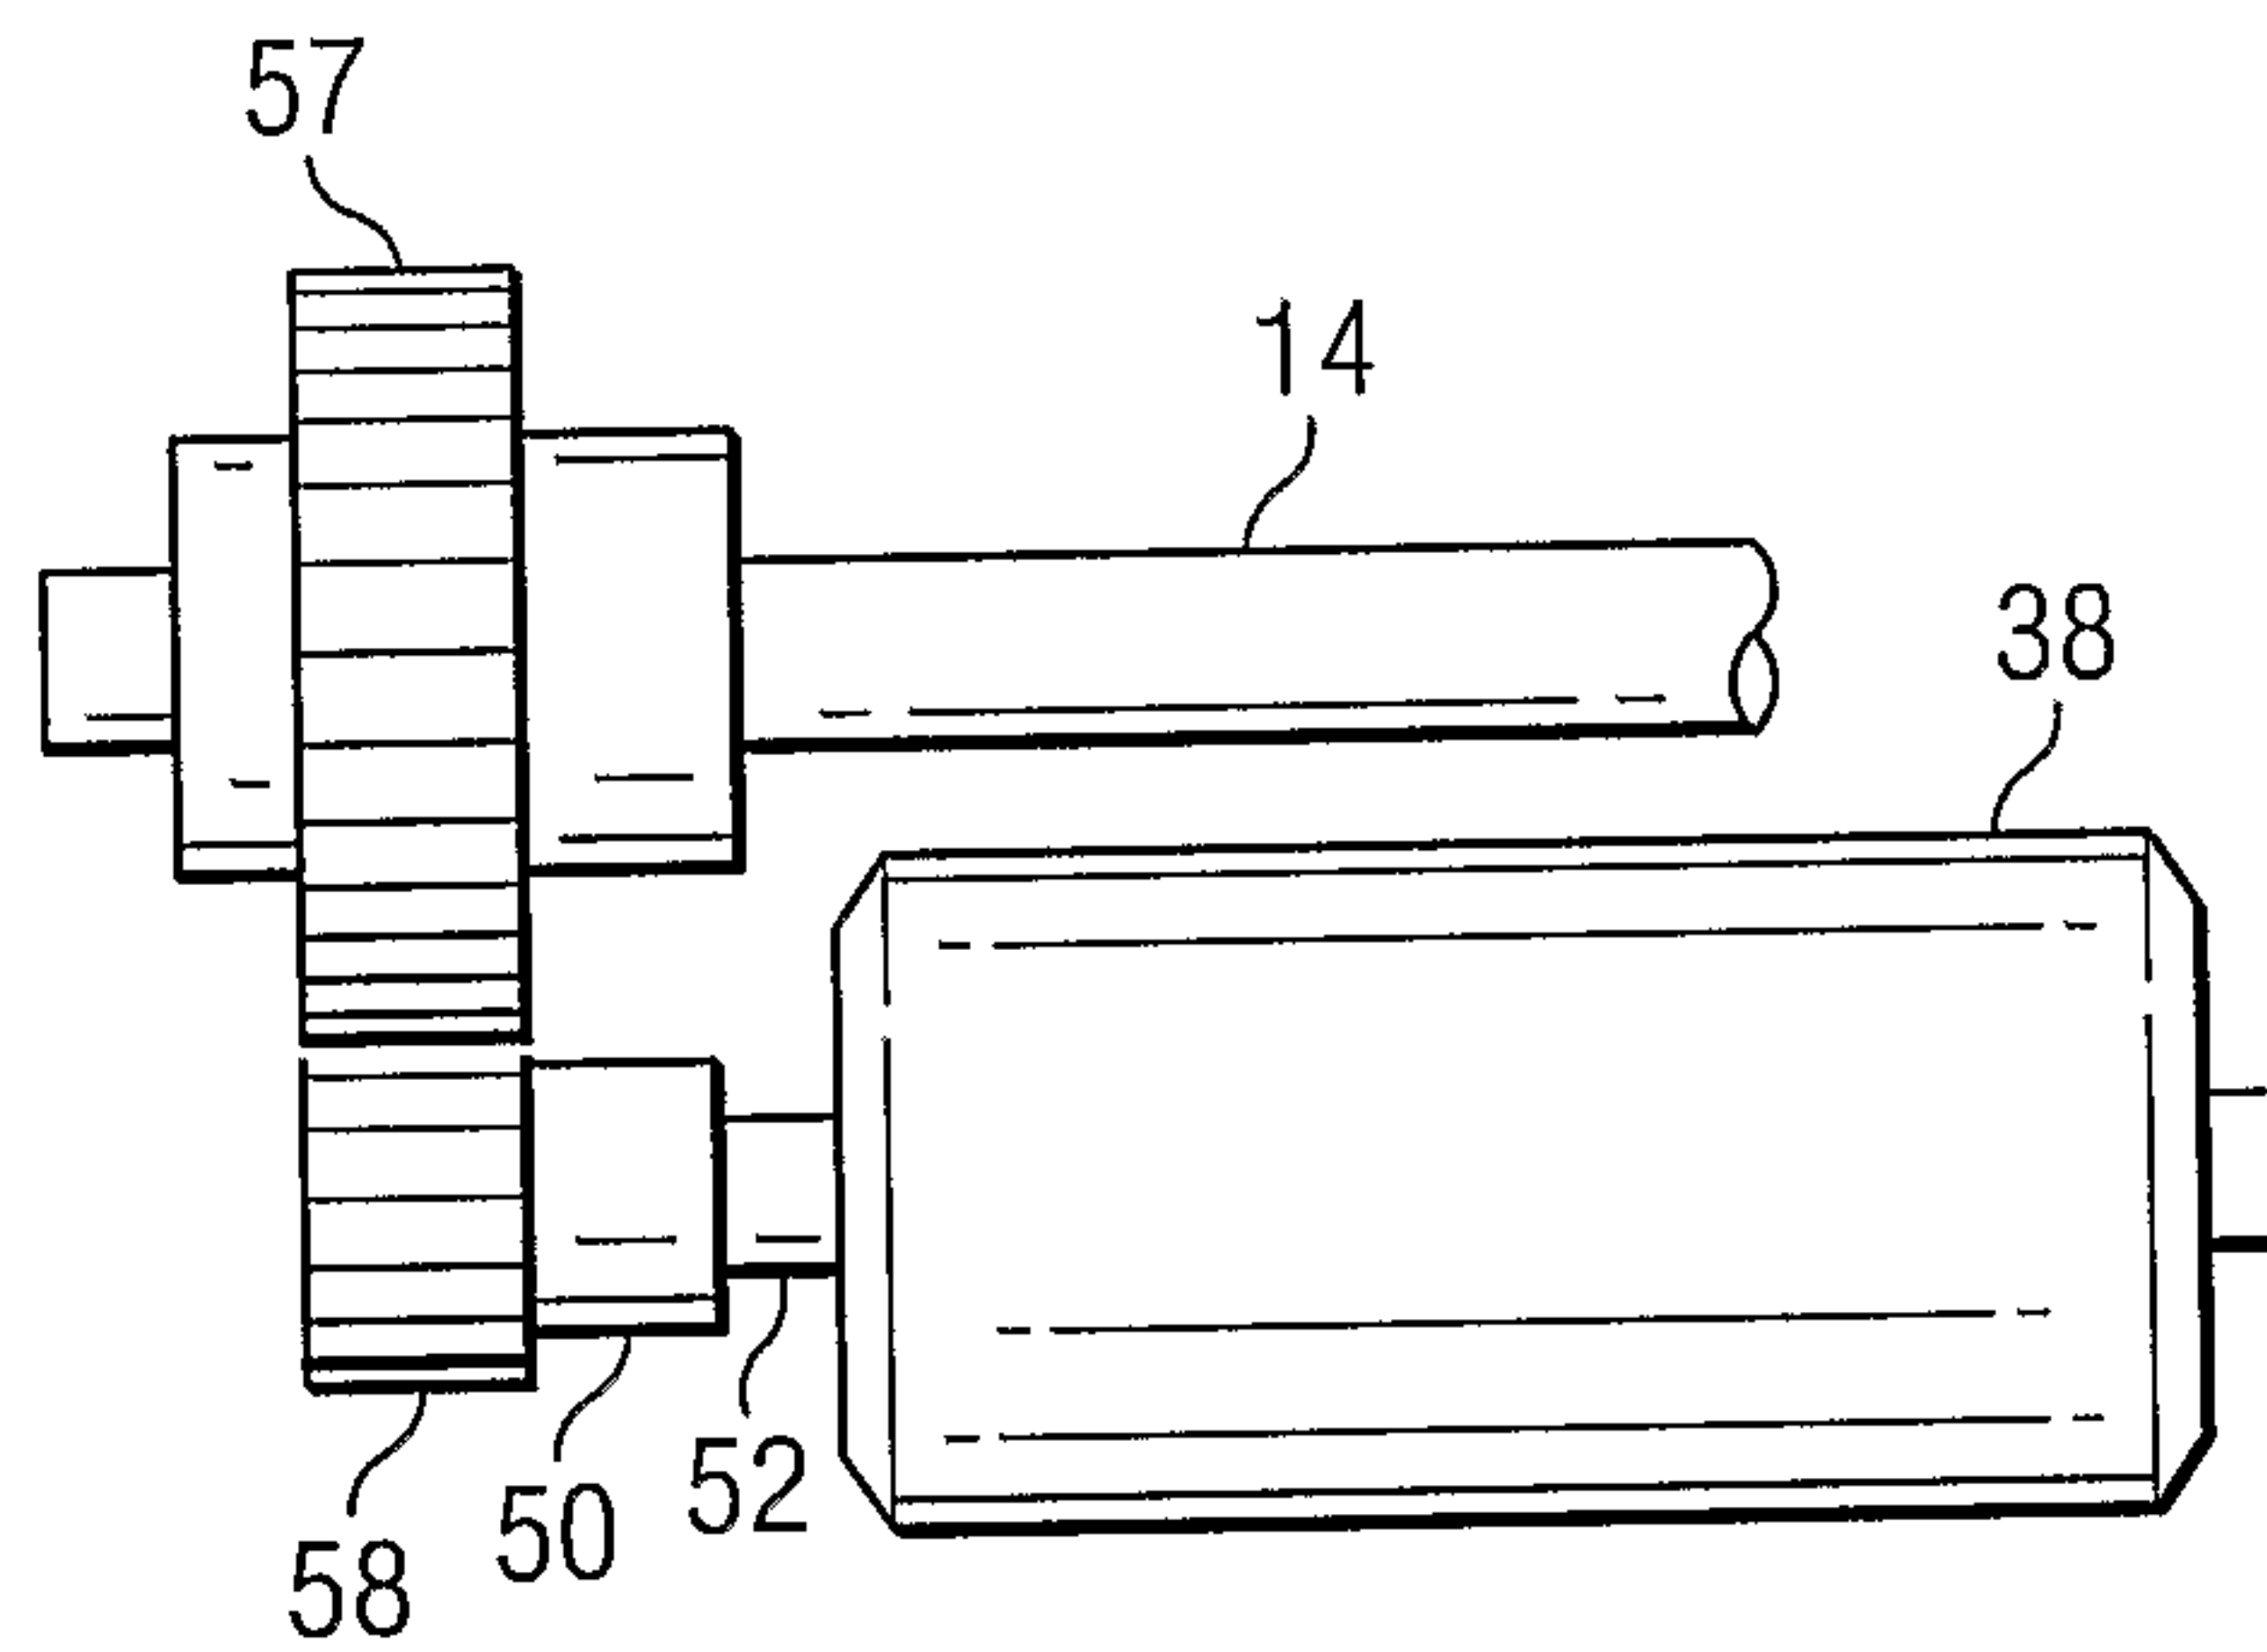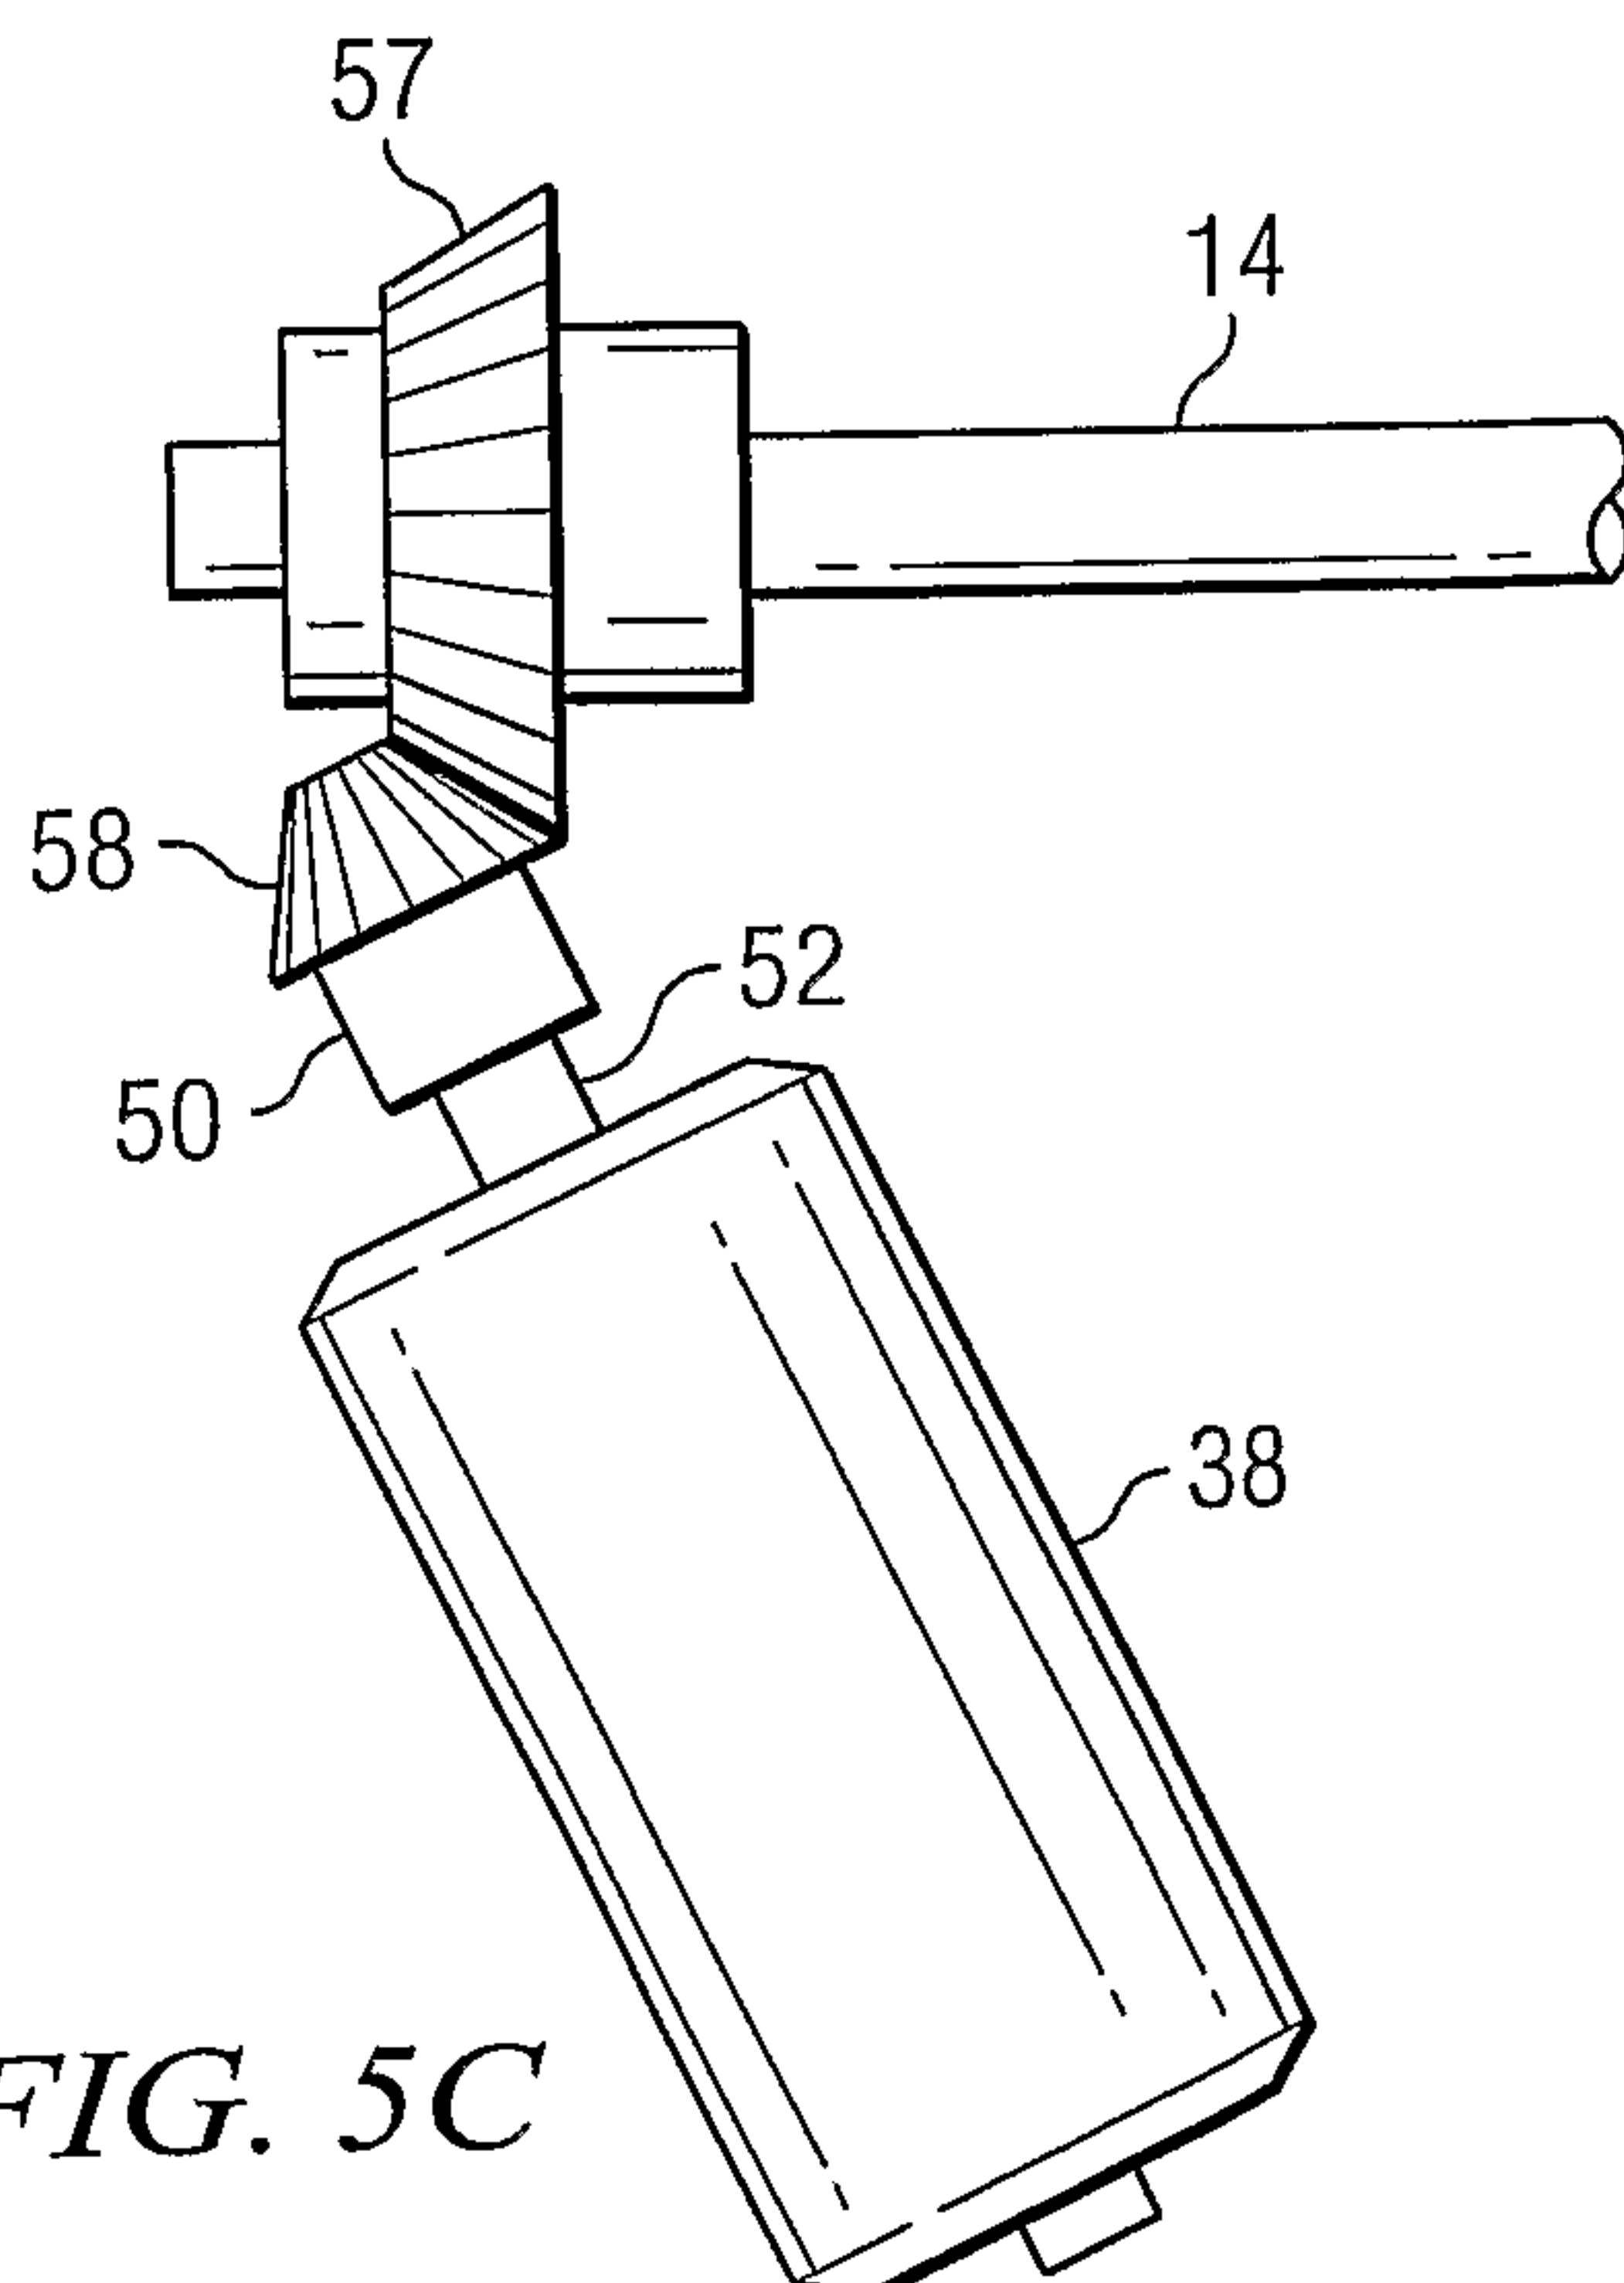*FIG. 5A**FIG. 5B**FIG. 5C*

