



(22) Date de dépôt/Filing Date: 2007/03/07

(41) Mise à la disp. pub./Open to Public Insp.: 2008/09/07

(45) Date de délivrance/Issue Date: 2014/04/29

(51) Cl.Int./Int.Cl. *F24F 7/06* (2006.01),
F24F 13/06 (2006.01)


(72) Inventeur/Inventor:
HU, SINE KON, CA

(73) Propriétaire/Owner:
NORTH AMERICA RANGE HOODS INC., CA

(74) Agent: DALE & LESSMANN LLP

(54) Titre : VENTILATEUR D'APPOINT POUR SYSTEMES ET CONDUITS DE CIRCULATION D'AIR PULSE

(54) Title: AIRFLOW BOOSTING ASSEMBLY FOR A FORCED AIR CIRCULATION AND DELIVERY SYSTEM

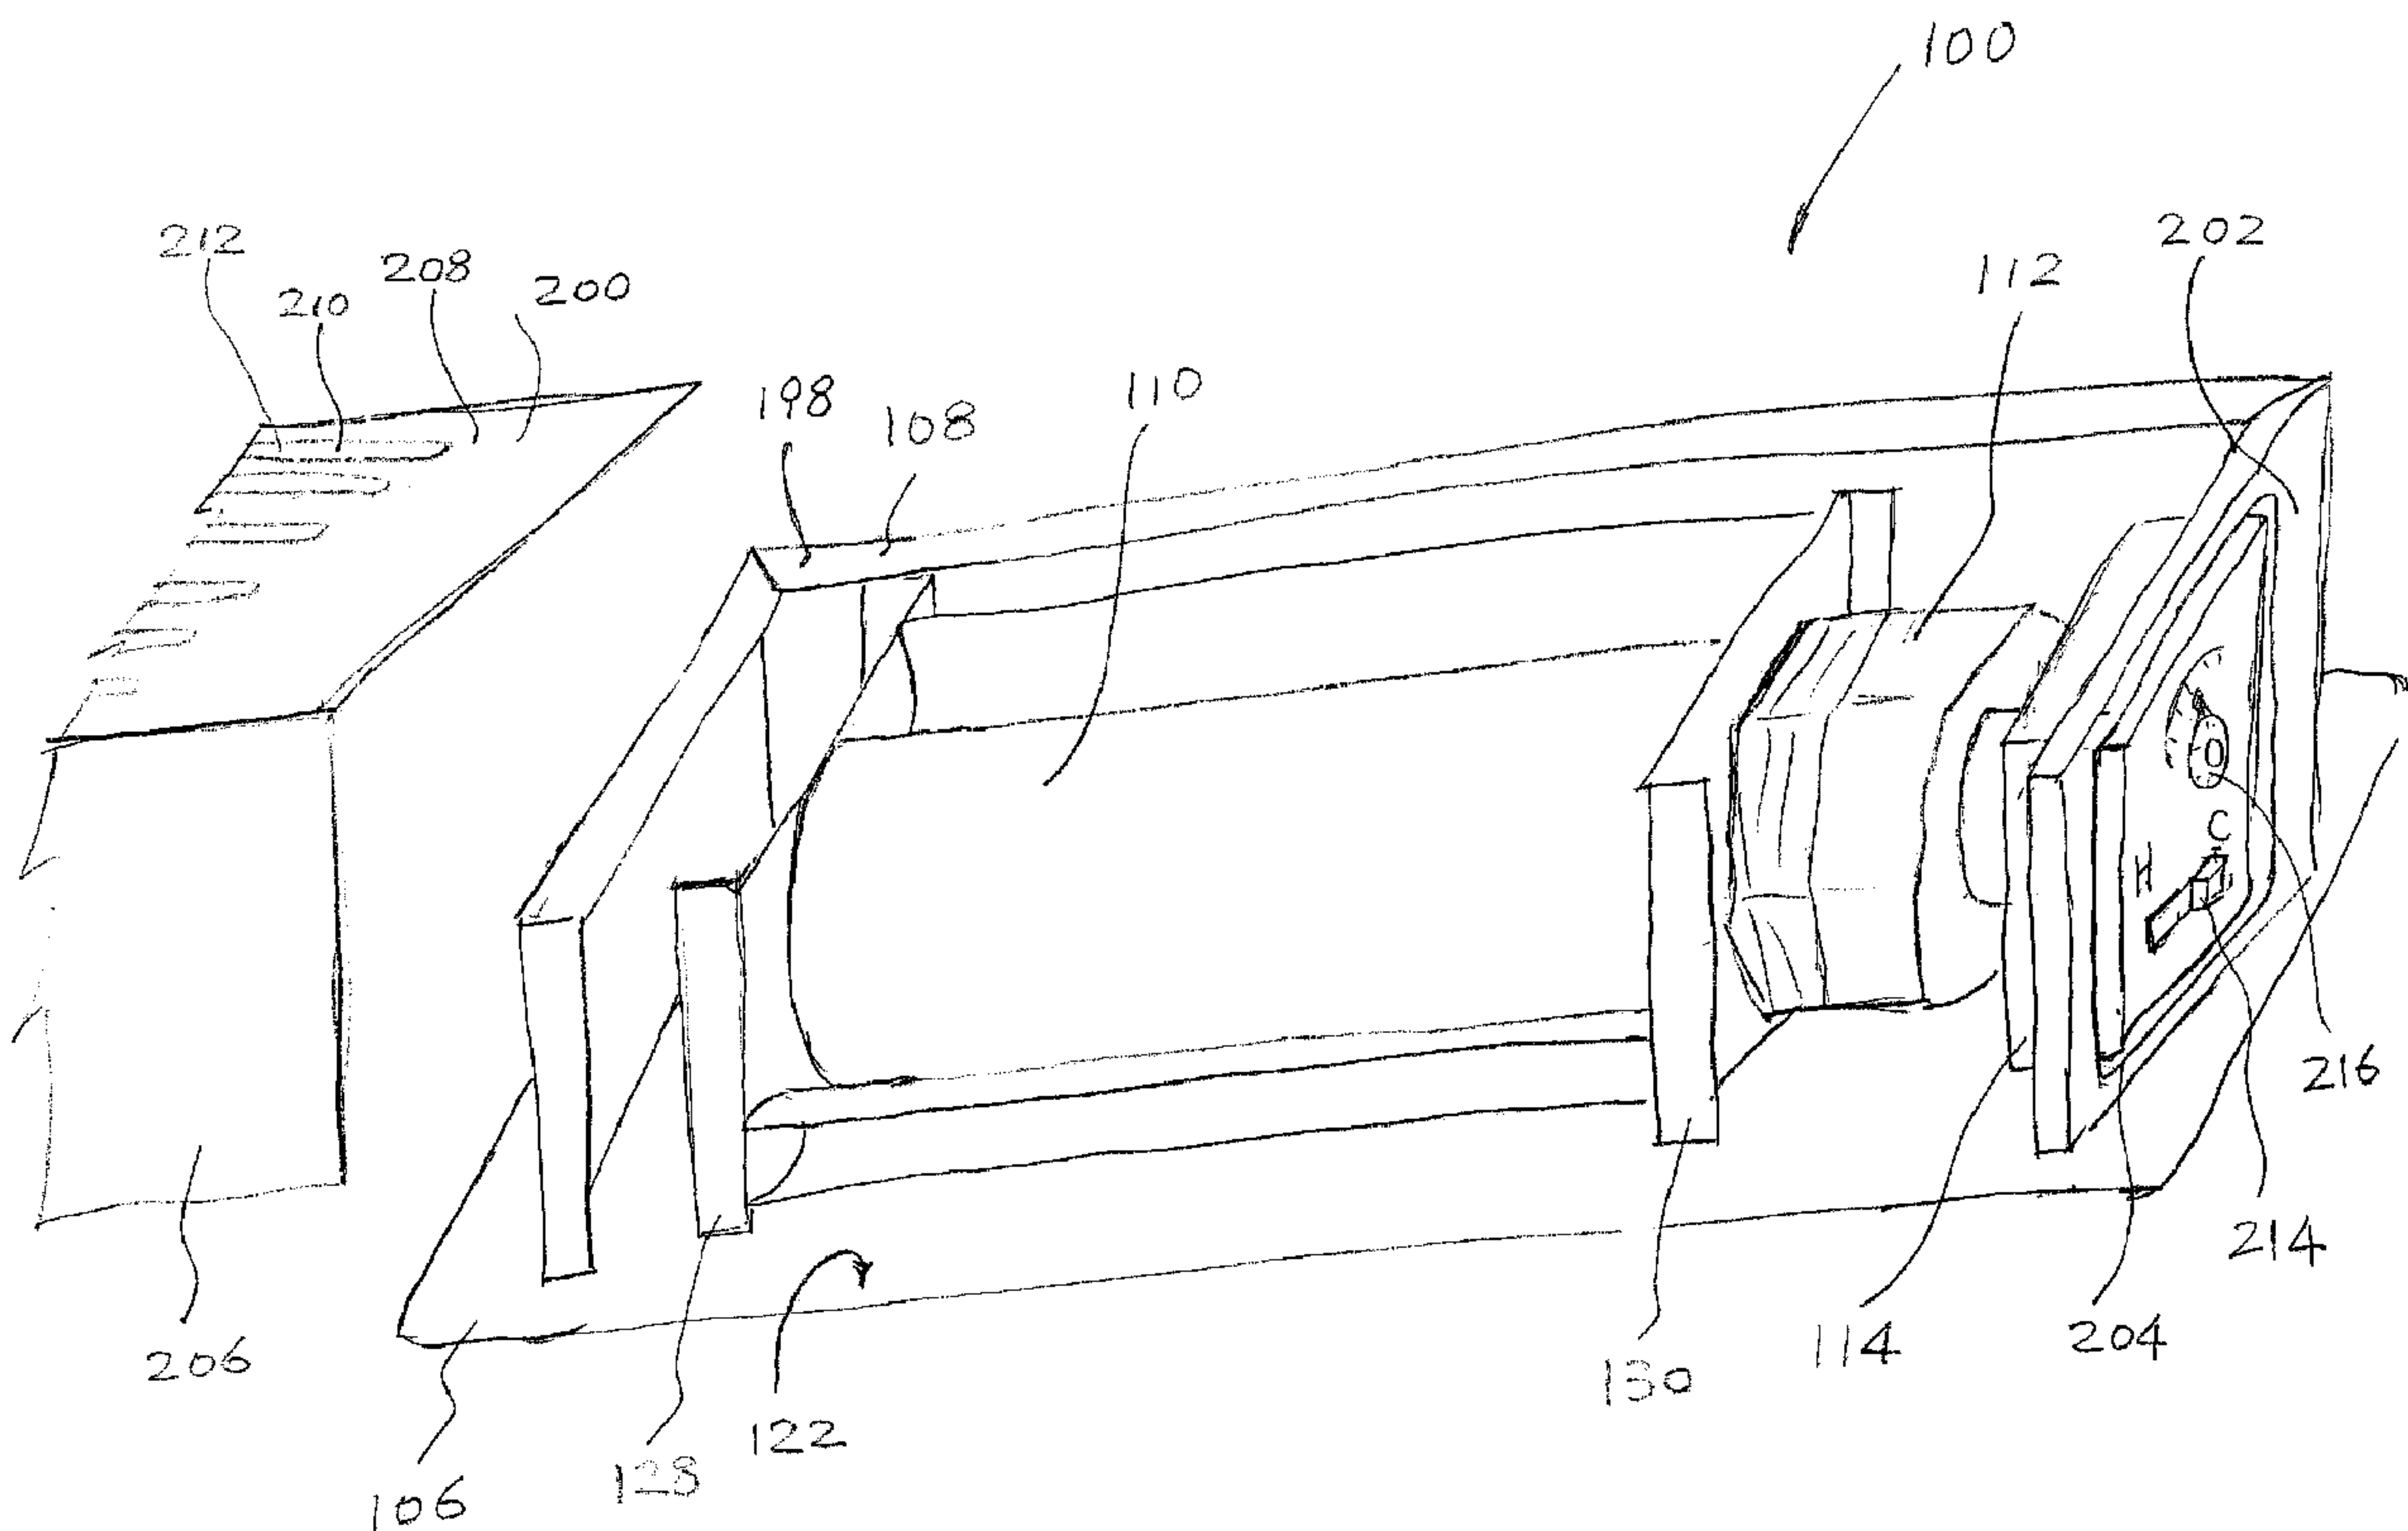

(57) Abrégé/Abstract:

The invention relates generally to the field of airflow boosting devices. In particular, the invention relates to a booster fan for installation into a vent opening of a duct system in a forced air circulation and delivery system. In an embodiment, the booster fan includes a register plate for covering a vent opening. An opening or openings on the register plate provide an air outlet. A housing is secured to the register plate for enclosing a crossflow fan therein. The crossflow fan is disposed adjacent and spaced from the register plate and resiliently supported at both ends. A motor is resiliently connected to the crossflow fan. The housing also has an aperture for providing an air inlet communicating with the duct system. Preferably, two arcuate air deflection panels are provided in the housing and connecting the air inlet and air outlet to form a guided air passageway.

ABSTRACT

The invention relates generally to the field of airflow boosting devices. In particular, the invention relates to a booster fan for installation into a vent opening of a duct system in a forced air circulation and delivery system. In an embodiment, the booster fan includes a register plate for covering a vent opening. An opening or openings on the register plate provide an air outlet. A housing is secured to the register plate for enclosing a crossflow fan therein. The crossflow fan is disposed adjacent and spaced from the register plate and resiliently supported at both ends. A motor is resiliently connected to the crossflow fan. The housing also has an aperture for providing an air inlet communicating with the duct system. Preferably, two arcuate air deflection panels are provided in the housing and connecting the air inlet and air outlet to form a guided air passageway.

Airflow Boosting Assembly for a Forced Air Circulation and Delivery System

Field of Invention

5 [0001] The invention relates generally to the field of airflow boosting devices. In particular, the invention relates to a booster fan for installation into a vent opening of a duct system in a forced air circulation and delivery system.

Background of Invention

10 [0002] Modern residential buildings are often equipped with a central air circulation and delivery system, which utilizes an air blower fan to force air into individual rooms through an air delivery duct system in the buildings. When the circulated air is heated or cooled or otherwise conditioned, circulation of the air inside a building also provides heating or cooling of ambient temperature or otherwise conditioning of air in the building or individual rooms thereof. It is desirable that each room is heated, cooled or otherwise conditioned according to user selectable criteria for the comforts of the room's occupants.

15 [0003] Such a centralized air circulation and delivery system, however, does not always provide satisfactory results. For example, in a residential building, the air blower may be installed in a basement while a bedroom may be two or three floors up. An air blower fan may not be sufficiently powerful to deliver the desired volume of air to such a bedroom, thereby may not be able to heat or cool the room to the desired temperature. In addition, distances from
20 different rooms to the air blower fan are generally different. The duct system may not be always designed to compensate for the different lengths of duct paths to reach individual rooms, with the result of uneven distribution and delivery of air in individual rooms in a building. To compensate, people tend to set temperature a little higher (in the winter) or a little lower (in the summer) for the entire building so that they may feel comfortable in the room or
25 rooms with insufficient air delivery. This generally wastes energy.

[0004] Traditionally, damper balancing has been used to balance air delivery. Air is discharged into each room through a vent or vents. A damper is provided near each vent for controlling the air supply to the vent. Thus, a damper may be used to partially close off or otherwise reduce or restrict airflow to rooms with stronger air delivery while leaving the

- 2 -

dampers fully open in a duct or ducts leading to other rooms that require more air delivery, thus achieving a more balanced delivery of air to all rooms. Each vent may be further equipped with an adjustable register, which is provided with louvers. Adjusting the louvers can further control volume of airflow through the register. This solution does not provide a satisfactory solution. Dampers are generally located some distance away from vents or may be hidden behind floor or wall coverings and therefore difficult to reach. Restricting or reducing air flow at some vents generally reduces the efficiency of the entire air delivery system. Air flow at other vents is not necessarily increased, or increased proportionally as a result of the reduction at the closed off or blocked vents. The efficiency of the air circulation and delivery system tends to be reduced as a result. More importantly, restricting air flow in some rooms results in air not being sufficiently circulated in these rooms. Sometimes, this may also produce the undesirable result of whistling at vents that are almost entirely closed off.

[0005] There have been other solutions proposed based on a booster fan installed over a register. Typically, such a booster fan has a housing enclosing a fan inside. For example, U.S. Patent No. 4,846,399 discloses a register booster fan for increasing the flow of air through a register. U.S. Patent No. 5,489,283 discloses another register booster fan that includes a centrifugal fan for drawing air from the register and redirecting air horizontally outwardly through side vents of the booster fan. These booster fans rest on a register with its air inlet facing the register. The fan directs air upwardly and draws air from the register, thereby increasing the air flow through the register. However, this solution is not entirely satisfactory. Such a booster fan, resting above a register, may create an obstacle on the floor. Being positioned on top of a register, it may also alter a room's otherwise aesthetic appearance. In addition, such a booster fan requires good sealing between the booster fan and the register in order to maintain a negative air pressure at the register for drawing air from the register and for avoiding ambient air being drawn into the booster fan and re-circulated.

[0006] There have also been proposals of in-line air duct booster fan. A booster fan of this type is generally installed in an air duct for increasing the air flow along a duct. However, an air duct may be used for delivering air into several different rooms, not all of which require a booster. Increasing air flow in a duct may cause further imbalance of air delivery in individual rooms. There have also been booster fans proposed that are installed in a vent opening directly

- 3 -

under a register. For example, U.S. Patent No. 5,632,677 discloses fan-equipped vent for installation in a vent opening under a register. The fan-equipped vent has a housing that fits inside a typical vent opening in a residential building and encloses one or several fans. As the fan-equipped vent has to fit within the available space of a typical vent opening, the size of a fan or fans used inside the housing is more restricted. This size limit tends to limit the ability of fans to move air. To compensate, more than one fan or increased fan speed is generally required. This tends to increase the noise level and may disturb the occupant's quiet enjoyment in a room. As more fans are used within a confined space, they may also obstruct air flow, which may partially defeat the purpose of installing such a booster fan.

[0007] There is therefore a need for an improved booster fan for use in a central air circulation and delivery system. It is an object of the present invention to mitigate or obviate at least one of the above mentioned disadvantages.

Summary of Invention

[0008] The present invention is directed to an airflow boosting assembly. In particular, the invention relates to a booster fan for installation into a vent opening of a duct system in a forced air circulation and delivery system.

[0009] In an embodiment, the booster fan includes a register plate for covering a vent opening. An opening or openings on the register plate provide an air outlet. A housing is secured to the register plate for enclosing a crossflow fan therein. The crossflow fan is disposed adjacent and spaced from the register plate and resiliently supported at both ends. A motor is resiliently connected to the crossflow fan in a driving relation. The housing also has an aperture for providing an air inlet communicating with the duct system. Preferably, two arcuate air deflection panels are provided in the housing and connecting the air inlet and air outlet to form a guided air passageway.

[0010] In a first aspect of the invention, there is provided an airflow boosting assembly for installation in a vent opening of a forced air circulation and delivery system. The airflow boosting assembly includes a housing, the housing having a register plate for covering the vent opening, the register plate having defined therein an air outlet; the housing having an air outlet spaced from the air inlet; a crossflow fan disposed downstream the air outlet, the crossflow fan

- 4 -

having a rotational axis, the crossflow fan being oriented such that the rotational axis is generally parallel to the register plate; an elastomeric motor connector; a motor secured to the housing, the motor being connected to the crossflow fan in a driving relation through the elastomeric motor connector; an elastomeric bearing housing attached to the housing and a bearing resiliently housed in the bearing housing; the crossflow fan having a shaft rotationally supported in the bearing, the bearing housing biasing the crossflow fan toward the motor along a direction generally parallel to the rotational axis; and a control circuitry for selectively energizing the motor.

[0011] In a second aspect, there is provided an airflow boosting assembly for installation in a vent opening of a forced air circulation and delivery system. The airflow boosting assembly includes a housing, the housing having a register plate for covering the vent opening and a bottom wall spaced from the register plate, the register plate having defined therein an air outlet, the bottom wall having defined thereon an air outlet; a crossflow fan disposed between the air inlet and the air outlet, the crossflow fan having a rotational axis, the crossflow fan being oriented such that the rotational axis is generally parallel to the register plate, the crossflow fan having a motor end disc, a bearing end disc, a plurality of fan blades extending between and connected to the motor end disc and the bearing end disc and a shaft extending from the bearing end disc; a motor secured to the housing and an elastomeric motor connector; the motor having a spindle and the elastomeric motor connector rotationally connecting the spindle to the motor end disc in a driving relation; a bearing having an insert hole for receiving the shaft; a bearing housing bracket secured to the housing; an elastomeric bearing housing resiliently attached to the bearing housing bracket; the bearing resiliently received in the bearing housing, the bearing housing biasing the crossflow fan toward the motor in a direction generally parallel to the rotational axis; and a control circuitry for selectively energizing the motor.

[0012] In one feature of this aspect of the invention, the bearing housing has a bowl-like profile, the bowl-like profile having a raised column formed on a bottom region of the bowl-like profile, the raised column having a receiving hole for receiving the bearing, the raised column being deformable to grip the bearing upon the bearing being urged toward the bottom region.

- 5 -

[0013] In another feature of this aspect of the invention, the bearing is made of a hard synthetic resin material and the insert hole has a low friction surface.

[0014] In yet another feature of this aspect of the invention, the motor end disc has a non-circular opening defined therein for receiving the motor connector, the motor connector having
5 an external profile matching the non-circular opening.

[0015] In another feature of this aspect of the invention, the air boosting device, further includes a first arcuate guidance panel and a second arcuate guidance panel, the first and second guidance panels being disposed between the register plate and the bottom wall to form a guided air passageway between the air inlet and the air outlet, the first guidance panel being
10 curved to embrace the crossflow fan and the second guidance panel being curved away from the crossflow fan.

[0016] In other aspects the invention provides various combinations and subsets of the aspects described above.

Brief Description of Drawings

15 [0017] For the purposes of description, but not of limitation, the foregoing and other aspects of the invention are explained in greater detail with reference to the accompanying drawings, in which:

[0018] Figure 1 is a perspective view of a booster fan according to an embodiment of the present inventions;

20 [0019] Figure 2 shows the booster fan shown in Figure 1 in an installed position;

[0020] Figure 3 is an exploded view of the booster fan shown in Figure 1, with several parts removed to more clearly show its internal structure;

[0021] Figures 4 shows in a partial sectional view a bearing and a bearing housing for supporting a crossflow fan in the booster fan shown in Figure 1;

25 [0022] Figure 5 shows in a partial sectional view the bearing received in the bearing housing shown in Figure 4;

- 6 -

[0023] Figure 6 is an exploded view showing a bearing housing and a bearing housing bracket;

[0024] Figure 7 is a plan view of a motor end disc of the crossflow fan shown in Figure 3;

5 [0025] Figure 8 shows in a top plan view and a side sectional view a motor connector for connecting a motor spindle to the motor end disc shown in Figure 7; and

[0026] Figure 9 shows in a cross-sectional view the relative positioning of two air deflection panels; also shown are a bypassing opening and a tab formed on the front panel.

Detailed Description of Embodiments

10 [0027] The description which follows and the embodiments described therein are provided by way of illustration of an example, or examples, of particular embodiments of the principles of the present invention. These examples are provided for the purposes of explanation, and not limitation, of those principles and of the invention. In the description which follows, like parts are marked throughout the specification and the drawings with the same respective reference
15 numerals.

[0028] The invention relates generally to the field of airflow boosting devices. In particular, the invention relates to a booster fan for installation into a vent opening of a duct system in a forced air circulation and delivery system. Although a forced air circulation and delivery system typically installed in a residential building is referenced in the examples that
20 follow, it will be appreciated that the invention is not restricted to such a system in a residential building. A booster fan according to the present invention may be installed in a multicabin cruiser boat, recreation vehicle, for example, or the like where airflow boosting is required or desirable at one or more vents. In an embodiment, the booster fan includes a register plate for covering a vent opening. An opening or openings on the register plate provide an air outlet. A
25 housing is secured to the register plate for enclosing a crossflow fan therein. The crossflow fan is disposed adjacent and spaced from the register plate. The crossflow fan is resiliently mounted to the housing. A motor is resiliently connected to the crossflow fan in a driving relation. The housing also has an aperture for providing an air inlet communicating with the

- 7 -

duct system. Preferably, two accurate air deflection panels are provided in the housing and connecting the air inlet and air outlet to form a guided air passageway.

[0029] The crossflow fan has a rotational axis. In its mounted position, the rotational axis is generally parallel to the register plate. The crossflow fan is supported at one end by a bearing. The bearing is disposed in a rubber housing attached to a bearing bracket secured to the housing. The crossflow fan is resiliently connected to and supported by a motor at the other end. The motor is secured to the housing, for example, through a mounting bracket.

[0030] A control box, containing a control circuitry for selectively energizing the motor, is disposed adjacent the housing. A temperature sensor, disposed in an airflow path downstream from the crossflow fan, may be provided for detecting temperature in the airflow path and selectively energizing the motor by providing an input signal to the control circuitry. Preferably, the control box is electrically isolated from the housing.

[0031] Referring to Figures 1-3, there is shown a booster fan, generally indicated as 100. Figure 1 is a perspective view of a booster fan 100 in accordance with an embodiment the present invention. Figure 2 is an exploded view of the booster fan 100 shown in Figure 1, with a few components removed to more clearly reveal its internal structure. Figure 3 shows the booster fan 100 in an installed position, with cutouts in floor covering 102 to show the fan 100 and a duct 104. Broadly speaking, the booster fan 100 has a register plate 106, a housing 108 secured to the register plate 106, a crossflow fan 110 disposed inside the housing 108, a motor 112 rotationally connected to the fan 110 and a control box 114 disposed adjacent the motor.

[0032] The register plate 106 is generally flat and typically has a rectangular shape. The register plate is shaped and sized so it can completely cover a vent opening 116 (shown in dashed lines in Figure 2). A vent opening in a residential building in North America generally has a number of typical (or standard) sizes. One common size is 4 inches by 10 inches (or about 10 cm by 26 cm). The register plate in one embodiment is about 5 3/4 inches by 11 1/2 inches (or about 135 cm by 285 cm) so it can completely cover such a vent opening. Of course, register plates of other sizes or other shapes can also be produced to cover vent openings of other sizes or shapes.

- 8 -

[0033] The register plate has a number of elongated openings **118** spaced along its longitudinal dimension. These elongated openings **118** are sized and arranged so that they provide a sufficiently large air outlet **120** without unduly reducing the strength of the register plate. In general, these elongated openings define an air outlet **120** (a rectangular shape
 5 illustrated in dot-dashed lines) for boosted airflow to exit therefrom into the environment. Louvers (not shown) may be provided for adjusting direction or volume of out-flowing air.

[0034] A fan **110** is disposed adjacent to and spaced from the undersurface **122** of the register plate, the upper surface **124** of the register plate being a surface facing upwardly or outwardly when the register plate is installed over a vent opening. The fan **110** is a crossflow
 10 fan, having a rotational axis **A 126**. A bearing housing bracket **128** and a motor mounting bracket **130** are secured to the register plate for supporting the fan. When the crossflow fan **110** is in its mounted position, the rotational axis **A** is generally parallel to the register plate **106**.

[0035] Referring to Figure 3, the crossflow fan **110** has two end discs and a number of fan blades extending between and secured to the end discs. On the bearing end, there is a bearing
 15 end disc **134**, extending from which is a shaft **132** to be rotationally supported in a bearing. On the other end, adjacent a motor, there is a motor end disc **170**. The motor end disc **170** has a connector hole **172** defined therein for receiving a motor connector **168**, which in turn connects the crossflow fan **110** to the motor **112**. The size of the fan area (defined by the diameter of the fan's end discs and the length of its blades) is such that the interior space of the housing is
 20 maximally utilized. In one embodiment, the fan covers a generally rectangular area that is significantly larger than 50% of the vent opening **116**. As will be appreciated, because of the relatively large coverage, fan speed does not need to be very high, which helps reducing noise.

[0036] Fan blades **135** are generally uniformly distributed angularly and at about equal distance from the central axis of the fan **110**. For improved efficiency, fan blades are inclined,
 25 i.e., oriented at an angle α with the radial direction and inclined toward the direction of rotation of the fan (labeled as " ω " in Figure 7). To further improve fan's efficiency, each fan blade is curved. In one embodiment, 22 fan blades are arranged on a circle, each blade inclined at an inclination angle α of about 20° . The circle has a diameter ϕ of about 3.5 cm. The blades are made of a metal, such as aluminum. Each blade is formed from a blank of about 1
 30 cm by 13 cm in size and curved with a curvature radius R of about 5 cm. It will be understood

that other inclination angles α , circle diameter ϕ , number and surface area of fan blades, and other blade curvature radius R are also possible.

[0037] On one end of the fan, the crossflow fan has a support shaft **132** extending from a bearing end disk **134**. The shaft **132** is substantially aligned with the rotational axis **126** of the fan. The shaft **132** is stabilized and rotatably supported by a bearing **136**, which in turn is hosted by a rubber bearing housing **138** that is attached to the bearing housing bracket **128**. The bearing **136** is formed of synthetic resin, by injection molding, for example. As shown in Figure 3, and more clearly in Figures 4 and 5, the bearing **136** has a generally cylindrical shape with a central insert hole **140** for receiving the shaft **132** of the fan. Preferably, the surface of the central insert hole **140** is smooth and has a high degree of hardness. The shaft **132** also has a smooth surface and a precise finish to ensure a precise fitting between the shaft **132** and the central insert hole **140**. The diameter of the central insert hole **140** is only slightly larger than that of the shaft **132**. As such, the shaft **132** can rotate freely inside the central insert hole **140** but without discernible lateral movement. Such a precise fitting helps reducing noise and vibration.

[0038] Preferably, the bearing **136** is formed of a hard resin or thermoplastic material, such as nylon. A bearing made of such a synthetic resin material generally provides high degree of hardness, wear-resistance and a low coefficient of friction. Of course, as will be appreciated, a bearing made of other materials may also be coated with a suitable surface material so that the surface of the bearing **136** is sufficiently smooth, wear-resistant and has low friction.

[0039] The bearing **136** is supported elastically in the rubber bearing housing **138**. The rubber bearing housing **138** has the shape of a generally round bowl **142** that has a bottom **144**, a sidewall **146** connected to the bottom and a brim **148**. In the central region **150** of the bottom **144**, there is formed a bulge in the nature of a raised column **152** with a receiving hole **154**. The bearing housing **138** receives the bearing **136** tightly inside the receiving hole **154**. The outer profile of the bearing **136** includes a shoulder **154**. An interior shoulder, or step **156**, is formed inside the receiving hole **154** so that shoulder **154** of the bearing can rest upon the step **156**. The raised column **152** is sufficiently flexible near its upper edge **158** to allow the bearing **136**, when fitted inside the receiving hole **154**, to push the raised column **152** toward the bottom **144** to deform it in such a way that the upper edge **158** of the raised column is deformed

- 10 -

downwards toward the bottom **144** and inwards toward the bearing **136** for better gripping of the bearing inside the receiving hole **154**. This also provides a gentle biasing in a direction away from the bottom and toward the brim.

[0040] The rubber bearing housing **138** is removeably and resiliently connected to the bearing housing bracket **128** (see Figure 6). The bearing housing bracket **128** has a central raised ring **160**. The rubber bearing housing **138** has a circular skirt **162** extending from the brim **148** of the bearing housing. The circular skirt **162** is sized to be tightly attached to the central raised ring **160**. Attaching the circular skirt **162** to the central raised ring **160** connects the rubber bearing housing **138** to the bearing housing bracket **128**.

[0041] A motor mounting bracket **130**, secured to the register plate **106**, has a shaft hole **164**. A motor mounting support (not shown) is secured to the motor mounting bracket **130**. Conveniently, the mounting support has a central through hole defined therein, aligned with the shaft hole **164** to allow a motor spindle **166** to pass therethrough when the motor **112** is secured to the motor mounting bracket **130**.

[0042] The other end of the crossflow fan **110** is connected to and rotated by motor **112**, which is secured to the housing. Referring to Figure 3, motor spindle **166** is resiliently connected to the crossflow fan **110** via an elastomeric connector **168**. The connector may be made of rubber or similar materials, which provides sufficient elasticity and sufficiently deformable, but not too deformable as to be unable to rotate the crossflow fan **110**. The crossflow fan **110** has a motor end disc **170** at the motor end of the fan. As shown in Figures 3 and 7, the motor end disc **170** has a connector hole **172** for receiving the elastomeric connector **168**. The connector hole **172** has a non-circular shape to prevent the connector **168** from rotating relative to the connector hole **172**. As shown in Figure 3 and more clearly in Figure 8, the elastomeric connector **168** has an exterior profile **174** matching the shape of the connector hole **172**. The elastomeric connector **168** is forcibly inserted into the connector hole **172**. To prevent the elastomeric connector **168** from accidentally slipping out of the connector hole **172**, the exterior profile of the elastomeric connector is generally tapered longitudinally towards its distal end **176** and is provided with a groove **178** near its base **180**. When the elastomeric connector **168** is being forcibly pushed through the connector hole **172**, the exterior profile is slightly deformed, i.e., compressed radially inwardly, to allow the connector **168** to pass

- 11 -

through the connector hole **172**. The connector **168** has a central spindle hole **182**. When the connector **168** rests inside the connector hole **172**, the central spindle hole **182** is generally aligned with the rotational axis **126** of the fan. The motor spindle **166** is forcibly inserted in the spindle hole **182** and is kept rotationally connected to the connector **168** by friction between the spindle and the spindle hole surface and a compression force applied by the connector **168** on the motor spindle **166**.

[0043] The shaft **132** supported in this manner (and the crossflow fan) is slightly biased toward the motor end of the crossflow fan and in a direction along the rotational axis A. Both the bowl **142** of the rubber bearing housing and the deformed raised column **152** provide the bias, gently urging the crossflow fan toward the motor. As will be appreciated, a motor spindle or its rotor generally tends to have some free play along its rotation axis. Such a free play tends to contribute to the overall noise level of the booster fan. Gently urging the crossflow fan towards the motor, i.e., by providing such a gentle bias toward the motor, tends to reduce and may eliminate the noise caused by such a free play. Additionally, the resilient support provided at both ends of the crossflow fan provides radial, axial and torsional damping and further absorbs both radial and axial vibrations, caused by misalignment and/or rotation of the fan, for example, and helps reducing noise further.

[0044] Referring to Figures 3 and 9, preferably, two air deflection panels, or guidance panels **184** are provided. Together with the bearing housing bracket **128** and the motor mounting bracket **130**, these two guidance panels **184** form an airflow passageway **186** connecting an air inlet and an air outlet. The guidance panels **184** are so positioned so that the airflow passageway **186** is generally diverged toward the air outlet. The crossflow fan is disposed in the airflow passageway, so that when the fan is energized, it urges or draws air to flow from the air inlet, moving through the passageway and exiting from the air outlet. Both air guidance panels **184** have a general arcuate profile. The rear panel **188** has a generally less bent than the front panel **190**. The rear panel **188** bends toward the crossflow fan **110** to embrace the fan and the front panel **190** bends away from the fan. It is found that such arcuate panels provide smoother airflow and help reducing noise. To further reduce noise, two slits, or bypassing openings **192**, are formed in the front panel **190**. In one embodiment, two slits are about of the same length and are positioned roughly one third of the width of the front panel

- 12 -

from the top lengthwise edge **194**. In one embodiment, both guidance panels are made of metal. Conveniently, these slits may be formed by punching through the front panel a shallow, generally U-shaped cut. The resulting metal tongue is then bent away (or bent during the punching process) to form an elongated tab **196** and a bypassing opening **192**. The elongated
5 tab **196** is adjacent the bypass opening **192** and forms an angle of about 60° with the surface of the front panel **190**. Each elongated tab, in one embodiment, is about 4 cm long and 0.3 cm wide. Of course, other slit/tab-forming techniques, such as stamping, cutting and welding etc. may also be used to form the bypassing openings **192** and the elongated tabs **196**.

[0045] As can be seen in Figures **1** and **2**, housing **108** is secured to the undersurface **122** of
10 the register plate. The motor **112** and crossflow fan **110** are enclosed inside the housing. Also enclosed inside the housing is a control box **114**. The housing **108** shown in Figure **1** has a fixed portion **198** and a removable portion **200**. The fixed portion **198** has two end walls and a rear wall connecting and extending between the end walls. The control box **114** is disposed near one end wall **202**, which has a central opening **204** for exposing control knobs and
15 switches of the control box. The removable portion **200** is bent from a sheet blank to form a front wall **206** and a bottom wall **208**. When the removable portion **200** is secured to the fixed portion **198**, the motor, the fan and the control box **114** are entirely enclosed in the housing **108**. A number of longitudinal slots **210** are formed on the bottom wall **208**, defining an air inlet **212**.

20 [0046] The control box **114** houses a control circuitry (not shown) for selectively energizing the motor **112**. The control circuitry can be any conventional type, triggered by a sensor signal, or may be otherwise programmable. The control circuitry is responsible for selectively energizing the motor. Different triggering signals, generated according to different triggering conditions may be used. For example, it may be temperature-based, as will be
25 described in greater detail below. It may also be time-based, for example, synchronized with, or at a pre-selected delay after the energizing of the air blower of the central air circulation and delivery system. It may also be based on a combination of temperature sensing and time delay, or any other suitable criteria.

[0047] In one embodiment, a temperature sensor (not shown), disposed in the housing **108**
30 and at a location downstream the fan, detects a temperature in the airflow passageway **186**.

- 13 -

The control circuitry is triggered, or activated, when the detected temperature rises or drops by a user selected amount. For example, a threshold value may be set at 5°C. When the central air circulation and delivery system is delivering cold air, the air temperature inside the duct **104**, and therefore the airflow passageway, will decrease. When the detected temperature drops by 5°C, indicating that the blower fan has started running and delivering cold air, the control circuitry is triggered. The motor **112** is then energized. The control circuitry turns off the motor after the air temperature returns to the triggering threshold. To increase efficiency, the control circuit may keep the motor **112** running for a fixed amount of time (e.g., 2 minutes) after the temperature returns to the triggering threshold. When the hot air is being delivered, the control circuit is triggered when the detected temperature rises by 5°C, and turns off the motor when the temperature returns to the threshold or lower. Of course, a user may select any other suitable threshold, not necessarily 5°C. Alternatively, the control circuit may be configured to trigger when the detected temperature crosses a fixed threshold temperature, such as below 18°C during summer and above 25°C during winter or any other suitable or desirable temperatures. As shown in Figure 1, a hot/cold switch **214** controls whether the booster fan is to boost hot or cold air. A temperature or sensitivity knob **216** allows a user to set the threshold value, i.e., the threshold at which the booster fan is to be energized.

[0048] The control circuitry and the motor may be operated using household electricity, in which case an electricity cord is provide for connecting to a wall electricity outlet, or using standard batteries, in which case space for installing batteries is provided in the control box. For safety, the control box, at least the control circuitry, is electrically isolated from the housing.

[0049] Various embodiments of the invention have now been described in detail. Those skilled in the art will appreciate that numerous modifications, adaptations and variations may be made to the embodiments without departing from the scope of the invention. Since changes in and or additions to the above-described best mode may be made without departing from the nature, spirit or scope of the invention, the invention is not to be limited to those details but only by the appended claims.

- 14 -

CLAIMS**WHAT IS CLAIMED IS:**

1. An airflow boosting assembly for installation in a vent opening of a duct system in a forced
5 air circulation and delivery system, said airflow boosting assembly comprising:
a housing, said housing having a register plate for covering said vent opening, said
register plate having defined therein an air outlet;
said housing having an air inlet spaced from said air outlet;
a crossflow fan disposed between said air outlet and said air inlet, said crossflow fan
10 having a rotational axis, said crossflow fan being oriented such that said
rotational axis is generally parallel to said register plate;
an elastomeric motor connector;
a motor secured to said housing, said motor being connected to said crossflow fan in a
driving relation through said elastomeric motor connector;
15 an elastomeric bearing housing attached to said housing and a bearing resiliently housed
in said bearing housing;
said crossflow fan having a shaft rotationally supported in said bearing, said bearing
housing biasing said crossflow fan toward said motor along a direction generally
parallel to said rotational axis;
20 a control circuitry for selectively energizing said motor;
two opposing guidance panels defining an airflow passageway formed in said housing
for guiding airflow from said air inlet to said air outlet, said airflow passageway
varying continuously and gradually along said airflow passageway;
said crossflow fan being disposed inside said airflow passageway, and
25 one of said guidance panels having a bypass opening formed therein and a tab disposed
adjacent an edge of said bypass opening for guiding air passing therethrough,
said tab extending into said passageway in a direction towards said outlet.
2. The airflow boosting assembly of claim 1, wherein said motor having a spindle, said
spindle being tightly received in said motor connector, said motor connector providing
30 damping for minimizing radial, torsional and axial vibrations of said crossflow fan.

- 15 -

3. The airflow boosting assembly of claim 1, wherein said bearing housing has a bulge in its central region, said bulge having a receiving hole for receiving the bearing therein, said bearing housing and said bulge providing axial and radial damping to said bearing.
4. The airflow boosting assembly of claim 1, wherein said air outlet has an elongated shape
5 and said crossflow fan extends longitudinally along a major portion the entire length of said elongated shape.
5. The airflow boosting assembly fan of claim 1, wherein
said control circuitry includes a temperature sensor, said control circuitry energizing
said motor when said temperature sensor detects a temperature change in said
10 housing within a pre-selected range.
6. The airflow boosting assembly of claim 5, wherein said temperature sensor is disposed proximate and in an airflow path downstream said crossflow fan.
7. The airflow boosting assembly of claim 5, wherein said control circuitry includes at least one input device for setting said pre-selected range.
- 15 8. An airflow boosting assembly for installation in a vent opening of a duct system in a forced air circulation and delivery system, said airflow boosting assembly comprising:
a housing, said housing having a register plate for covering said vent opening and a
bottom wall spaced from said register plate, said register plate having defined
therein an air outlet, said bottom wall having defined therein an air inlet;
20 a crossflow fan disposed between said air inlet and said air outlet, said crossflow fan
having a rotational axis, said crossflow fan being oriented such that said
rotational axis is generally parallel to said register plate, said crossflow fan
having a motor end disc, a bearing end disc, a plurality of fan blades extending
between and secured to said motor end disc and said bearing end disc, and a
25 shaft extending from said bearing end disc;
a motor secured to said housing, said motor having a spindle;
an elastomeric motor connector, said elastomeric motor connector resiliently connecting
said spindle to said motor end disc in a driving relation;

- 16 -

a bearing having an insert hole for receiving said shaft;
a bearing housing bracket secured to said housing;
an elastomeric bearing housing resiliently attached to said bearing housing bracket;
said bearing resiliently received in said bearing housing, said bearing housing biasing
5 said crossflow fan toward said motor along a direction generally parallel to said
 rotational axis;
a control circuitry for selectively energizing said motor, and
a first arcuate guidance panel and a second arcuate guidance panel, said first and second
 guidance panels being disposed between said register plate and said bottom wall
10 to form a guided air passageway between said air inlet and said air outlet, and
 said second guidance panel having a bypass opening formed therein and a tab
 disposed adjacent an edge of said bypass opening for guiding air passing
 therethrough.

9. The airflow boosting assembly of claim 8, wherein said tab extends into said passageway in
15 a direction towards said outlet.

10. The airflow boosting assembly of claim 8 or claim 9, wherein said bearing housing has a
bowl-like profile, said bowl-like profile having a raised column formed on a bottom region
of said bowl-like profile, said raised column having a receiving hole for receiving said
bearing, said raised column being deformed to grip said bearing when said bearing is urged
20 toward said bottom region.

11. The airflow boosting assembly of claim 8 or claim 9, wherein said bearing is made of a
hard synthetic resin material and said insert hole has a low friction surface.

12. The airflow boosting assembly of claim 8 or claim 9, wherein said motor end disc has a
non-circular opening defined therein for receiving said motor connector, said motor
25 connector having an external profile matching said non-circular opening.

13. The airflow boosting assembly of claim 8 or claim 9, wherein said fan blades are made of
metal.

- 17 -

14. The airflow boosting assembly of claim 8 or claim 9, wherein said first guidance panel is curved to embrace said crossflow fan and said second guidance panel is curved away from said crossflow fan.
15. The airflow boosting assembly of claim 8 or claim 9, further comprising a temperature
5 sensor electrically connected to said control circuitry, said temperature sensor being disposed in said housing.
16. The airflow boosting assembly of claim 15, wherein said control circuitry includes adjustment means for selecting a threshold for triggering said control circuitry thereby energizing said motor.
- 10 17. The airflow boosting assembly of claim 16 wherein said threshold is associated with a temperature signal generated by said temperature sensor.
18. The airflow boosting assembly of claim 8 or claim 9, wherein said control circuitry includes adjustment means for selecting a time delay for energizing said motor.

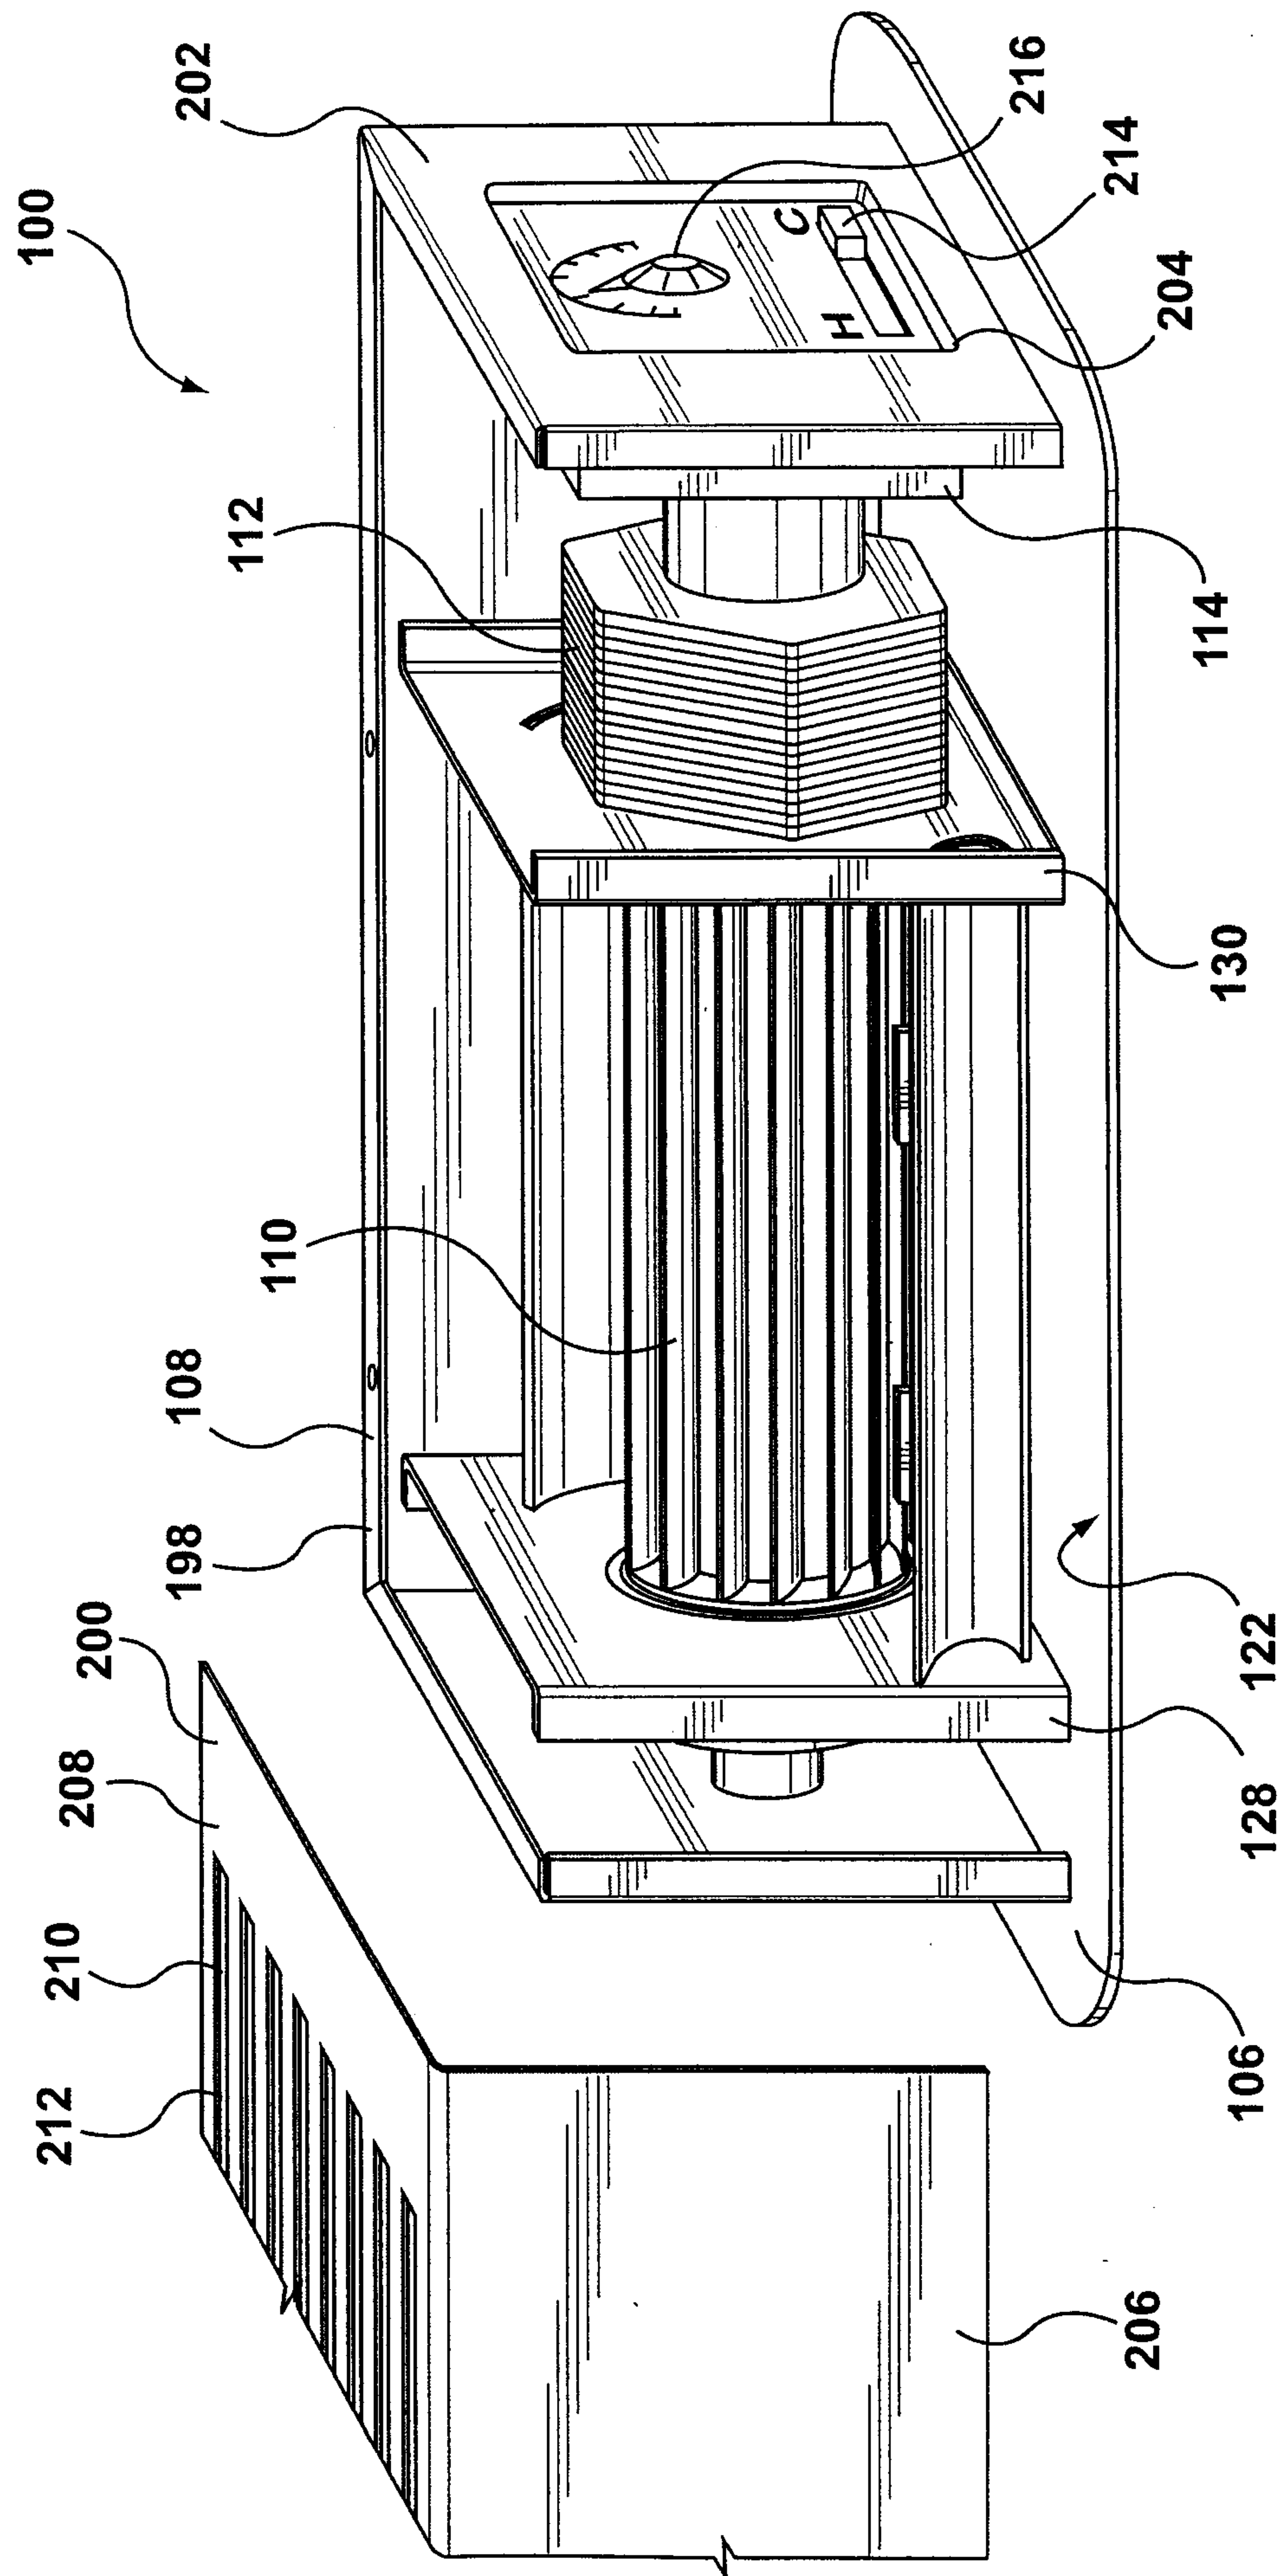


FIG. 1

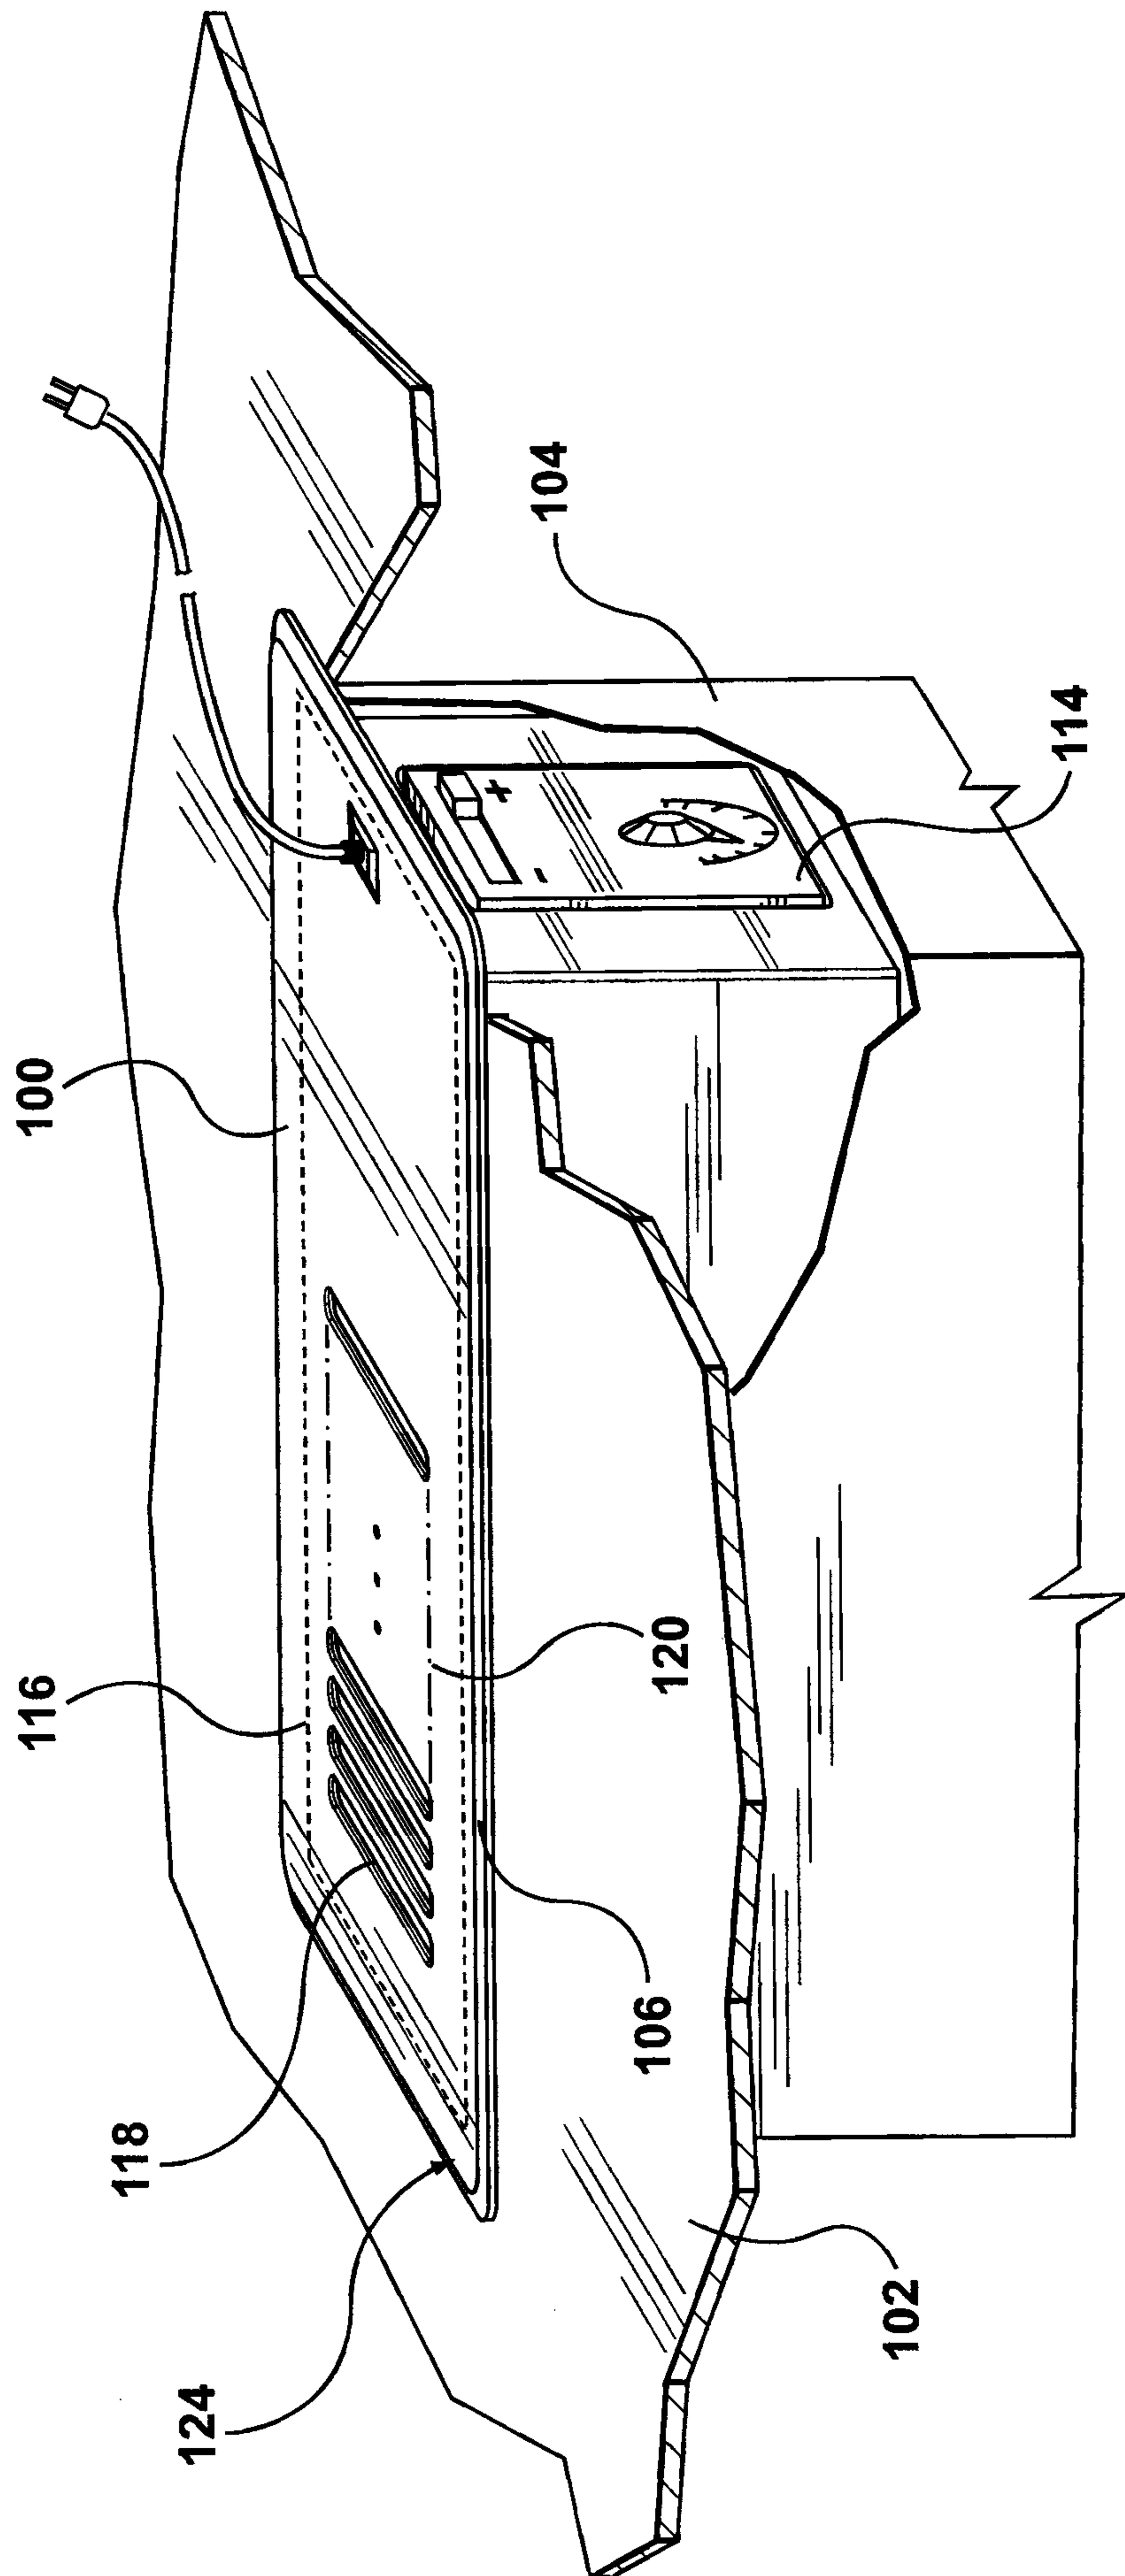


FIG. 2

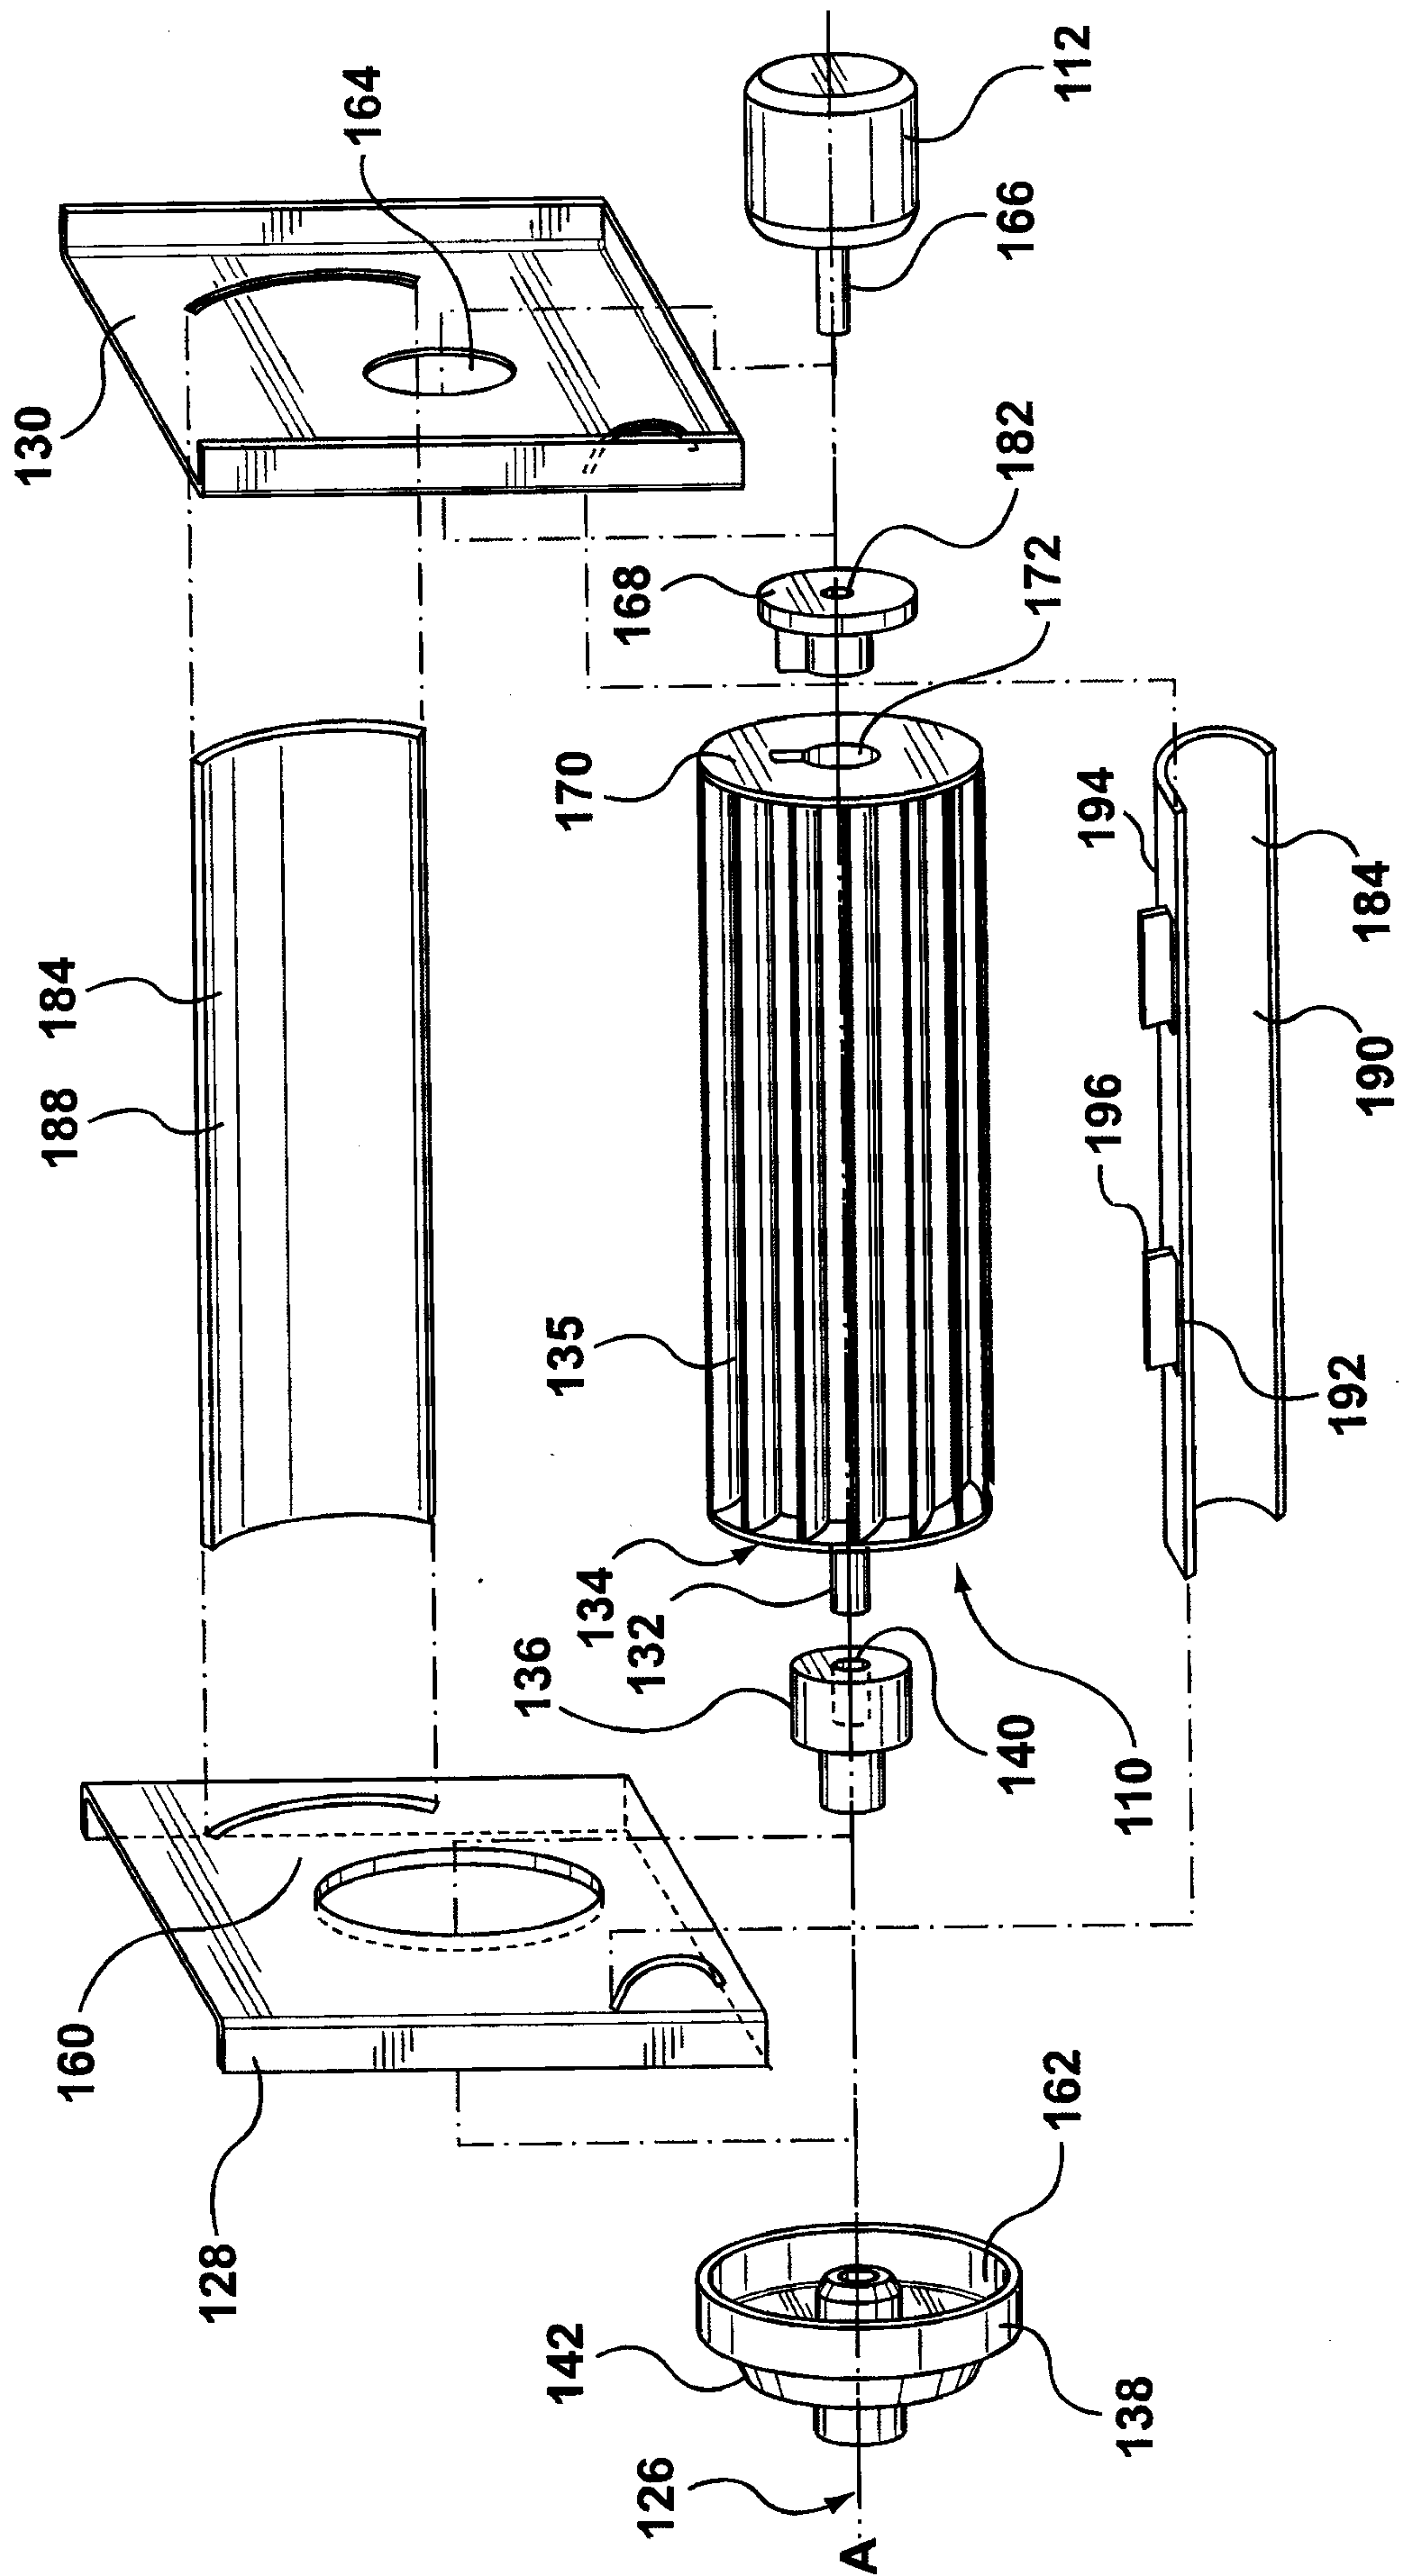


FIG. 3

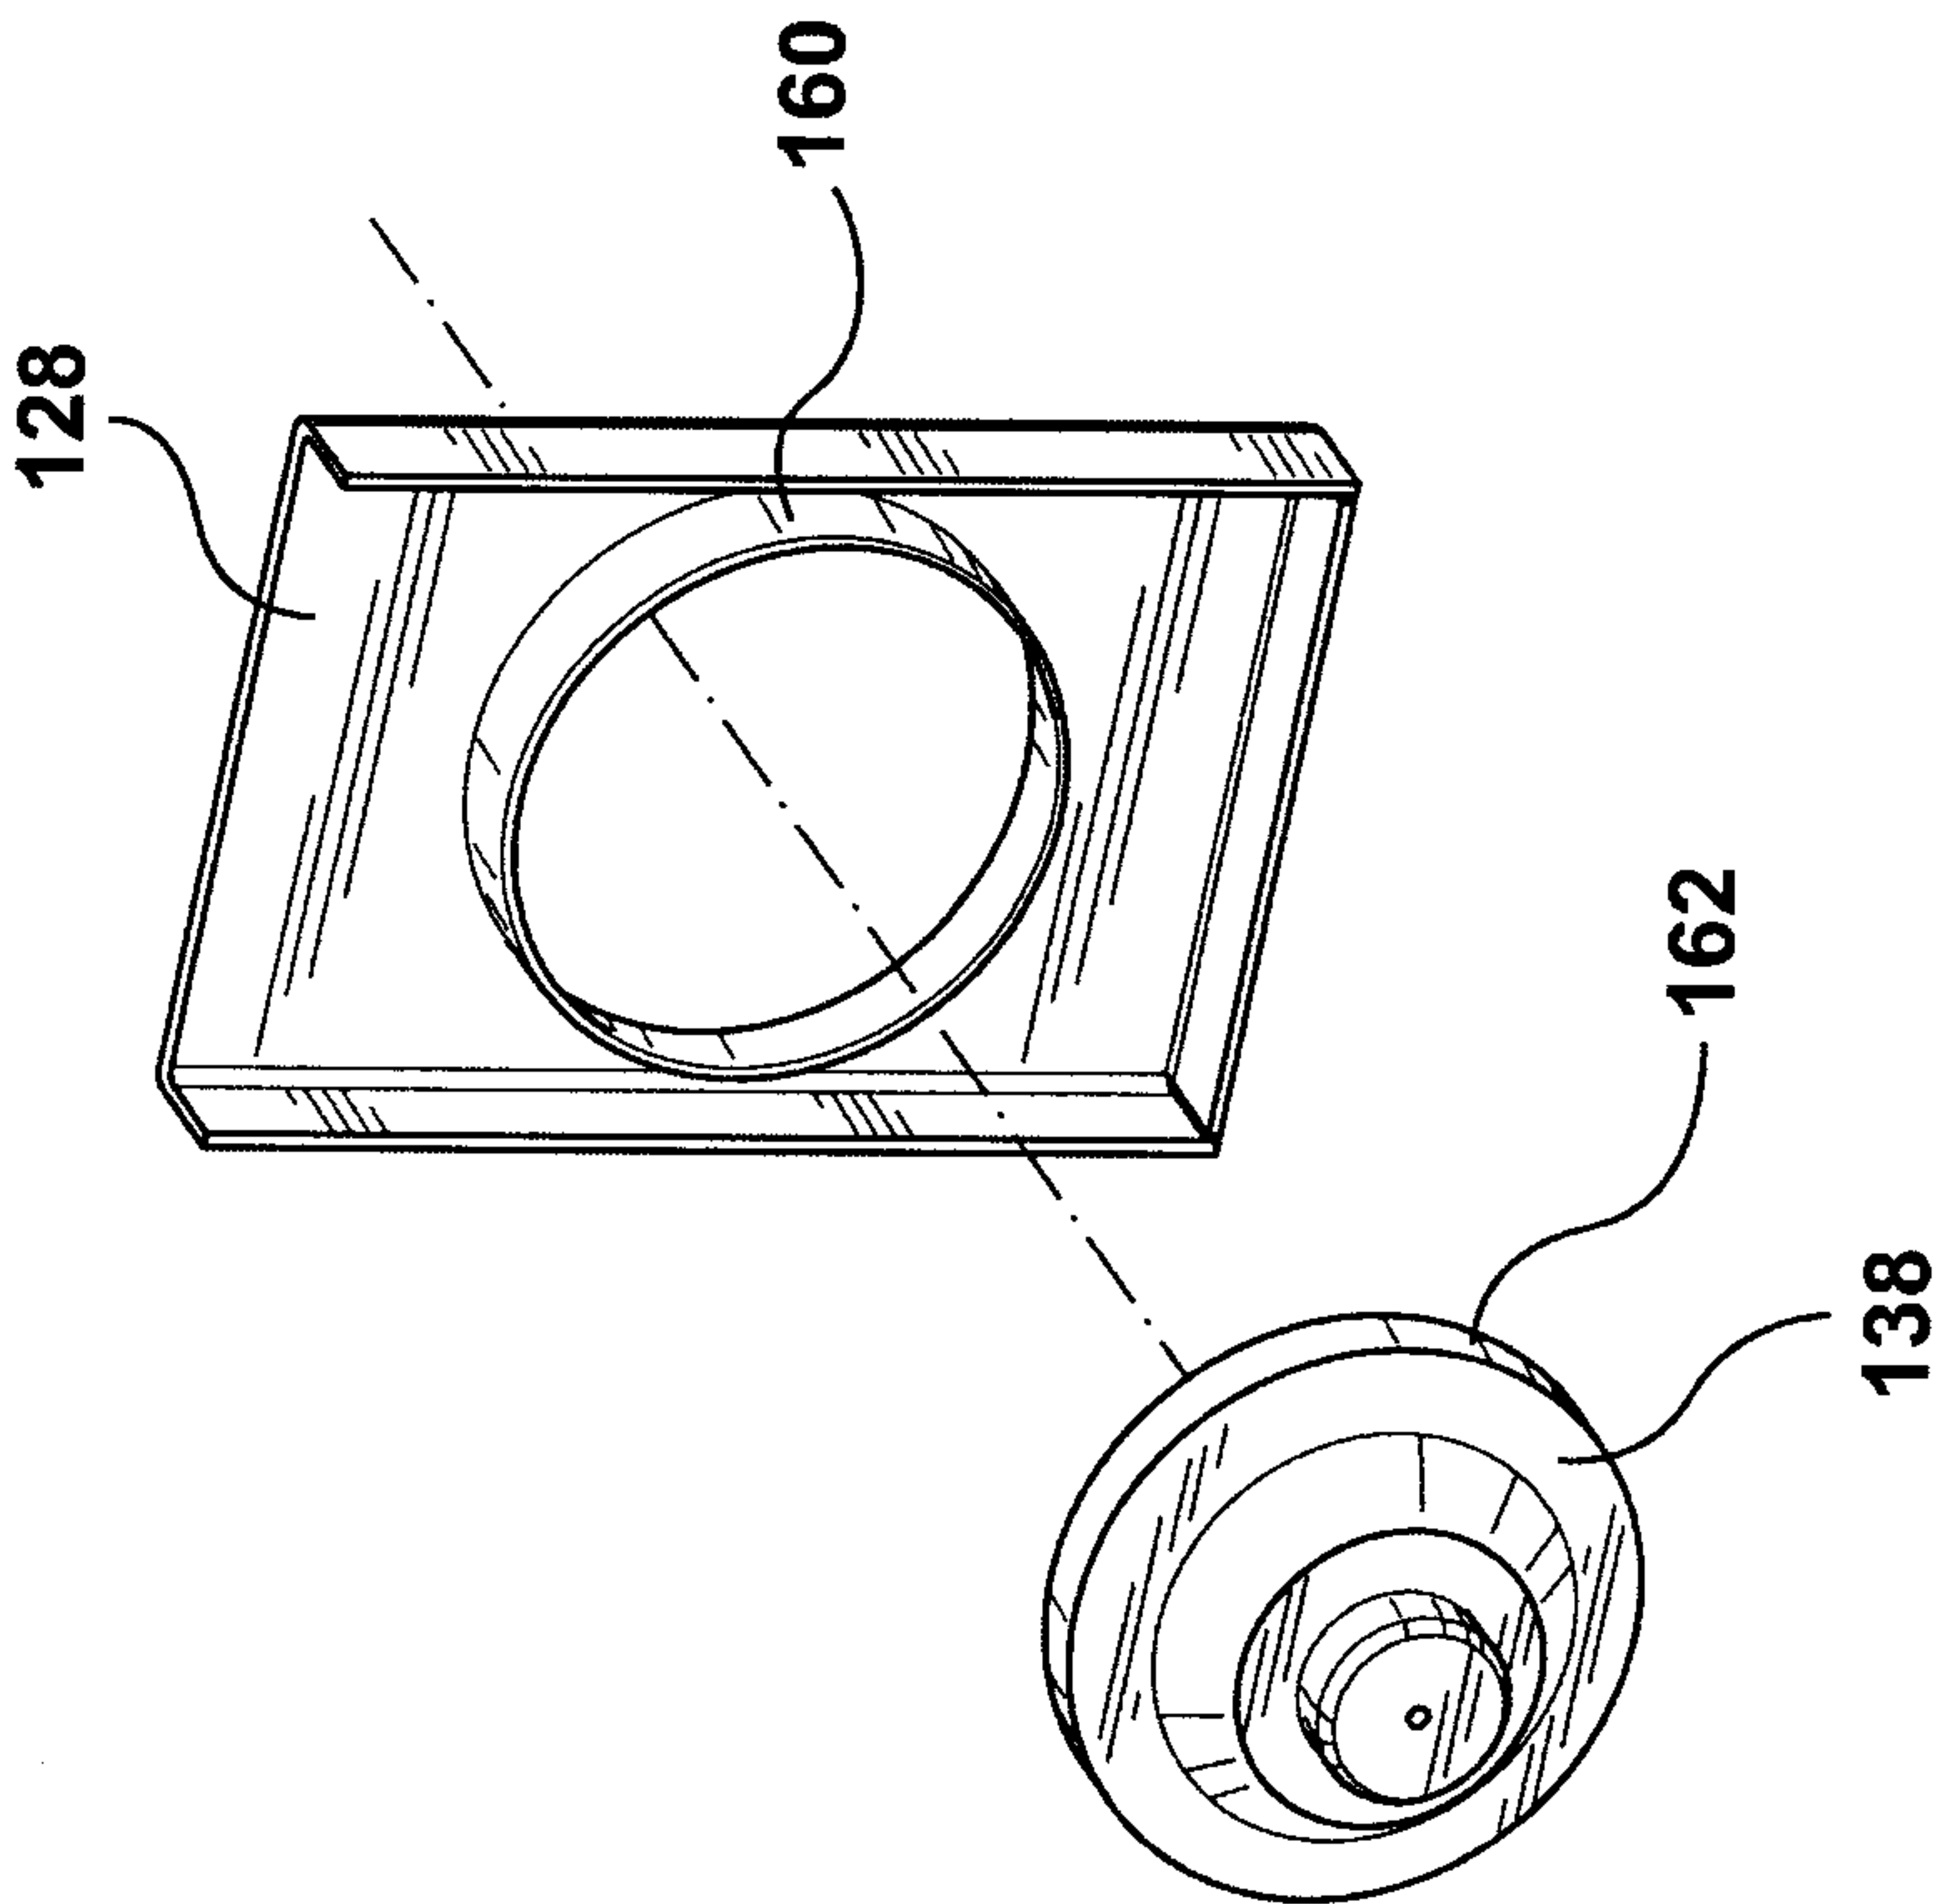


FIG. 6

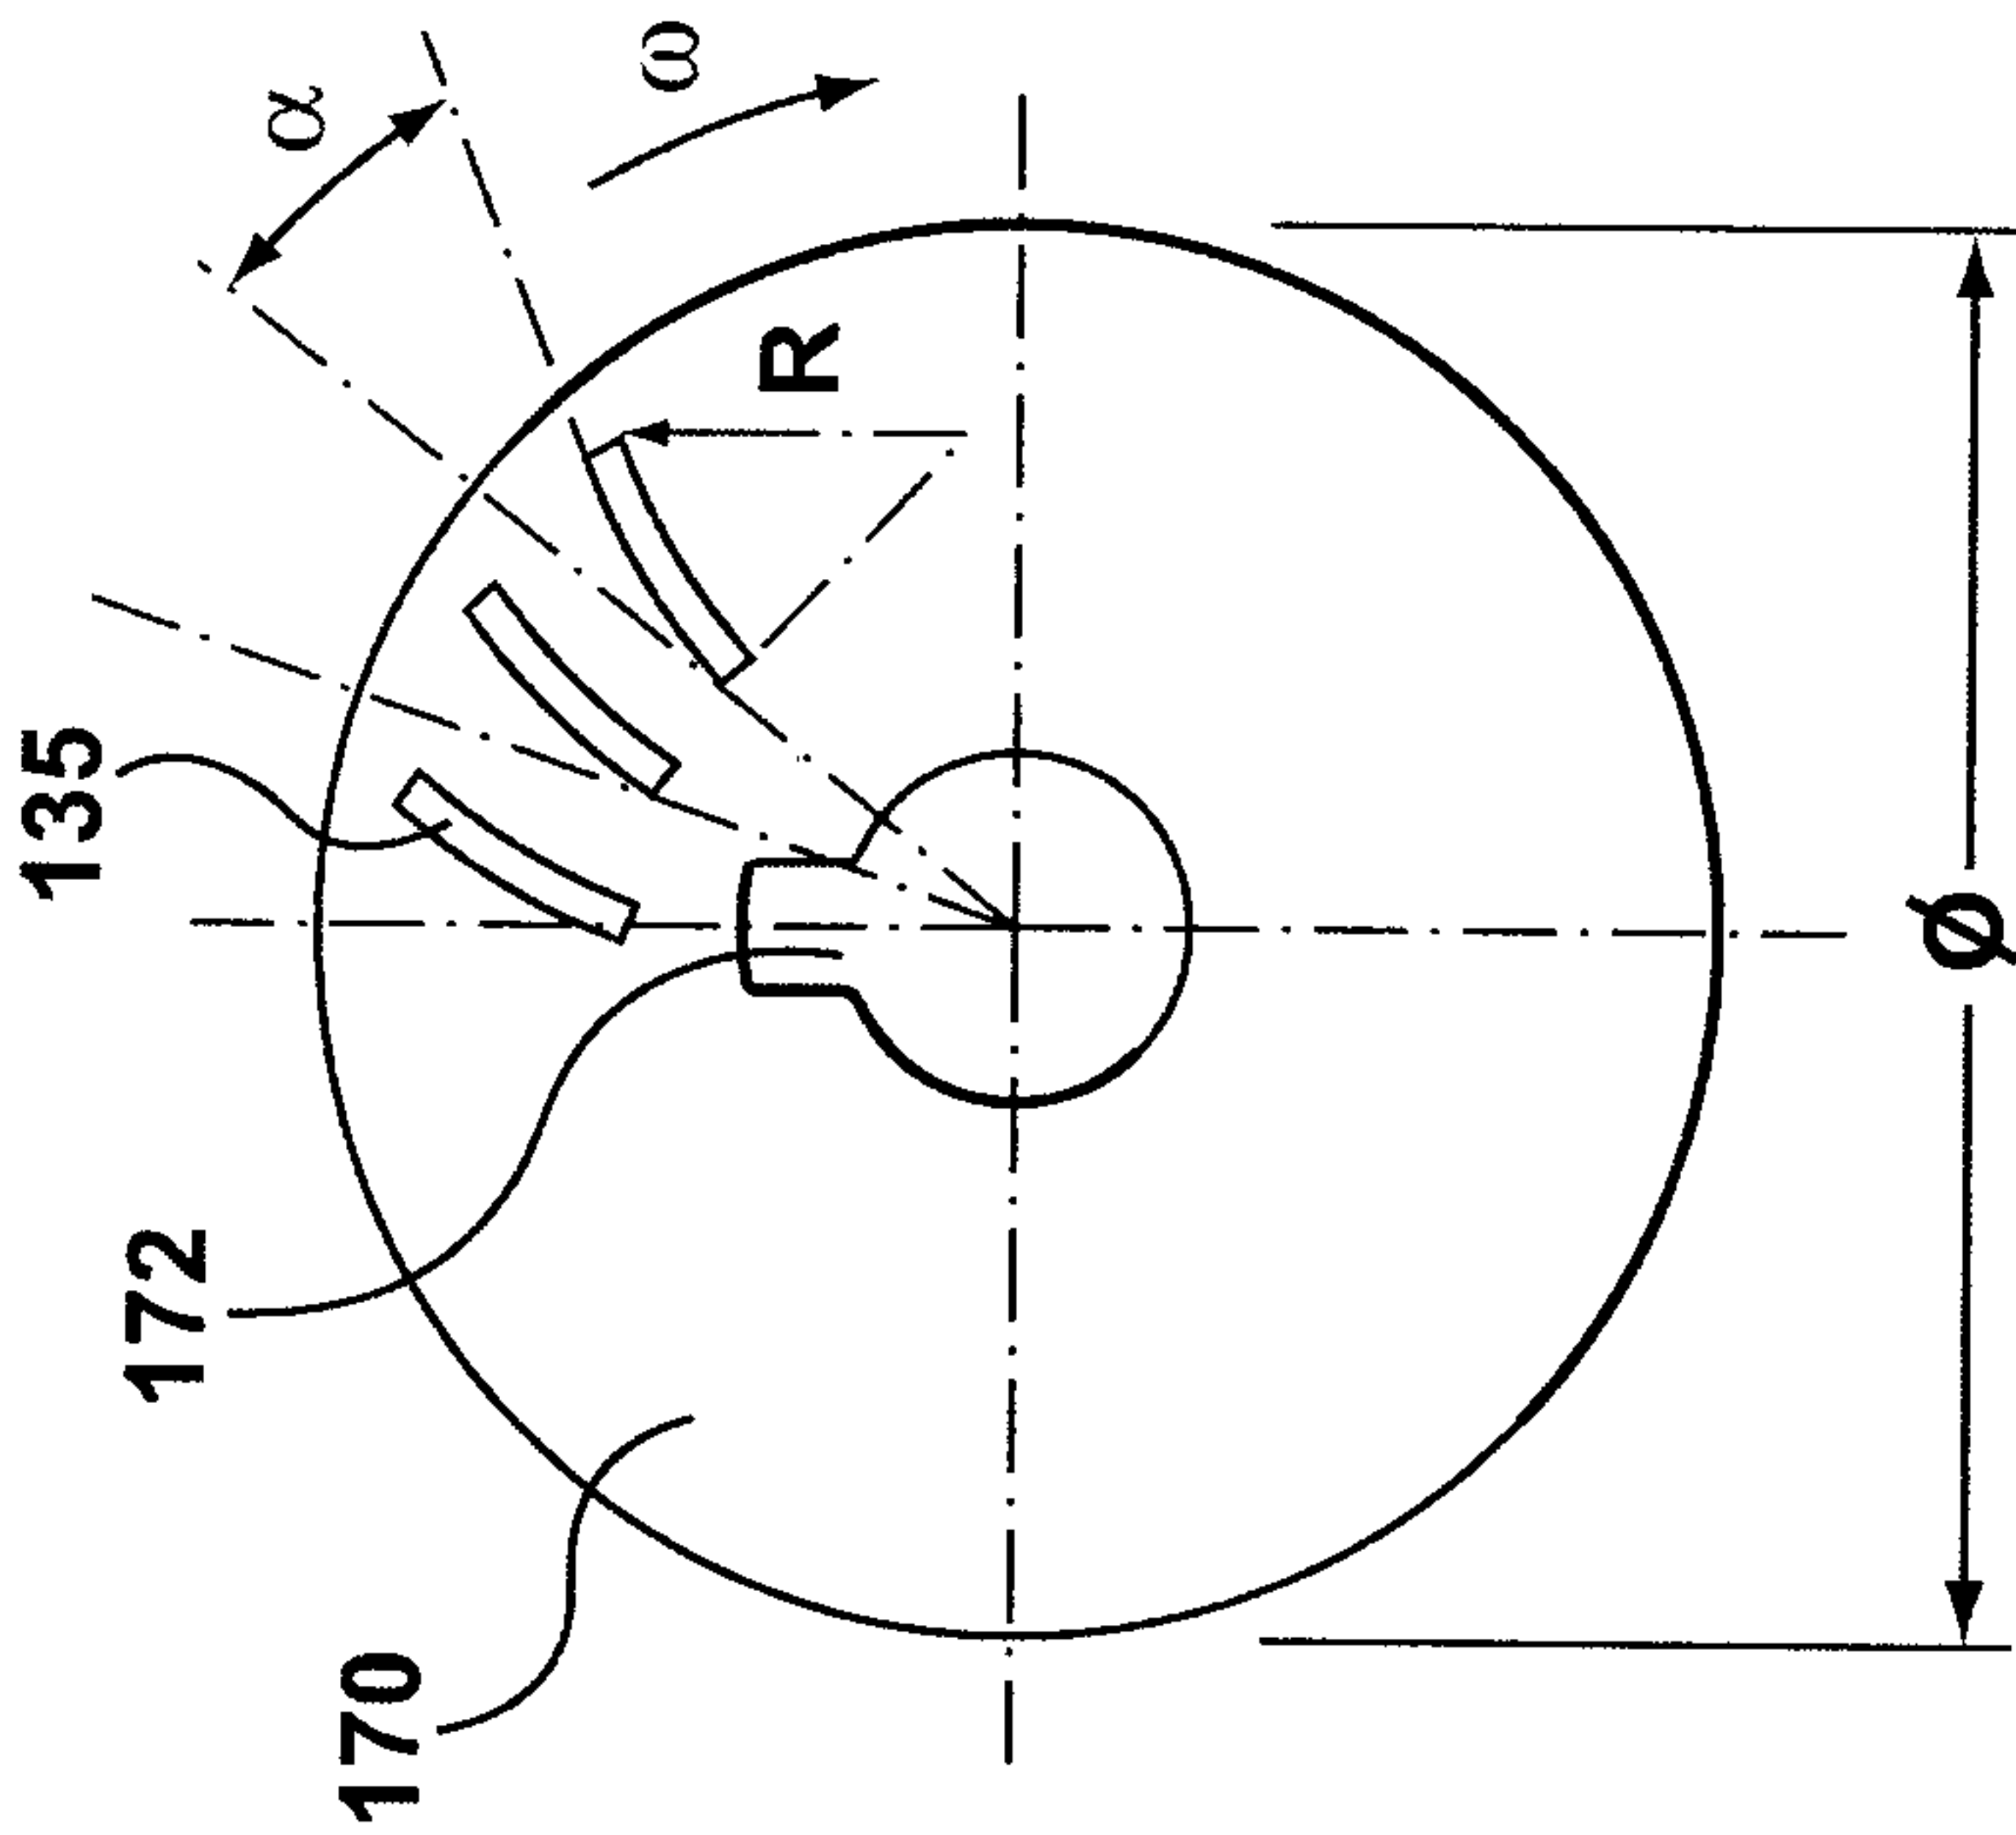


FIG. 7

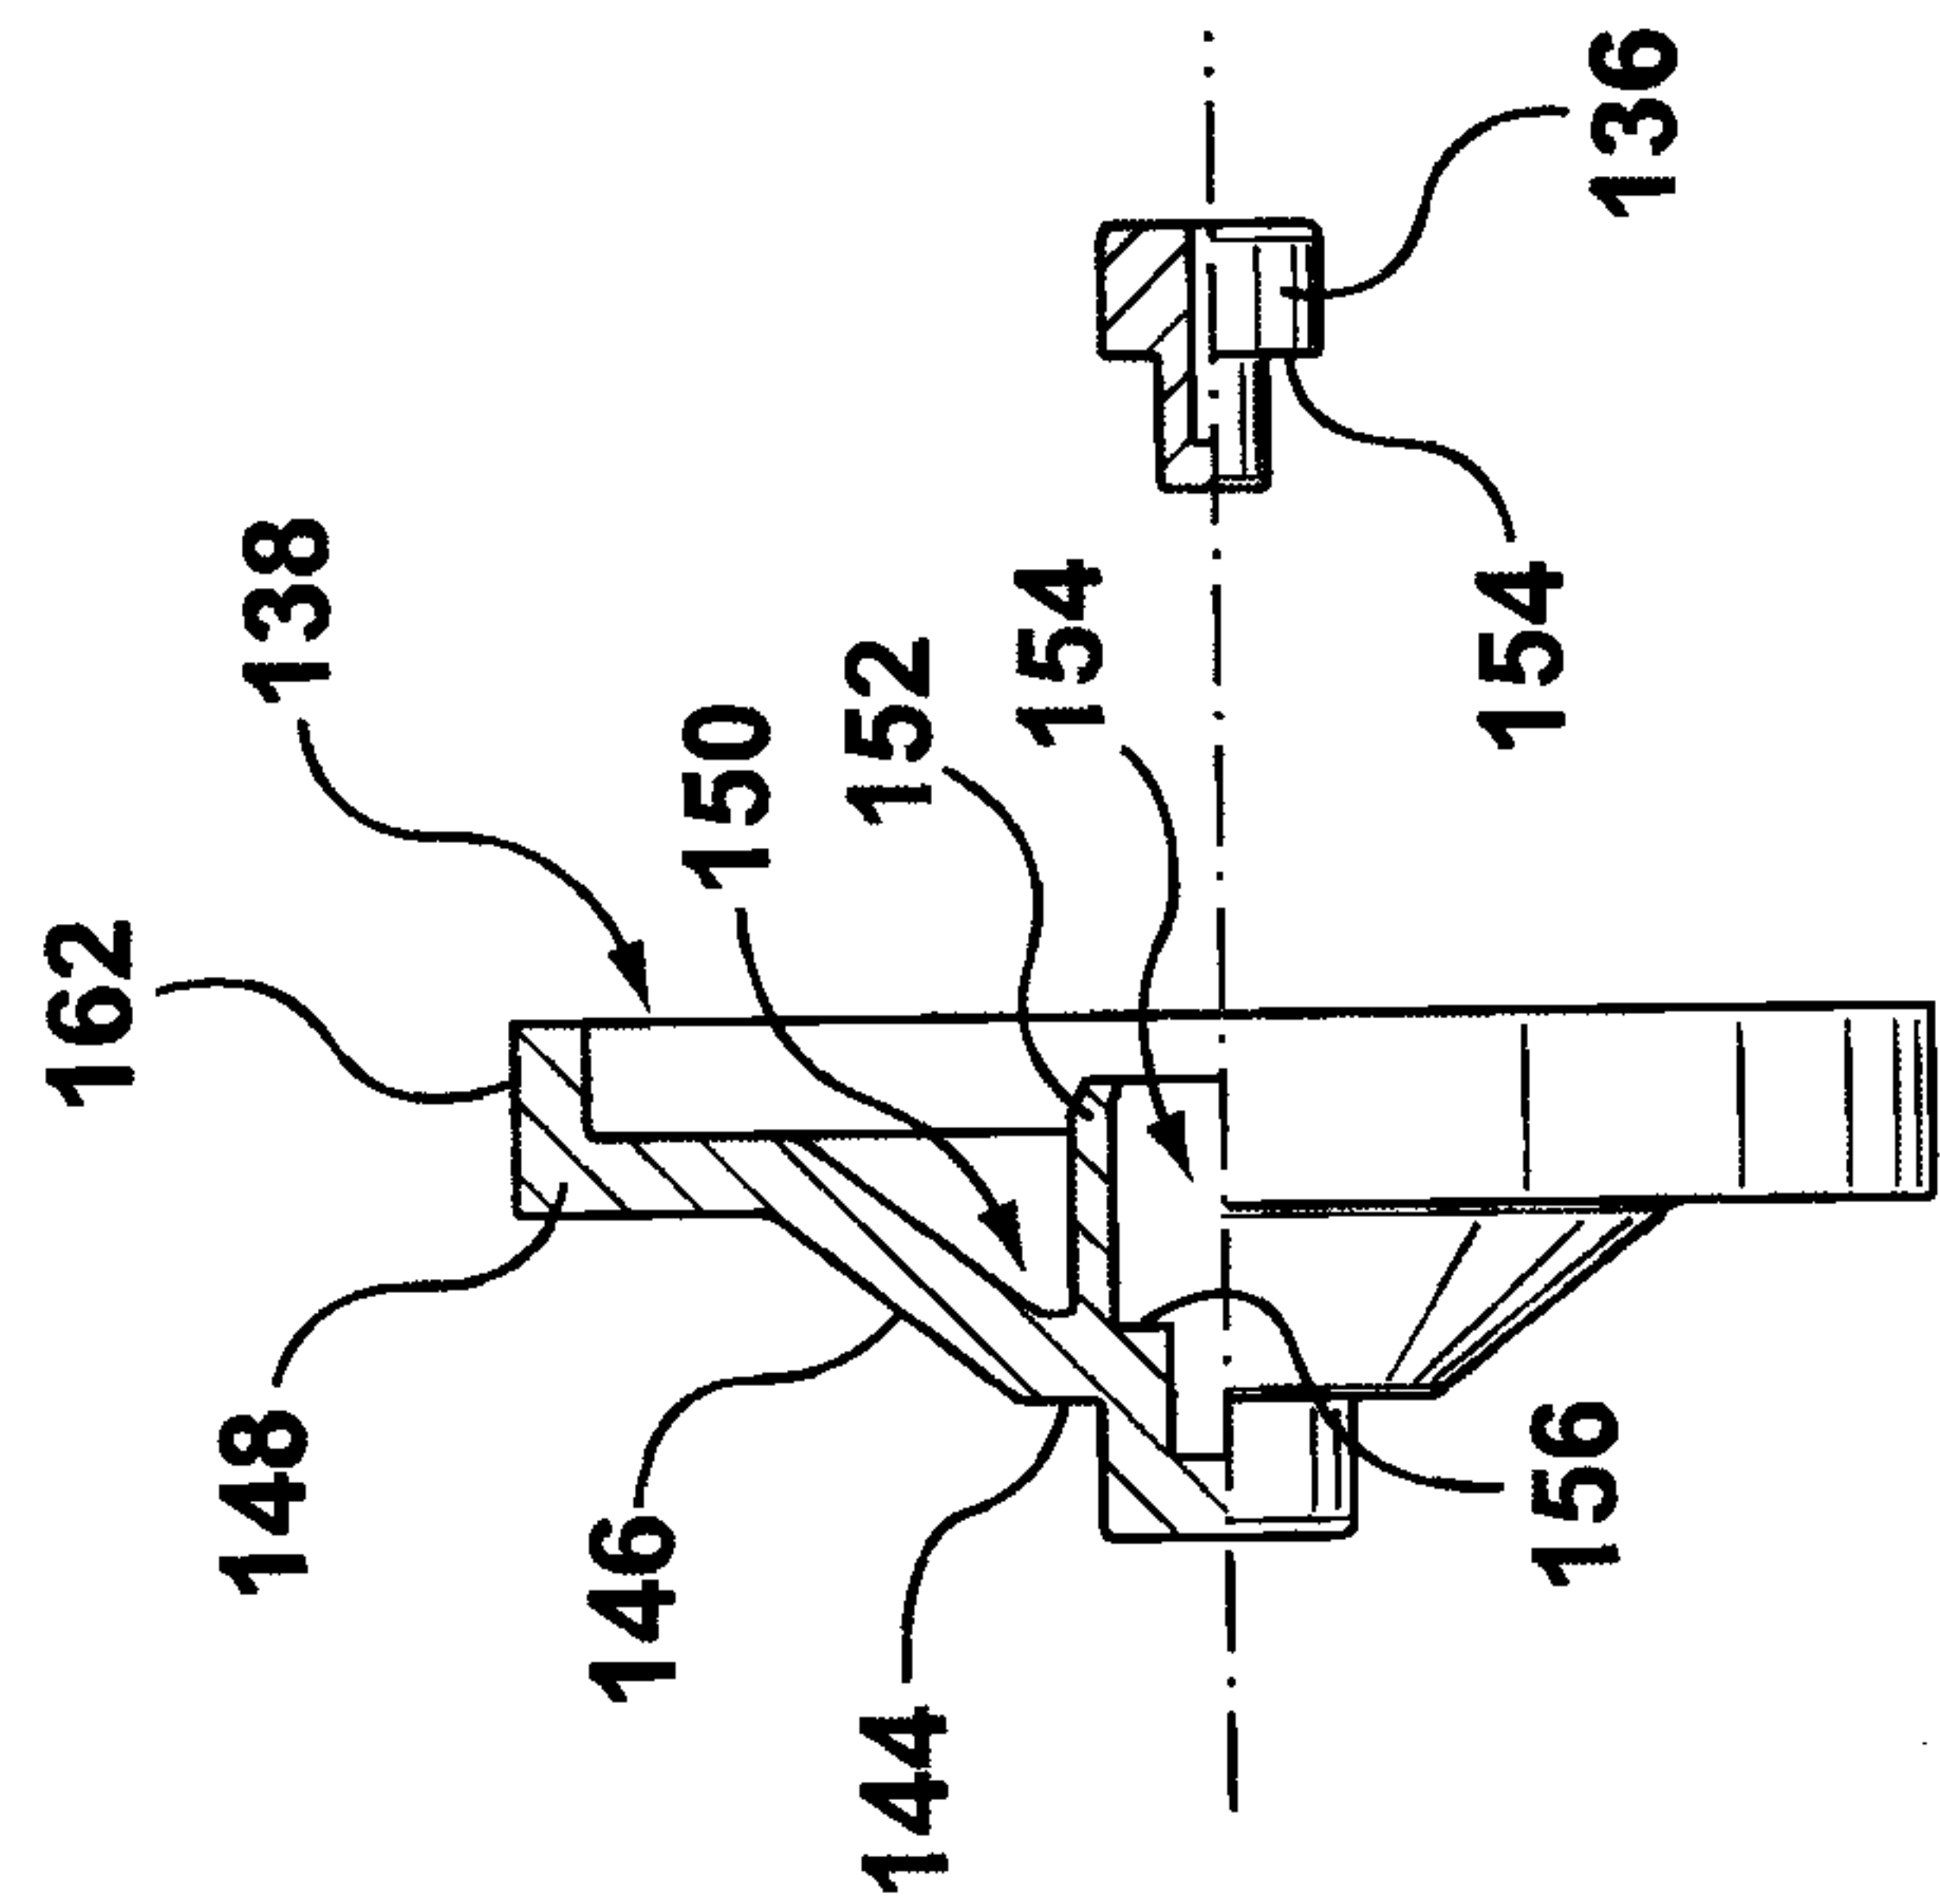


FIG. 4

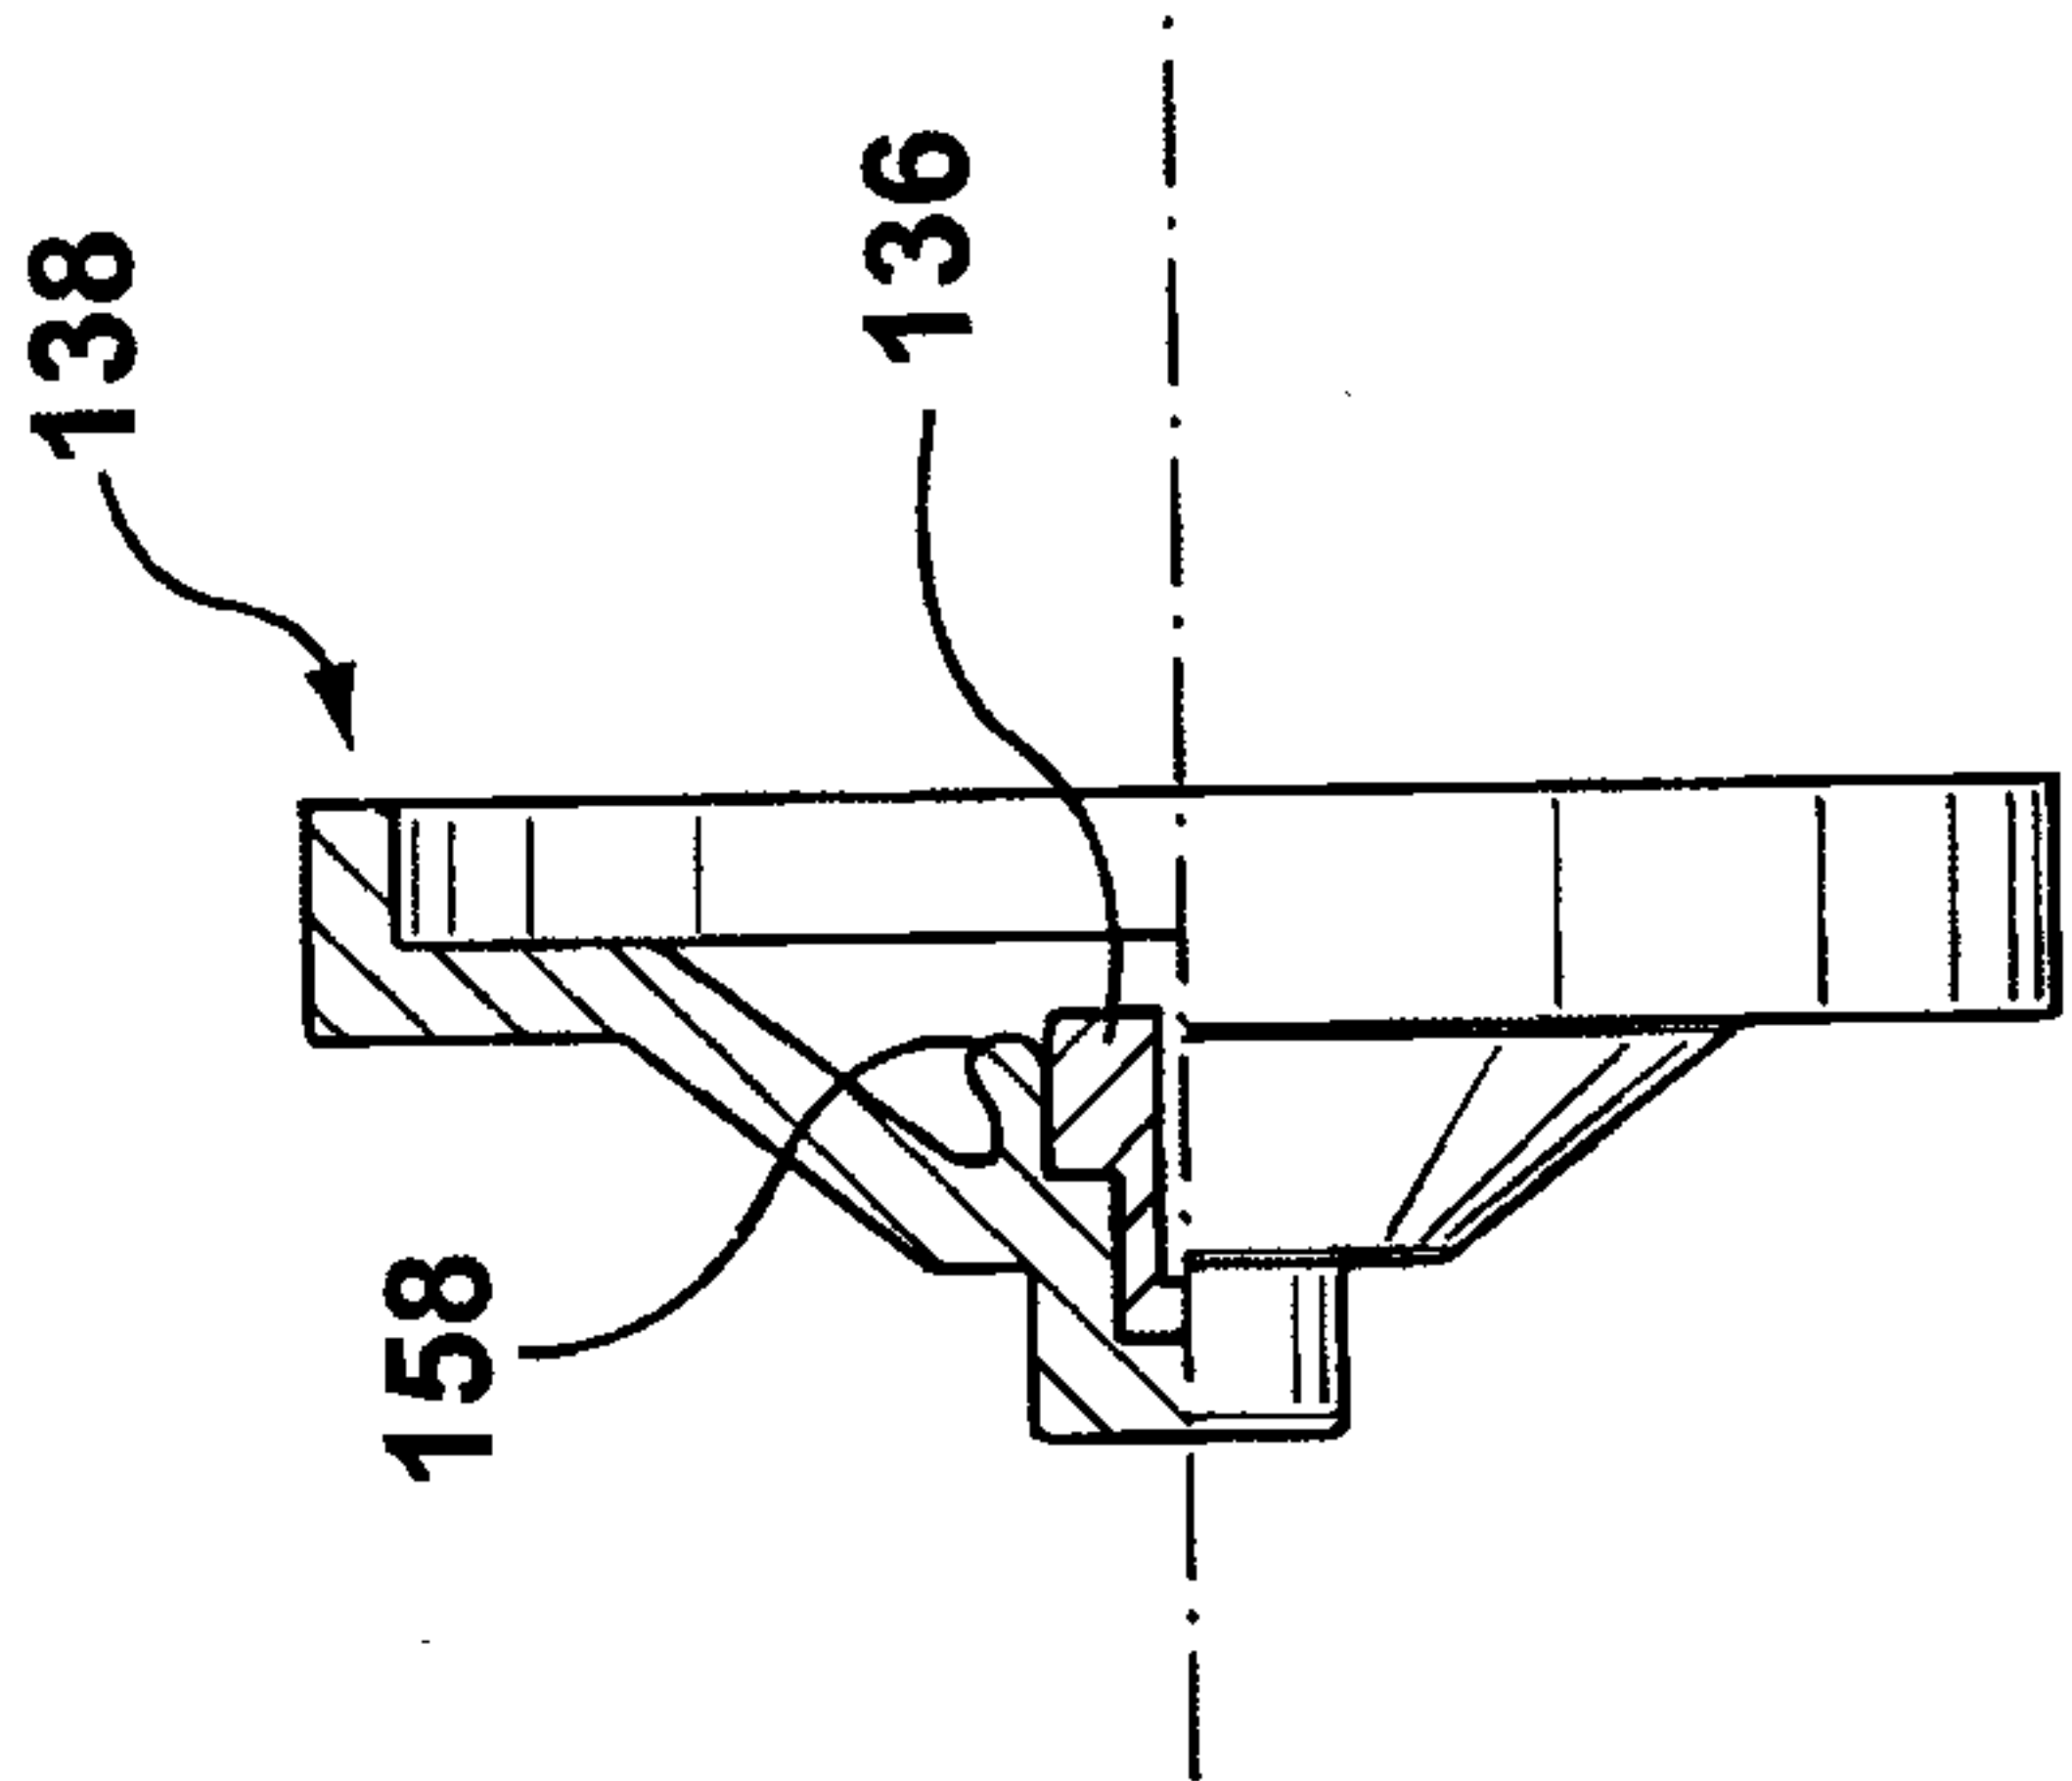


FIG. 5

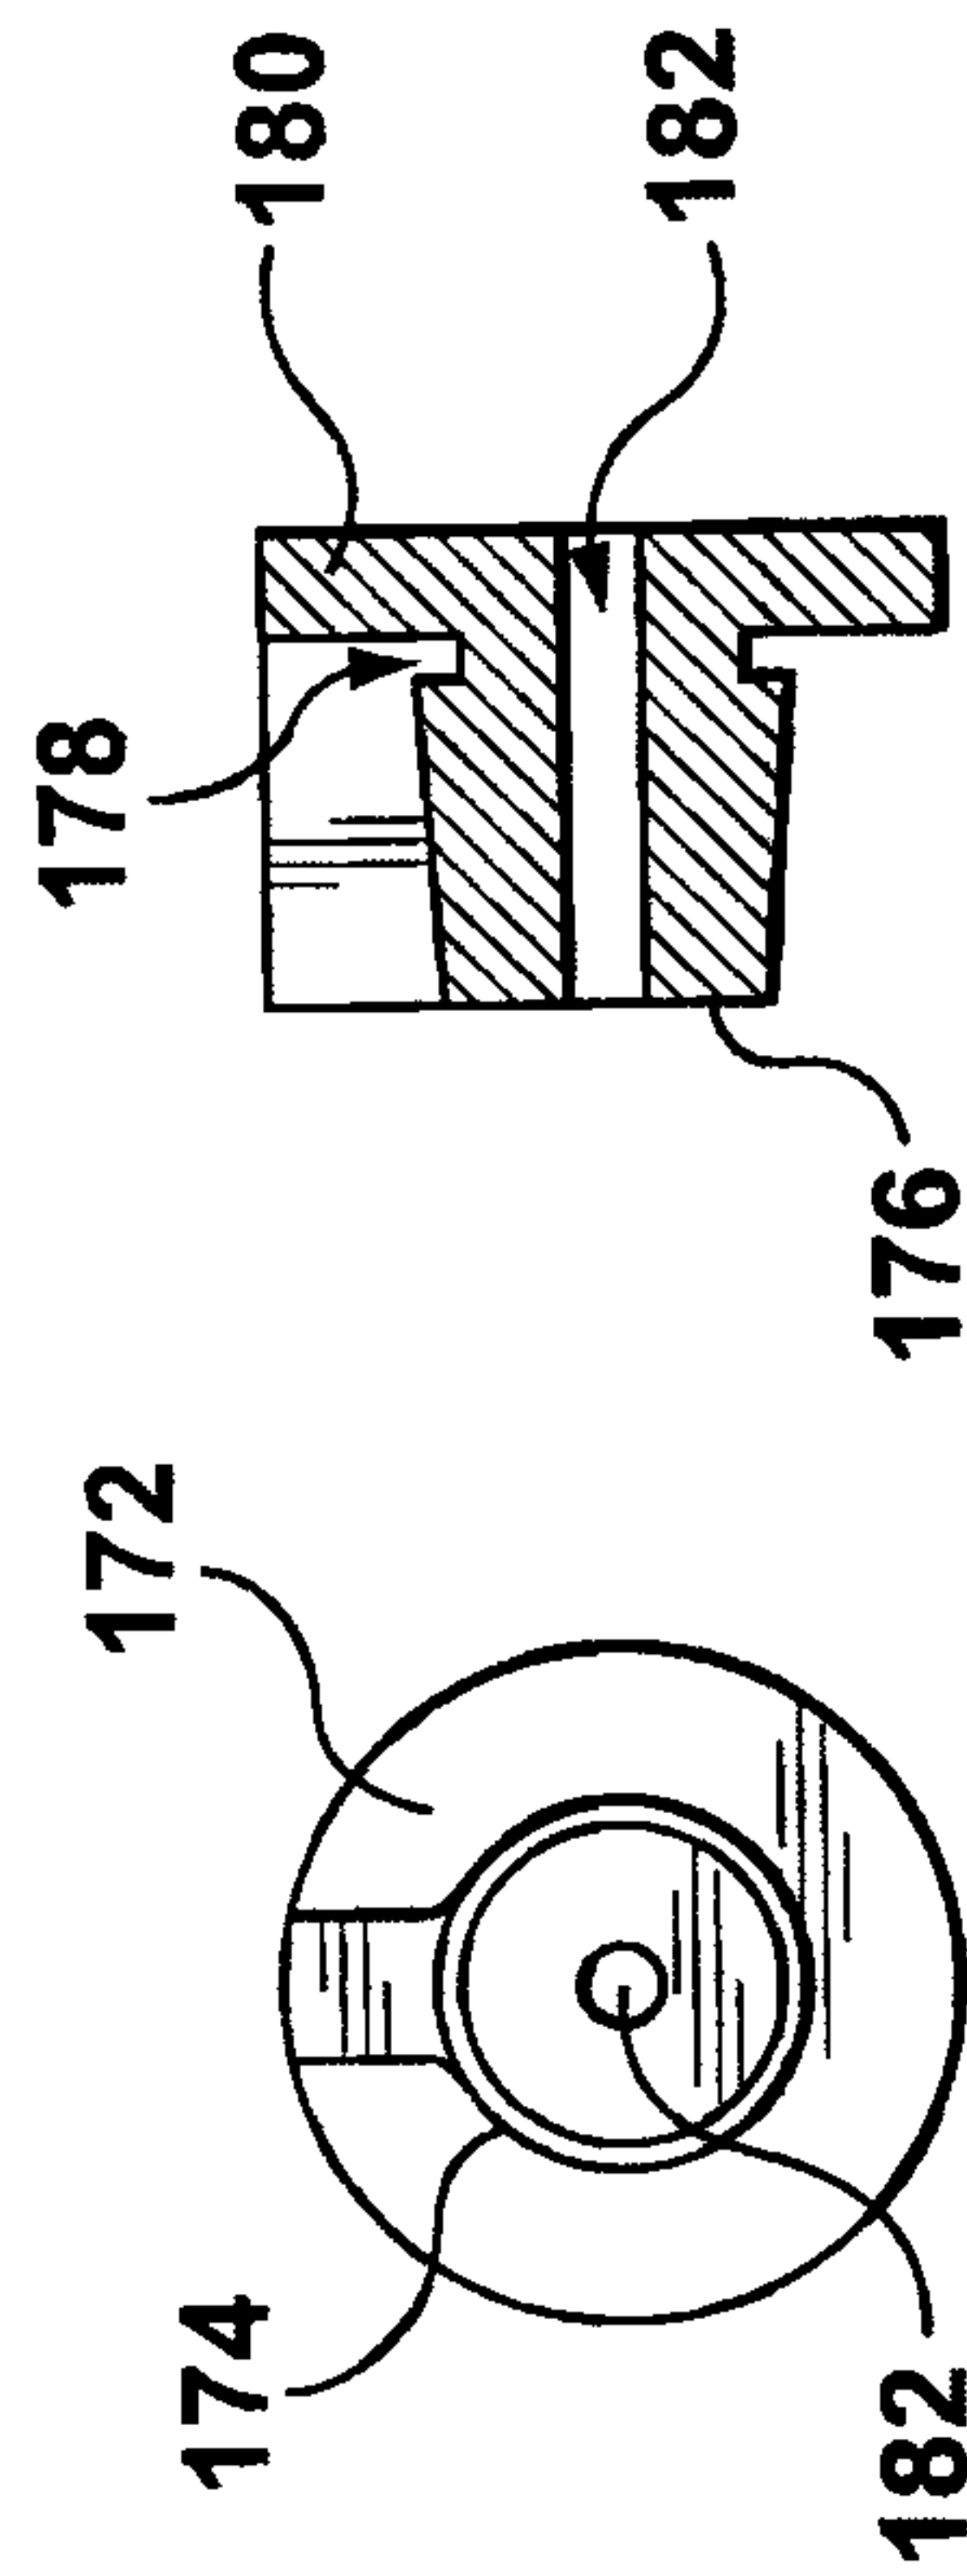


FIG. 8

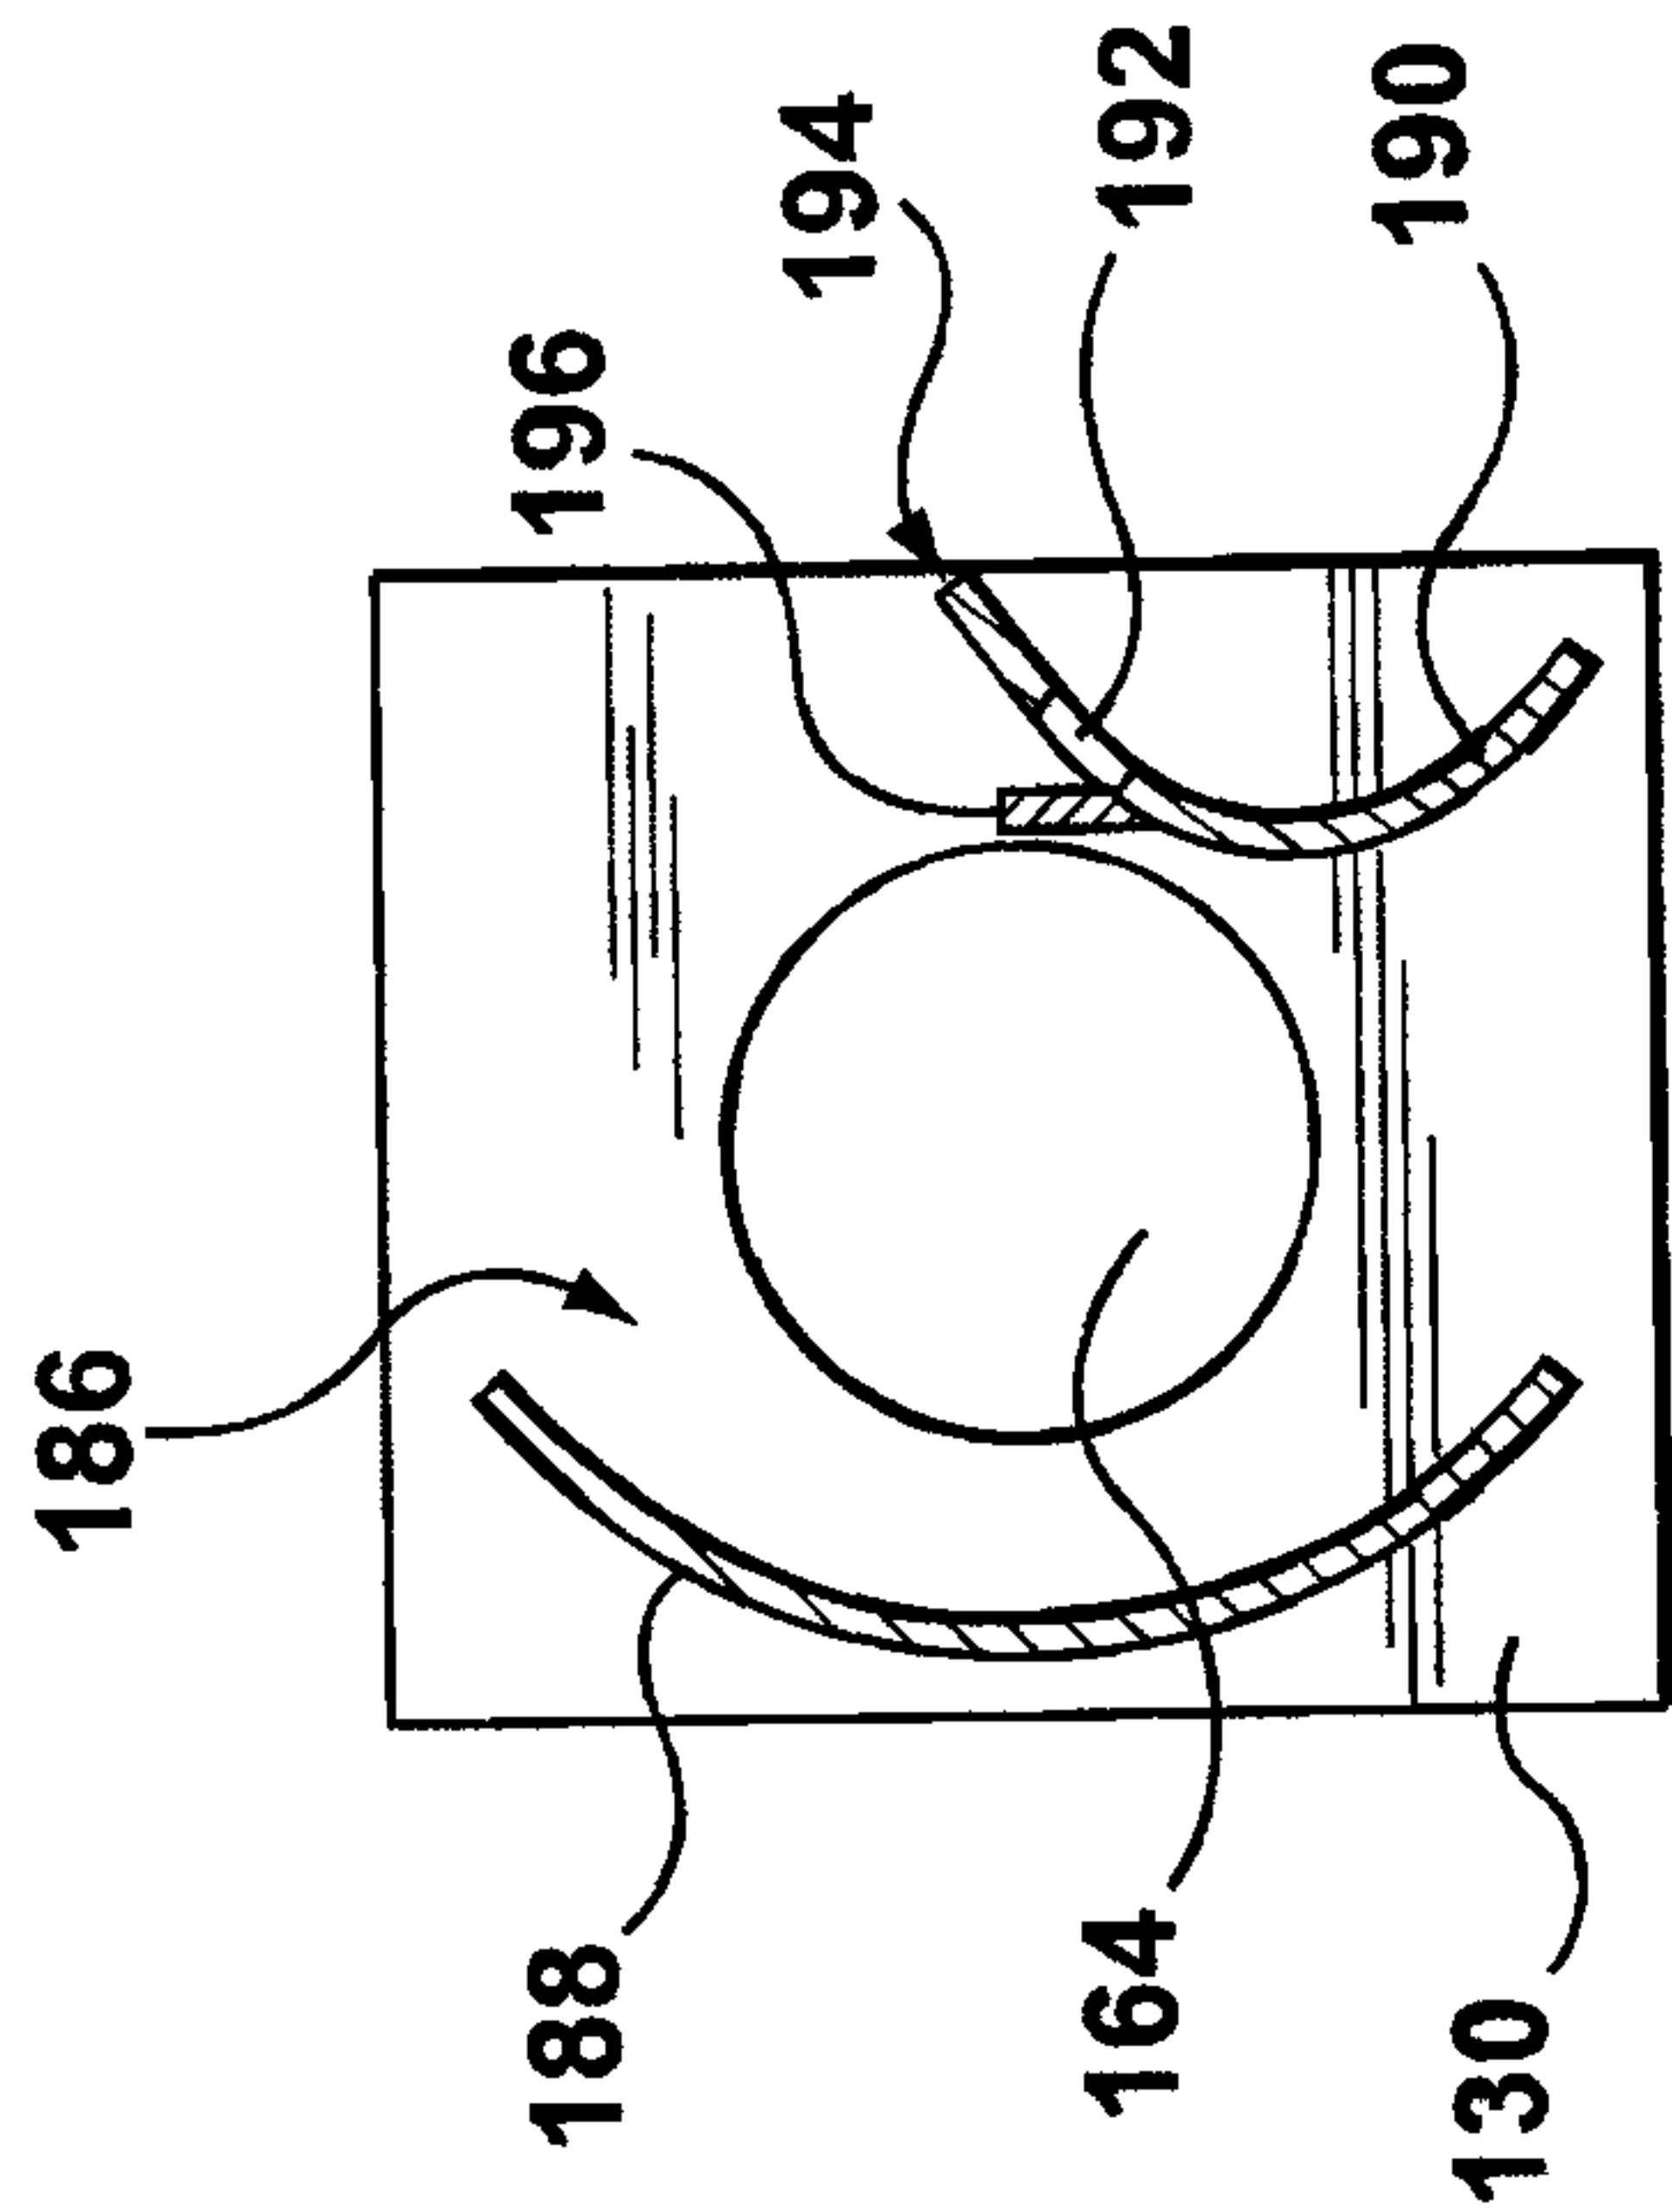


FIG. 9

