




(86) Date de dépôt PCT/PCT Filing Date: 2004/08/19
 (87) Date publication PCT/PCT Publication Date: 2005/06/09
 (45) Date de délivrance/Issue Date: 2010/09/14
 (85) Entrée phase nationale/National Entry: 2006/05/25
 (86) N° demande PCT/PCT Application No.: JP 2004/011917
 (87) N° publication PCT/PCT Publication No.: 2005/051786
 (30) Priorité/Priority: 2003/11/26 (JP2003-395890)

(51) Cl.Int./Int.Cl. *B65D 25/34* (2006.01)
 (72) Inventeur/Inventor:
 SHIMADA, SHINJI, JP
 (73) Propriétaire/Owner:
 YOSHINO KOGYOSHO CO., LTD., JP
 (74) Agent: BLAKE, CASSELS & GRAYDON LLP

(54) Titre : RECIPIENT EN RESINE SYNTHETIQUE
 (54) Title: SYNTHETIC RESIN CONTAINER

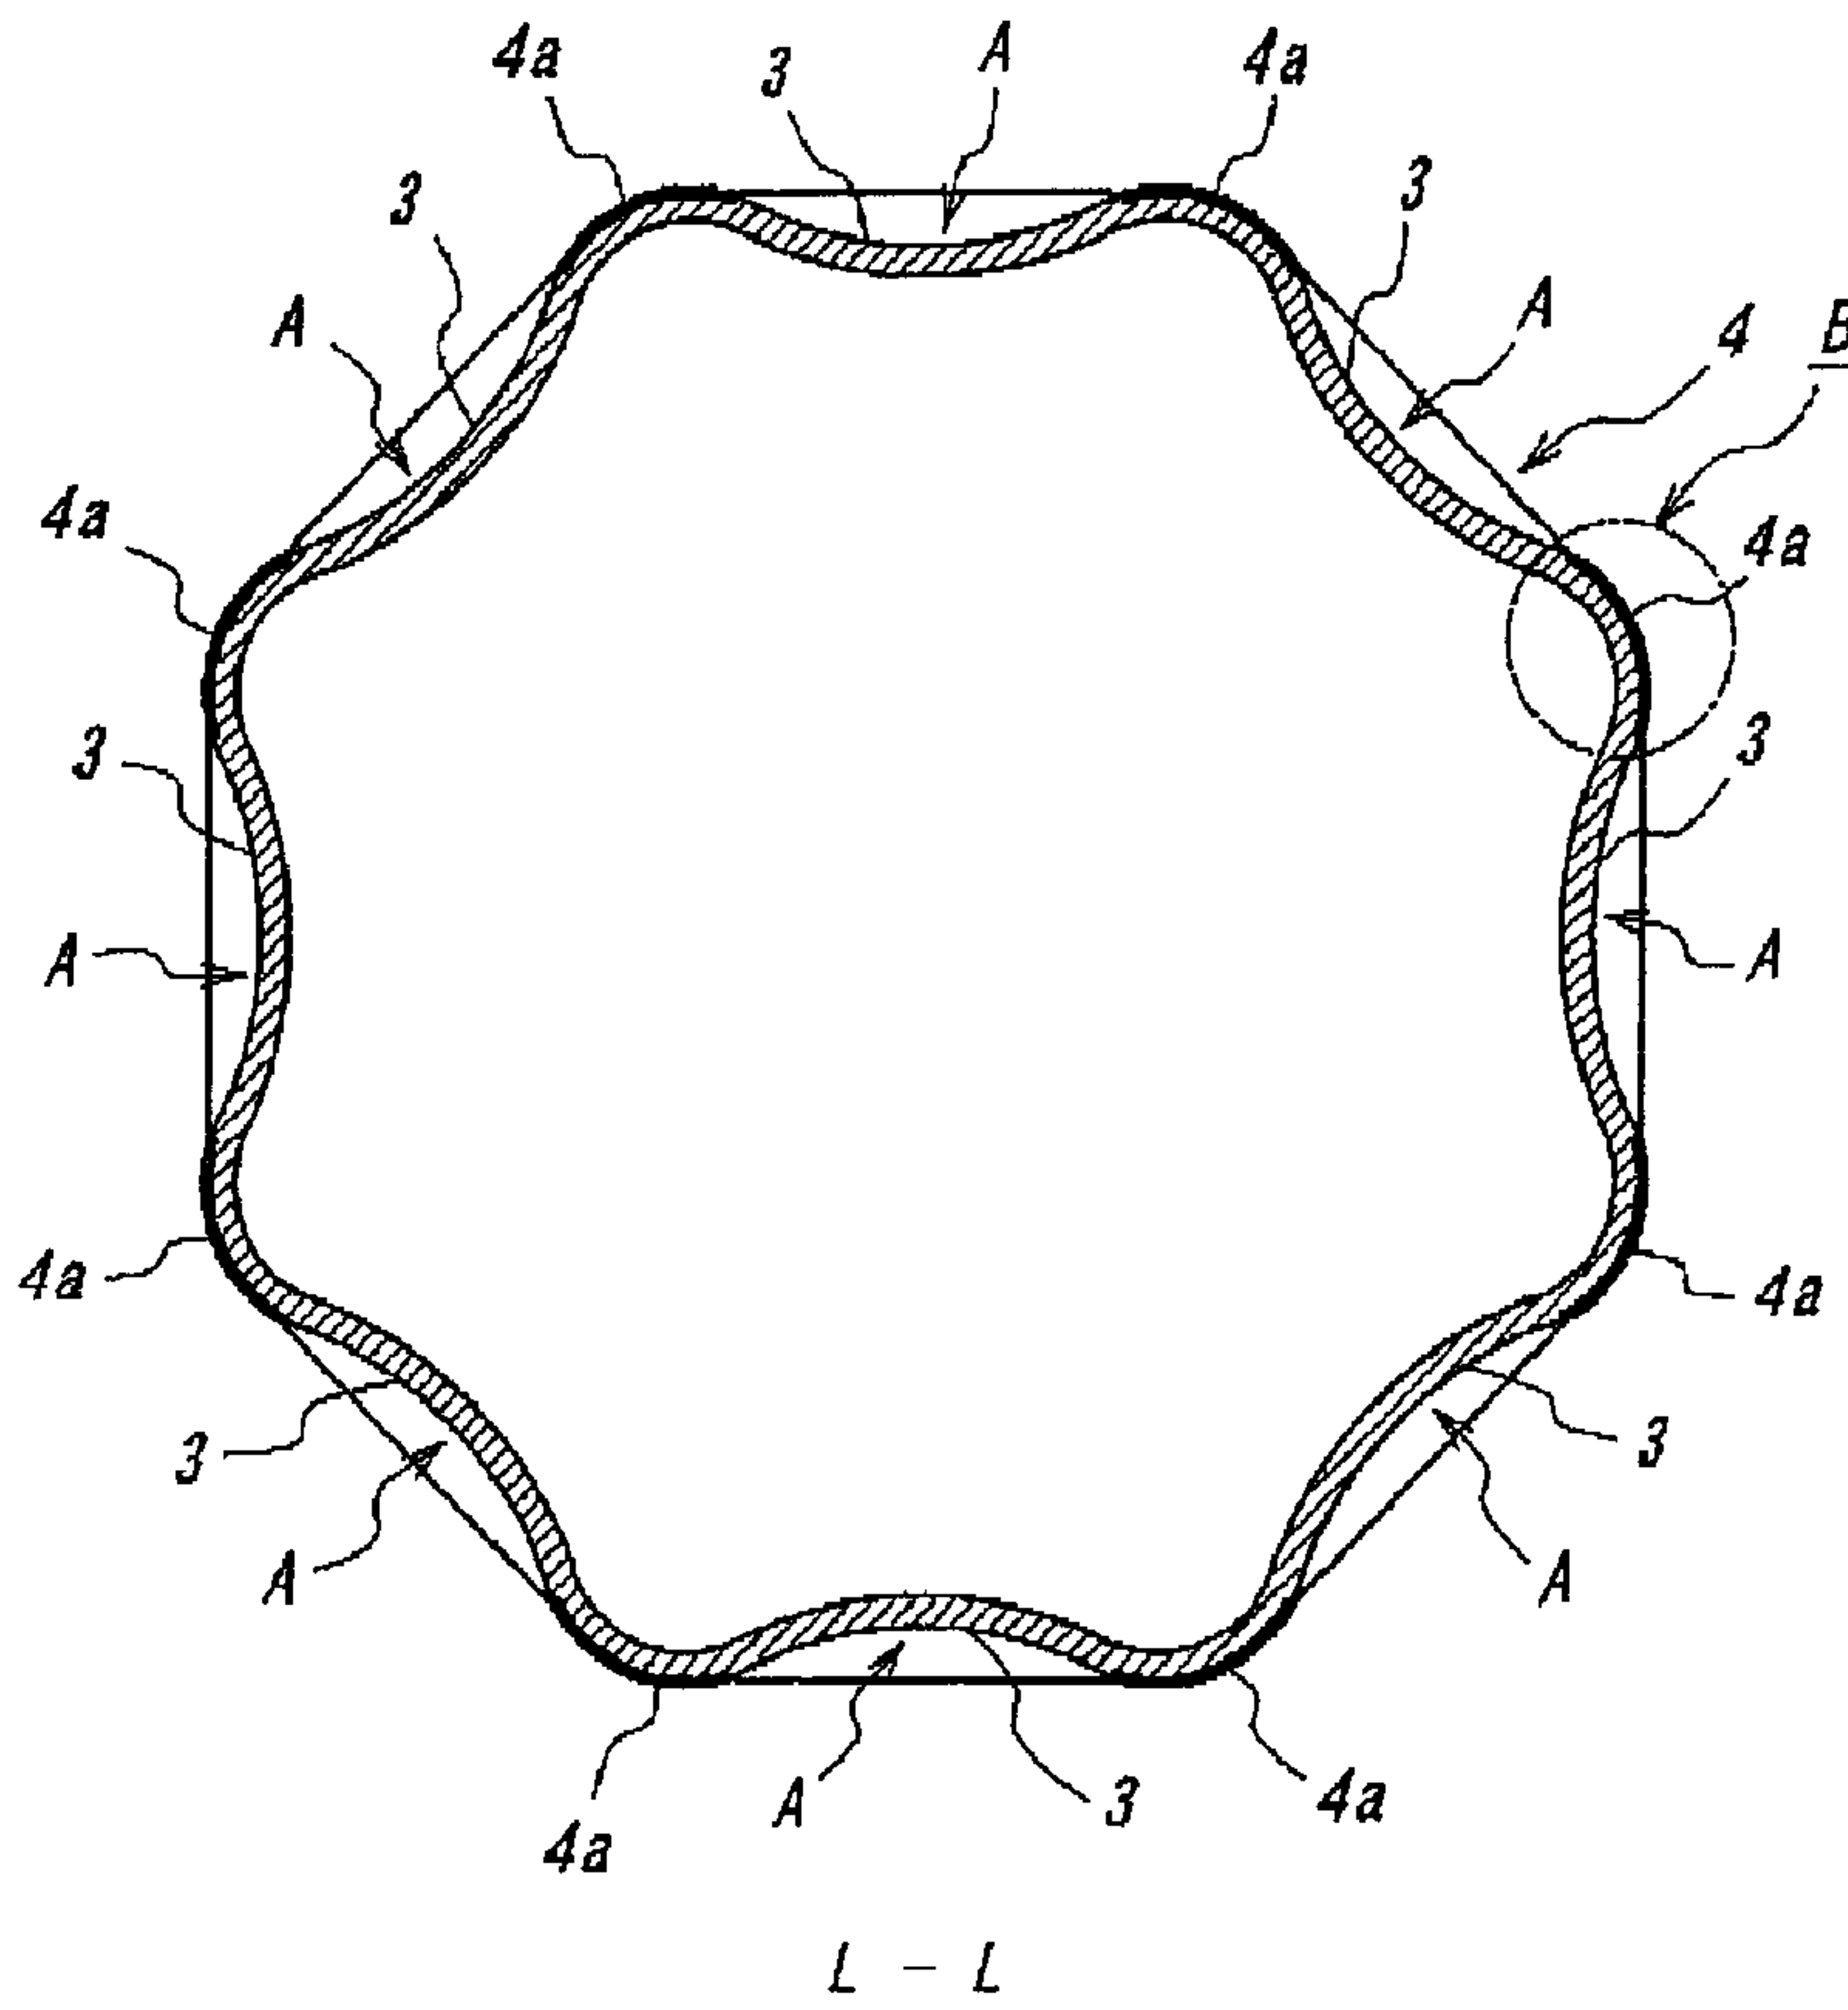

(57) **Abrégé/Abstract:**

A synthetic resin container having an improved strength without requiring use of increased resin amount has a container body with a plurality of sectioned recesses (3). In the disclosed invention, a label (4) is arranged on the container body (1) for improving the rigidity of the container by surrounding the container body.

ABSTRACT

A synthetic resin container having an improved strength without requiring use of increased resin amount has a container body with a plurality of sectioned recesses (3). In the disclosed invention, a label (4) is arranged on the container body (1) for improving the
5 rigidity of the container by surrounding the container body.

SYNTHETIC RESIN CONTAINER

TECHNICAL FIELD

[0001] The present invention relates to a container made of synthetic resin, such as
5 polyethylene terephthalate (PET), polypropylene (PP), polyethylene (PE) or the like, and
aims at further improvement of the strength (rigidity) of the container without increasing a
use amount of the resin, while simplifying the classification works upon waste disposal.

BACKGROUND ART

[0002] Synthetic resin containers as represented by PET bottles are recently used widely,
10 as container for beverages, seasonings, liquors, detergents, medicaments, or the like, since
they are light in weight and easy to handle, they allow transparency to be preserved, they
exhibit excellent appearance comparable to that of glass container, and they are less costly.

[0003] This type of containers encounters difficulty in reuse or disposal, and it would be
desirable to reduce the amount of waste by decreasing, as far as possible, the amount of
15 resin used to produce one bottle. On the other hand, however, if the amount of resin used
for a container is simply reduced, the containers tend to be readily deformed due to the
reduced rigidity of the container, *per se*, to thereby degrade the commercial value.

[0004] Thus, it has been a conventional practice to provide improved shape and
appearance of the container and form the contained body with recesses of various
20 configuration, to thereby preserve the rigidity of the container while reducing the use
amount of resin (cf. JP 06-127542A).

[0005] Furthermore, in connection with disposal of used containers as waste, from the
viewpoint of promoting recycling, there have been proposed containers wherein labels can
be readily separated from the container body so as to allow a classified waste disposal, by
25 the provision of separation assisting means, such as tabs, notches or perforations (cf.
JP2002-120848A).

DISCLOSURE OF THE INVENTION

[0006] It is an object of the present invention to provide a novel synthetic resin container
having improved strength and rigidity without requiring increase in the resin amount used,
30 while allowing classification works for waste disposal to be eliminated.

[0007] To this end, according to the present invention, there is provided a synthetic resin
container comprising a container body, said container body having a main body portion
formed with a plurality of sectioned recesses, said container further comprising:

a label arranged at said main body portion of the container body and surrounding the main body portion, for providing an improved rigidity of the container.

[0008] It is preferred that the label is immovably arranged through an adhesive layer.

[0009] The label may be one of a heat-shrinkable label and a stretch label, which is
5 tightly in close contact with the container body.

[0010] The label may comprise a tack label.

[0011] The label may comprise an essentially same type of material as the container, so as to eliminate burdensome classification works.

[0012] According to the present invention, since either the label itself, or the label in
10 combination with the adhesive layer, functions as reinforcement for the container, the strength of the contained can be further improved without increasing the amount of resin. Thus, the arrangement according to the present invention is particularly useful for resource savings.

[0013] Generally, in a contents filling line, the container after having been filled with the
15 contents is subjected to a shower treatment process for the purpose of cooling or sterilization by heating. Therefore, it is preferred from sanitary viewpoint to apply the label to the container before the shower treatment process, in order to prevent entry of water into the recesses and thereby avoid formation of wrinkles.

[0014] Furthermore, according to the present invention, when a heat shrinkable label is
20 used, the expansion force of the container occurring during the hot filling or heat sterilization is resisted by the shrinking force of the label to suppress deformation of the container. Besides, the closed spaces between the label and the recesses function as heat insulating layers so that the container can be readily grasped even when the contents are maintained at high temperature.

[0015] Moreover, according to the present invention, when the label is comprised of an
25 essentially same type of material as the container, it is possible to eliminate burdensome classification works upon waste disposal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1 is a front view of a container according to one embodiment of the present
30 invention;

FIG. 2 is a sectional view taken along the line L-L in FIG. 1;

FIG. 3 is a perspective view of a container according to another embodiment of the present invention;

FIG. 4 is a sectional view showing one example of a region B in FIG. 2;

FIG. 5 is a sectional view showing another example of the region B in FIG. 2;

FIG. 6 is an enlarged sectional view of the label;

FIG. 7 is a view showing the label that has been deformed into a cylindrical
5 shape;

FIG. 8a is a side view of a container suitable for applying a non-adhesive type
label, and FIG. 8b is a sectional view taken along the line I-I in FIG. 8a; and

FIG. 9 is a view showing the method for testing the rigidity of the container body.

BEST MODE FOR CARRYING OUT THE INVENTION

10 [0017] The present invention will be described below with reference to the drawings.
FIGS. 1 and 2 illustrate the synthetic resin container according to the present invention,
which is in the form of a bottle-type container, by way of example, wherein FIG. 1 is the
front view and FIG. 2 is a sectional view along line L-L in FIG. 1.

[0018] Reference numeral 1 in FIG. 1 denotes a container body having an inner space to
15 be filled with contents, 2 a mouth portion connected integrally to the container body 1, and
3 a plurality of sectioned recesses provided for the main body portion of the container
body 1. These sectioned recesses 3 serve as pressure reduction absorption walls for
preventing deformation due to a pressure drop within the container, which arises, for
example, upon cooling of the contents filled under hot temperature. Here, the term "main
20 body portion" refers to an entire peripheral wall of the container body 1, excluding the
mouth portion 2 and the bottom portion 1a of the container body 1.

[0019] Reference numeral 4 denotes a label, which covers the sectioned recesses 3 and
defines closed spaces (air layers) A together with the main body portion of the container
body 1. The label 4 is made of an essentially same type of material as the container, and
25 is adhered to the main body portion of the container body 1 through an adhesive layer 4a.
The label made of essentially the same type of material as the container, as used herein,
means that the material forming at least the base material layer is essentially of the same
type as the major material of the container.

[0020] When the label 4 is adhered to the main body portion of the container body 1
30 through the adhesive layer 4a, air layers isolated from ambient air are formed in the
sectioned recesses 3, which serve as reinforcements for the container for providing a
higher rigidity, and also as cushion materials for absorbing impacts from outside.

[0021] With reference to FIGS. 1 and 2, the label 4 has been described as being adhered

to the main body portion of the container body 1 except the sectioned recesses 3.

However, according to the present invention, the label 4 may be adhered to the main body portion along the entire periphery at the upper end region or the lower end region of the label 4. Alternatively, or additionally, the label may be adhered to the main body portion of the container body 1 along several regions extending in the longitudinal direction of the container body. These measures also provide improved rigidity of the container. The arrangement for the adhesive layer 4a of the label 4 is not particularly limited; hence, the adhesive layer 4a may be provided on the entire back surface of the label 4, or only at the required regions thereof. FIG. 3 shows another embodiment of the present invention in which the label is adhered to the main body portion of the container body 1 at its upper and lower end regions, and also along several longitudinal regions of the main body portion of the container body 1.

[0022] Region B in FIG. 2 is shown in an enlarged scale in FIG. 4. It can be seen that the label 4 is adhered to the container body 1 through the adhesive layer 4a (heat-sensitive adhesive agent, etc.), and has a two-layered basic structure. However, as shown in FIG. 5, the label 4 may be of a laminated structure comprising a base layer 4b, which consists of essentially the same type of material as the container body 1, and a barrier layer 4c that is laminated on the base layer 4b. Although not shown in the drawings, the label 4 may further comprise a printed layer between the base layer 4b and the barrier layer 4c.

[0023] FIG. 6 is an enlarged view showing the label (heat-shrinkable label) which can be suitably applied to the container according to the present invention, wherein the label is shown as being in the form of a sheet. Here, a sheet-like film forming the base layer 4b has a surface which is applied with a heat-sensitive adhesive agent except along its one edge, so as to form the adhesive layer 4a. A cylindrical label 4 is formed by rolling up the sheet-like film and joining the leading and trailing ends with each other by the adhesive agent 5, and has a laminated structure comprised, as seen from the inner side, of the adhesive layer 4a (heat-sensitive adhesive agent), the base layer 4b, the adhesive layer 4a (heat-sensitive adhesive agent)/adhesive agent 5, and the base layer 4b, so as to positively prevent gas transmission through the joined portion, and also to provide an improved strength.

[0024] Other than a heat-shrinkable label, the label 4 may comprise a stretch label wherein a stretch film is formed into a cylindrical shape. As for the heat-shrinkable label, in particular, it is preferred to use a resin that is essentially of the same type as the

container body, since troublesome separation of the label from the container body is not required upon disposal of the used container, and the same type of resin exhibits the same tendency in deformation characteristic which is thus easy to control.

5 [0025] When the label 4 is comprised of a non-adhesive label (i.e., a label without the adhesive layer), which is brought into tight contact with the main body portion of the container body 1, as shown in FIGS. 8a and 8b, it is preferred that at least one annular groove portion 6 is provided on each side, i.e., the upper side and the lower side, of the sectioned recesses 3, since the provision of such annular groove portions serves to improve the tightness of the contact.

10 [0026] The container according to the present invention can be produced by a conventional process, such as blow molding or injection molding, by using such resin as PET, PP, PE or the like. However, the present invention is not limited to these resins, and the shape of the container may be suitably selected as bottle-shape, cup shape or any other shape.

15 (Embodiment 1)

[0027] In order to demonstrate functional advantages of the present invention, there have been produced samples of container of substantially circular cross-section, exhibiting an appearance substantially as shown in FIG. 1. Each sample container has a capacity of 500 milliliters, and is formed with sectioned recesses in the main body portion. These
20 sample containers were produced by biaxial stretch blow molding process using 21 grams of PET resin. Then, the sample container was applied with a label of essentially the same kind of resin as the container (i.e., a heat-shrinkable label applied with a heat-sensitive glue or adhesive agent for the inventive example 1, and a non-adhesive type heat-shrinkable label for the inventive example 2, both having a base layer comprising PET and a
25 thickness of 40 μm). After the label has been applied to the container, the label has been subjected to shrinkage by steam. For these sample containers, the buckling strength, the rigidity of the main body portion and the columnar rigidity have been investigated. The data obtained by such investigations are shown in Table 1 below, together with the data for a reference container (control example) which is not provided with the label.

30 [0028] In Table 1, the term "empty" refers to an empty container not filled with contents, while the term "full" refers to a container filled with hot water at 85°C, then maintained for 45 seconds in an overturned state and for another 5 minutes 15 seconds in an upright state before it has been subjected to cooling.

[0029] Furthermore, the term "buckling strength (N)" refers to the load upon occurrence of buckling of the container when the container in upright state is compressed from its upper side (mouth portion side) toward the bottom side by using a disc of 100 mm in diameter, which is moved at a speed of 50 mm/min, with an air vent placed between the disc and the mouth portion in the case of the empty bottle. The term "body portion rigidity (mm)" refers to the displacement of the bottle when the contained maintained at 5°C for 24 hours was placed in an overturned state with one of its columnar portions (projections between the sectioned recesses) oriented upwards as the upper surface, and a square rod of a width 10 mm × 10 mm and a length of 150 mm was arranged in parallel with an axis that connects the mouth portion side and the bottom portion side (with one end of the rod spaced from the bottom of the container by 20 mm, as shown in FIG. 9), before a vertical load of 58.8 N (6 kgf) was applied through the rod to the container from the upper surface side toward the lower surface side. Furthermore, the term "columnar rigidity (N)" refers to the load upon occurrence of buckling of the container when the container was placed in an overturned state with one of its columnar portions oriented upwards as the upper surface, and a cylindrical rod of a diameter 20 mm and a length of 100 mm was arranged at right angles to the axis that connects the mouth portion side and the bottom portion side so as to vertically compress the center region of the columnar portion. The data obtained are shown in Table 1 as indices with reference to the data of the control example indicated as 100.

[0030]

Table 1

Measurements	Examples	Inventive Example 1	Inventive Example 2	Control Example
Buckling strength	Empty	130	112	100
	Full	117	109	100
Body portion rigidity	Empty	124	108	100
	Full	120	107	100
Columnar rigidity	Empty	137	111	100
	Full	132	113	100

[0031] It can be understood from Table 1 that the inventive example 2 in which the main body portion of the container body is applied with a non-adhesive type label provided improved buckling strength, body portion rigidity and columnar rigidity, as compared to the control example. Moreover, the inventive example 1 in which a heat shrinkable label

is applied by adhesion provides further improved buckling strength, body portion rigidity and columnar rigidity, even when compared to the inventive example 1.

[0032] Incidentally, the data obtained for the inventive examples 1 and 2 are with respect to the so-called pre-label type bottles in which an empty bottle is applied with a label
5 before the filling of the contents. However, it has been confirmed that similar results are obtained with respect to the so-called after-label type bottles in which a label is applied to the container after the filling of the contents.

INDUSTRIAL APPLICABILITY

[0033] It will be appreciated from the foregoing description that the present invention
10 provides a contained made an amount of resin, which has been reduced as far as possible, yet preserving a required rigidity.

What is claimed is:

1. A synthetic resin container comprising a container body, said container body having a main body portion formed with a plurality of sectioned recesses, said container further comprising:
a label arranged at said main body portion of the container body and surrounding the main body portion, for providing an improved rigidity of the container, wherein said label and said container body each comprise polyethylene terephthalate (PET) resin, and wherein said label is permanently affixed through an adhesive layer.
2. The container according to claim 1, wherein said label is one of a heat-shrinkable label and a stretch label, which is tightly in close contact with the container body.
3. The container according to claim 1 or 2, wherein said label is a tack label.
4. The container according to any one of claims 1 to 3 further comprising closed air layers provided between said plurality of sectioned recesses and said label.
5. The container according to claim 4 wherein said closed air layers form a cushion structure that absorbs impacts from outside of the container.
6. The container according to any one of claims 1 to 5 wherein the label is adhered at upper and lower end regions of the label along a longitudinal axis of the container.
7. The container according to any one of claims 1 to 5 further comprising annular groove portions extending about a longitudinal axis of the container on opposite sides of said plurality of sectioned recesses, the annular groove portions being covered by the label.
8. The container according to claim 7 wherein said label is a heat-shrinkable label with a heat-sensitive adhesive agent.

FIG. 1

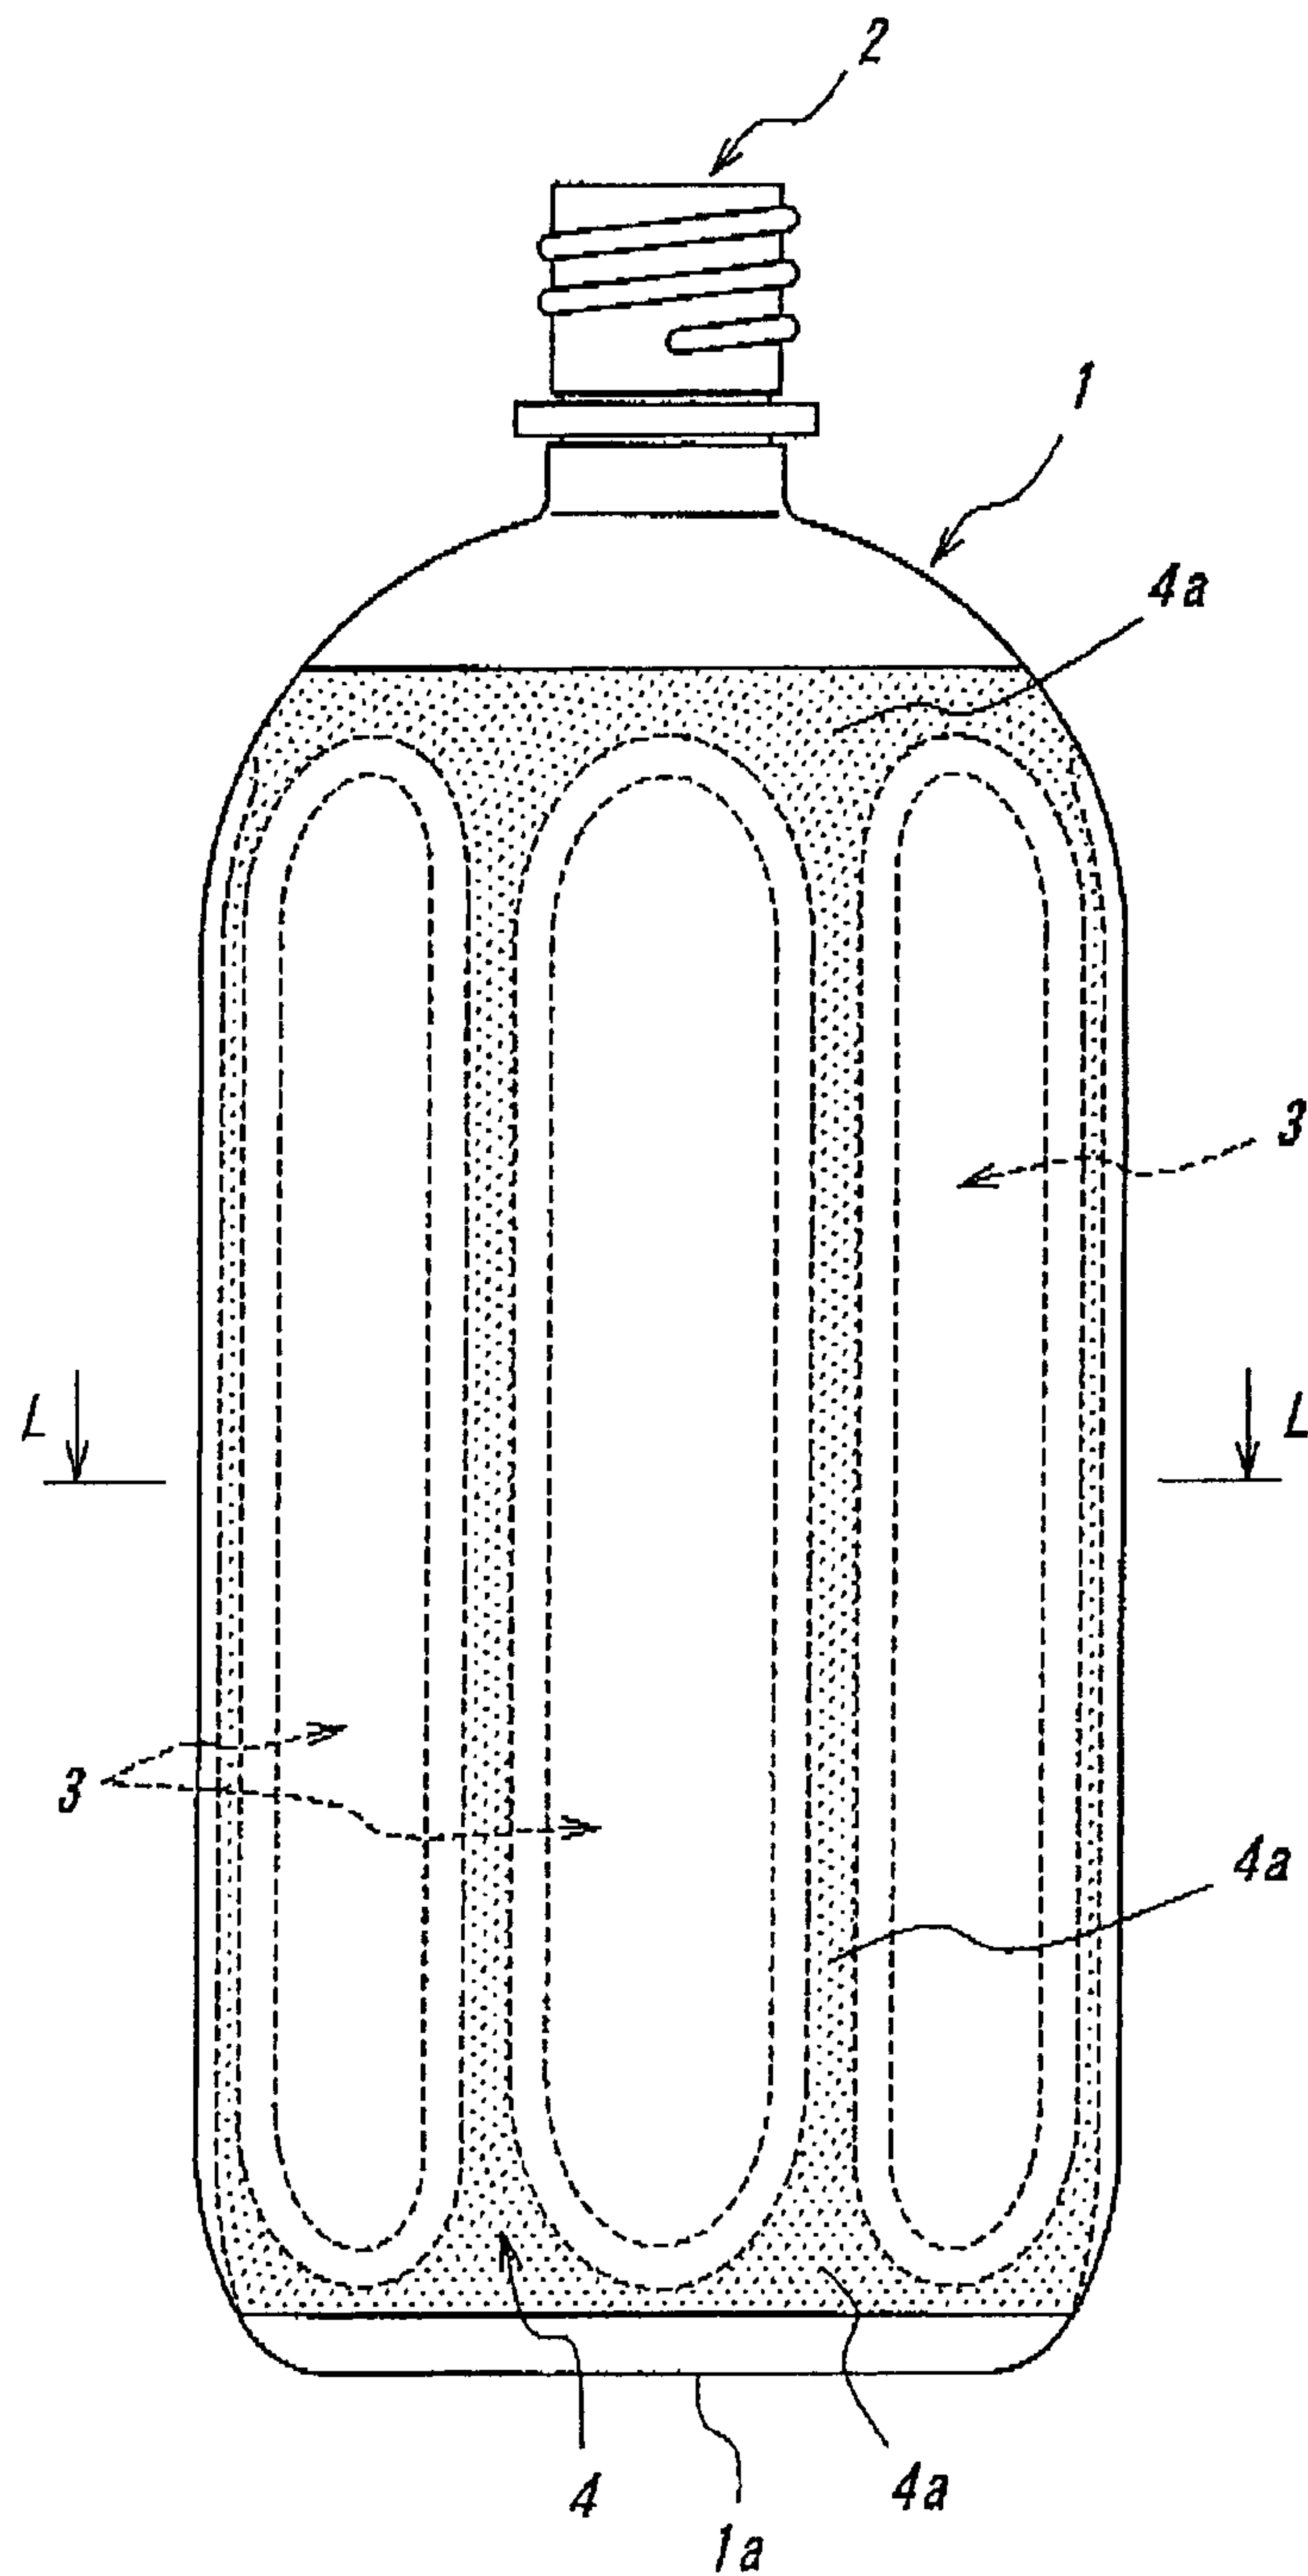


FIG. 2

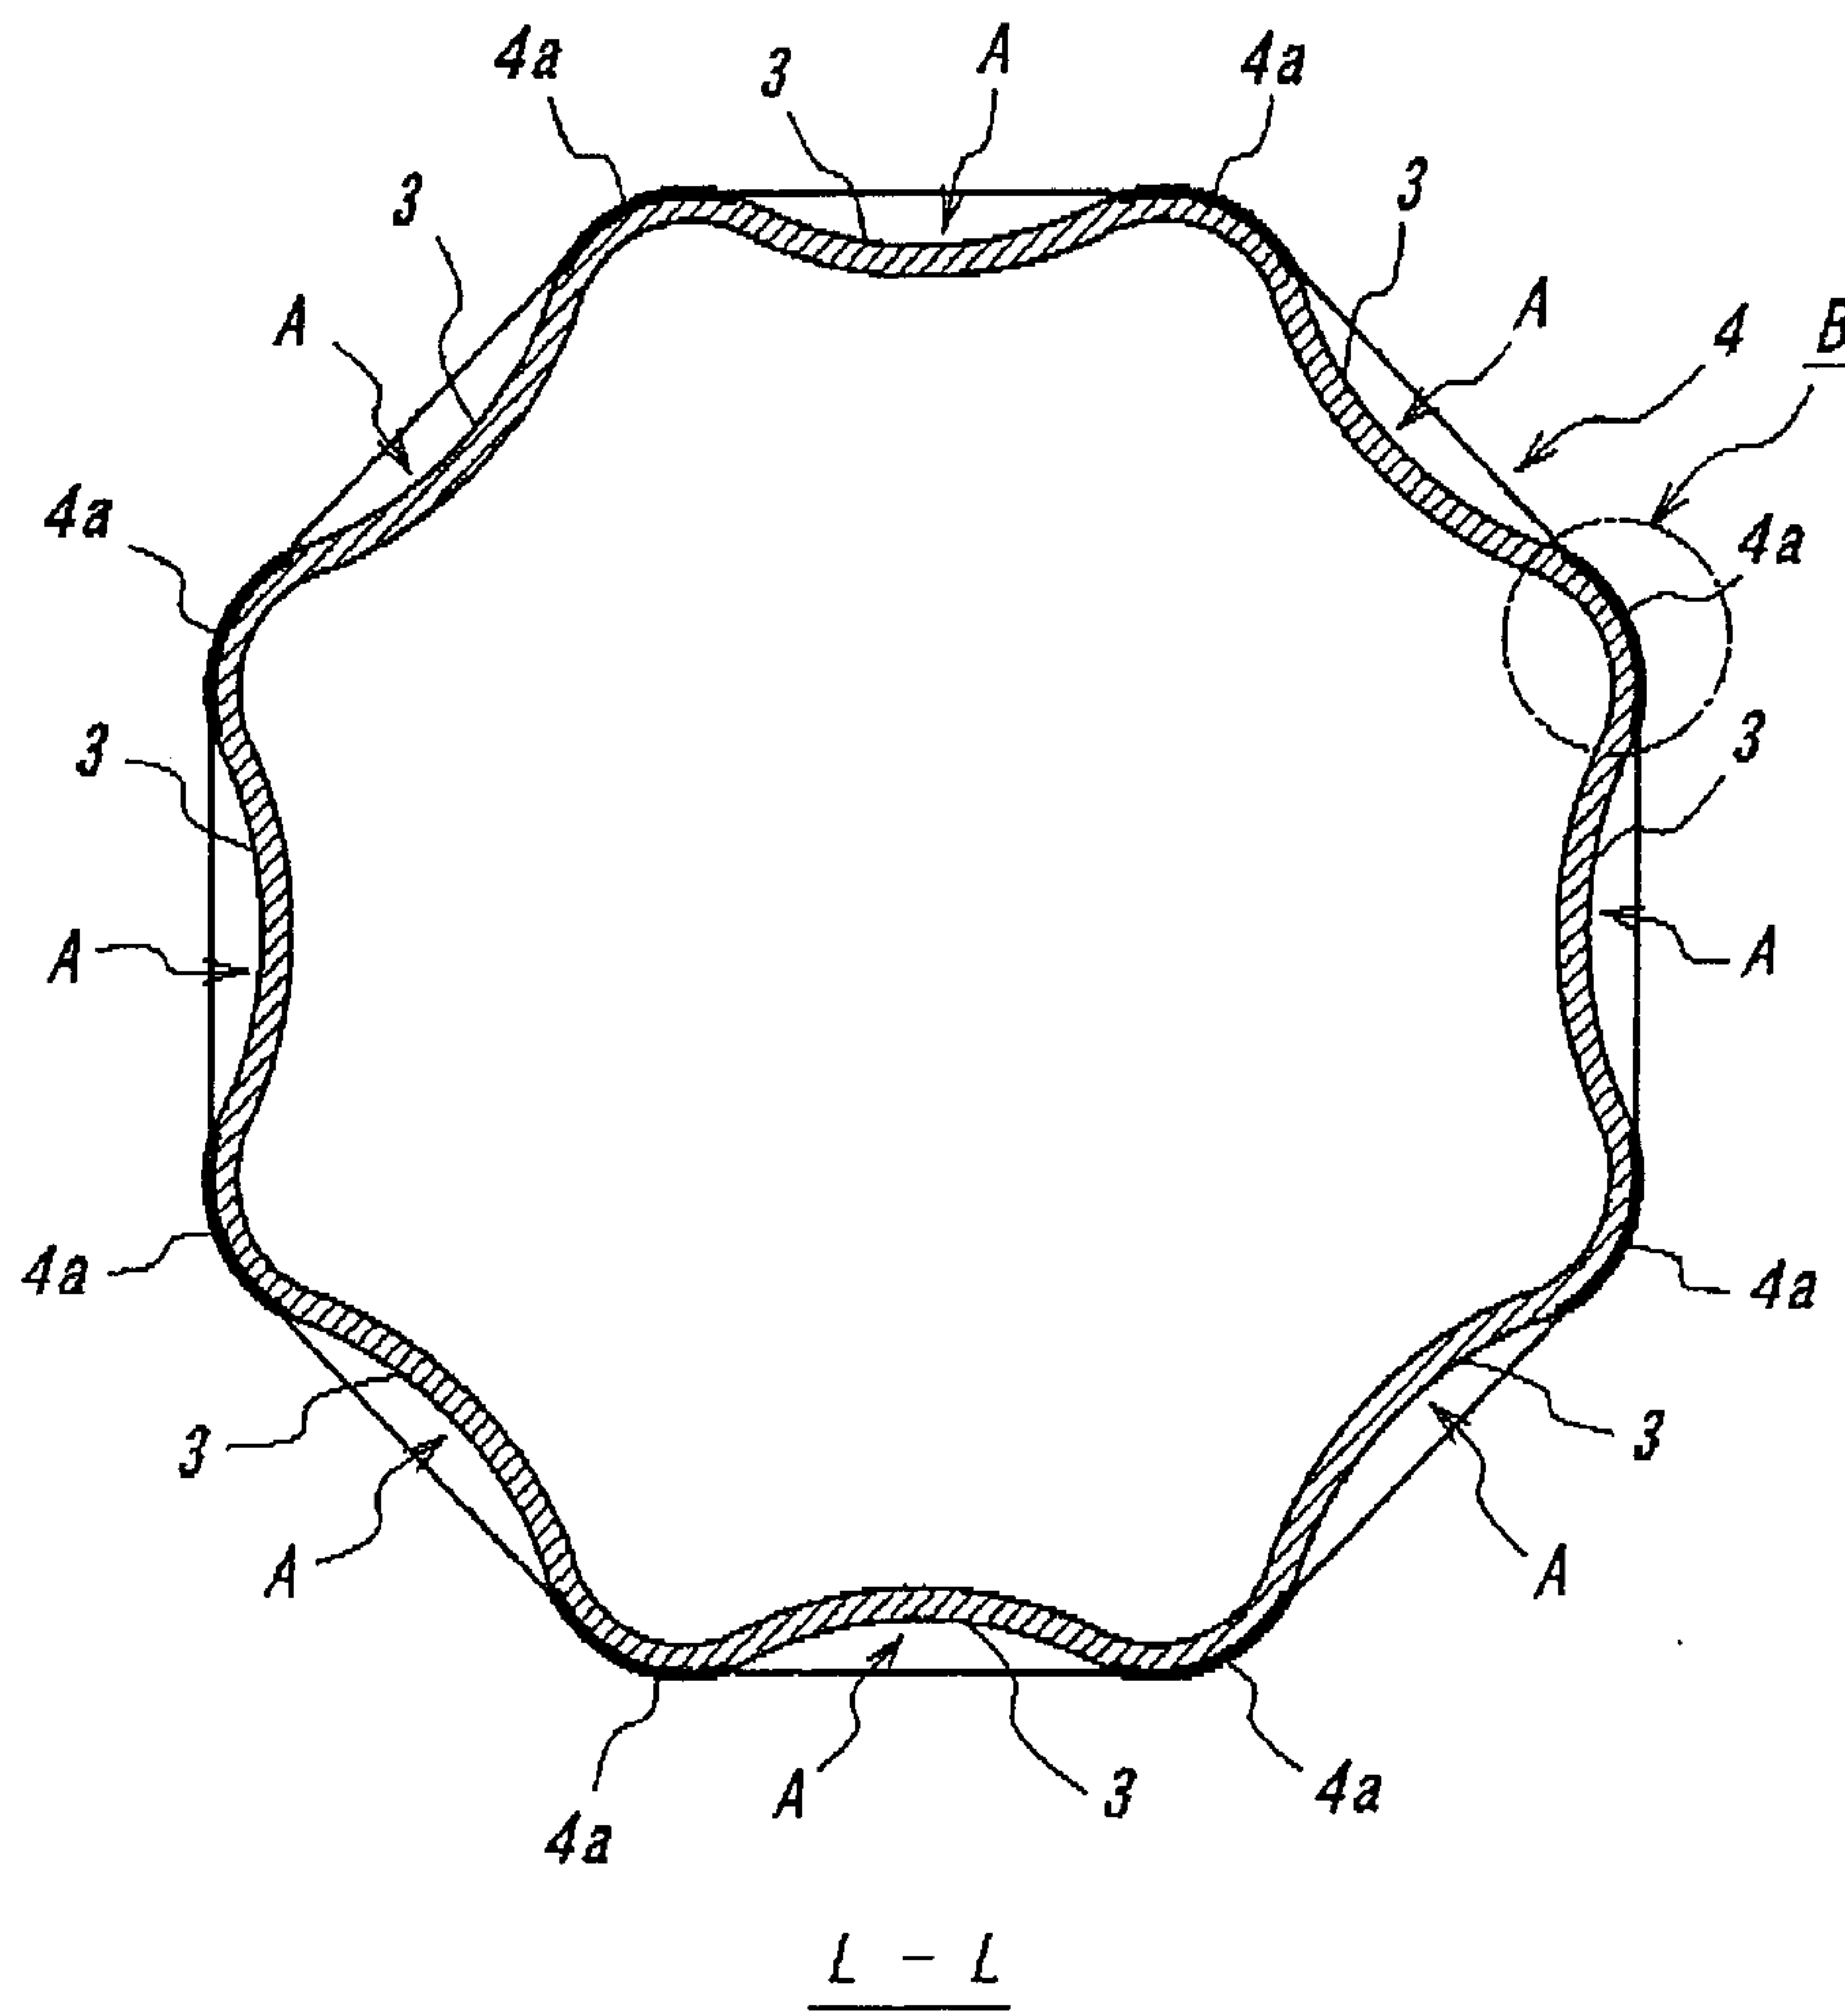


FIG. 3

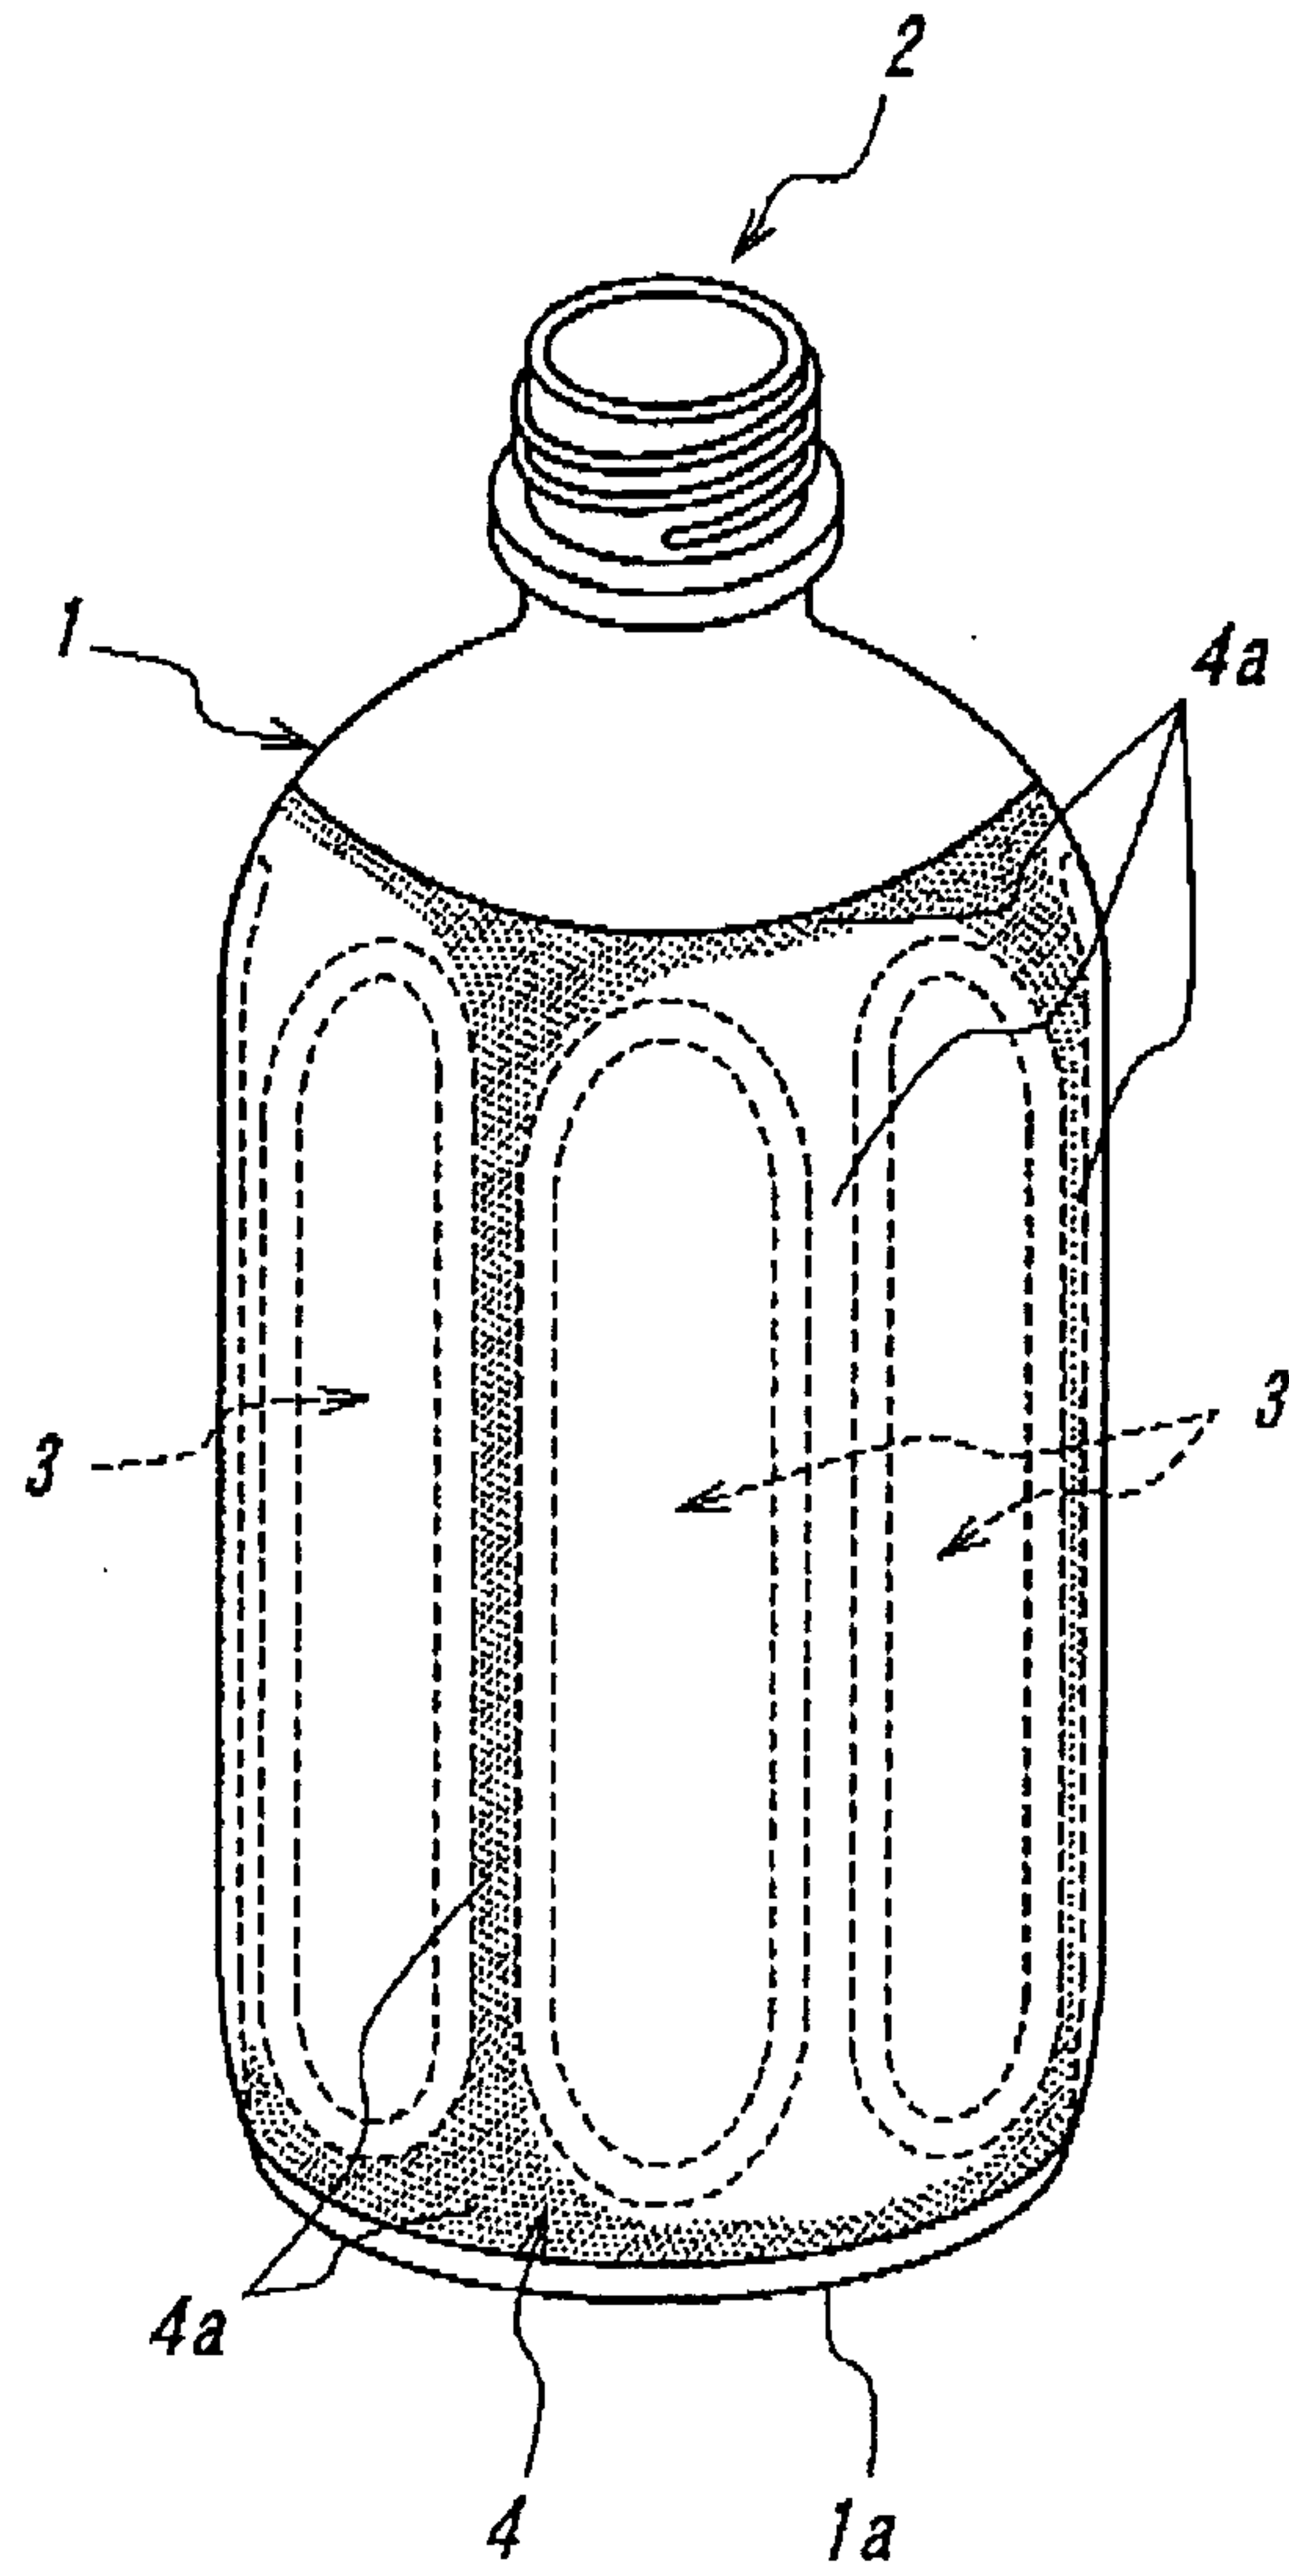


FIG. 4

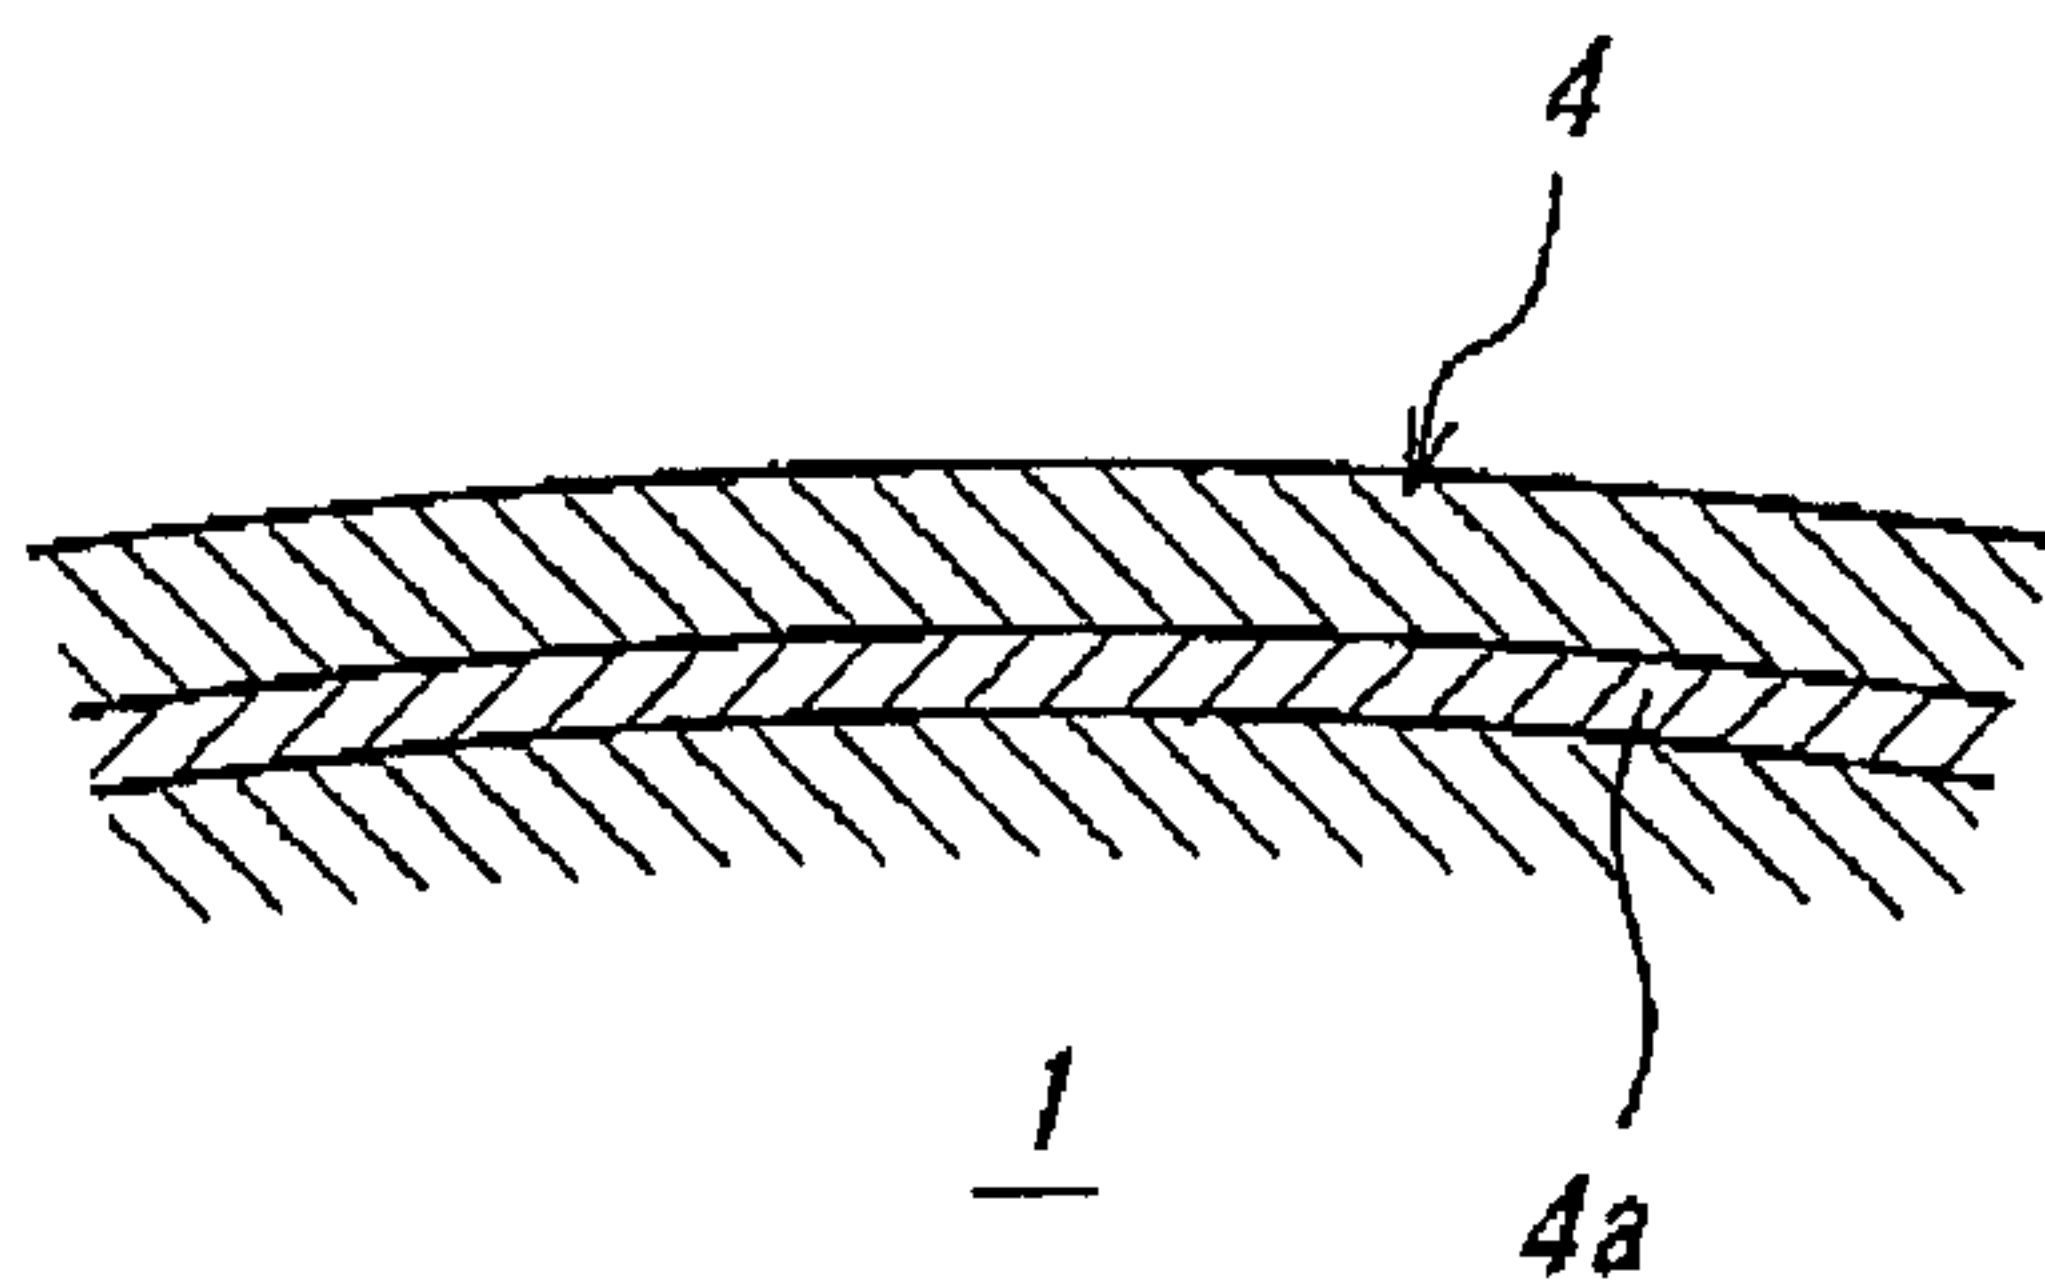


FIG. 5

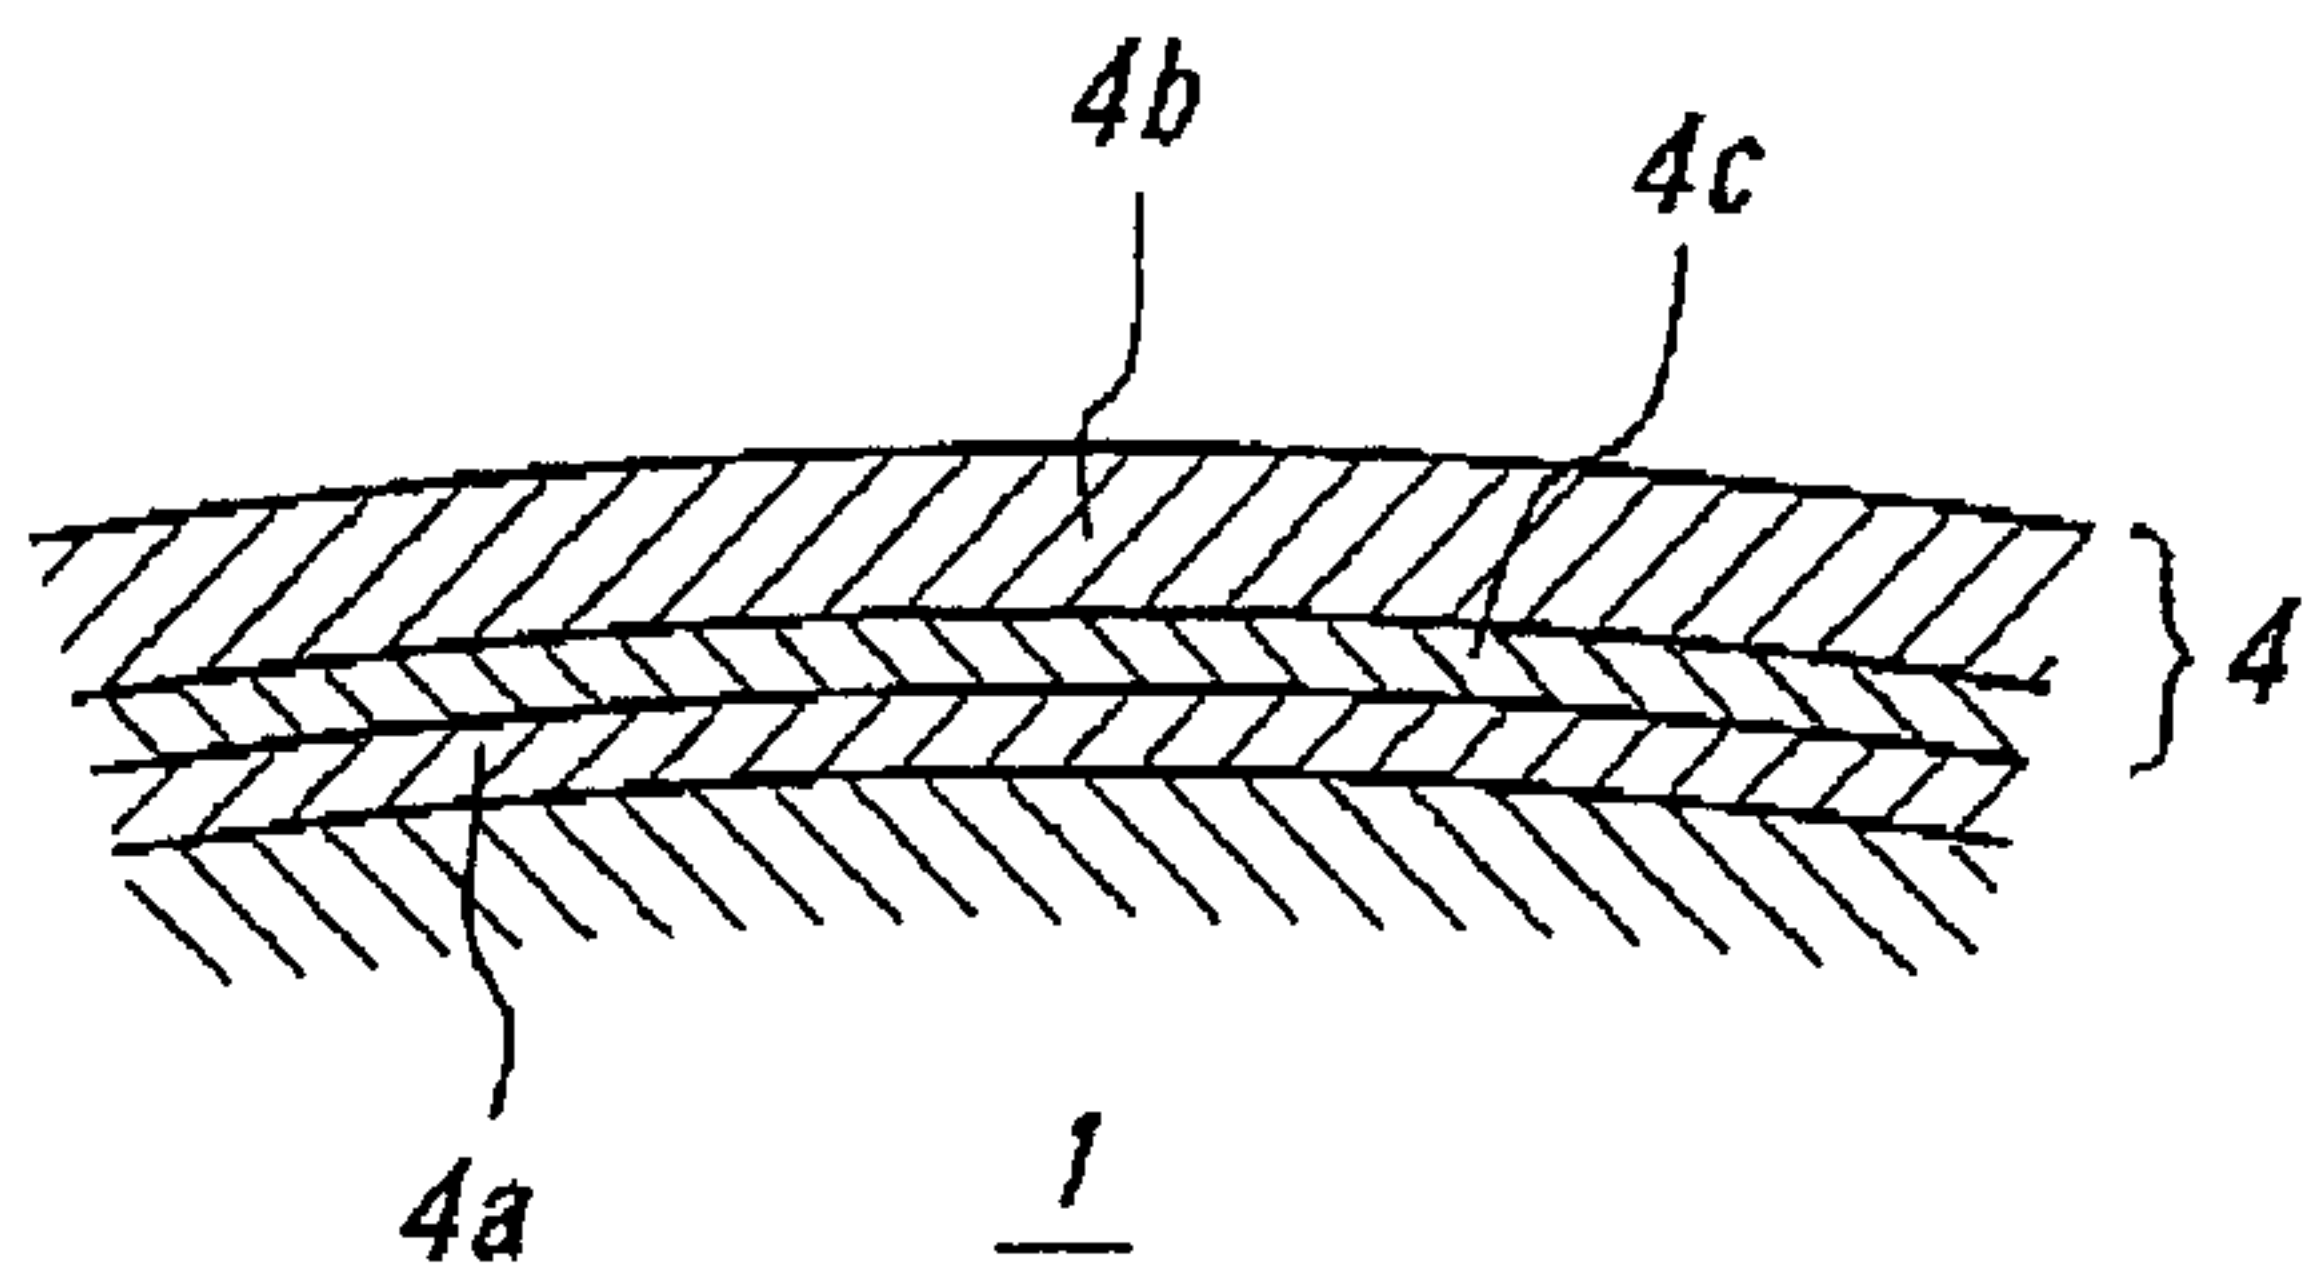


FIG. 6

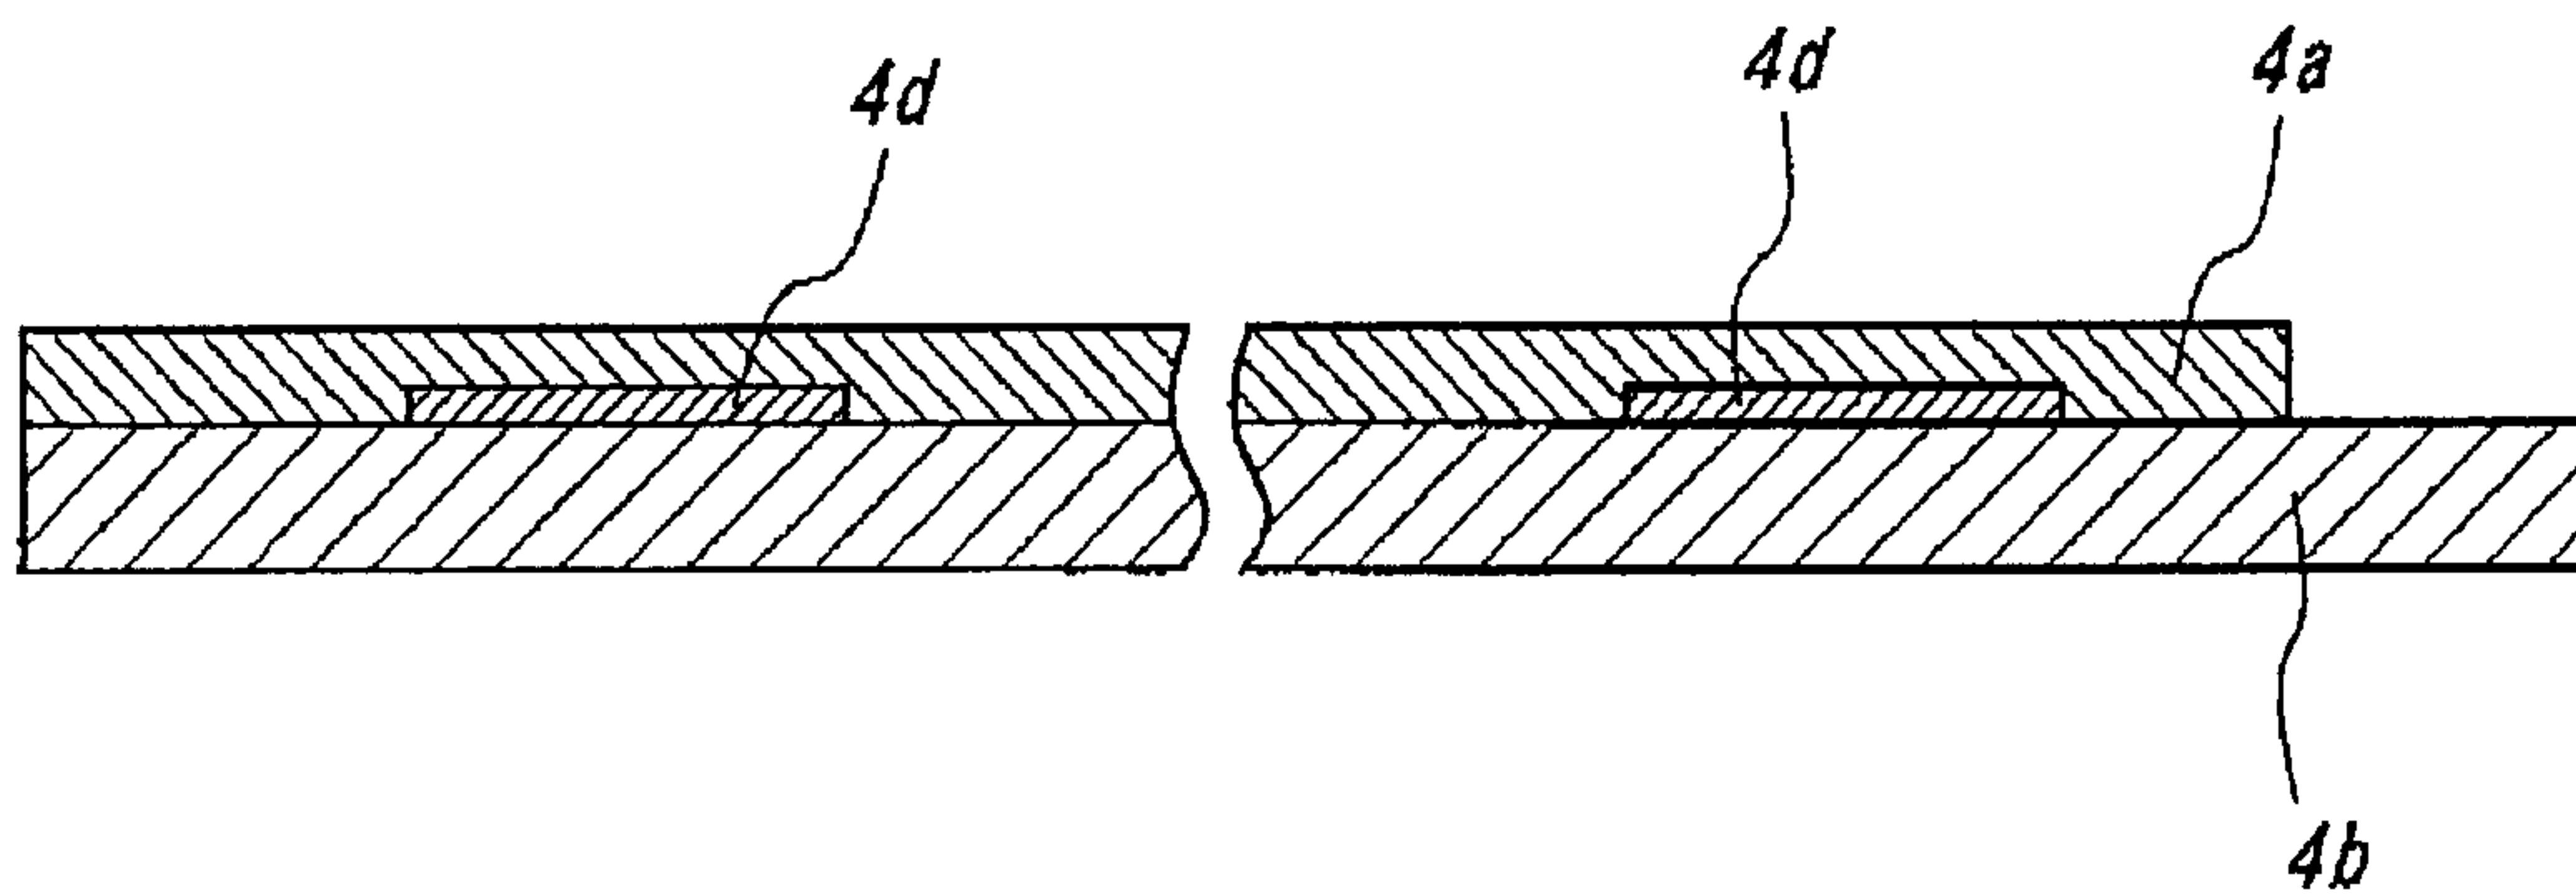


FIG. 7


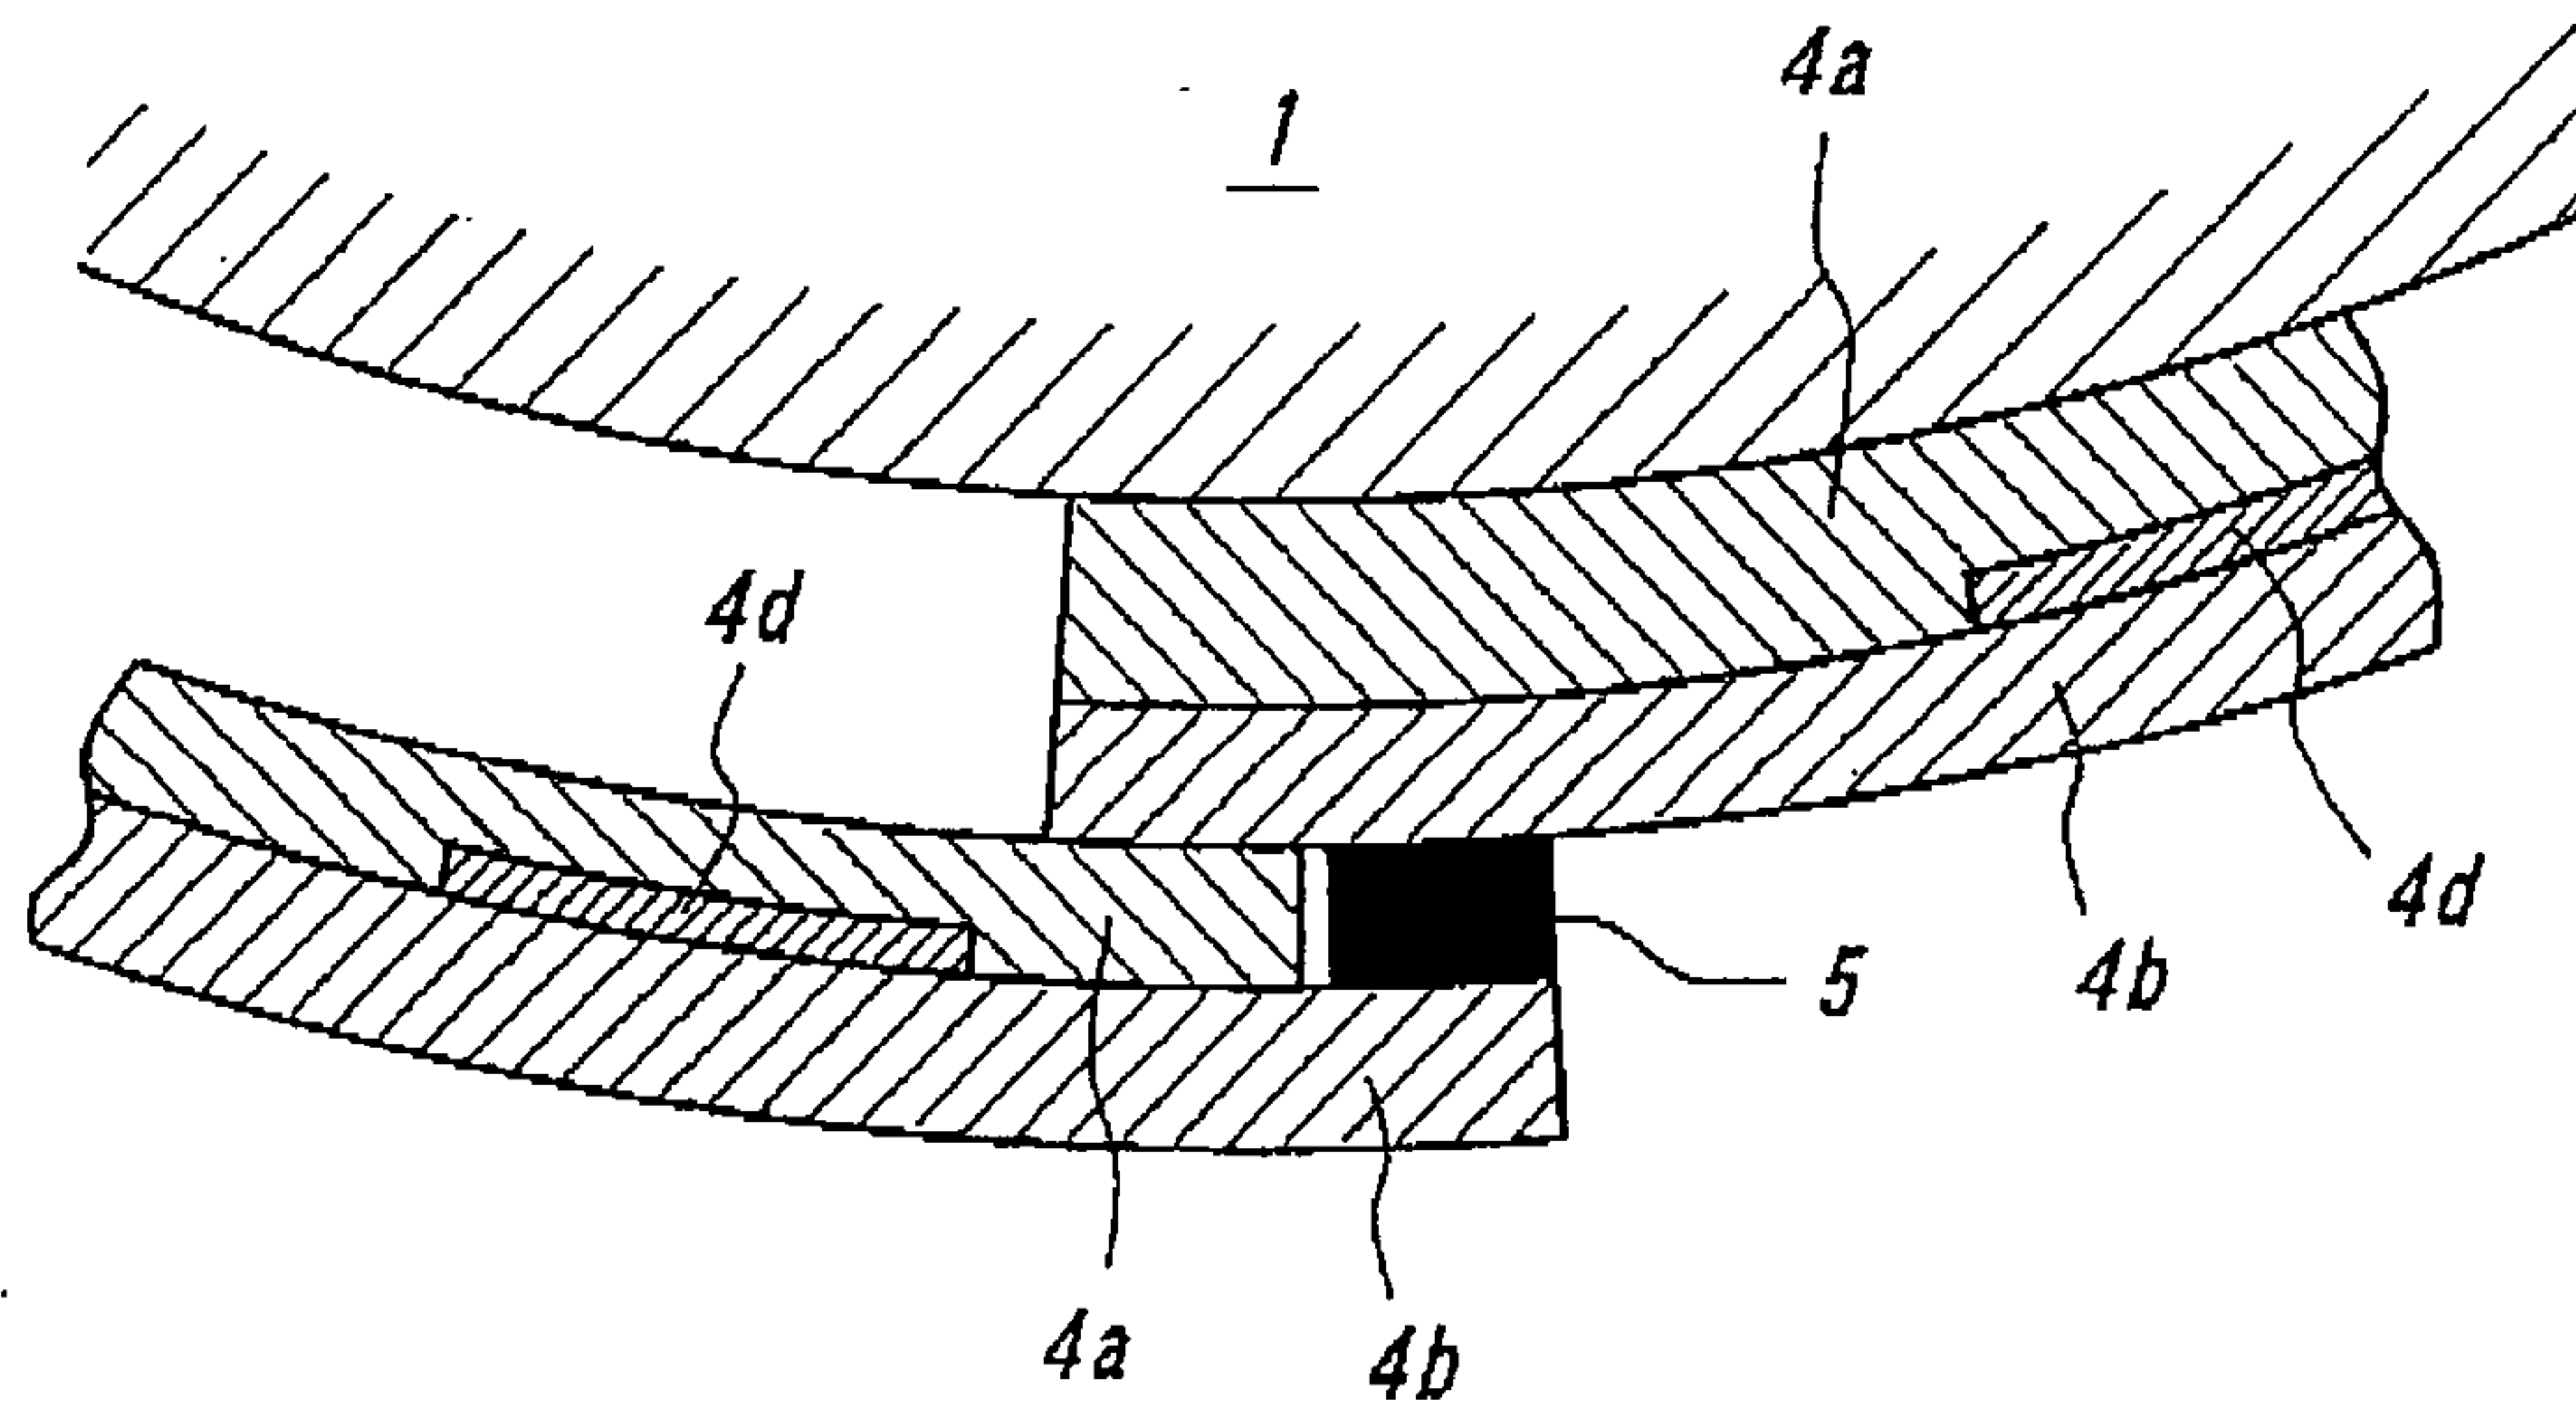



FIG. 8a


FIG. 8b

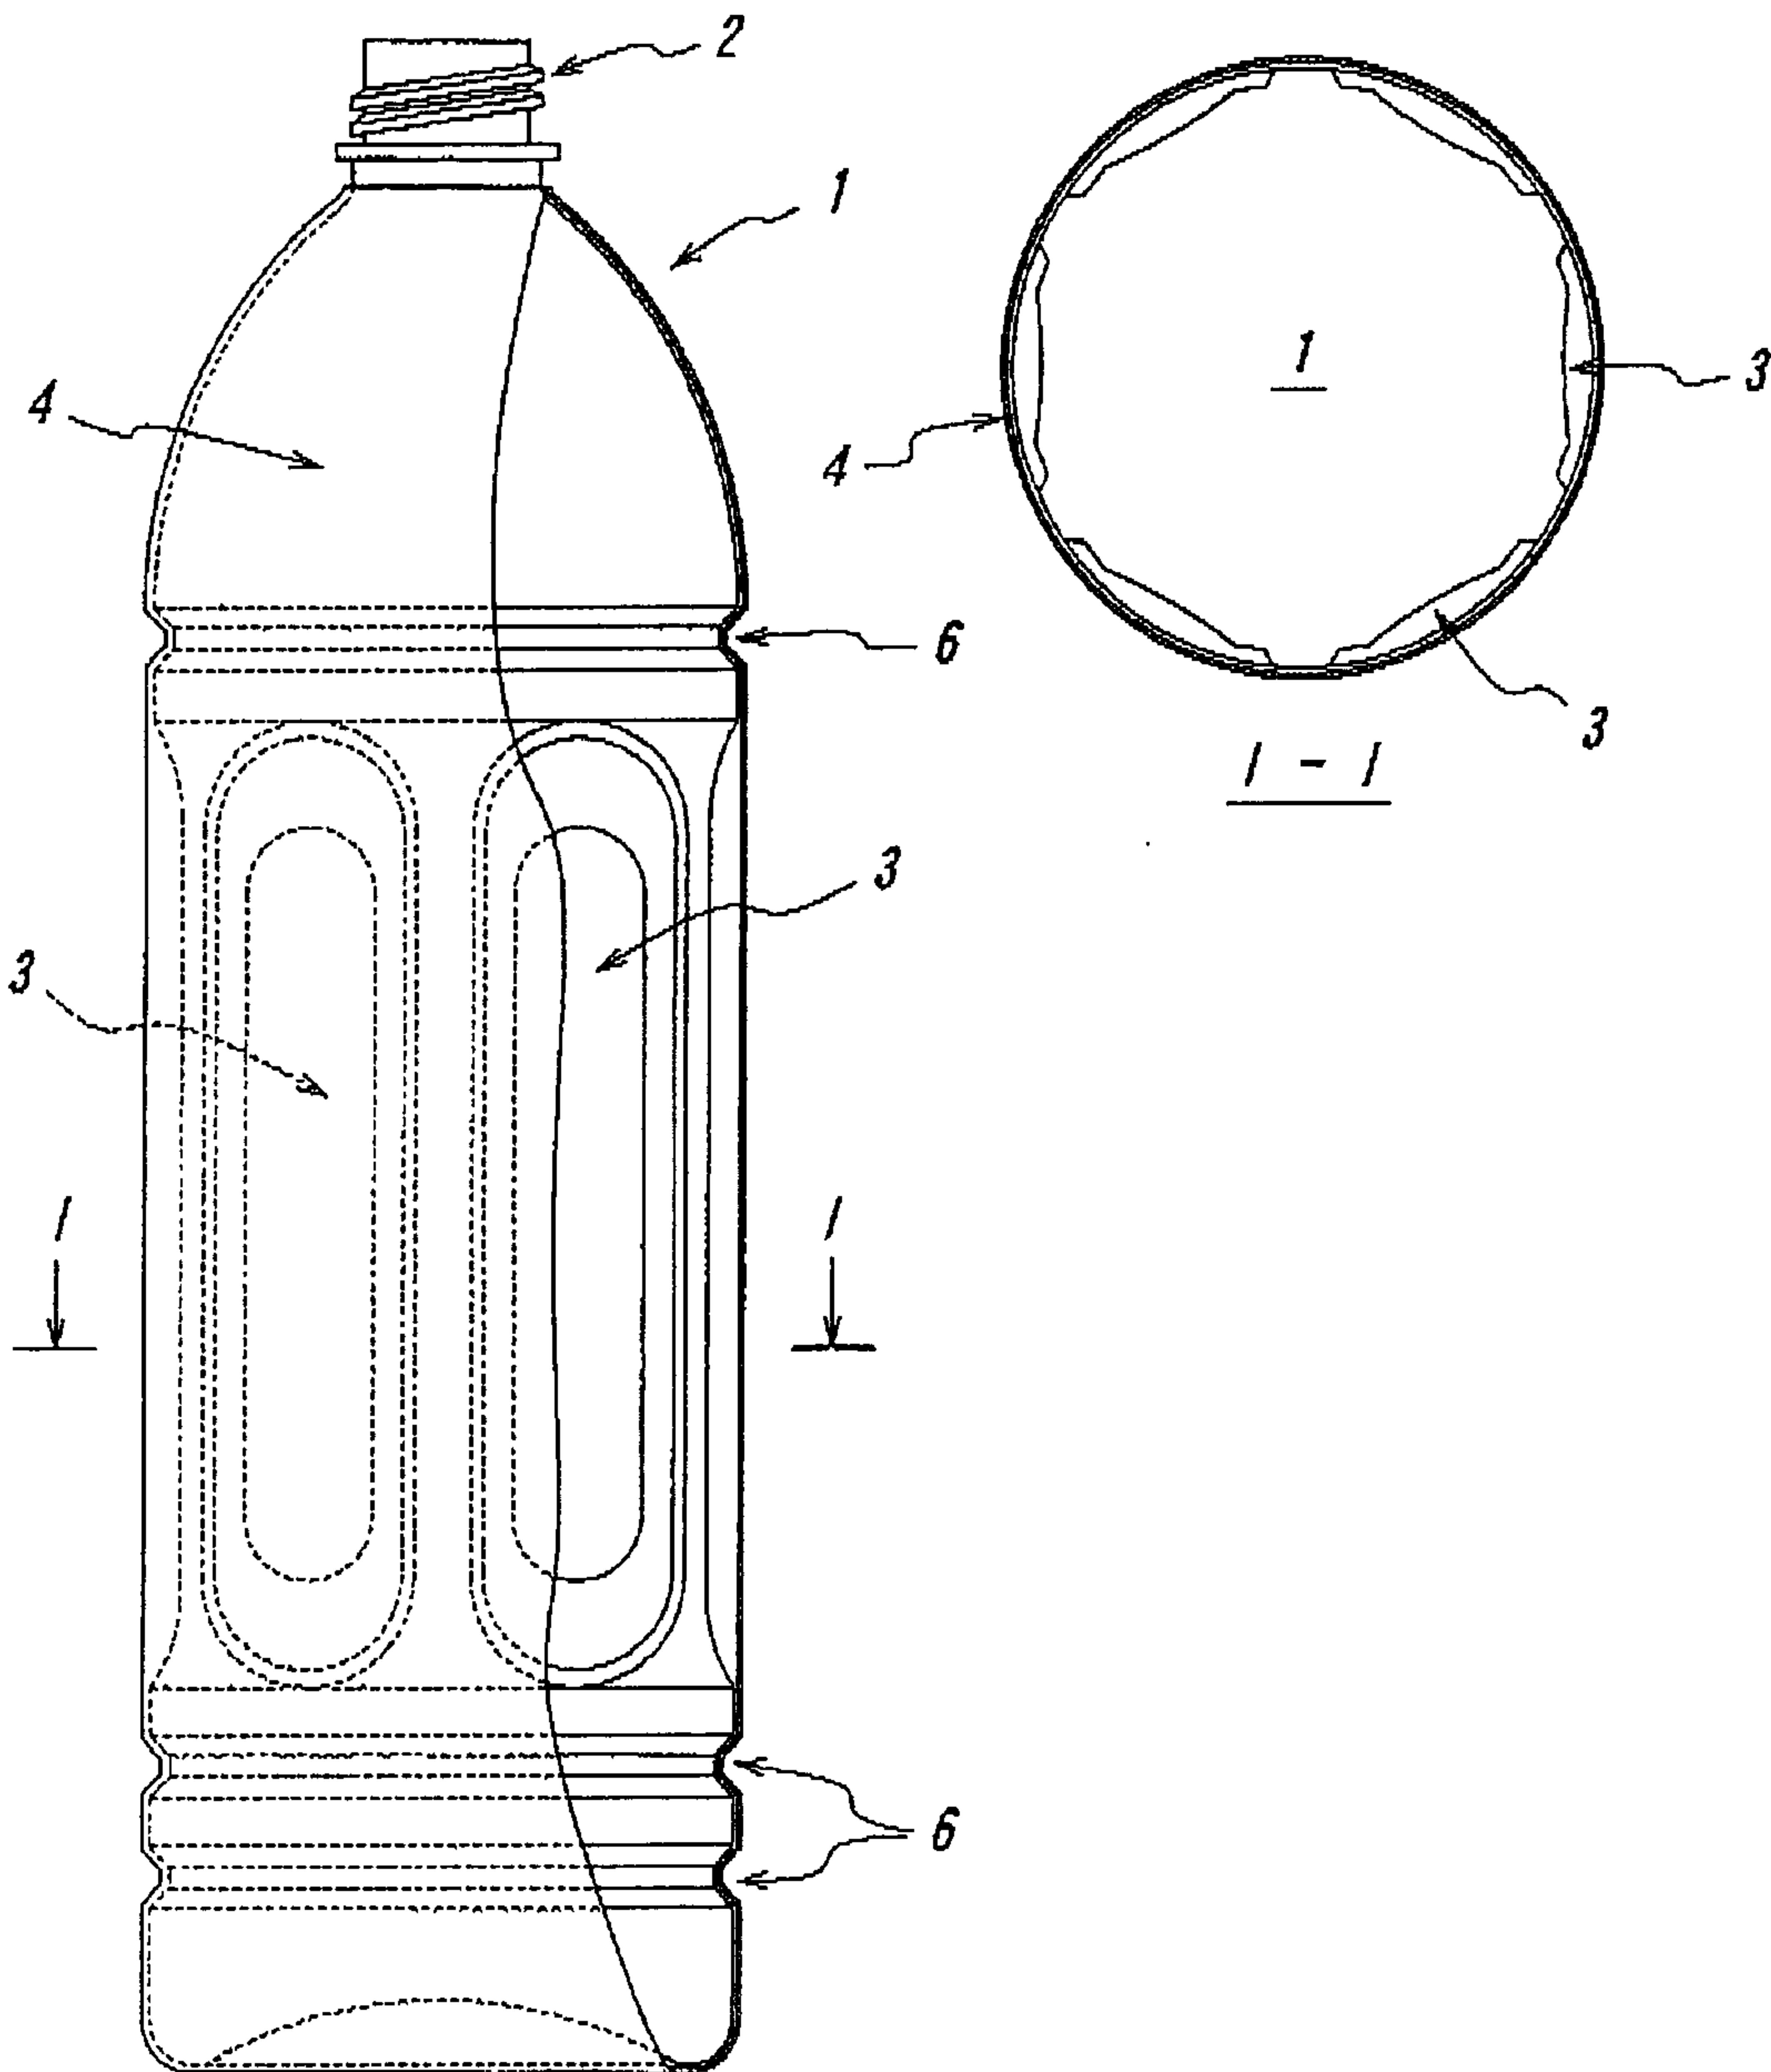

7/7

FIG. 9

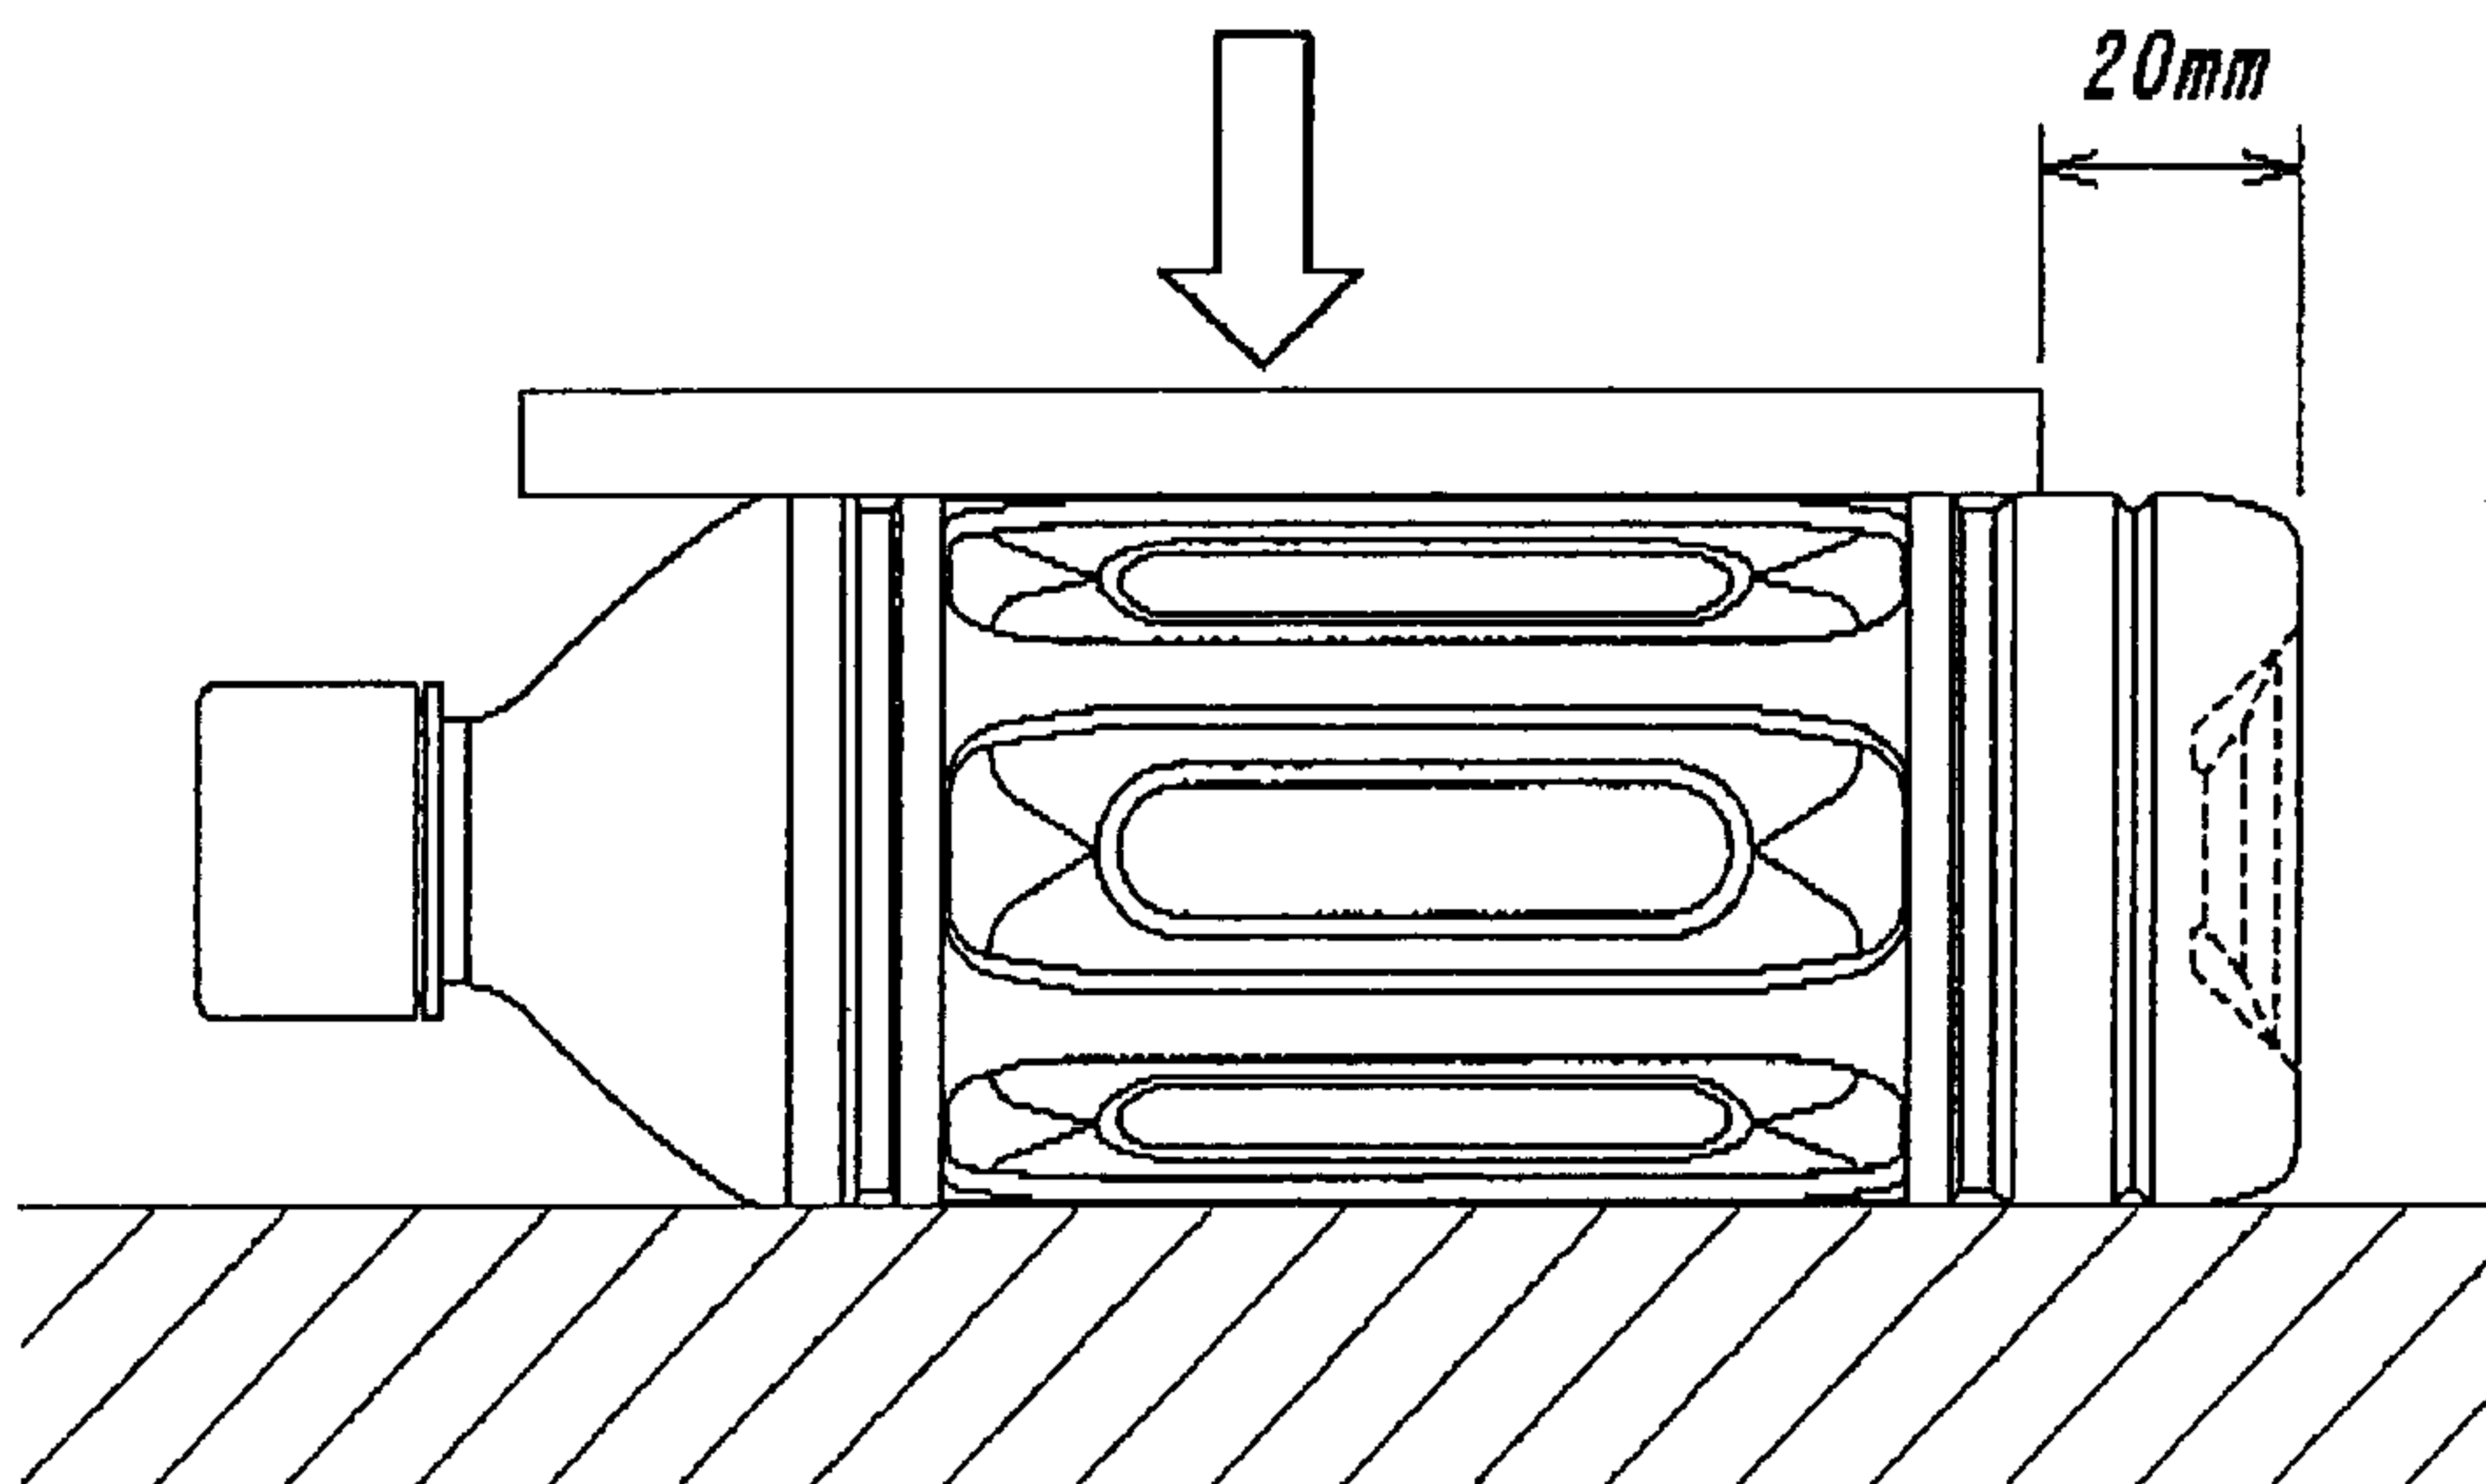

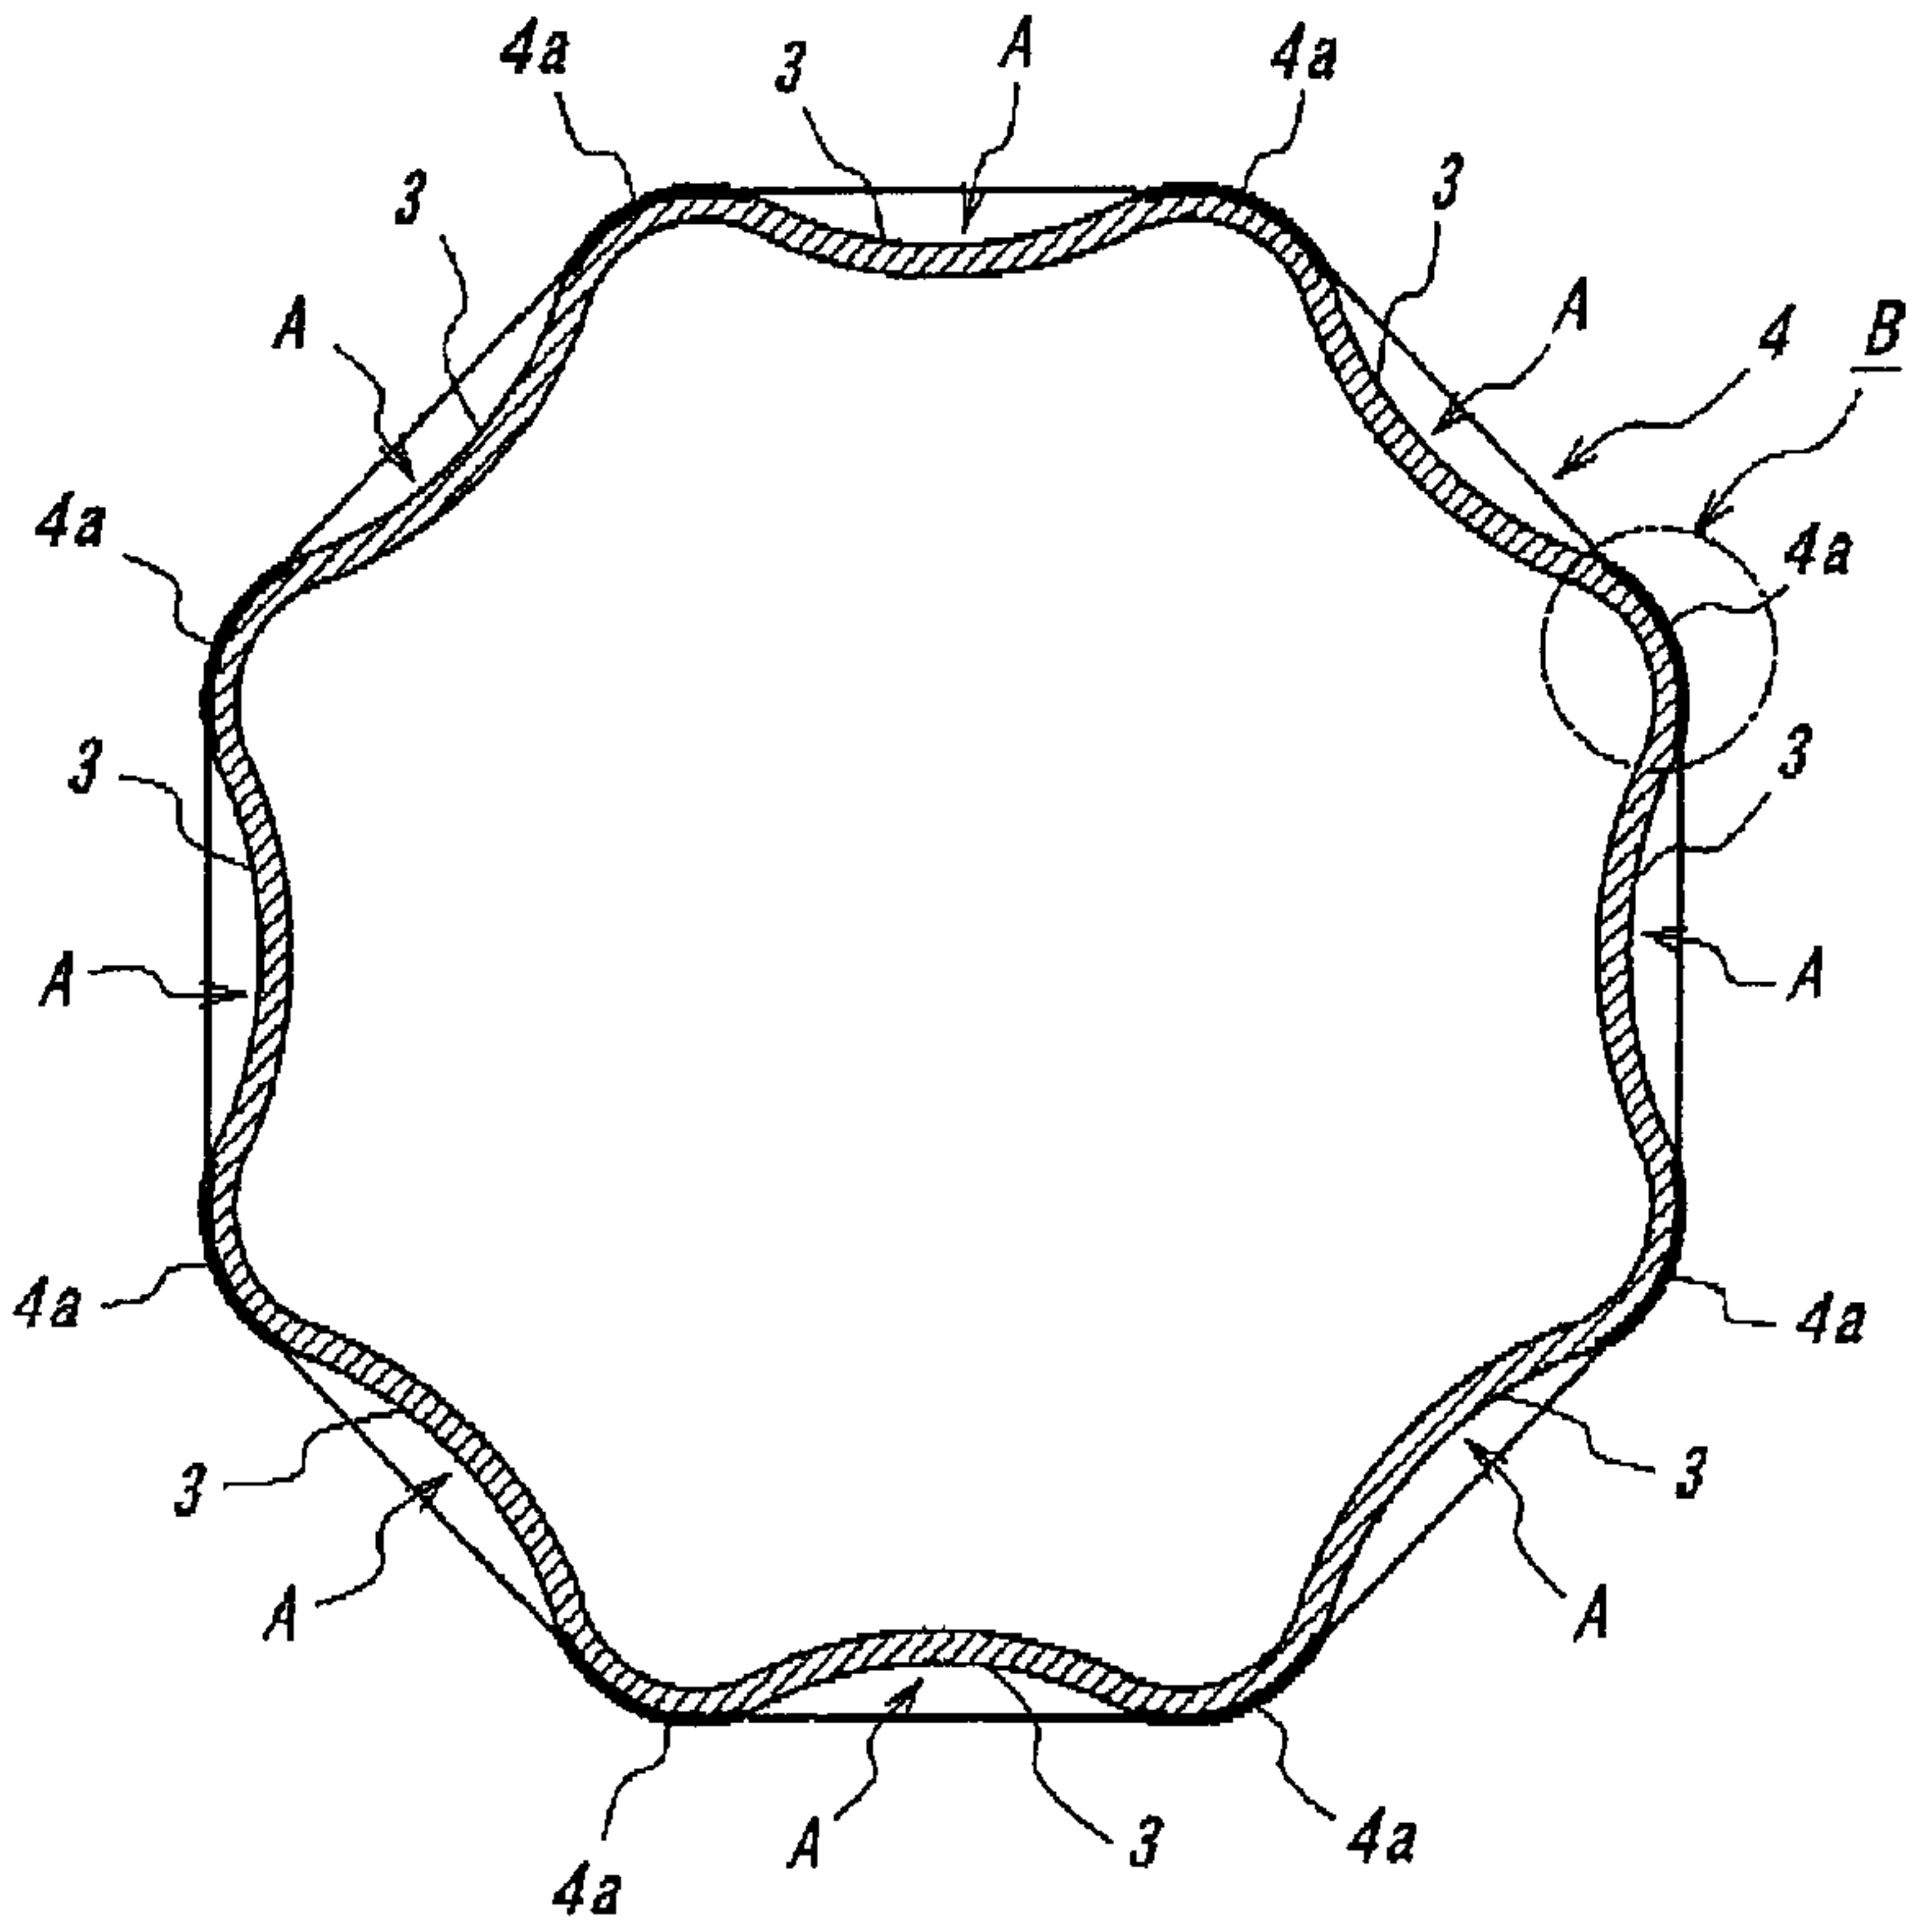

L - L