



US00RE49046E

(19) **United States**
(12) **Reissued Patent**
Liu et al.

(10) **Patent Number:** **US RE49,046 E**
(45) **Date of Reissued Patent:** ***Apr. 19, 2022**

(54) **METHODS AND APPARATUS FOR PACKAGE ON PACKAGE DEVICES**

H01L 25/10 (2006.01)
H01L 25/00 (2006.01)

(71) Applicant: **Taiwan Semiconductor Manufacturing Company, Ltd.**,
Hsinchu (TW)

(52) **U.S. Cl.**
CPC **H01L 24/17** (2013.01); **H01L 21/50** (2013.01); **H01L 23/488** (2013.01); **H01L 23/49816** (2013.01); **H01L 23/49827** (2013.01); **H01L 23/52** (2013.01); **H01L 24/81** (2013.01); **H01L 25/105** (2013.01); **H01L 25/50** (2013.01)

(72) Inventors: **Ming-Kai Liu**, New Taipei (TW);
Kai-Chiang Wu, Hsinchu (TW);
Hsien-Wei Chen, Hsinchu (TW);
Shih-Wei Liang, Dajia Township (TW)

(58) **Field of Classification Search**
CPC **H01L 24/17**; **H01L 21/50**; **H01L 23/488**;
H01L 23/49816; **H01L 23/49827**; **H01L 23/52**; **H01L 24/81**; **H01L 25/105**; **H01L 25/50**

(73) Assignee: **Taiwan Semiconductor Manufacturing Company, Ltd.**,
Hsin-Chu (TW)

See application file for complete search history.

(*) Notice: This patent is subject to a terminal disclaimer.

(56) **References Cited**

U.S. PATENT DOCUMENTS

(21) Appl. No.: **16/014,434**

5,099,309 A 3/1992 Kryzaniwsky
5,111,278 A 5/1992 Eichelberger
5,644,828 A 7/1997 Degani et al.
5,751,060 A 5/1998 Laine et al.
5,783,870 A 7/1998 Mostafazadeh et al.
5,841,193 A 11/1998 Eichelberger

(22) Filed: **Jun. 21, 2018**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **9,373,599**
Issued: **Jun. 21, 2016**
Appl. No.: **14/539,779**
Filed: **Nov. 12, 2014**

(Continued)

Primary Examiner — Tuan H Nguyen

(74) *Attorney, Agent, or Firm* — Slater Matsil, LLP

U.S. Applications:


(63) Continuation of application No. 13/463,667, filed on May 3, 2012, now Pat. No. 8,901,730.

(57) **ABSTRACT**

Package on package (PoP) devices and methods of packaging semiconductor dies are disclosed. A PoP device is formed by connecting a top package and a bottom package together using a plurality of PoP connectors on the bottom package connected to corresponding connectors of the top package. The PoP device further comprises a plurality of dummy connectors contained in the bottom package and not connected to any corresponding connector in the top package.

37 Claims, 8 Drawing Sheets

(51) **Int. Cl.**
H01L 23/00 (2006.01)
H01L 23/488 (2006.01)
H01L 23/52 (2006.01)
H01L 21/50 (2006.01)
H01L 23/498 (2006.01)

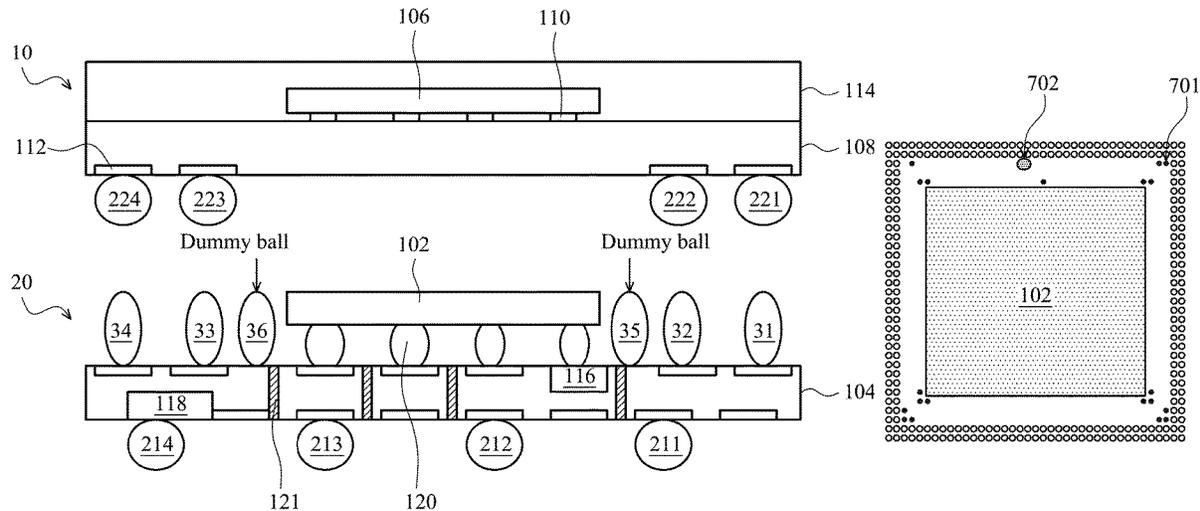

(56)

References Cited

U.S. PATENT DOCUMENTS

5,977,640	A	11/1999	Bertin et al.	8,474,133	B2	7/2013	Eichelberger et al.	
6,031,284	A	2/2000	Song	8,533,941	B2	9/2013	Eichelberger et al.	
6,038,133	A	3/2000	Nakatani et al.	8,564,119	B2	10/2013	Eichelberger et al.	
6,159,767	A	12/2000	Eichelberger	8,590,145	B2	11/2013	Eichelberger et al.	
6,222,265	B1	4/2001	Akram et al.	8,901,730	B2*	12/2014	Liu	H01L 23/488
6,335,571	B1	1/2002	Capote et al.	2002/0034066	A1*	3/2002	Huang et al.	361/704
6,348,728	B1	2/2002	Aiba et al.	2002/0152610	A1	10/2002	Nishiyama et al.	
6,396,148	B1	5/2002	Eichelberger et al.	2003/0122240	A1	7/2003	Lin et al.	
6,407,929	B1	6/2002	Hale et al.	2003/0137045	A1	7/2003	Sugaya et al.	
6,426,545	B1	7/2002	Eichelberger et al.	2003/0205826	A1	11/2003	Lin et al.	
6,445,075	B1	9/2002	Scanlan et al.	2004/0000425	A1	1/2004	White et al.	
6,476,503	B1	11/2002	Imamura et al.	2004/0150081	A1	8/2004	Ogawa	
6,489,685	B2	12/2002	Asahi et al.	2004/0150097	A1	8/2004	Gaynes et al.	
6,507,115	B1	1/2003	Hofstee et al.	2004/0195686	A1	10/2004	Jobetto et al.	
6,538,210	B2	3/2003	Sugaya et al.	2004/0212099	A1	10/2004	Klein et al.	
6,555,908	B1	4/2003	Eichelberger et al.	2004/0227258	A1	11/2004	Nakatani	
6,607,938	B2	8/2003	Kwon et al.	2005/0001329	A1	1/2005	Matsuki et al.	
6,633,081	B2	10/2003	Sahara et al.	2005/0006784	A1	1/2005	Nakayama	
6,714,418	B2	3/2004	Frankowsky et al.	2005/0046039	A1	3/2005	Yang et al.	
6,759,268	B2	7/2004	Akagawa	2005/0051886	A1	3/2005	Mihara et al.	
6,770,971	B2	8/2004	Kouno et al.	2005/0101116	A1	5/2005	Tseng	
6,774,467	B2	8/2004	Horiuchi et al.	2005/0184377	A1	8/2005	Takeuchi et al.	
6,784,530	B2	8/2004	Sugaya et al.	2005/0224988	A1	10/2005	Tuominen	
6,818,544	B2	11/2004	Eichelberger et al.	2005/0269681	A1	12/2005	Asahi et al.	
6,838,750	B2	1/2005	Nuytkens et al.	2006/0022332	A1	2/2006	Koyama et al.	
6,885,099	B2	4/2005	Ogawa	2006/0121718	A1	6/2006	Machida et al.	
6,888,209	B2	5/2005	Jobetto	2006/0125082	A1	6/2006	Wakabayashi et al.	
6,939,738	B2	9/2005	Nakatani et al.	2006/0255458	A1	11/2006	Dangelmaier	
6,946,325	B2	9/2005	Yean et al.	2007/0052083	A1	3/2007	Kobayashi et al.	
6,958,537	B2	10/2005	Eng et al.	2007/0069389	A1	3/2007	Wollanke et al.	
7,034,386	B2	4/2006	Kurita	2007/0096292	A1	5/2007	Machida	
7,049,692	B2	5/2006	Nishimura et al.	2007/0141751	A1*	6/2007	Mistry	H01L 21/561 438/109
7,112,467	B2	9/2006	Eichelberger et al.	2007/0164457	A1	7/2007	Yamaguchi et al.	
7,242,081	B1	7/2007	Lee	2007/0246806	A1	10/2007	Ong et al.	
7,355,290	B2	4/2008	Shioga et al.	2007/0246811	A1	10/2007	Tsai et al.	H01L 25/50
7,365,416	B2	4/2008	Kawabata et al.	2008/0157328	A1*	7/2008	Kawata	257/678
7,514,335	B2	4/2009	Wakabayashi et al.	2008/0237834	A1	10/2008	Hu et al.	H01L 21/561
7,615,411	B2	11/2009	Jobetto	2009/0135977	A1	5/2009	Sheu	257/686
7,619,901	B2	11/2009	Eichelberger et al.	2010/0244219	A1*	9/2010	Pagaila	H01L 21/568
7,633,765	B1	12/2009	Scanlan et al.	2011/0006433	A1*	1/2011	Kanetaka	257/686
7,791,206	B2	9/2010	Takeuchi et al.	2011/0068481	A1*	3/2011	Park et al.	H05K 3/3436
7,795,721	B2	9/2010	Kurita	2011/0117700	A1	5/2011	Weng et al.	257/773
7,830,000	B2	11/2010	Eichelberger et al.	2011/0149493	A1*	6/2011	Kwon et al.	257/777
7,863,090	B2	1/2011	Eichelberger et al.	2013/0113097	A1*	5/2013	Yu	361/679.02
7,868,445	B2	1/2011	Kohl et al.					H01L 24/14
8,169,065	B2	5/2012	Kohl et al.					257/738
8,324,020	B2	12/2012	Eichelberger et al.					
8,334,590	B1	12/2012	Jung et al.					
8,384,199	B2	2/2013	Eichelberger et al.					

* cited by examiner

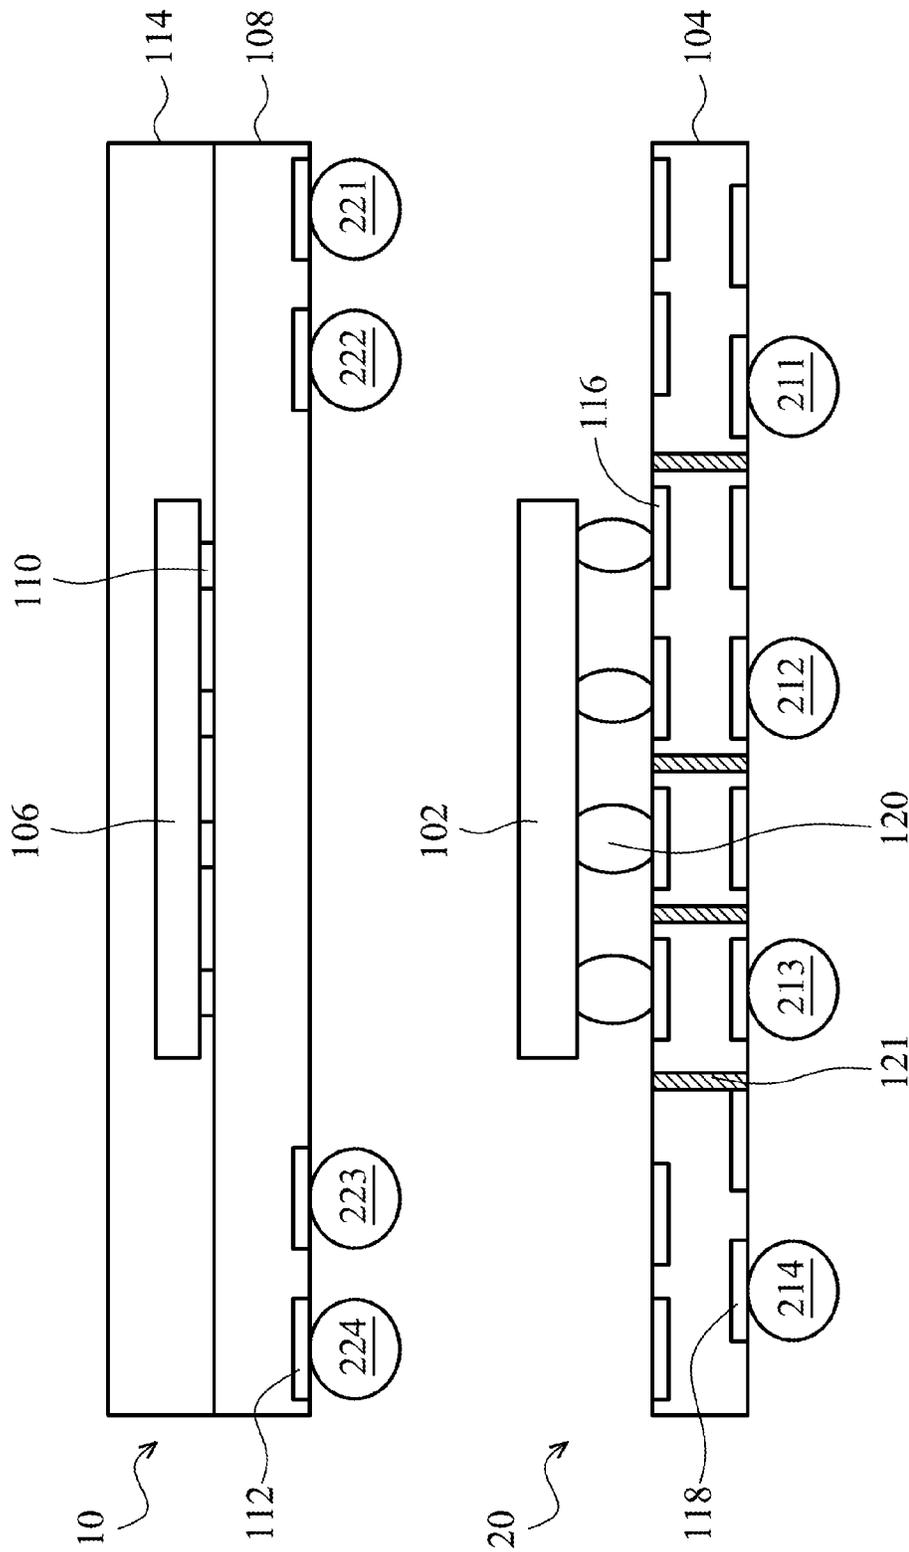


Figure 1(a)

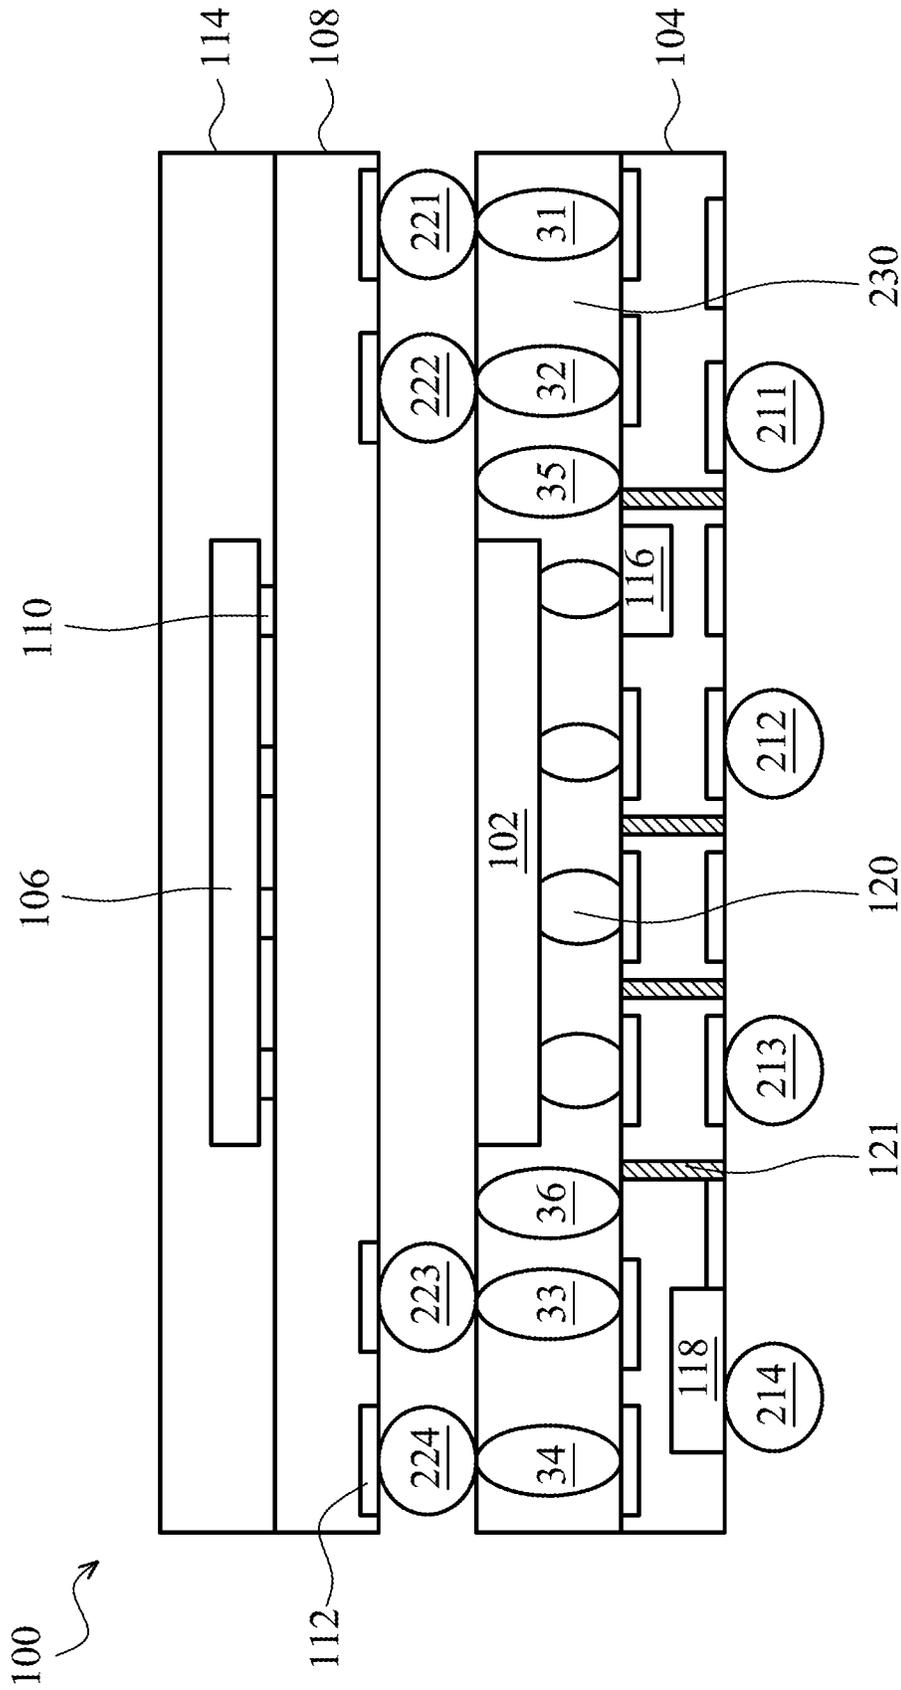


Figure 1(b)

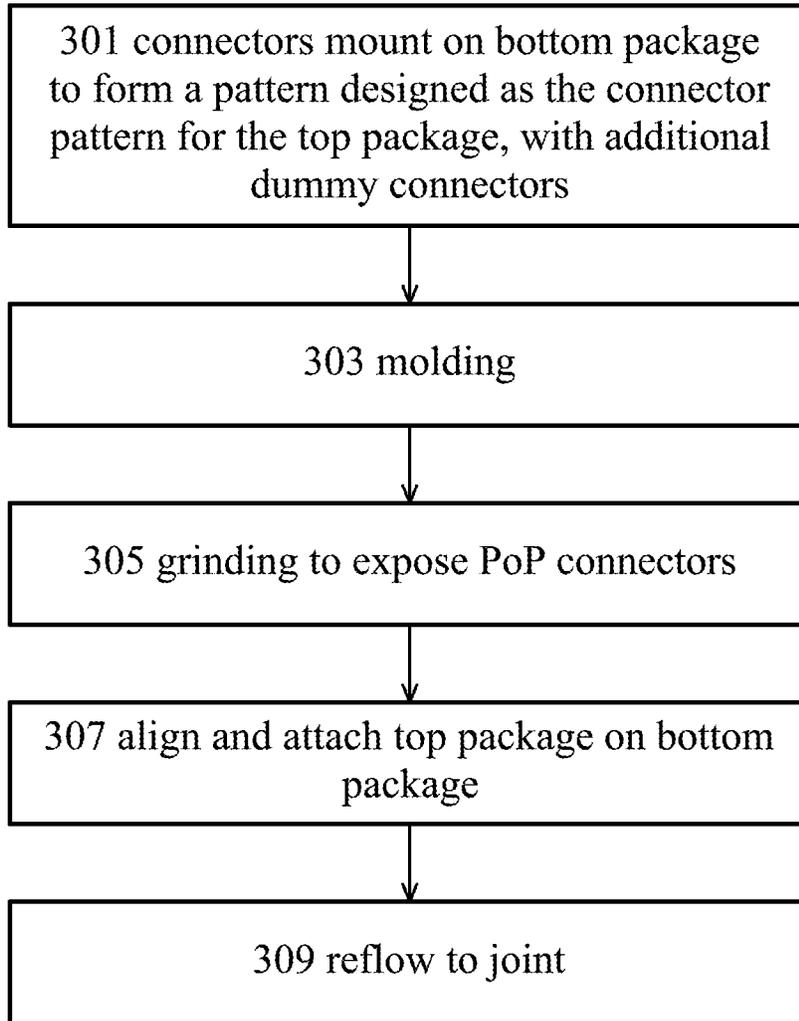


Figure 1(c)

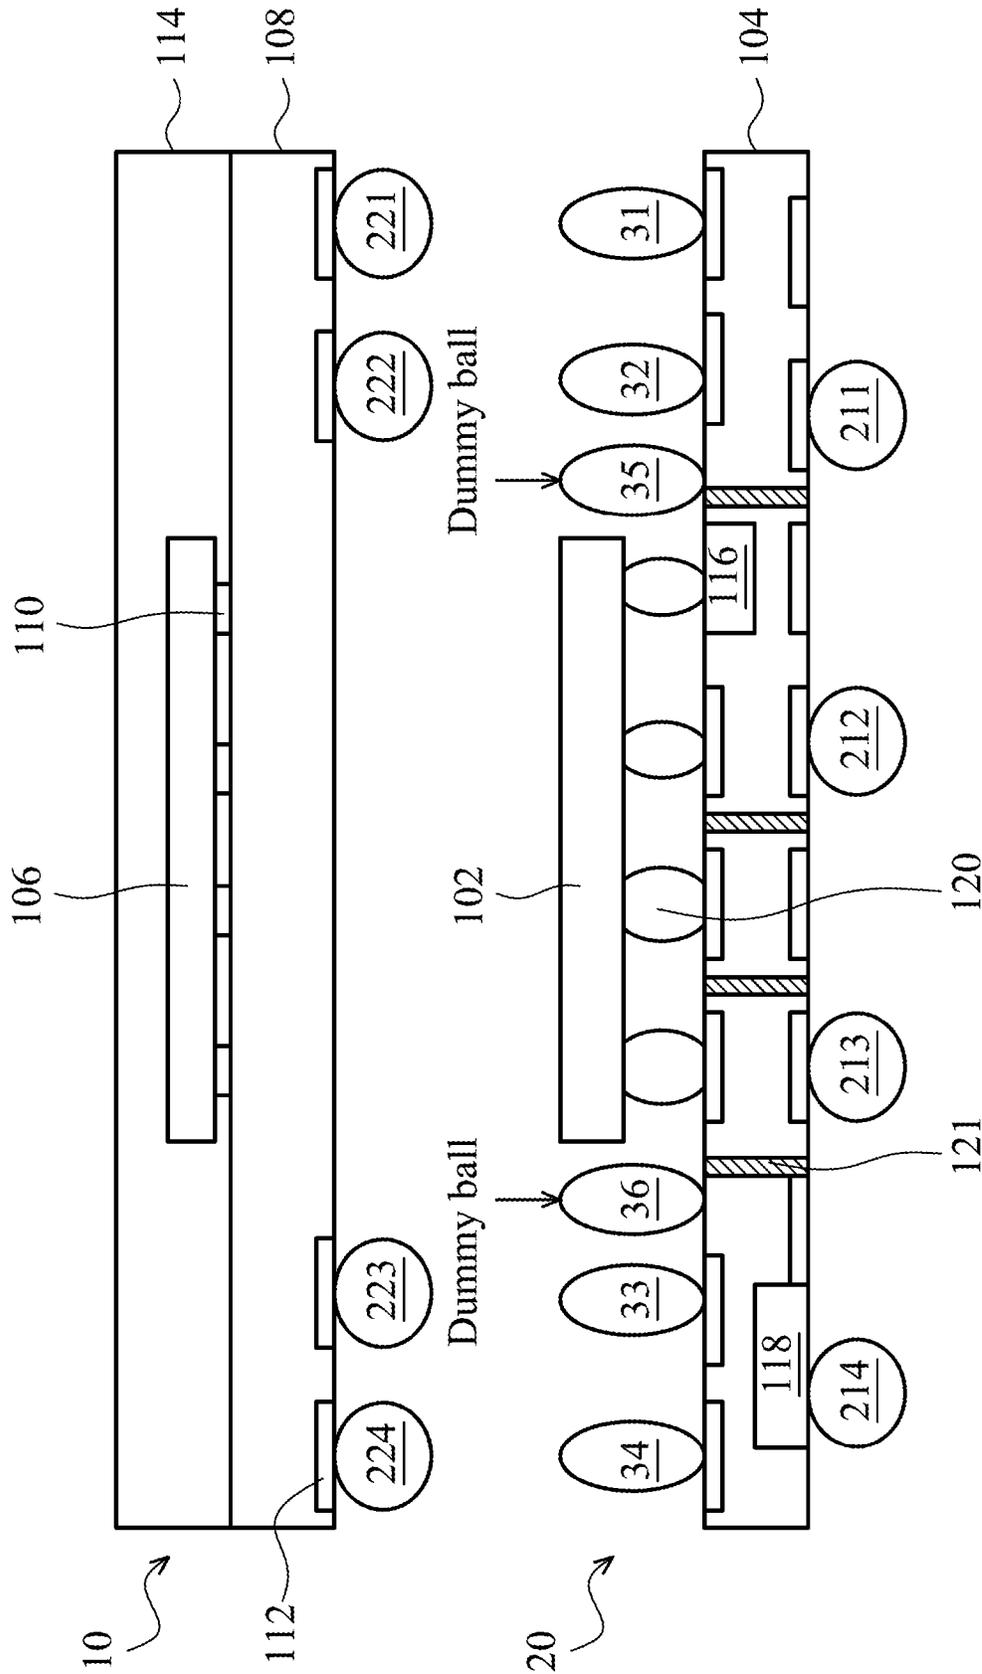


Figure 1(d)

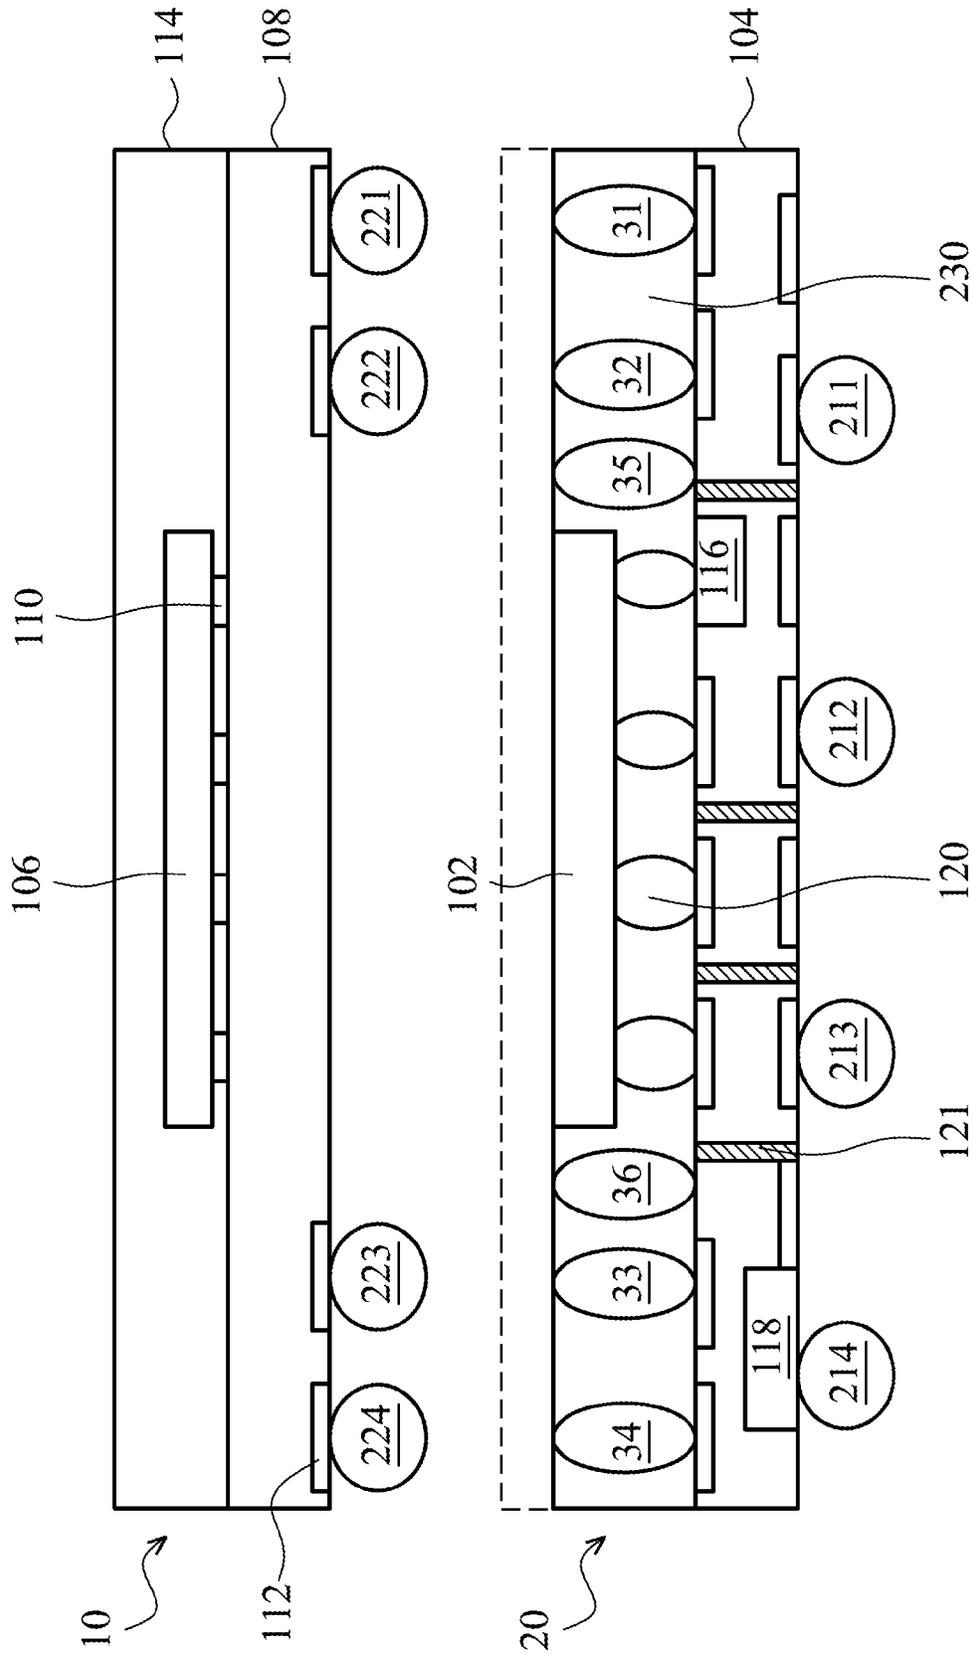


Figure 1(e)
(Amended)

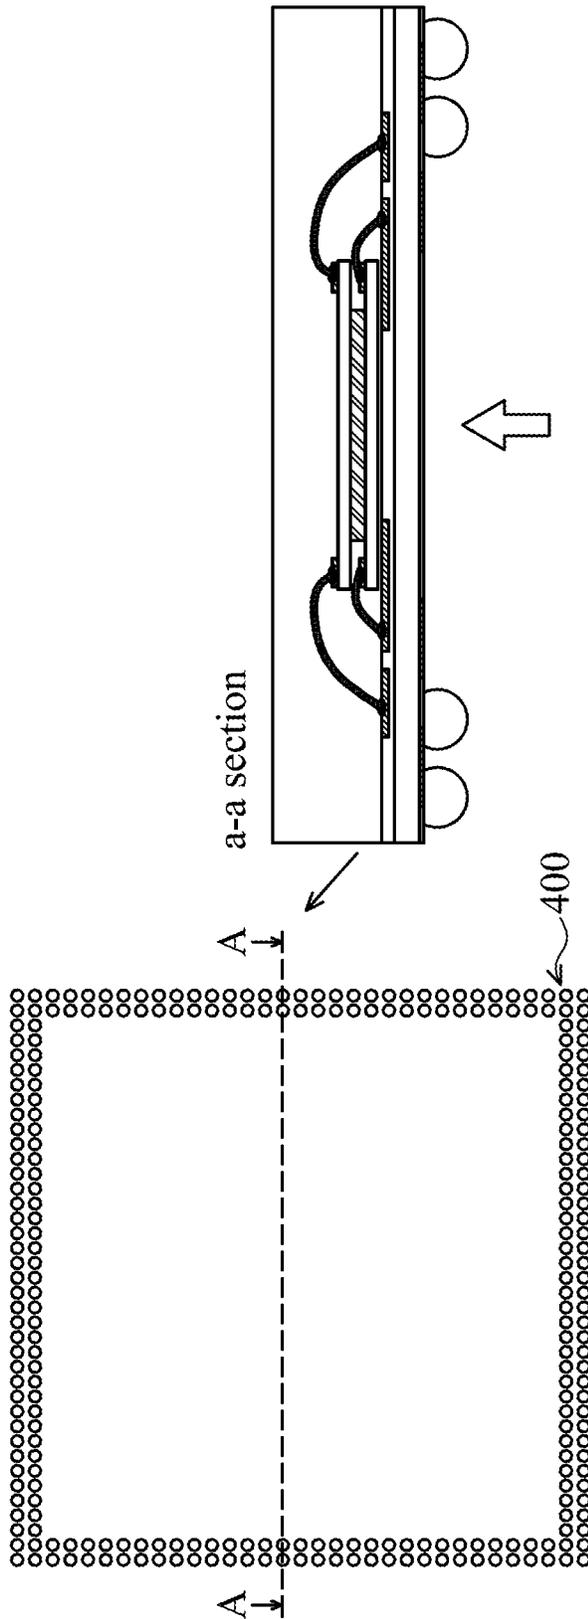


Figure 2(b)

Figure 2(a)

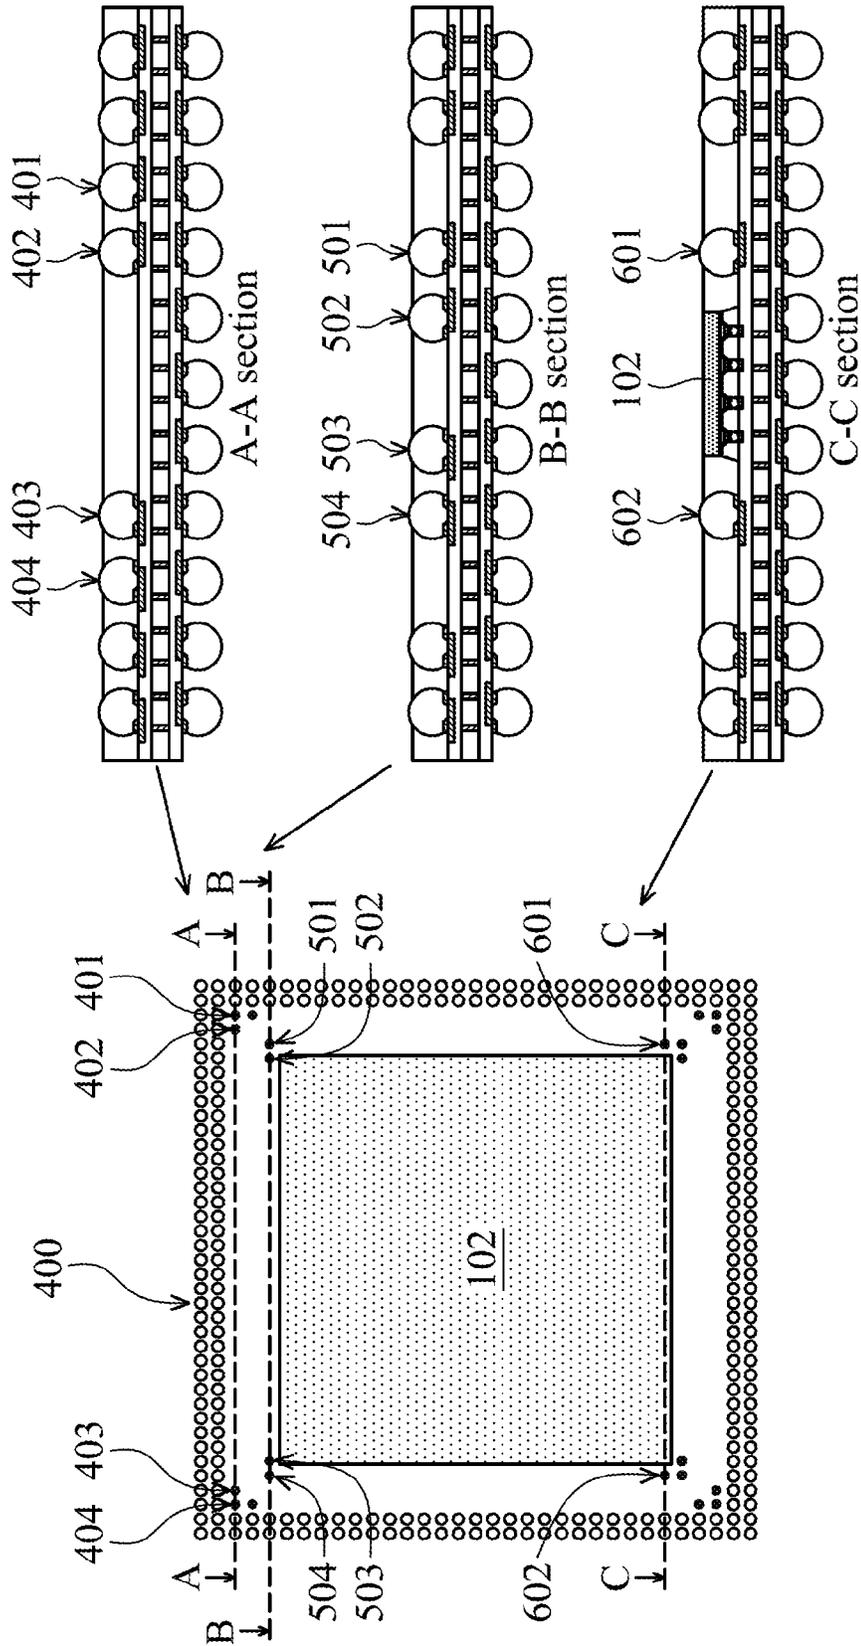


Figure 2(c)

Figure 2(d)

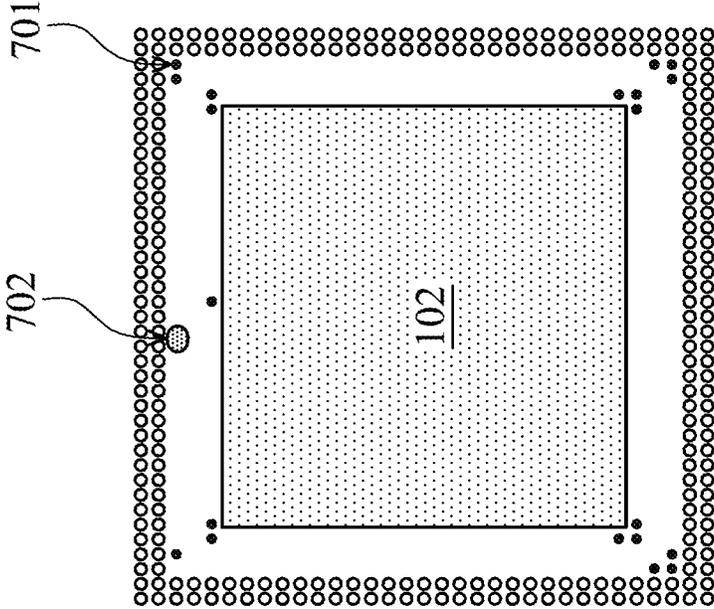


Figure 2(e)

METHODS AND APPARATUS FOR PACKAGE ON PACKAGE DEVICES

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

This application is a reissue application of U.S. Pat. No. 9,373,599.

This application is a continuation application of patent application Ser. No. 13/463,667, entitled "Methods and Apparatus for Package on Package Devices," filed on May 3, 2012, which application is incorporated herein by reference.

BACKGROUND

Since the invention of the integrated circuit (IC), the semiconductor industry has experienced rapid growth due to continuous improvements in the integration density of various electronic components (i.e., transistors, diodes, resistors, capacitors, etc.). For the most part, this improvement in integration density has come from repeated reductions in minimum feature size, which allows more components to be integrated into a given area.

These smaller electronic components also require smaller packages that utilize less area than previous packages. Some smaller types of packages for semiconductors include quad flat pack (QFP), pin grid array (PGA), ball grid array (BGA), flip chips (FC), three dimensional integrated circuits (3DICs), wafer level packages (WLPs), and package on package (PoP) devices. Package on package (PoP) technology is becoming increasingly popular for its ability to allow for denser integration of integrated circuits into a small overall package. PoP technology is employed in many advanced handheld devices, such as smart phones.

In a PoP device, individual semiconductor dies may be packaged either separately or with multiple semiconductor dies in each separate individual package, and then the separate individual packages may be brought together and interconnected to form a PoP device so that the individual semiconductor dies in the separate individual packages may be integrated together in order to perform desired tasks. The separate individual packages may be electrically interconnected to each other, for example, by using contact bumps or other connectors. The heat dissipation and warpage control for PoP devices are issues to consider.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present disclosure, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

FIGS. 1(a)-1(e) illustrate cross-sectional views of a package on package (PoP) device and a method for forming such a device in accordance with an embodiment; and

FIGS. 2(a)-2(e) illustrate cross-sectional views and top views of additional embodiments of PoP devices.

Corresponding numerals and symbols in the different figures generally refer to corresponding parts unless other-

wise indicated. The figures are drawn to clearly illustrate the relevant aspects of the embodiments and are not necessarily drawn to scale.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

The making and using of the embodiments of the present disclosure are discussed in detail below. It should be appreciated, however, that the present disclosure provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative of specific ways to make and use the disclosure, and do not limit the scope of the disclosure.

As will be illustrated in the following, methods and apparatus for a package-on-package (PoP) device are disclosed. In short, an embodiment of a PoP device is formed by connecting a top package and a bottom package together using a plurality of PoP connectors on the bottom package connected to corresponding connectors of the top package. The PoP device further comprises a plurality of dummy connectors. A dummy connector is placed on the bottom package and is not connected to any corresponding connector in the top package. Therefore a dummy connector is not used for connection purposes. Instead, a dummy connector is used to reduce the molding compound volume in order to reduce the device warpage. Moreover, the dummy connector is made of metal, and can improve heat dissipation and stress redistribution. The dummy connector may be formed at the same time as the PoP connectors are formed.

FIG. 1(a) illustrates a cross-sectional view of two individual packages **10** and **20**, connected together to form a PoP device **100** as illustrated in FIG. 1(b) in accordance with an embodiment, using an exemplary method illustrated in FIG. 1(c). More detailed intermediate steps are illustrated in FIGS. 1(d) and 1(e).

As illustrated in FIG. 1(a), a first package **10**, which may be a top package, has a first substrate **108**. A first integrated circuit (IC) die **106** is mounted on one surface of the substrate **108**, which may be the top surface of the substrate, via a set of conductive connectors **110**. Through vias (TVs) (not shown) may be used to provide electrical connections between the first die **106** and another set of conductive connectors **112** such as bond pads on an opposing surface of the substrate **108**, which may be the bottom surface of the substrate. An encapsulant or mold **114** may be formed over the components to protect the components from the environment and external contaminants. A plurality of connectors such as solder balls **221** to **224** may be formed on the bottom surface of the first substrate **108**. The connectors **221** to **224** may be used to connect to another package, such as a bottom package **20**. The connectors **221** to **224** are attached to the connectors **112**, which may be bond pads, on the bottom of the first substrate **108**. The number of connectors such as **112**, **110**, and the number of connectors such as **221** to **224** are only for illustrative purposes, and is not limiting. A connector may be a bond pad such as a connector **112** or a solder ball such as a connector **221**. As long as a component may provide an electronic connection, the component may be called a connector. There may be other number of connectors for the package **10**.

The first package **10** may package the die **106** using a flip-chip wafer level package (WLP) and wire bonding technique, or using a flip-chip and bump-on-trace (BOT) technique. Alternative package techniques may be used to form the package **10**. The substrate **108** may also include

3

redistribution lines (RDLs) (not shown) within and/or on one or both surfaces of the substrate **108** to allow for a different pin configuration as well as larger electrical connections. The substrate **108** may be, for example, a packaging substrate, a printed-circuit board, a high-density interconnect, or the like. The die **106** may be a memory chip or a logic chip, for example. The set of connectors **110** and **112** may comprise, for example, contact pads, lead free solder, eutectic lead, conductive pillars, combinations thereof, and/or the like. If the connectors **221** to **224** are solder balls, they may be formed using a ball mount process, followed by a solder reflow process. The connectors **221** to **224** may alternatively be formed using other methods.

A second package **20**, which may be called a bottom package, comprises a second substrate **104** with a second IC die **102** mounted thereon on one surface of the substrate, which may be the top surface of the substrate **104**. The second die **102** may be of a logic function. The substrate **104** is connected to the die **102** by a set of connectors **116** and **120**. The connectors **116** may be bond pads and the connectors **120** may be a plurality of solder balls, which together form the connections between the die **102** and the substrate **104**. Another set of connectors **118** may be formed along an opposing surface of the second substrate **104** from the die **102**, which may be the bottom surface. TSVs **121** in the second substrate **104** may provide an electrical connection among the connectors **116** and the connectors **118**. A plurality of connectors such as solder balls **211** to **214** may be formed on the bottom surface of the substrate **104**. The substrate **104** may also include RDLs (not shown) within and/or on one or both surfaces of the second substrate **104** to allow for a different pin configuration as well as larger electrical connections.

In an embodiment, the substrate **104** may be any suitable substrate, such as a silicon substrate, an organic substrate, a ceramic substrate, a dielectric substrate, a laminate substrate, or the like. The connectors **116**, **120**, and **118** may comprise, for example, contact pads, lead free solder, eutectic lead, conductive pillars, combinations thereof, and/or the like. The die **102** may be any suitable integrated circuit die for a particular application. For example, the die **102** may be a memory chip, such as a DRAM, SRAM, NVRAM, or a logic circuit. There is only die **102** shown in FIGS. **1(a)** and **1(b)**. However, there may be a plurality of dies on the substrate **104**. Similarly, there may be a plurality of dies on the substrate **108** as well.

The first package **10** and the second package **20** may be electrically coupled to form a package-on-package (PoP) device **100** as shown in FIG. **1(b)**. A set of connectors such as **31** to **36** may be formed on the top surface of the substrate **104**, which is the same surface where the die **102** is mounted. The connectors **31** to **34**, which may be called as PoP connectors, are formed according to the pattern of the connectors **221** to **224** of the top package **10**, meaning PoP connectors **31** to **34** are aligned with connectors **221** to **224**, respectively. The connectors **35** and **36** are extra connectors, sometimes referred to herein as dummy connectors, that do not correspond to and are not connected to any connectors of the top package **10**. The connectors **31** to **34** may be further connected to some bond pads on the substrate **104**, which are connected to other internal functions of the chip **102** or the substrate **104**. The connectors **35** and **36** on the other hand, may not be connected to any other functions or bond pads. All the connectors **31** to **36** are further covered by an encapsulant or mold **230** to protect the components from the environment and external contaminants. The encapsulant **230** is then grinded to expose the connectors **31**

4

to **34**. Afterwards, the top package **10** may be aligned and attached so that the connectors **31** to **34** are connected to the connectors **221** to **224** in an one to one correspondence fashion.

The connectors **35** and **36** illustrated in FIG. **1(b)** are called dummy connectors, or dummy balls. In short, a dummy connector at a bottom package is a connector that is not connected to any corresponding connector in the top package, therefore a dummy connector or a dummy ball is not used for connection purposes as the PoP connectors are. Instead, dummy connectors are used to reduce the molding compound volume in order to reduce the package warpage. Moreover, the dummy connectors are made of metals, and they can improve heat dissipation and stress redistribution.

FIG. **1(c)** illustrates a flow chart of an exemplary process of packaging semiconductor devices in accordance with an embodiment of the present disclosure. In step **301**, a plurality of connectors such as solder balls is mounted on a surface of a substrate of the bottom package, which may be the top surface of the substrate. Some connectors form a pattern designed as the connector pattern for the top package, which are called PoP connectors. Some other connectors are dummy connectors not corresponding to the pattern of the connectors for the top package. In step **303**, the substrate surface with the connectors, both the PoP connectors and the dummy connectors, are molded with an encapsulant such as molding materials. In step **305**, the encapsulant is grinded to expose the PoP connectors so that they can be connected to the connectors of the top package. Dummy connectors may be exposed by this process as well. In step **307**, the top package is aligned so that the connectors of the top package are placed on top of the PoP connectors of the bottom package and connections to the PoP connectors can be made. Afterwards, in step **309**, the formed package is reflowed to form connections between the PoP connectors and the connectors of the top package.

FIG. **1(d)** illustrates an example step **301** showing a set of connectors such as **31** to **36** may be formed on the top surface of the substrate **104** of the bottom package **20**. The connectors **31** to **34** are PoP connectors, which are formed according to the pattern of the connectors **221** to **224** of the top package **10**. The connectors **35** and **36** are the dummy connectors which do not correspond to any connectors of the top package **10**. The connectors **31** to **34** may be further connected to some connectors on the substrate **104**, which are connected to other internal functions of the chip **102** or the substrate **104**. The connectors **35** and **36** on the other hand, may not be connected to any other functions. The connectors or the balls **31** to **36** may comprise a material such as tin, or other suitable materials, such as silver, lead-free tin, copper, combinations thereof, or the like.

FIG. **1(e)** illustrates an example step **303** showing the formation of a molding encapsulant **230** applied on the second substrate **104** in accordance with an embodiment. In an embodiment, the molding encapsulant **230** is a molding underfill (MUF) comprising, for example, a polymer, epoxy, and/or the like. The molding encapsulant **230** may be molded onto the die **102** and the substrate **104** using, for example, compressive molding or transfer molding. The molding encapsulant **230** may be in contact with the top surface and the edges of the die **102**. In one embodiment, a top surface of the molding encapsulant **230** may be coplanar with a top surface of the die **102**. In other embodiments, a top surface of the molding encapsulant **230** may be higher than a top surface of the die **102** such that the die **102** may be fully encapsulated in the molding encapsulant **230**.

At step **305**, a grinding or polishing process may be performed to remove portions of the molding encapsulant **230** from over a top surface of the die **102** to expose the die **102**. The molding encapsulant **230** is also grinded to expose the PoP connectors **31** to **34** so that they can be connected to the connectors of the top package. In addition, not shown, a flux may be applied to the surface of the molding encapsulant **230** and the connectors **31** to **34**. The flux helps clean the surface of the molding encapsulant **230** and the PoP connectors **31** to **34**, thereby aiding in formation of an electrical contact between the PoP connectors **31** to **34** and the connectors **221** and **224**. The flux may be applied by, for example, in a dipping operation in which the surface of the molding compound **230** and the connectors **31** to **34** is dipped in a flux.

In step **307**, the top package is aligned so that the connectors **221** to **224** of the top package are placed on top of the PoP connectors **31** to **34** of the bottom package. The method includes coupling each of the plurality of connectors **221** to **224** of the top package to one of the plurality of connectors **31** to **34** on the top surface of the second substrate of the bottom package.

Afterwards, in step **309**, the formed package is reflowed to form connections between the PoP connectors **31** to **34** of the bottom package and the connectors **221** to **224** of the top package. In an embodiment, the reflow process is performed using an induction reflow process. In other embodiments, however, other reflow processes may also be used. The result is a PoP device as shown in FIG. **1(b)**.

Following a similar process, further embodiments may be constructed. FIGS. **2(a)-2(e)** illustrate cross-sectional views and top views of additional embodiments of PoP devices. FIG. **2(a)** is a top view of the top package, while FIG. **2(b)** shows the cross-section view of the top package. The top package may be packaged using a flip-chip WLP and wire bonding technique, or using a flip-chip and BOT technique. Alternative package techniques may be used to form the top package.

FIGS. **2(c)** and **2(e)** illustrate top views of the bottom package of a PoP device, while FIG. **2(d)** illustrates a cross-section view of the bottom package. The bottom package has two rows of PoP connectors **400**, which may be ball arrays, surrounding the peripheral region of the substrate of the bottom package, forming two rings, corresponding to the connectors **400** of the top package shown in FIG. **2(a)**. A plurality of dummy connectors **401** to **404**, **501** to **504**, and **601** to **602** may be placed on the top surface of the bottom package. The number of dummy connectors is only for illustration purposes and is not limiting. Alternatively, other numbers of balls may be used.

The dummy connectors **401** to **404** aligned on line A are placed close to the PoP connectors. FIG. **2(d)** shows the cross section view of the four dummy balls **401** to **404** formed, together with two PoP connectors on each side. The connectors **501** to **504** aligned on line B are placed close to the chip **102**. FIG. **2(d)** shows the cross section view of the four dummy connectors **501** to **504** formed, together with two PoP connectors on each side. The connectors **601** to **602** aligned on line C are placed close to chip **102**, and a cross section view of the connectors **601** and **602** also include the chip **102**. The connectors **601** and **602** are also surrounded by the two PoP connectors on each side.

FIG. **2(e)** further illustrates a top view of the bottom package for an embodiment of a PoP device, wherein a plurality of dummy connectors is formed. Some of the dummy connectors are placed around the rings of the PoP connectors, while some others are placed in the middle

positions. Some of the dummy connectors such as connectors **701** may be smaller than some other dummy connectors **702**.

It should be understood that the above description provides a general description of embodiments and that embodiments may include numerous other features. For example, embodiments may include under bump metallization layers, passivation layers, molding compounds, additional dies and/or substrates, and the like. Additionally, the structure, placement, and positioning of the die **106** and the die **102** are provided for illustrative purposes only, and accordingly, other embodiments may utilize different structures, placements, and positions.

It should also be understood that the ordering of the various steps discussed above are provided for illustrative purposes only, and as such, other embodiments may utilize different sequences. These various orderings of the step are to be included within the scope of embodiments.

Thereafter, other normal processes may be used to complete the device **100**. For example, the second substrate **104** may be attached to yet another substrate, such as a printed circuit board (PCB), a high-density interconnect, a silicon substrate, an organic substrate, a ceramic substrate, a dielectric substrate, a laminate substrate, another semiconductor package, or the like.

Although embodiments of the present disclosure and their advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the disclosure as defined by the appended claims. For example, it will be readily understood by those skilled in the art that many of the features, functions, processes, and materials described herein may be varied while remaining within the scope of the present disclosure. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods and steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure of the present disclosure, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed, that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein may be utilized according to the present disclosure. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps.

What is claimed is:

1. A device comprising:

- a first substrate;
- a first die attached to a first surface of the first substrate;
- a second substrate attached to the first substrate, the first die being interposed between the first substrate and the second substrate;
- one or more signaling connectors interposed between the first substrate and the second substrate; and
- a plurality of dummy connectors interposed between the first substrate and the second substrate, the plurality of dummy connectors not passing electrical signals between the first substrate and the second substrate, the plurality of dummy connectors being connected to only one of first substrate and the second substrate, wherein a first dummy connector is a different size than a second dummy connector.

7

2. The device of claim 1, further comprising one or more intermediate connectors electrically coupling the one or more signaling connectors to the second substrate.

3. The device of claim 2, wherein the one or more intermediate connectors comprise solder balls.

4. The device of claim 1, further comprising an encapsulant, wherein the first die is exposed through the encapsulant.

5. The device of claim 4, wherein the encapsulant encircles the plurality of dummy connectors and the one or more signaling connectors.

6. The device of claim 1, further comprising an encapsulant, wherein the encapsulant covers [an upper surface of] the first die.

7. The device of claim 1, wherein the first dummy connector of the plurality of dummy connectors is of a different size from a first signaling connector of the one or more signaling connectors.

8. The device of claim 1, wherein the one or more signaling connectors comprise a plurality of signaling connectors arranged in a pattern, and wherein the plurality of dummy connectors comprise a first number of dummy connectors in a first corner of the pattern and a second number of dummy connectors in a second corner of the pattern, the first number being different than the second number.

9. A device comprising:

a first substrate;

a first die attached to a first surface of the first substrate;

a second substrate attached to the first substrate, the first die being interposed between the first substrate and the second substrate;

an encapsulant on the first surface of the first substrate, the encapsulant extending to at least an upper surface of the first die, an uppermost surface of the encapsulant being spaced apart from the second substrate;

one or more first connectors extending through the encapsulant to the first substrate, the one or more first connectors electrically coupling the first substrate to the second substrate, *wherein the encapsulant has a first height and the one or more first connectors have the first height and wherein the one or more first connectors have curved sidewalls from a first side of the encapsulant to a second side of the encapsulant*;

[one] two or more dummy connectors extending through the encapsulant to the first substrate, the [one] two or more dummy connectors interposed between the first substrate and the second substrate, the [one] two or more dummy connectors not being electrically coupled between a conductive element and the first substrate; and

one or more second connectors extending between corresponding ones of the one or more first connectors and the second substrate, *wherein a first dummy connector is a different size than a second dummy connector*.

10. The device of claim 9, wherein the encapsulant covers the first die.

11. The device of claim 9, wherein the [one] two or more dummy connectors are exposed through the encapsulant.

12. The device of claim 9, wherein the one or more first connectors are arranged a pattern around a periphery of the first substrate, the one or more first connectors being placed around the first die, the first die being spaced apart from the one or more first connectors, wherein a first one of the [one] two or more dummy connectors is placed at a corner of the first die and a second one of the [one] two or more dummy

8

connectors is placed at a corresponding corner of the pattern of the one or more first connectors.

[13. The device of claim 9, wherein a first dummy connector is a different size than a second dummy connector.]

14. A method comprising:

providing a first substrate;

attaching a first die to the first substrate;

forming an encapsulant layer over the first substrate, *wherein after the forming the encapsulant layer the encapsulant layer [having] has a signaling connector and a first dummy connector extending through an encapsulant of the encapsulant layer to the first substrate, the encapsulant layer being interposed between the signaling connector, the first dummy connector and the first die, wherein the encapsulant layer comprises a first material that has a straight sidewall which extends from a first side of the encapsulant layer to an opposite side of the encapsulant layer, the opposite side being in physical contact with the first substrate, wherein a second dummy connector extends through the encapsulant layer to the first substrate, the second dummy connector being a different size than the first dummy connector*;

removing a portion of the encapsulant layer to expose the signaling connector and the first dummy connector; and attaching a second substrate to the signaling connector, wherein the first dummy connector is electrically isolated from electrical devices on the second substrate.

15. The method of claim 14, wherein an upper surface of the first die is exposed through the encapsulant layer.

16. The method of claim 14, wherein the encapsulant layer is in contact with a top surface and sidewalls of the first die.

17. The device of claim 14, wherein the first dummy connector provides no electrical connection between a conductive element and conductive pad on the first substrate.

18. The method of claim 14, wherein the removing the portion of the encapsulant layer exposes surface of the first die.

19. The method of claim 18, wherein the attaching the second substrate to the signaling connector comprises attaching the signaling connector to the second substrate using an intermediate connector, the intermediate connector protruding from the second substrate.

20. The method of claim 19, wherein the intermediate connector is a solder ball.

21. A device comprising:

a first substrate;

a first die attached to a first surface of the first substrate; an encapsulant on the first surface of the first substrate, the encapsulant extending to at least an upper surface of the first die facing away from the first substrate, the encapsulant having a straight sidewall extending between a first side of the encapsulant to a second side of the encapsulant;

one or more first connectors extending through the encapsulant to the first substrate, wherein at least one of the one or more first connectors comprises a first material in physical contact with the first substrate, the first material extending to a point located within the encapsulant;

two or more dummy connectors extending through the encapsulant to the first substrate, the two or more dummy connectors not being electrically coupled between a conductive element and first substrate; and

one or more second connectors extending over corresponding ones of the one or more first connectors, wherein a first dummy connector is a different size than a second dummy connector.

22. The device of claim 21, wherein the encapsulant covers the first die.

23. The device of claim 21, wherein the two or more dummy connectors are exposed through the encapsulant.

24. The device of claim 21, wherein the one or more first connectors are arranged a pattern around a periphery of the first substrate, the one or more first connectors being placed around the first die, the first die being spaced apart from the one or more first connectors, wherein a first one of the two or more dummy connectors is placed at a corner of the first die and a second one of the two or more dummy connectors is placed at a corresponding corner of the pattern of the one or more first connectors.

25. A device comprising:

a first package comprising a first die placed on a first surface of a first substrate and a first connector connected to a second surface of the first substrate; and a second package comprising a second die, a second connector and a dummy connector, the second connector and the dummy connector extending through an encapsulant, the encapsulant being interposed between the dummy connectors and the second die, the encapsulant being non-conductive, wherein the dummy connector has a curved sidewall extending from a first side of the encapsulant to a second side of the encapsulant; wherein the first connector is connected to the second connector, and the dummy connector is not electrically connected to the first package, wherein the dummy connector is of a different size from a size of the second connector.

26. The device of claim 25, further comprising a first plurality of connectors connected to the second surface of the first substrate, a second plurality of connectors, and a third plurality of dummy connectors, wherein any of the first plurality of connectors is connected to one of the second plurality of connectors, none of the third plurality of dummy connectors is connected to any connector of the first package.

27. The device of claim 25, wherein the first connector is connected to a bottom surface of the first substrate and the first die is placed on a top surface of the first substrate.

28. The device of claim 25, wherein the first substrate is selected from a group consisting essentially of a packaging substrate, a printed-circuit board, and a high-density interconnect.

29. The device of claim 25, wherein the first die is a memory chip or a logic chip.

30. The device of claim 25, wherein the first substrate comprises a redistribution line (RDL) on a surface of the first substrate.

31. The device of claim 25, wherein the second package comprises a plurality of dies.

32. The device of claim 25, wherein the second die is a memory chip or a logic chip.

33. The device of claim 25, wherein the second connector comprises copper.

34. The device of claim 25, wherein the dummy connector comprise copper.

35. A device comprising:

a first die attached to a first surface of a first redistribution structure;

an encapsulant in physical contact with the first surface, the encapsulant extending to at least an upper surface of the first die facing away from the first surface, the encapsulant comprising a first material throughout the encapsulant, the first material having a first external sidewall which is straight from a first surface of the encapsulant to a second surface of the encapsulant opposite the first surface;

one or more first connectors extending through the encapsulant to the first surface of the first redistribution structure; and

two or more dummy connectors extending through the encapsulant to the first surface of the first redistribution structure, the two or more dummy connectors not being electrically coupled between a conductive element and the first surface, wherein a first dummy connector is a different size than a second dummy connector.

36. The device of claim 35, wherein the encapsulant covers the first die.

37. The device of claim 35, wherein the two or more dummy connectors are exposed through the encapsulant.

38. The device of claim 35, wherein the one or more first connectors are arranged a pattern around a periphery of the first substrate, the one or more first connectors being placed around the first die, the first die being spaced apart from the one or more first connectors, wherein a first one of the two or more dummy connectors is placed at a corner of the first die and a second one of the two or more dummy connectors is placed at a corresponding corner of the pattern of the one or more first connectors.

* * * * *