


<p>(51) International Patent Classification ⁶ : B01J 19/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/30817</p> <p>(43) International Publication Date: 24 June 1999 (24.06.99)</p>
<p>(21) International Application Number: PCT/GB98/03761</p> <p>(22) International Filing Date: 15 December 1998 (15.12.98)</p> <p>(30) Priority Data: 9726482.4 15 December 1997 (15.12.97) GB</p> <p>(71) Applicant (for all designated States except US): KALIBRANT LIMITED [GB/GB]; 2 Oakwood Drive, Loughborough Park, Loughborough, Leicestershire LE11 3NH (GB).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): PALMER, Derek, Adeyemi [GB/GB]; 8 Chiltern Avenue, Cove, Farnborough, Hampshire GU14 9SE (GB). FRENCH, Martin, Thomas [GB/GB]; 1 Oldbury Villas, Spring Lane, Ightham, Sevenoaks, Kent TN15 9DH (GB).</p> <p>(74) Agents: KIRKHAM, Nicholas, Andrew et al.; Graham Watt & Co., Riverhead, Sevenoaks, Kent TN13 2BN (GB).</p>	<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: METHOD AND APPARATUS FOR CHEMICAL SYNTHESIS

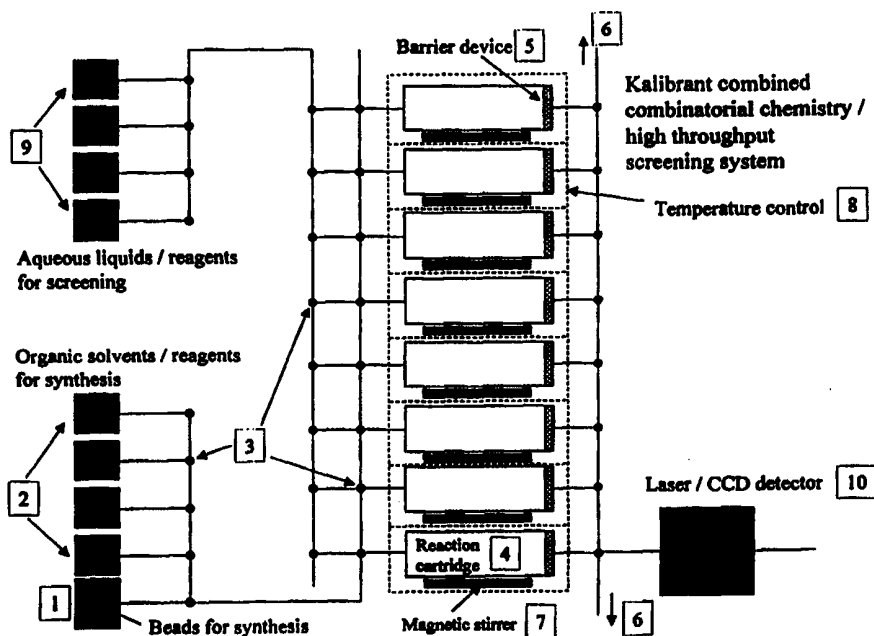

(57) Abstract

The present invention provides a chemical synthesis apparatus comprising a plurality of reagent inputs (2) and a solid support input (1). Each input (1, 2) is connectable to a main fluid pathway via a respective switchable valve (3). The apparatus further includes a reaction chamber (4) fluidly connectable to the main fluid pathway by a respective switchable valve (3) downstream of the inputs (1, 2). The reaction chamber (4) further includes an outlet downstream of a barrier (5) arranged to prevent passage of said solid supports but allows passage of unbound molecules.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Method and Apparatus for Chemical Synthesis

The present invention relates to a method and apparatus for chemical synthesis. In particular, but not exclusively, the invention relates to a method of and apparatus for combinatorial chemistry for synthesise potential drug candidate molecules.

The process of drug discovery has historically adopted the following development pathway. First, specific molecular targets for drug intervention are defined through in-depth molecular and cellular studies. Once the target is defined, an assay system is developed to monitor biological or kinetic activity of potential drug molecules. Small libraries of chemicals are then synthesised and assayed to select those few that have apparent activity. The biological properties of those selected molecules are then studied on actual cells that are targeted for drug intervention. Those that seem to have favourable biological properties on natural cells then move on to chemical optimisation to improve their potency and selectivity. Their improved biological activity is reconfirmed and, those few that seem to be promising are then moved forward into pre-clinical animal studies to evaluate biological activity *in vivo*.

Combinatorial chemistry represents a novel approach for the synthesis of large collections of compounds for screening. This approach began in the laboratories of peptide chemists for the generation of peptide libraries. Due to the poor oral absorption and metabolic instability of peptides, non-peptide mimetic compounds (usually molecular weight of less than 500) have been developed. In combinatorial chemistry experiments, diverse chemical libraries can be produced by selecting sets of reactants, or building blocks, and reacting the sets with each other in all possible combinations thereby generating hundreds of thousands of individual small molecules. Libraries may consist of molecules free in solution, linked to solid particles or beads, or even arrayed on

-2-

surfaces of modified microorganisms. Through the intelligent selection of building blocks, these libraries can be designed either as exploratory libraries, or as targeted libraries that are focused on certain structural hypotheses.

- 5 Combinatorial libraries are created in the laboratory by one of two methods, namely split synthesis or parallel synthesis.

In split synthesis, compounds are assembled on the surfaces of microparticles or beads. In each step, beads from previous steps are partitioned into several
10 groups and a new building block is added. The different groups of beads are then recombined and separated once again to form new groups. The next building block is added, and the process continues until the desired combinatorial library has been assembled containing a random selection of molecules. Libraries resulting from split synthesis are characterised by the
15 phrase "one bead, one compound." Each bead in the library holds multiple copies of a single library member.

Combinatorial libraries can also be made by parallel synthesis, in which different compounds are synthesised in separate vessels (without remixing), often in an
20 automated fashion. Unlike split synthesis, which requires a solid support, parallel synthesis can be done either on a solid support or in solution.

Planning and performing combinatorial experiments in the laboratory is a complex and time-consuming process and thus automation is desirable.
25 Instrumentation systems to help speed combinatorial chemistry experiments are believed to be in development at a number of biotechnology and pharmaceutical companies.

WO94/05394 suggests adoption of reusable spatially addressable solid phase
30 plates on which all the synthesis reactions such as deprotection, cleaving and

-3-

washing, can take place. US 5,324,483, US 5,593,642, US 5,565,173, US 5,582,801, US 5,567,391 and WO94/08711 disclose the use of reservoir blocks having a plurality of wells for multiple simultaneous synthesis. WO93/12427 discloses the automation of the cleaving, deprotecting and purification processes for solid phase polypeptides. Most of the above processes have been semi-automated with robotic attachments which perform various steps required in synthesis reactions including reagent delivery, changing of reaction/collection vessels, incubation and agitation of reaction mixture, cleavage of synthesised compound from solid support in a range of environments e.g. under pressure or in a vacuum.

US 5,503,805 and WO95/12608 disclose the development of a device for solid phase split and mix chemical synthesis in a closed system. The synthesis is carried out between a parent and daughter reaction vessels. The reagents are transported around the system by flow tubes and valves for example back and forth between the parent and daughter vessels.

The synthesis of organic compounds poses many problems in automated instrumentation including developing a device which will accommodate the wide range of manipulations required for organic synthesis. The synthesis of organic compounds often requires varied conditions such as heating, cooling, agitation, an inert atmosphere etc. Also such synthesis require chemical compatibility between the materials used in the apparatus for synthesis and the solvents and reactants. Therefore the instruments must be constructed of materials which are resistant to organic synthesis conditions and procedures.

The present invention seeks to provide an apparatus for preparing chemicals in an efficient manner.

According to a first aspect of the present invention there is provided a chemical

-4-

synthesis apparatus, comprising a plurality of reagent inputs, an input for solid supports and an input for solvents, each input being connectable to a main fluid pathway via a respective switchable valve, the apparatus further including a reaction chamber fluidly connectable to the main fluid pathway by a respective switchable valve downstream of the inputs and the reaction chamber further including an outlet downstream of a barrier arranged to prevent passage of the solid supports but allow passage of unbound molecules. The invention thus provides an apparatus which provides automated production of chemicals without the need for robotic arms for switching trays or the like, as all the manipulations take place in the fluid pathway. It is particularly advantageous for the flow through the reaction chamber to be one way as this allows much greater control of the reaction taking place within the chamber. Versatility is maintained by all of the inputs being connectable to the reaction chamber.

Preferably, the reaction chamber is one of a plurality of reaction chambers, where each reaction chamber is fluidly connectable to the main fluid pathway by a respective switchable valve downstream of the inputs and each reaction chamber further includes an outlet downstream of a barrier arranged to prevent passage of said solid supports but allow passage of unbound molecules. In this way more than one reaction may be undertaken at a time.

It is advantageous if the, some or each of the reaction chambers is removable from the apparatus. Thus physically different reaction chambers, for example with different volumes or internal coatings, can be used in the apparatus depending on the desired reaction.

It is also advantageous if the, some or each reaction chamber includes means for stirring or agitating the contents of the chamber and/or includes temperature control means arranged to control the temperature in the reaction chamber.

30

-5-

In a preferred embodiment of the invention, the output of the, some or each reaction chamber is connectable to detector means. The present invention allows combined synthesis and screening. All the known methods as described above can only be used to carry out synthesis. The device from US 5,565,173
5 uses solid substrates to carry out the synthesis. The screening or analysis process is carried out separately following the removal of an aliquot of the synthesised compound from the reaction well. In the work disclosed in US 5,324,633 arrays of polymers are also synthesised on a substrate. For the screening process the array of polymers is then exposed to a fluorescently
10 labelled receptor. The fluorescence intensity of the labelled receptor is measured by photon counting using a separate instrument i.e. a confocal microscope. Binding affinities of the receptor for the synthesised polymers are determined through the analysis of the relationship between the fluorescence intensity and the solution concentration of the receptor. A similar procedure
15 has also been described by US 5,639,603, WO95/12608 and US 5,5038,805 involving flow cytometry. The synthesis and screening procedures included numerous steps and separate devices. The devices just described and all the commercially available instruments do not have the combined synthesis/screening capability in the one device. These needs are met by the
20 instrument of the present invention. There is a great benefit in terms of cost and time for having such a device for the screening process following the synthesis stage.

In the combined synthesis and screening apparatus there may be provided a
25 screening agent input fluidly connectable to the respective switching valve for the, some or each of the reaction chambers. Thus the assay can take place in the reaction chamber after, of course, suitable washing cycles. In this case the screening agent input is preferably fluidly connectable to the respective switching valve via a secondary fluid pathway isolated from the main fluid
30 pathway. This is because the synthesis reaction(s) will normally take place in

-6-

an organic fluid environment, whereas the screening will normally take place in an aqueous environment.

5 In order to facilitate different assays a plurality of the screening agent inputs will normally be provided.

10 The output of the, some of each reaction chamber is advantageously selectively fluidly connectable to an output fluid pathway, the output fluid pathway including valve means to direct the output of the reaction chamber selectively to either a) waste or b) collection and/or analysis of the chemical compound. This simplifies the washing steps which will normally be required.

15 According to a second aspect of the present invention, there is provided a method of synthesising a chemical compound comprising the steps of:

- a) transferring reagents from respective inputs into a reaction chamber via a main fluid pathway, wherein at least one reagent is affixed to a solid support and each of the inputs is separately connectable to the fluid pathway by a respective switchable valve;
- 20 b) maintaining the reactants in the reaction chamber to synthesise the chemical compound on the solid support;
- c) releasing the chemical compound from the reaction chamber via an output downstream of all of the inputs. Controlled synthesis is thus efficiently and simply provided.

25

The reagents are advantageously selectively transferred to the reaction chamber. In this way the different reactants are only introduced into the chamber when required.

30 To increase capacity the reaction chamber in one of a plurality of reaction

-7-

chambers all selectively connectable to the main fluid pathway. Normally different compounds are synthesised in different reaction chambers at different times. Alternatively, the same compound is synthesised in more than one reaction chamber and in step b) the reactants are maintained under preselected
5 different reaction conditions in each of the more than one reaction chambers. This allows a way of optimising reaction conditions for a particular reaction.

In most reactions an excess of at least one reactant is used in the synthesis. Advantageously, the method takes place in a closed fluid system which greatly
10 simplifies the control of the reactants, solvents, washing stages, etc..

According to a third aspect of the present invention, there is provided a method of synthesising and screening a chemical compound in a closed fluid system, comprising the steps of:

15

- a) synthesising the chemical compound from reactants in a reaction chamber on a solid support;
- b) mixing the chemical compound with a screening agent in the reaction chamber;
- 20 c) directing a detectable moiety indicative of the chemical compound to a detector downstream of the reaction chamber.

According to a fourth aspect of the present invention, there is provided a method of synthesising and screening a chemical compound in a closed fluid
25 system, comprising the steps of:

- a) synthesising the chemical compound from reactants in a reaction chamber;
- b) transferring the chemical compound in a fluid stream to a screening zone
30 where the chemical compound is combined with a screening agent;

-8-

- c) directing a detectable moiety indicative of the chemical compound to a detector downstream of screening zone.

Both the third and fourth aspects of the invention allow particularly efficient
5 synthesis and screening of new compounds.

A preferred embodiment of the invention will now be described with reference to the accompanying drawings in which:

10 Fig. 1: shows a schematic representation of an apparatus according to the present invention;

Fig. 2: shows a reaction chamber for use in the apparatus of Fig. 1.

The illustrated and particularly preferred embodiment of the present invention
15 provides a system which can be provided as a combined flow analysis/combinatorial chemistry/high-throughput screening (HTS) device. The individual reactions will be carried out on solid phase supports in sealed reaction vessels. Normally means will be provided for agitation of the vessel or stirring in the vessel to aid mixing. It is possible to vary the reaction
20 conditions/environments (such as temperature, pressure, agitation, etc.) in the different vessels to suit different reactions or to test different conditions for the same reactants.

It is thus possible to directly screen compounds synthesised combinatorially
25 against the multiple targets with the same instrument thereby gaining information on the potential usefulness of the compounds.

Since the preferred embodiment is a synthesising and screening device there is a need to remove all traces of organic solvent (i.e. transfer to an aqueous
30 phase) prior to the screening process of the synthesised compounds with the

-9-

targets and receptors.

The device is made up of four main components:

- 1) Fluid delivery system;
- 5 2) Reaction chamber or cartridge;
- 3) Reagent compartments;
- 4) Proprietary fluorescence detection system.

Fluid delivery system

10 The pressurised fluid delivery system is a means of transporting reagent around the system. The fluid delivery system comprises individual components including:

- a) flow analysis tubing made of materials such as PTFE or PEEK or any such organic solvent resistant material;
- 15 b) switching valves [3] having fluid-contact surfaces made of organic solvent resistant material, which valves divert the flow of solvents, reagents into the appropriate reaction vessels or receptacles;
- c) flow sensors which monitor the flow rate within the system;
- d) pressure sensors which monitor the pressure within the system.

20

The fluid delivery system comprises a fluid pathway into which the reactant, solvents etc. can be selectively input. Thereafter the input is delivered to a selected one or more reaction chamber.

25 Reaction chamber/cartridge

The reaction chamber is the receptacle where the synthesis and screening takes place. The chamber would be made of chemically inert mater such as Teflon, polypropylene, glass etc.. The reaction chamber will normally contain a magnetic flea for stirring of the reagents and will be housed in a sleeve which
30 may include heating and/or cooling elements to effect heating and cooling e.g..

-10-

from -40°C to + 150°C as required. A preferred embodiment of a reaction chamber [4] in the form of a removal chamber is shown in Figure 2.

5 The reaction chamber will selectively receive reactants, solvents, etc. from the main fluid pathway via an inlet. The outlet port of the reaction chamber is separate from the inlet and contains a barrier (e.g. a membrane filter) to prevent the flow of the solid phase beads onto which the combinatorially synthesised compounds are attached when synthesised. The barrier will be formed of a chemically inert material.

10

Reactions that could be carried out in the chamber include carbon-carbon and carbon-heteratom bond formation reactions e.g. acylation of amines and alcohols, aldol and claisen condensations, cycloadditions, epoxidation, nucleophilic substitutions. Functional group interconversions include mitsunobu reactions, hydroborations, some oxidation reactions, preparations of imines and oximes and esterification/amidations of phosphates and carboxylates.

15

Reagent compartment

20 The reagent compartment (1,2) will house the solid phase supports (e.g. beads) which will have the starter building blocks compound attached via a linker. The other building block components and receptor/target molecules used in the screening process will also be contained in normally separate areas of the reagent compartment. Each separate area (1,2) of the housing can separately input the stored component into the fluid delivery system.

25

The solid phase supports and other building blocks will be suspended or dissolved in a solvent of appropriate density and surface tension. Solid phase supports that could be used in this system include controlled pore glass, silica, latex, polystyrene or similar polymer colloid metal particles.

30

-11-

The preferred and illustrated embodiment provides a combined combinatorial/high throughput screening system. This combined system may be used as an automated parallel combinatorial chemistry synthesiser with the final products released from the beads for storage or otherwise. The system offers a novel approach to lead compound generation with an emphasis on more targeted synthesis and immediate screening of the resulting products. This approach avoids the need to generate vast libraries of compounds which take an enormous length of time to screen and/or take up space waiting to be screened with the resulting concerns over storage stability. The present invention can allow for rapid turnaround of screening results which may lead to structure activity relationships being investigated in almost real time, with subsequent synthesis rounds being led by previous screening results. The ability to fully automate both the synthesis and the screening against multiple targets in a device that is small enough to operate on the bench top means that this approach provides a personal drug discovery platform.

A typical synthesis is described hereinafter where:

The flowlines for delivery of organic solvent are first primed from reagent reservoirs [2] and then a fixed quantity of reaction beads from input [1] are introduced into the flowline through the appropriate switching valve [3] and carried to a first reaction cartridge [4]. The beads are diverted into the reaction cartridge [4] by a first inlet switching valve [3] on the inlet to the cartridge [4] by the barrier device [5] at the outlet. Excess solvent passes through the barrier and is diverted to a waste via a switching valve [3] and output fluid pathway [6]. The first inlet switching valve [3] then diverts flow along the transmission tubing; the process is repeated with reaction beads added to each reaction cartridge as necessary via a respective inlet switching valve [3].

Synthesis in each reaction cartridge then proceeds independently with building

-12-

blocks or wash steps added as appropriate from the reagent reservoirs [2] with stirring via stirring means [7] and temperature via temperature control means [8] as necessary. in the illustrated embodiment each individual reaction cartridge [4] has independent temperature control so that the system could also be used
5 during the optimisation experiments, where each cartridge could be used to evaluate changes in solvent, temperature, time, etc..

Following synthesis the beads are washed and then, if required, the product can be cleaved using any of the standard methods and collected by washing out the
10 reaction cartridge via the respective outlet switching valve [3] via the outlet fluid pathway [6]. Although the synthesised product may be directed to the waste point for collection, normally a separate outlet from outlet fluid pathway [6] is provided and the outlet switching valves [3] direct the synthesised product to the designated output.

15

Alternatively the product may be left on the bead in the cartridge for the on-board automated screening process and after screening detectable compound is output via output fluid pathway [6] to the detector [10].

20 A typical screening process is described hereinafter:

The flowlines for delivery of aqueous and biological reagents are first primed from the aqueous reservoirs [9], including flushing out the reaction cartridges where necessary. Reagents for the screening assay are transferred to the
25 appropriate cartridges [4] and the synthesised product incubated with the assay reagents. The product can be used on the bead or cleaved prior to incubation when immobilised reagents are used and the target is conjugated to a solid support such as a bead.

30 Regardless of approach, the screening assay contains a reporter molecule (e.g.

-13-

a fluorophore) which at the end of the assay is released through the cartridge and diverted to the laser/CCD detector system [10] via the output fluid pathway [6]. Often the assay will be a fluorescence assay and the amount of fluorescence measured will be related to the degree of inhibition or interference
5 that the product has on the assay.

Details of the detector and assay systems may be found in the Applicants co-pending applications namely WO 97/29376, International Application No. PCT/GB98/02394 and International Application No. PCT/GB98/02396, the
10 disclosures of which are herein incorporated by reference. Please note that the reaction cartridge [4] of the present invention may replace the incubation loops with the barrier [5] on the outlet replacing the of the Applicants previous applications. Alternatively, the synthesised compound may be broken of the bead in the reaction cartridge [4] and transferred to a detector and assayed
15 therein via the outlet fluid pathway [6].

The use of the Applicants multi-analyte detector system means that several screens can be run simultaneously in the same cartridge [4], against the same product.
20

A separate fluorescent reporter is used for each screen so that a single synthesised product can be examined against a number of different targets at the same time with specific inhibition/interference simultaneously monitored for each target.

CLAIMS:

1. A chemical synthesis apparatus comprising a plurality of reagent inputs, a solid support input, each input being connectable to a main fluid pathway via a respective switchable valve, the apparatus further including a reaction chamber fluidly connectable to the main fluid pathway by a respective switchable valve downstream of the inputs, the reaction chamber further including an outlet downstream of a barrier arranged to prevent passage of said solid supports but allow passage of unbound molecules.
2. The apparatus according to claim 1, wherein the reaction chamber is one of a plurality of reaction chambers, where each reaction chamber is fluidly connectable to the main fluid pathway by a respective switchable valve downstream of the inputs and each reaction chamber further including an outlet downstream of a barrier arranged to prevent passage of said solid supports but allow passage of unbound molecules.
3. The apparatus according to claim 1 or claim 2, wherein the, some or each of the reaction chambers is removable from the apparatus.
4. The apparatus according to any one of the preceding claims, wherein the, some or each reaction chamber includes means for stirring or agitating the contents of the chamber.
5. The apparatus according to any one of the preceding claims, wherein the, some or each reaction chamber includes temperature control means arranged to control the temperature within the reaction chamber.
6. The apparatus according to any one of the preceding claims, wherein the

-15-

output of the, some or each reaction chamber is connectable to detector means.

- 5 7. The apparatus according to any one of the preceding claims further including a screening agent input fluidly connectable to the respective switching valve for the, some or each of the reaction chambers.
- 10 8. The apparatus according to claim 7, wherein the screening agent input is fluidly connectable to the respective switching valve via a secondary fluid pathway isolated from the main fluid pathway.
9. The apparatus according to either claim 7 or claim 8, further including a plurality of the screening agent inputs.
- 15 10. The apparatus according to any one of the preceding claims, wherein the output of the, some or each reaction chamber is selectively fluidly connectable to a output fluid pathway, the output fluid pathway including valve means to direct the output of the reaction chamber selectively to either a) waste or b) collection and/or analysis of the chemical compound.
- 20 11. A method of synthesising a chemical compound comprising the steps of:
- 25 a) transferring reagents from respective inputs into a reaction chamber via a main fluid pathway, wherein at least one reagent is affixed to a solid support and each of the inputs is separately connectable to the fluid pathway by a respective switchable valve;
- b) maintaining the reactants in the reaction chamber to synthesise the chemical compound on the solid support;
- 30 c) releasing the chemical compound from the reaction chamber via an

-16-

output downstream of all of the inputs.

12. The method of claim 11, wherein the reagents are selectively transferred to the reaction chamber.
- 5
13. The method of claim 11 or claim 12, wherein the reaction chamber is one of a plurality of reaction chambers all selectively connectable to the main fluid pathway.
- 10
14. The method of claim 13, wherein different compounds are synthesised in different reaction chambers at different times.
15. The method of claim 14, wherein the same compound is synthesised in more than one reaction chamber and in step b) the reactants are maintained under preselected different reaction conditions in each of the more than one reaction chambers.
- 15
16. The method according to any one of claims 11 to 15, wherein an excess of at least one reactant is used in the synthesis.
- 20
17. The method according to any one of claims 11 to 16, wherein the method takes place in a closed fluid system.
18. A method of synthesising and screening a chemical compound in a closed fluid system, comprising the steps of:
- 25
- a) synthesising the chemical compound from reactants in a reaction chamber on a solid support;
- b) mixing the chemical compound with a screening agent in the reaction chamber;
- 30

-17-

- c) directing a detectable moiety indicative of the chemical compound to a detector downstream of the reaction chamber.
- 5 19. A method of synthesising and screening a chemical compound in a closed fluid system, comprising the steps of:
- a) synthesising the chemical compound from reactants in a reaction chamber;
- 10 b) transferring the chemical compound in a fluid stream to a screening zone where the chemical compound is mixed with a screening agent;
- c) directing a detectable moiety indicative of the chemical compound to a detector downstream of screening zone.
- 15 20. The method of claim 18 or 19, wherein the step a) of synthesising the chemical compound comprises the method of any one of claims 11 to 17.
- 20 21. The method of any one of the preceding claims 11 to 17, wherein the method is conducted in the apparatus of any one of claims 1 to 10.
22. The method of any one of the preceding claims 18 to 21, wherein the method is conducted in the apparatus of any one of claims 6 to 10.
- 25 23. An apparatus as hereinbefore described with reference to, and as illustrated by, the accompanying drawings.
- 30 24. A method of synthesising a chemical compound as hereinbefore described with reference to, and as illustrated by, the accompanying drawings.

-18-

25. A method of synthesising and screening a chemical compound hereinbefore described with reference to, and as illustrated by, the accompanying drawings.


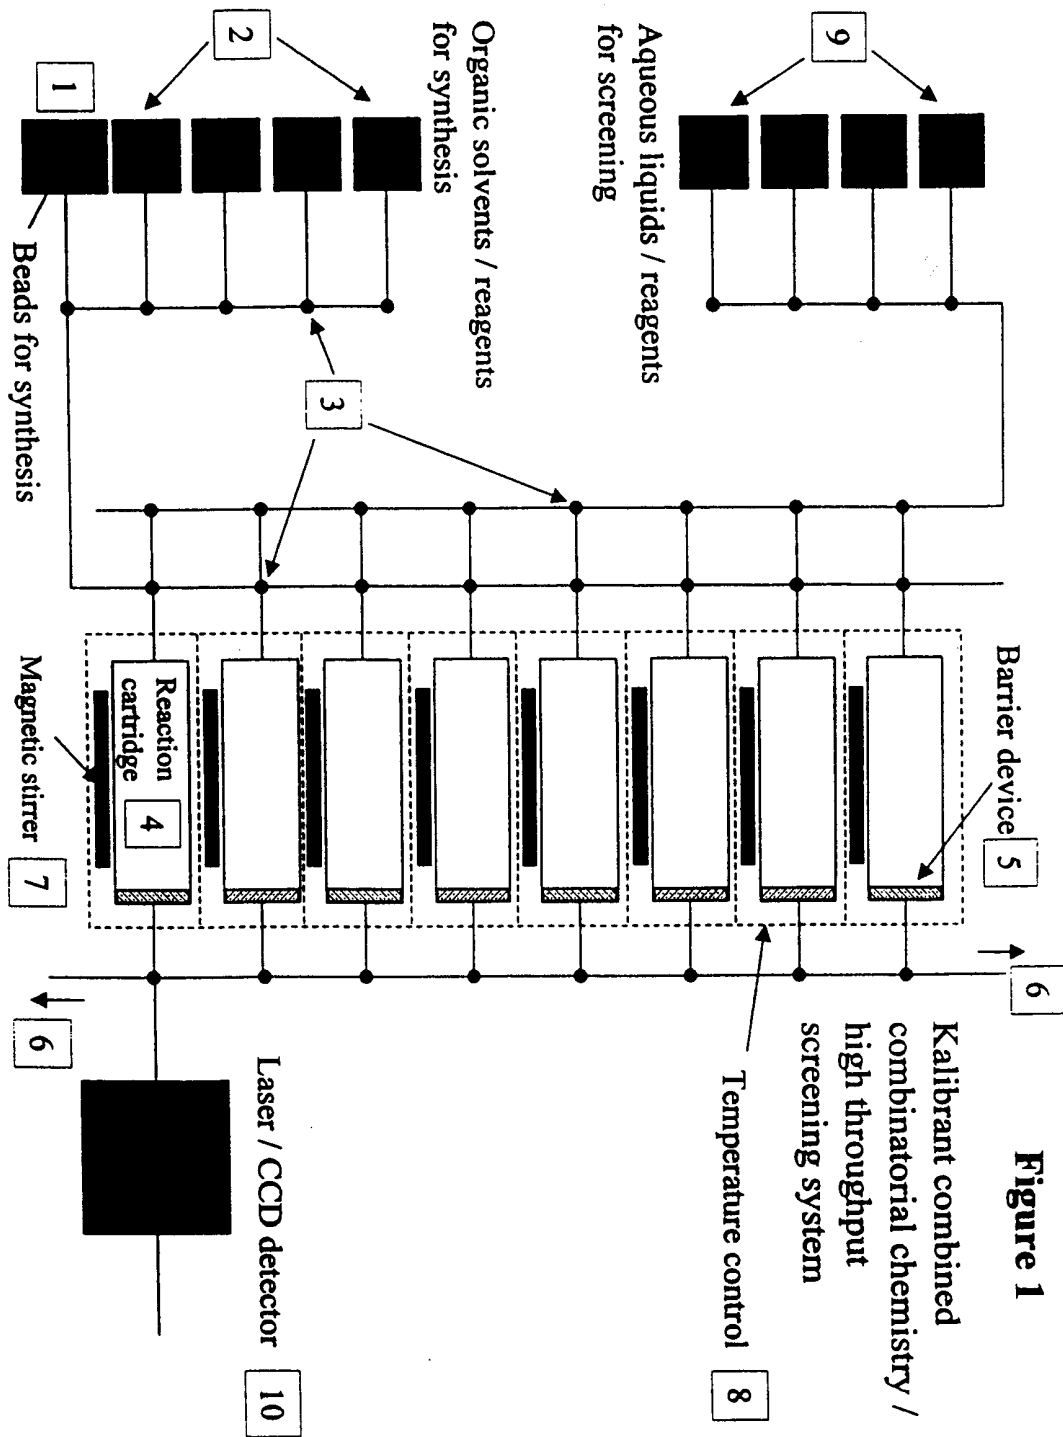


Figure 1

Figure 2
Combscreen reaction cartridge 4

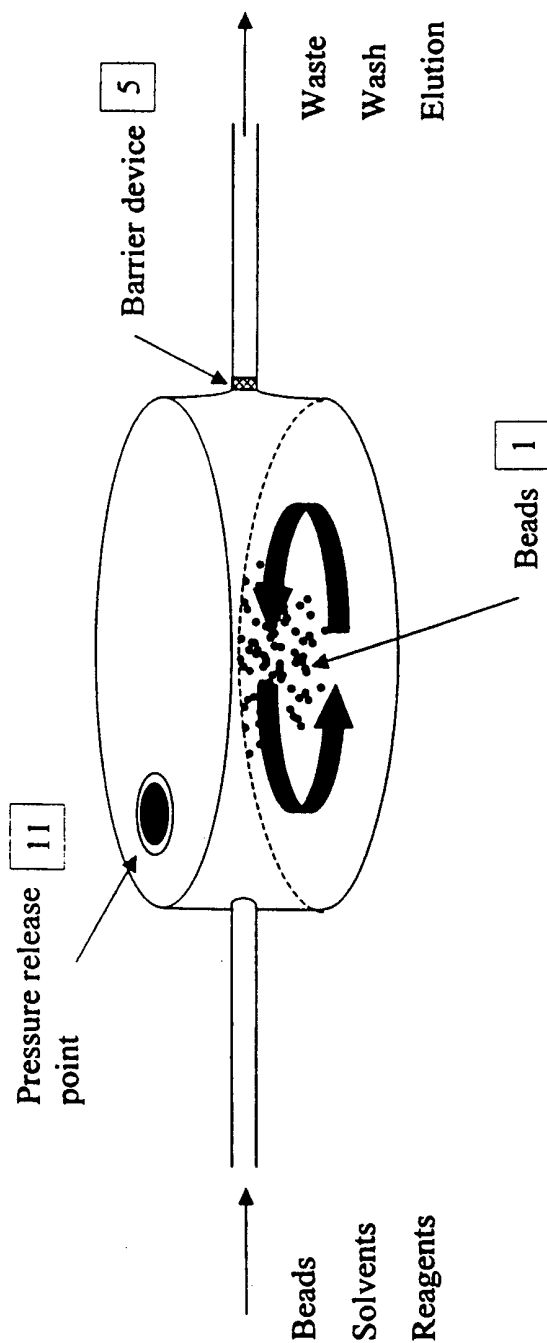

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03761

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 B01J19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 85 01224 A (HOSSAIN H. SANEII) 28 March 1985 see abstract see page 7, line 24 - page 10, line 32 see page 12, line 13 - page 14, line 5 see page 21, line 25 - page 23, line 11 see page 37, line 8 - line 22 see page 46, line 12 - line 23 see page 47, line 23 - page 48, line 12 see figures 2,2A,3,4,6	1-6, 10-14, 17,18, 20-22
A	--- -/--	7-9,15, 16,19

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

12 April 1999

Date of mailing of the international search report

22.04.99

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Stevnsborg, N

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03761

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 07126 A (HYBRIDON, INC.) 27 February 1997 see page 7, line 15 - page 8, line 36 see page 10, line 19 - page 12, line 14 see figures 1,2	1,6,10
A	---	2-5,7-9, 11-22
X	WO 97 06884 A (PHARMACIA BIOTECH AB) 27 February 1997 see page 6, line 28 - page 14, line 14 see figures	1,6,10
A	---	2-5,7, 11-22
A	EP 0 794 001 A (THE PERKIN-ELMER CORPORATION) 10 September 1997 see the whole document	1-22
A	WO 91 17823 A (PROTOS CORPORATION) 28 November 1991 see page 8, line 13 - page 20, line 31 see figures	1-22
A	WO 95 12608 A (AFFYMAX TECHNOLOGIES N.V.) 11 May 1995 cited in the application	1-22
A	FR 2 630 928 A (RHÔNE POULENC CHIMIE, S.A.) 10 November 1989 -----	

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 98/03761

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.: 23-25
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
PCT Rule 6.2 (a).

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest.
- No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/GB 98/03761

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8501224 A	28-03-1985	EP 0156875 A	09-10-1985
		US 4746490 A	24-05-1988
WO 9707126 A	27-02-1997	US 5807525 A	15-09-1998
		AU 6456496 A	12-03-1997
WO 9706884 A	27-02-1997	US 5641459 A	24-06-1997
		EP 0844910 A	03-06-1998
EP 794001 A	10-09-1997	US 5047524 A	10-09-1991
		DE 68928582 D	26-03-1998
		DE 68928582 T	23-07-1998
		EP 0375278 A	27-06-1990
		JP 2022677 C	26-02-1996
		JP 3068593 A	25-03-1991
		JP 7053749 B	07-06-1995
		US 5262530 A	16-11-1993
		WO 9117823 A	28-11-1991
US 5252296 A	12-10-1993		
AT 128380 T	15-10-1995		
CA 2082650 A	16-11-1991		
DE 69113484 D	02-11-1995		
DE 69113484 T	07-03-1996		
DK 593460 T	22-01-1996		
EP 0593460 A	27-04-1994		
ES 2079064 T	01-01-1996		
GR 3017793 T	31-01-1996		
IE 72085 B	12-03-1997		
JP 2544269 B	16-10-1996		
JP 5509257 T	22-12-1993		
PT 97662 A	30-07-1993		
US 5705610 A	06-01-1998		
US 5811387 A	22-09-1993		
US 5840841 A	24-11-1998		
WO 9512608 A	11-05-1995	US 5639603 A	17-06-1997
		US 5503805 A	02-04-1996
		AU 1128095 A	23-05-1995
		BR 9407947 A	26-11-1996
		CN 1134156 A	23-10-1996
		EP 0726906 A	21-08-1996
		GB 2298863 A, B	18-09-1996
		JP 9508353 T	26-08-1997
		NZ 276860 A	22-09-1997
		US 5665975 A	09-09-1997
FR 2630928 A	10-11-1989	EP 0415973 A	13-03-1991
		WO 8910789 A	16-11-1989