



- (51) **International Patent Classification:**
E21B 23/00 (2006.01) *E21B 23/14* (2006.01)
- (21) **International Application Number:**
PCT/US2013/066741
- (22) **International Filing Date:**
25 October 2013 (25.10.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
13/675,829 13 November 2012 (13.11.2012) US
- (71) **Applicant (for CA only):** **SCHLUMBERGER CANADA LIMITED** [CA/CA]; 525-3rd Avenue Southwest, Calgary, Alberta T2P-0G4 (CA).
- (71) **Applicant (for FR only):** **SERVICES PETROLIERS SCHLUMBERGER** [FR/FR]; 42 rue Saint Dominique, F-75007 Paris (FR).
- (71) **Applicant (for GB, JP, NL only):** **SCHLUMBERGER HOLDINGS LIMITED** [GB/GB]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Islands, British, 1110 (VG).
- (71) **Applicant (for all designated States except AE, AO, BH, CA, CN, FR, GB, GH, IN, IR, JP, LY, MA, MZ, NA, NG, NL, PH, SD, SY, US, VN):** **SCHLUMBERGER TECH-**

NOLOGY B.V. [NL/NL]; Parkstraat 83-89m, NL-2514 JG The Hague (NL).

- (71) **Applicant (for AE, AO, BF, BH, BJ, CF, CG, CI, CM, CN, GA, GH, GN, GQ, GW, IN, KM, LY, MA, ML, MR, MZ, NA, NE, NG, PH, SD, SN, SY, TD, TG, VN only):** **PRAD RESEARCH AND DEVELOPMENT LIMITED** [GB/GB]; P.O. Box 71, Craigmuir Chambers, Road Town, Tortola, Virgin Island, British, 1110 (VG).
- (71) **Applicant (for US only):** **SCHLUMBERGER TECHNOLOGY CORPORATION** [US/US]; 300 Schlumberger Drive, Sugar Land, Texas 77478 (US).
- (72) **Inventors:** **HERNANDEZ MARTI, Ramon**; 1710 Dunlavy St., Houston, Texas 77006 (US). **PARRY, John**; 2006 Martin Lake Court, Richmond, Texas 77469 (US). **RENDUSARA, Dudi**; 6 Cedarwood Grove, Singapore 738424 (SG).
- (74) **Agents:** **VEREB, John** et al.; 10001 Richmond Avenue, IP Administration Center of Excellence, Room 4720, Houston, Texas 77042 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,

[Continued on next page]

- (54) **Title:** POWER CONTROL FOR ELECTRICAL APPLICATIONS OVER LONG CABLES

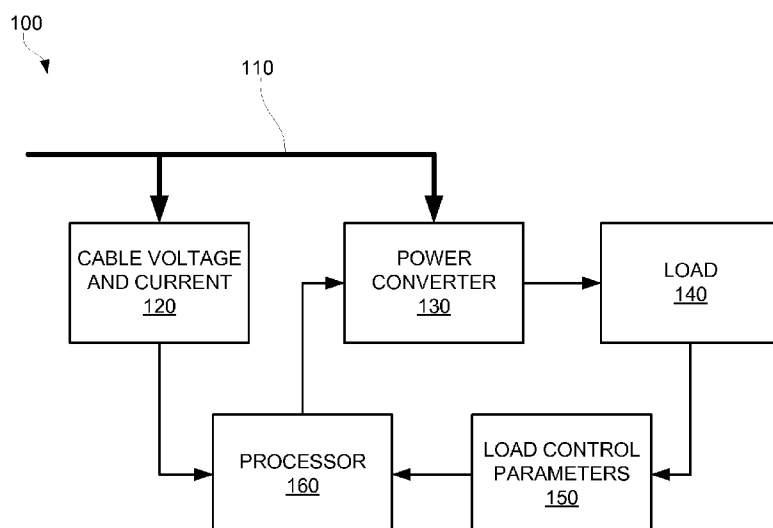


FIG. 1

(57) **Abstract:** This disclosure is drawn to methods, systems, devices and/or apparatus related to power control in applications over long cables. Specifically, the disclosed methods, systems, devices and/or apparatus relate to power control that considers the maximum power available at the end of a long cable (or from a battery) to a load over a broad range of load conditions. Some example systems may include a power supply located at the Earth's surface and a power converter coupled to the power supply via a cable having a first end coupled to the power supply and a second end coupled to the power converter. Some example power converters may be configured to measure the power being consumed by the electrical load in the well, and adjust operating parameter(s) of the electrical load based, at least in part, on the maximum power available at the second end of the cable.



KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,

Published:

— *with international search report (Art. 21(3))*

POWER CONTROL FOR ELECTRICAL APPLICATIONS OVER LONG CABLES

FIELD OF THE INVENTION

[0002] Aspects relate to drilling of wellbores. More specifically, aspects relate to power control for electrical applications over long cables used in wellbores.

BACKGROUND INFORMATION

[0003] In some deep and highly deviated wellbores, power is needed for many operations, including, for example, conveying evaluation tools, taking formation cores, operating valves, milling plugs, and other mechanical operations. Electrical motors (such as direct current powered motors) are commonly used for such operations. Due to the depth of some wells in which motors must operate and the length of cables needed to power such motors, motor performance is severely diminished.

[0004] In oil wells and with cables that may be 30,000 feet or longer, motors must operate continuously at the peak power the cable can convey, and traditional motor control, based on maintaining either velocity or torque, is not appropriate for reliable and efficient operation. Similarly, actuators, power converters and signal generators may cause a demand of peak power above what the power delivery system can provide when transient the load impedance changes while operating at or near maximum power. Peak power limitations similar to those described for long cables also exist in battery powered systems, where peak power demands can shorten battery autonomy.

SUMMARY

[0005] In a first aspect, some example systems for powering an electrical load may include a power supply and a power converter coupled to the power supply via a cable having one end coupled to the power supply and another end coupled to the power converter. Some example power converters may measure the power being consumed by the electrical load, and adjust operating parameter(s) of the electrical load based on the maximum power available at the end of the cable.

[0006] In a second aspect, some example systems for powering an electrical load in a well may include a battery and a power converter coupled to the battery. The power converter may measure the power being consumed by the electrical load in the well, and adjust operating parameter(s) of the electrical load based on the maximum power available from the battery.

[0007] In a third aspect, some example methods of controlling an electrical load in a well are provided. The electrical load may be coupled to a power converter via a cable having one end coupled to a surface power supply and another end coupled to the power converter. Some example methods may include determining the power being consumed by the electrical load in the well, determining the maximum power available at the end of the cable near the power converter, and adjusting operating parameter(s) of the electrical load such that the power being consumed by the electrical load equals and/or approximates the maximum power available at the end of the cable near the power converter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The foregoing and other features of the present disclosure will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict several embodiments in accordance with the disclosure and are, therefore, not to be considered limiting of its scope, the disclosure will be described with additional specificity and detail through use of the accompanying drawings.

[0009] FIG. 1 is a graphical representation of an example system for powering an electrical load in a well.

[0010] FIG. 2 is a graphical representation of example system for powering an electric motor in a well.

[0011] FIG. 3 is a graphical representation of an example system for powering a downhole tool having an electrical load in a well; and

[0012] FIG. 4 is a flowchart of an example method of controlling an electrical load in a well, each arranged in accordance with at least an embodiment of the present disclosure.

DETAILED DESCRIPTION

[0013] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description and drawings are not meant to be limiting and are for explanatory purposes. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented herein. It will be readily understood that the aspects of the present disclosure, as generally described herein, and illustrated in the drawings, may be arranged, substituted, combined, and designed in a wide variety of different configurations, each of which are explicitly contemplated and made part of this disclosure.

[0014] This disclosure is drawn to methods, systems, devices and/or apparatus related to power control in applications over long cables. Specifically, the disclosed methods, systems, devices and/or apparatus relate to power control that considers the maximum power available at the end of a long cable (or from a battery) to a load over a broad range of load conditions.

[0015] The present disclosure contemplates that motors are conventionally controlled to operate at a constant speed, to control the speed of conveyance or the cutting operation of a drill bit. Constant speed may be equated to driving the motor at constant voltage. Motors may also be operated at constant torque, to produce a controlled force, which may be equated to driving the motor at constant current. When a motor operates at constant speed near the maximum power available through a cable and the motor meets a restriction (e.g., the drilling bit lifts a burr), the torque requirement increases. The increased torque causes an increase in current that, over the cable resistance, decreases the power available to the motor. This decreased power available causes a serious speed reduction that may stall the motor.

[0016] Generally, the present disclosure considers a complete system, including a surface power supply, a cable, a power converter, and an electrical load. Some example systems adjust the power converter operation not to exceed the maximum power available at the end of the cable.

[0017] FIG. 1 is a graphical representation of an example system **100** for powering a load **140** in a well. Cable **110** may extend into a well and be operatively coupled to a power converter **130**. Cable voltage and cable current **120** may be measured in the well adjacent and/or at power converter **130**. Power converter **130** may be operatively coupled to load **140**. Load **140** may have associated load control parameters **150** (e.g., load voltage, load current) related to the operation of load **140**. Cable voltage and cable current **120** and load control parameters **150** may be inputted to a processor **160**. Processor **160** may be coupled to power converter **130** to adjust the operating parameter(s) of load **140** to approximate and/or equal the maximum power available at the end of cable **110**.

[0018] Knowing cable voltage and cable current **120** allows for calculating the maximum power that is available to the system **100** at or near the end of cable **110**. Cable voltage and cable current **120** relate to the cable's resistance and the surface power supply as follows:

$$V_s = V + I \cdot R_c,$$

where V_s is the surface supply voltage and R_c is the cable resistance. Taking such measurements at different regimes results in the following equations:

$$\begin{aligned} V_s &= V_1 + I_1 \cdot R_c \\ V_s &= V_2 + I_2 \cdot R_c \end{aligned}$$

and subtracting the two expressions:

$$0 = V_1 - V_2 + (I_1 - I_2) \cdot R_c \rightarrow R_c = \frac{V_1 - V_2}{I_1 - I_2}.$$

[0019] Replacing the value of the cable resistance R_c in one of the two initial equations provides the value of the surface supply.

[0020] The present disclosure contemplates that maximum power is transmitted on a cable when the voltage at the load end of the cable is half of the surface power supply voltage (i.e., $\frac{V_s}{2}$), or the point where the load matches the source impedance. The

present disclosure further contemplates that this occurs when the cable current is $\frac{V_s}{2R_c}$, which leads to the following known formulas relating power to voltage and resistance:

$$W_{\max} = \frac{V_s^2}{4R_c}$$

and

$$I_{\max} = \frac{V_s}{2R_c}.$$

[0021] Measurements to determine the cable resistance may be conducted periodically and/or continuously during a downhole tool's operation. As the tool progresses in the well, ambient temperature changes and the current passing to the cable may contribute to an increased temperature, resulting in an increase in the cable resistance. While such temperature changes may be slow, they may be tracked to maintain accuracy of the power model.

[0022] The present disclosure contemplates that some surface power supply systems may implement feed forward compensation, modulating the surface voltage as a function of the current on the cable to maintain a constant downhole voltage. Both the downhole voltage and the cable resistance may be known to the surface power supply system and may be passed to the downhole tool using telemetry. The above equations may still apply by replacing the surface voltage V_s with the downhole voltage and denominators as follows:

$$W_{\max} = \frac{V_{dh}^2}{R_c}$$

and

$$I_{\max} = \frac{V_{dh}}{R_c}.$$

[0023] In some examples, a downhole tool may receive power from battery or batteries. In such examples, the minimum voltage and maximum current may be defined by the battery design and may be passed to the power convertor as system parameters.

[0024] In some examples, power converter **130** may be a switching converter of a type (e.g., buck, boost) appropriate for load **140** being driven. Example power converter **130** may provide better conversion efficiency than linear and/or static converters, and may operate in a constant power mode, thus adapting the load characteristics to the power supply impedance. A power converter **130** may have a voltage feedback loop and/or a current feedback loop, including, for example, a current feedback loop inside a voltage feedback loop.

[0025] In some examples having an electrical load, load control parameters **150** may include often load voltage (V_l) and load current (I_l) which may be used by processor **160** and power converter **130** to adjust operating conditions of load **140**. The product of load voltage (V_l) and load current (I_l) may define the power absorbed by load **140**, and may be used as another control variable and inputted in the following control equation:

$$V_l \times I_l \leq \eta \cdot W_{\max},$$

where η is the allowed conversion efficiency inherent to any power conversion system.

[0026] In some examples, processor **160** may be a specialized device for pulse width modulation and/or resonant modulation. In some examples, processor **160** may be a digital signal processor (DSP). Processor **160** may receive load control parameters **150** (e.g., load voltage and load current signals) and may control operation of power converter **130** to maintain the load conditions at a specified level. In some examples, processor **160** may also receive cable voltage and cable current **120** and may calculate the maximum power available at the end of the cable. In some examples, processor

160 may also calculate the power equation described above and may adjust an appropriate load parameter setting in an added control loop to maintain the inequality.

[0027] In some examples, a conventional buck converter may be placed between cable **110** and power converter **130**. In examples having a direct current (DC) brushless motor, the inductance of the stator coils may be used to perform the voltage to current translation or impedance conversion.

[0028] FIG. 2 is a graphical representation of example system **200** for powering an electric motor **240** (e.g., traction motor at the end of a logging cable) in a well. Cable **210** may extend into a well and be operatively coupled to a motor drive **230**. Cable voltage and cable current **220** may be measured in the well adjacent and/or at motor drive **230**. Motor drive **230** may be operatively coupled to electric motor **240**. Electric motor **240** may have associated velocity and torque control parameters **250** related to the operation of electric motor **240** while performing a task **270** (e.g., conveying tools, taking formation cores, operating valves, milling plugs) in the well. Cable voltage and cable current **220** and velocity and torque control parameters **250** may be inputted to a processor **260**. Processor **260** may be coupled to motor drive **230** to adjust the operating parameter(s) of electric motor **240** to approximate and/or equal the maximum power available at the end of cable **210**.

[0029] In some examples, electric motor **240** could be a DC motor. In some examples, motor drive **230** may be a buck converter configured to adapt the cable voltage and current to the electric motor's **240** excitation voltage. In a DC brushless example, motor drive **230** may include pulse width modulation to modulate the cable voltage to excite the three phase coils to generate a rotating magnetic field in electric motor **240**, as well as adapting the excitation voltage and current to the cable voltage and current. Many configurations and topologies are known to those skilled in the art to implement such functions.

[0030] In some examples, velocity and torque are parameters in conventional motor controls. In some examples, velocity data may be integrated to obtain or determine position information. In some examples, the product of velocity (*Vel*) and torque (*Torq*)

may define the power absorbed by electric motor **240**, and may be used as another control variable and inputted in the following control equation:

$$Vel \times Torq \leq \eta \cdot W_{\max} ,$$

where η is the allowed conversion efficiency inherent to any power conversion system. In some examples, average motor voltage and average motor voltage current may be used instead of velocity and torque, respectively.

[0031] In some examples, processor **260** may be (or be based on) a specialized microprocessor or DSP configured to receive velocity and torque control parameters **250** and control pulse width modulation switching on the motor excitation phase coils to generate the corresponding rotating magnetic vector (as determined by velocity and/or torque settings). In some examples, processor **260** may also receive cable voltage and cable current **220**, and may calculate the maximum power available from cable **210**. In some examples, processor **260** may also calculate the power equation described above and may adjust an appropriate velocity and/or torque setting in an added control loop to maintain the inequality.

[0032] The present disclosure contemplates that a control loop may appear difficult to implement with the inherent product calculation in real time. However, it can be greatly simplified. For example, in a system where the surface power supply is fixed, processor **260** may determine the cable voltage at which the power delivered by cable **210** is at its maximum, and it may control the velocity setting to prevent the cable voltage from going any lower than that determined cable voltage. In another example, in a system where the surface supply system implements a feed forward compensation that keeps the cable voltage constant, processor **260** may determine the current at which the power transfer on cable **210** is maximized, and it may control the velocity setting to prevent the cable current from going any higher than that determined cable current. The effects of these example control policies are equivalent to the power equation described above.

[0033] FIG. 3 is a graphical representation of an example system **300** for powering a downhole tool **315** having an electrical load **340** in a well **305**. In some examples, a

power supply **325** may be located at the Earth's surface **380** and may be coupled to downhole tool **315** via a cable **310**. Cable **310** may include an end **312** coupled to power supply **325** and an end **314** coupled to downhole tool **315**. A cable voltage and cable current **320**, a power convertor **330**, a load **340**, a load control parameters **350**, and/or a processor **360** may be disposed within downhole tool **315**. Processor **360** may be coupled to power converter **330** to adjust the operating parameter(s) of load **340** to approximate and/or equal the maximum power available at the end of cable **310**.

[0034] FIG. 4 is a flowchart of an example method **400** of controlling an electrical load in a well, in accordance with at least some embodiments of the present disclosure. Example method **400** may include determining **410** the power being consumed by the electrical load in the well. Example method **400** may continue by determining **420** the maximum power available at the end of the cable coupling the electrical load to a surface power supply. Example method **400** may also include adjusting **430** operating parameter(s) of the electrical load such that the power being consumed by the electrical load equals and/or approximates the maximum power available at the end of the cable.

[0035] In one embodiment, a system for powering an electrical load is disclosed, the system comprising a power supply, a power converter coupled to the power supply via a cable having a first end coupled to the power supply and a second end coupled to the power converter, the power converter configured to: measure a power being consumed by the electrical load and adjust at least one operating parameter of the electrical load based, at least in part, on a maximum power available at the second end of the cable. In another embodiment, a system is disclosed comprising a battery, a power converter coupled to the battery, the power converter configured to measure a power being consumed by the electrical load in the well and adjust at least one operating parameter of the electrical load based, at least in part, on a maximum power available from the battery. In another example embodiment, a method of controlling an electrical load is disclosed, the electrical load being coupled to a power converter via a cable having a first end coupled to a surface power supply and a second end coupled to the power converter, the method comprising: determining a power being consumed by the electrical load; determining a maximum power available at the second end of the cable;

and adjusting at least one operating parameter of the electrical load such that the power being consumed by the electrical load equals the maximum power available at the second end of the cable.

[0036] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

What is claimed is:

1. A system for powering an electrical load, the system comprising:
 - a power supply;
 - a power converter coupled to the power supply via a cable having a first end coupled to the power supply and a second end coupled to the power converter, the power converter configured to:
 - measure a power being consumed by the electrical load; and
 - adjust at least one operating parameter of the electrical load based, at least in part, on a maximum power available at the second end of the cable.
2. The system of claim 1, wherein the power converter is further configured to adjust the at least one operating parameter of the electrical load such that the power being consumed by the electrical load equals the maximum power available at the second end of the cable.
3. The system of claim 1, wherein the power converter is further configured to adjust the at least one operating parameter of the electrical load to operate the electrical load at the maximum power available at the second end of the cable.
4. The system of claim 1, wherein the power convertor is further configured to continuously measure the power being consumed by the electrical load.
5. The system of claim 1, wherein the power convertor is further configured to periodically measure the power being consumed by the electrical load.
6. The system of claim 1, further comprising:
 - a processor in electrical communication with the cable and the power converter, the processor configured to measure a cable voltage and a cable current, and further configured to calculate the maximum power available at the second end of the cable based, at least in part, on the cable voltage and the cable current.

7. The system of claim 1, wherein the power supply is located on a surface of the Earth; and

wherein the power converter is further configured to receive from the surface a measurement representative of the maximum power available at the second end of the cable.

8. The system of claim 1, wherein the electrical load is an electric motor; and wherein the power converter is a motor drive circuit.

9. The system of claim 8, wherein the motor drive circuit is further configured to measure the power being consumed by the electric motor based, at least in part, on at least one of a velocity of the electric motor, a torque of the electric motor, an average motor voltage of the electric motor, and an average motor current of the electric motor.

10. The system of claim 8, wherein power supplied by the power supply has a fixed voltage; and

wherein the motor drive circuit is configured to adjust a velocity of the electric motor to maintain a voltage at the second end of the cable at or above a maximum power transfer voltage.

11. The system of claim 8, wherein the power supply includes a feed-forward loop that maintains a constant voltage at the second end of the cable; and

wherein the motor drive circuit is configured to adjust a velocity of the electric motor to maintain a current at the second end of the cable at or below a maximum power transfer current.

12. A system comprising:
 - a battery;
 - a power converter coupled to the battery, the power converter configured to:
 - measure a power being consumed by the electrical load in the well; and
 - adjust at least one operating parameter of the electrical load based, at least in part, on a maximum power available from the battery.
13. The system of claim 12, wherein the power converter is further configured to adjust the at least one operating parameter of the electrical load such that the power being consumed by the electrical load equals the maximum power available at the battery.
14. The system of claim 12, wherein the power converter is further configured to adjust the at least one operating parameter of the electrical load to operate the electrical load at the maximum power available at the battery.
15. A method of controlling an electrical load, the electrical load being coupled to a power converter via a cable having a first end coupled to a surface power supply and a second end coupled to the power converter, the method comprising:
 - determining a power being consumed by the electrical load;
 - determining a maximum power available at the second end of the cable; and
 - adjusting at least one operating parameter of the electrical load such that the power being consumed by the electrical load equals the maximum power available at the second end of the cable.

16. The method of claim 15, wherein determining the maximum power available at the second end of the cable comprises:

- measuring a cable voltage of the cable and a cable current of the cable;
- calculating a cable resistance of the cable based, at least in part, on the cable voltage and the cable current; and
- calculating the maximum power available at the second end of the cable based, at least in part, on the cable resistance.

17. The method of claim 15, wherein determining the maximum power available at the second end of the cable comprises:

- measuring a cable voltage of the cable and a cable current of the cable;
- calculating the maximum power available at the second end of the cable based, at least in part, on the cable voltage and the cable current.

18. The method of claim 15, receiving, via telemetry, at least one of a cable voltage of the cable, a cable current of the cable, a cable resistance of the cable, and a measurement representative of the maximum power available at the second end of the cable.

19. The method of claim 15, further comprising:

- determining a maximum power transfer voltage; and
- adjusting a velocity of the electrical load to maintain a voltage at the second end of the cable at or above the maximum power transfer voltage.

20. The method of claim 15, determining a maximum power transfer current; and
adjusting a velocity of the electrical load to maintain a current at the second end of the cable at or below a maximum power transfer current.

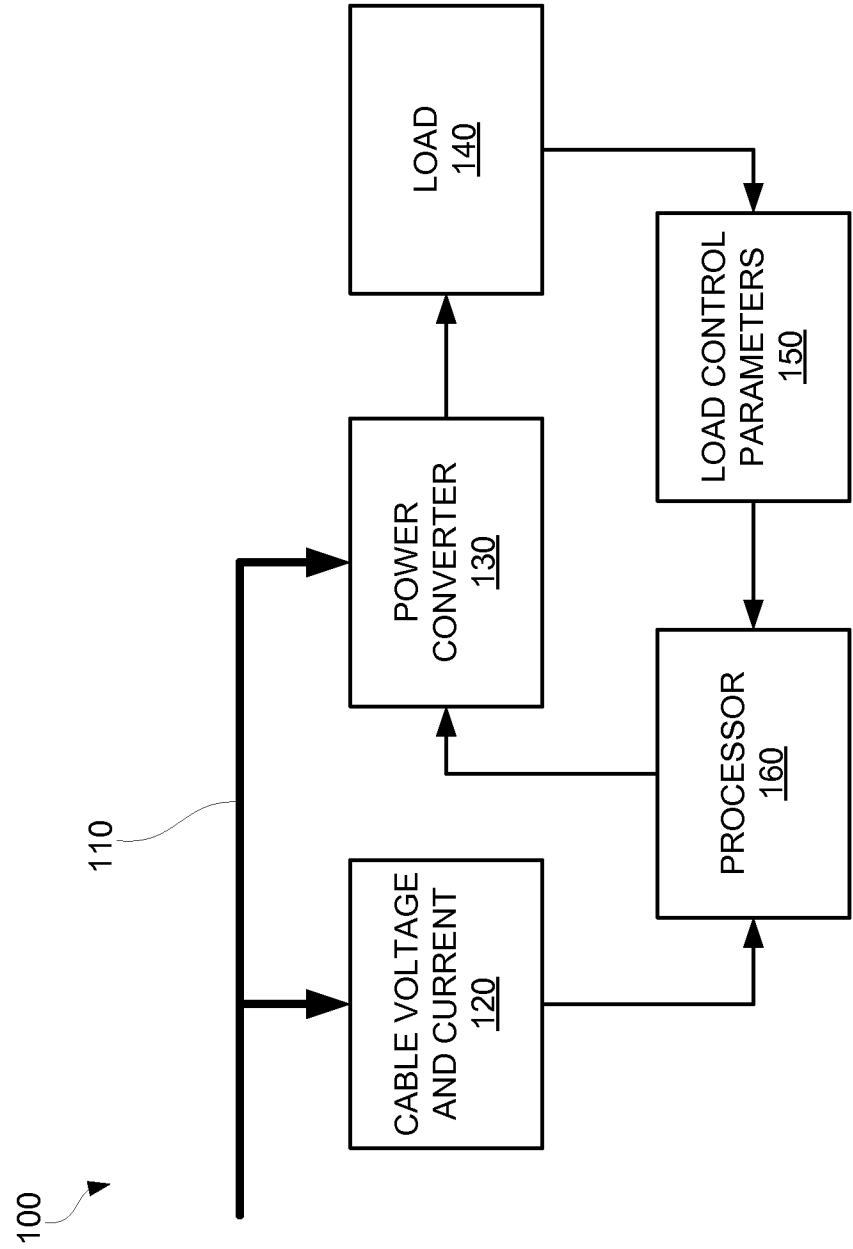


FIG. 1

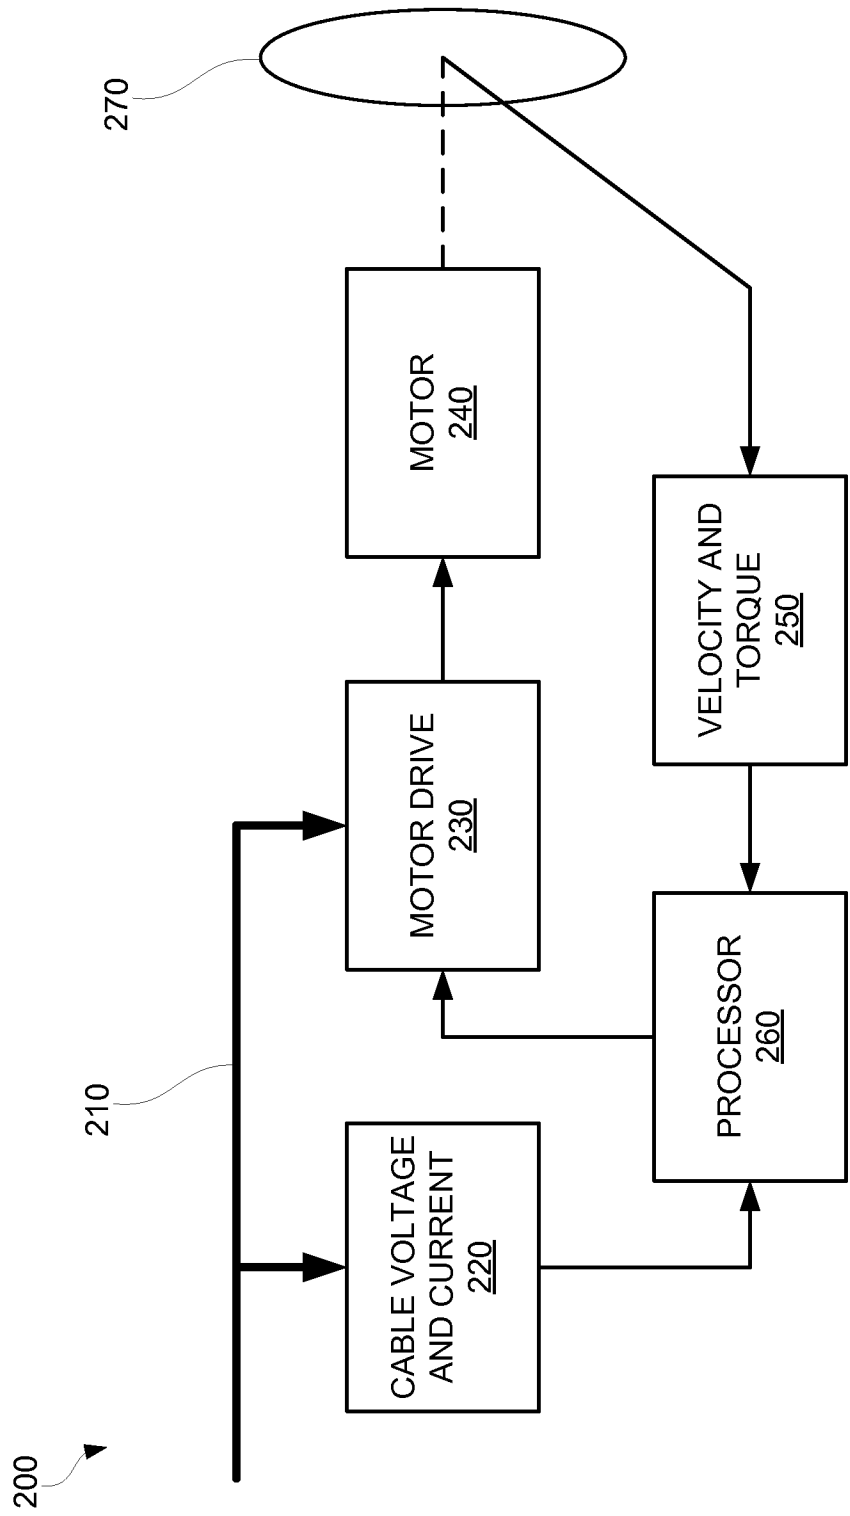


FIG. 2

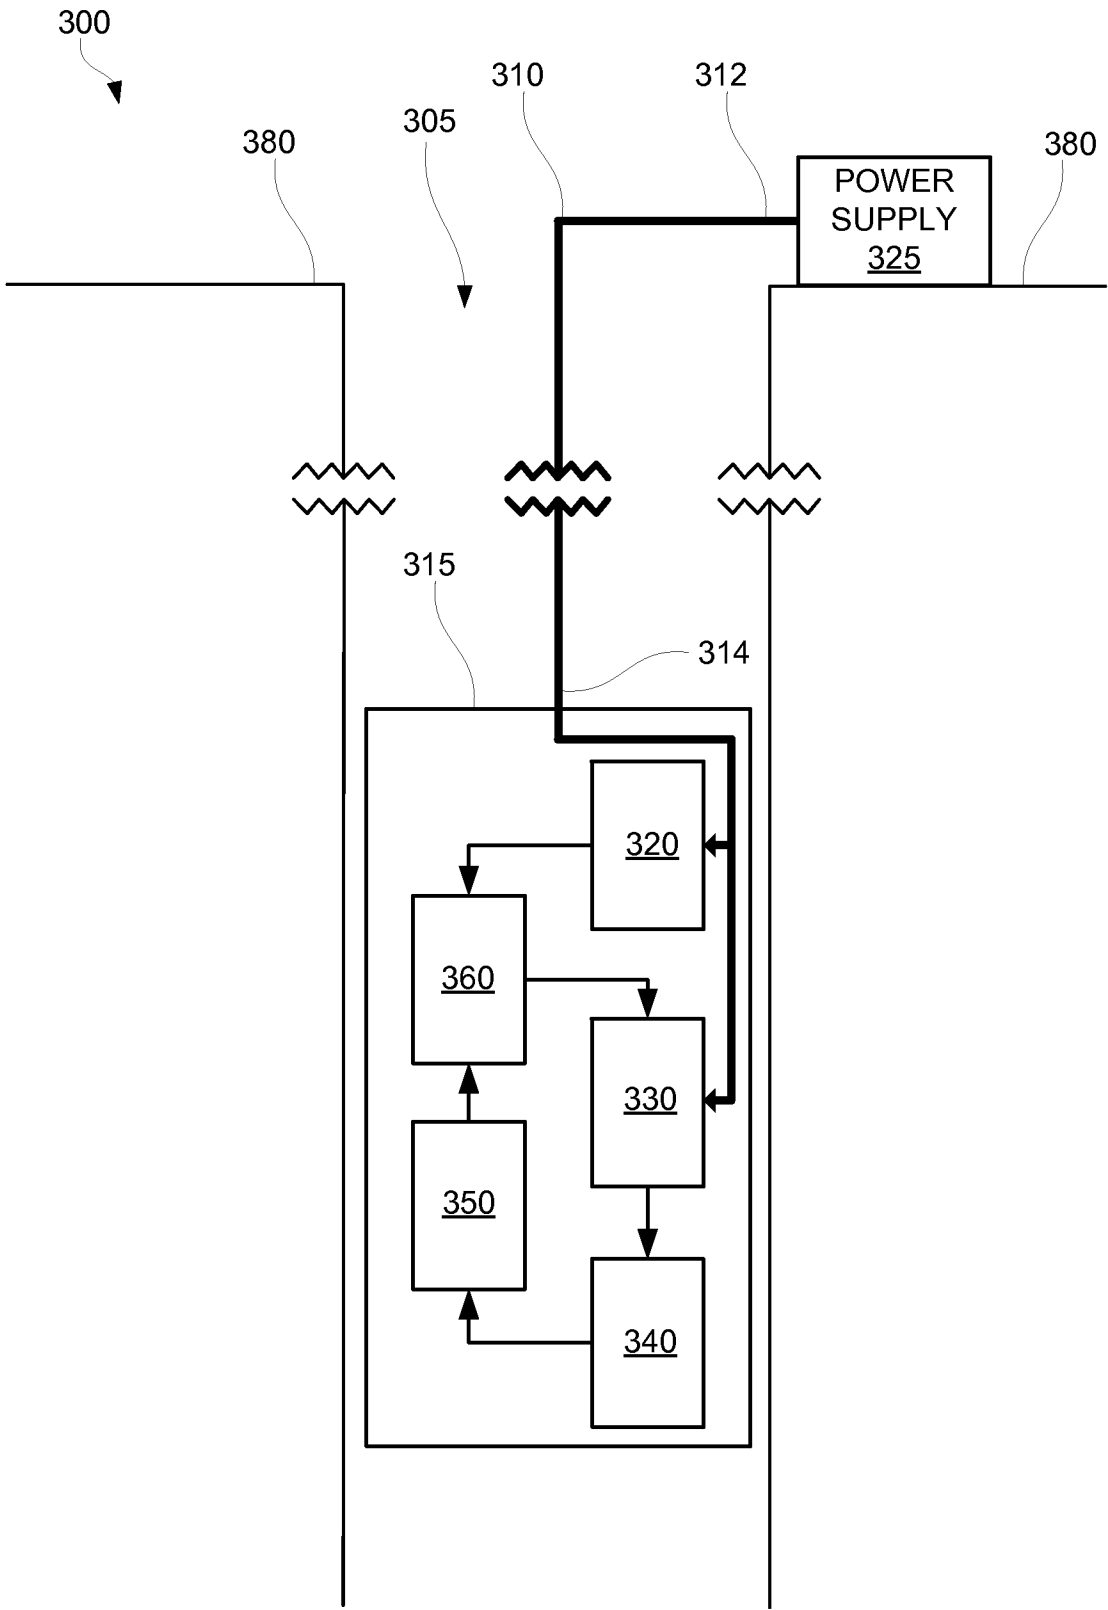


FIG. 3

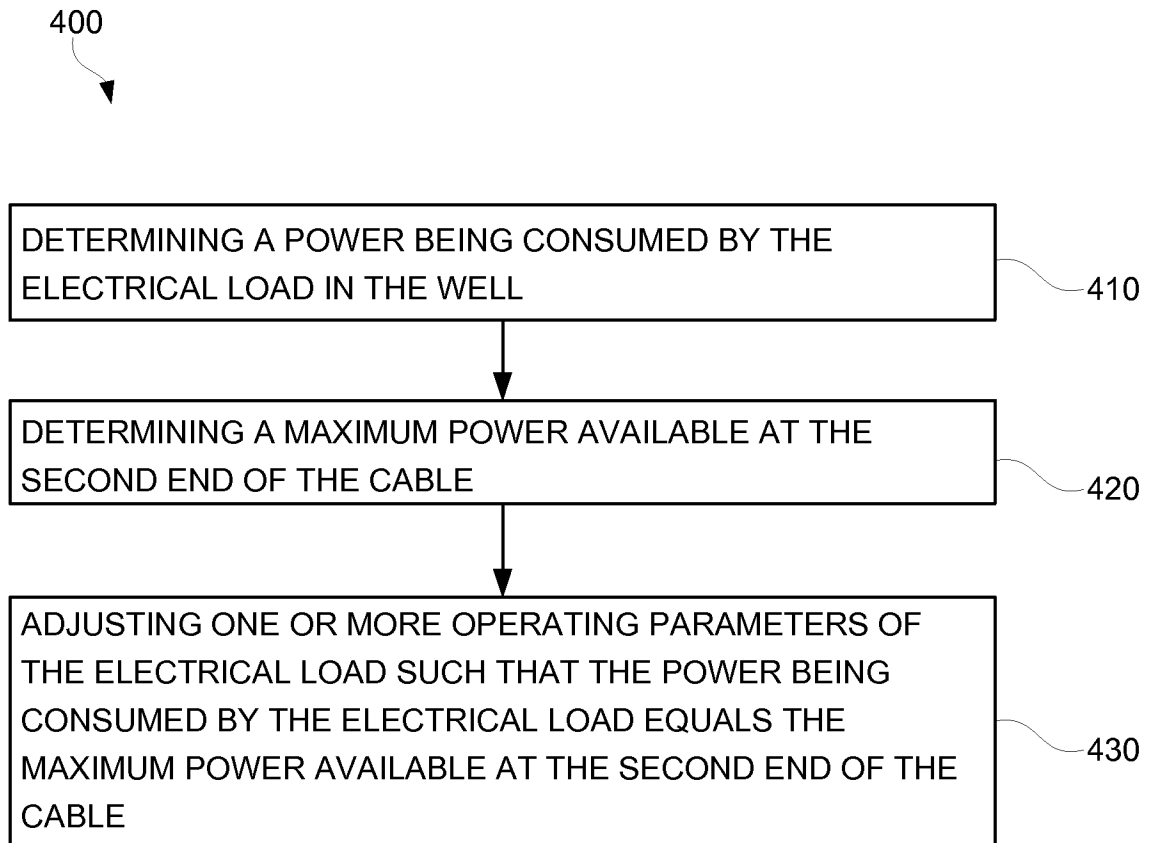


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/066741**A. CLASSIFICATION OF SUBJECT MATTER****E21B 23/00(2006.01)i, E21B 23/14(2006.01)i, E21B 4/04(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E21B 23/00; H02P 7/06; H02P 27/00; H02P 27/04; G05F 1/10; H02P 1/24; G01V 1/00; E21B 23/14; E21B 4/04

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: power supply, converter, electrical load, operating parameter, and processor

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6489742 B2 (LUMSDEN, JOHN) 03 December 2002 See abstract, column 6, line 1 - column 7, line 14, and figure 1.	1-3, 8-15, 18-20
Y		4-7, 16-17
Y	US 2012-0206074 A1 (KURECK et al.) 16 August 2012 See abstract, paragraph [0036], and figure 5.	4-5
Y	US 5736936 A (BOMBAY et al.) 07 April 1998 See abstract, column 5, lines 37-51, column 7, lines 51-57, and figures 1-2.	6-7, 16-17
A	US 7839025 B2 (BESSER et al.) 23 November 2010 See abstract, column 6, line 37 - column 7, line 10, and figure 3.	1-20
A	US 8232760 B2 (LU et al.) 31 July 2012 See abstract, claim 1, and figure 1.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

04 March 2014 (04.03.2014)

Date of mailing of the international search report

04 March 2014 (04.03.2014)

Name and mailing address of the ISA/KR

International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701,
Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

LEE, Jong Kyung

Telephone No. +82-42-481-3360



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/066741

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6489742 B2	03/12/2002	US 2002-0079859 A1 WO 02-052712 A1	27/06/2002 04/07/2002
US 2012-0206074 A1	16/08/2012	None	
US 5736936 A	07/04/1998	US 5483232 A	09/01/1996
US 7839025 B2	23/11/2010	AU 2008-214329 A1 CA 2680561 A1 CN 101647172 A EP 2109927 A2 JP 2010-518510 A JP 5323725 B2 US 2008-0121272 A1 US 2008-0122449 A1 US 2008-0122518 A1 US 2008-0179949 A1 US 2008-0191560 A1 US 2008-0191675 A1 US 7960870 B2 US 8013474 B2 US 8212399 B2 WO 2008-097591 A2 WO 2008-097591 A3	14/08/2008 14/08/2008 10/02/2010 21/10/2009 27/05/2010 23/10/2013 29/05/2008 29/05/2008 29/05/2008 31/07/2008 14/08/2008 14/08/2008 14/06/2011 06/09/2011 03/07/2012 14/08/2008 02/10/2008
US 8232760 B2	31/07/2012	AU 2010-259066 A1 CA 2774625 A1 CN 102668366 A EP 2441167 A2 RU 2012100270 A US 2010-0315034 A1 WO 2010-144308 A2 WO 2010-144308 A3	19/01/2012 16/12/2010 12/09/2012 18/04/2012 20/07/2013 16/12/2010 16/12/2010 07/06/2012