



US010566748B2

(12) **United States Patent  
Holland**

(10) **Patent No.: US 10,566,748 B2**  
(45) **Date of Patent: Feb. 18, 2020**

(54) **SHIELDED COAXIAL CONNECTOR**

(71) Applicant: **HOLLAND ELECTRONICS, LLC**,  
Ventura, CA (US)

(72) Inventor: **Michael Holland**, Santa Barbara, CA  
(US)

(73) Assignee: **Holland Electronics, LLC**, Ventura,  
CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

(21) Appl. No.: **16/290,925**

(22) Filed: **Mar. 3, 2019**

(65) **Prior Publication Data**

US 2019/0199045 A1 Jun. 27, 2019

**Related U.S. Application Data**

(63) Continuation of application No. 15/784,105, filed on  
Oct. 14, 2017, now Pat. No. 10,236,646, which is a  
continuation of application No. 15/221,429, filed on  
Jul. 27, 2016, now Pat. No. 9,793,660, which is a  
continuation-in-part of application No. 14/728,589,  
filed on Jun. 2, 2015, now Pat. No. 9,407,050, which  
is a continuation of application No. 13/723,800, filed  
on Dec. 21, 2012, now Pat. No. 9,048,600.

(60) Provisional application No. 61/612,922, filed on Mar.  
19, 2012.

(51) **Int. Cl.**  
**H01R 24/46** (2011.01)  
**H01R 103/00** (2006.01)  
**H01R 24/52** (2011.01)

(52) **U.S. Cl.**  
CPC ..... **H01R 24/46** (2013.01); **H01R 24/525**  
(2013.01); **H01R 2103/00** (2013.01)

(58) **Field of Classification Search**

CPC ... H01R 24/46; H01R 24/525; H01R 2103/00  
USPC ..... 439/578  
See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

3,768,063 A \* 10/1973 Coffman ..... H01P 1/266  
439/135  
4,099,825 A 7/1978 Jackson  
4,275,946 A 6/1981 Manina et al.  
4,333,697 A \* 6/1982 Dreyer ..... H01R 24/542  
439/166  
4,358,174 A \* 11/1982 Dreyer ..... H01R 24/52  
439/249  
4,525,013 A \* 6/1985 Phillips ..... H01R 24/42  
439/578  
4,590,950 A \* 5/1986 Iwaszkiewicz ..... H01R 4/00  
174/75 R  
4,660,921 A \* 4/1987 Hauver ..... H01R 13/719  
333/22 R  
4,687,279 A \* 8/1987 Holland ..... H01R 24/542  
439/578  
4,892,491 A \* 1/1990 Budano, II ..... H01R 24/44  
439/582  
4,915,651 A 4/1990 Bout  
4,941,846 A 7/1990 Guimond et al.  
(Continued)

**FOREIGN PATENT DOCUMENTS**


JP 09161892 A 6/1997  
JP 2011188135 A 9/2011

*Primary Examiner* — Alexander Gilman  
(74) *Attorney, Agent, or Firm* — Paul D. Chancellor;  
Ocean Law

(57) **ABSTRACT**

A coaxial connector has a selectively engageable radio  
frequency interference shield.

**11 Claims, 21 Drawing Sheets**

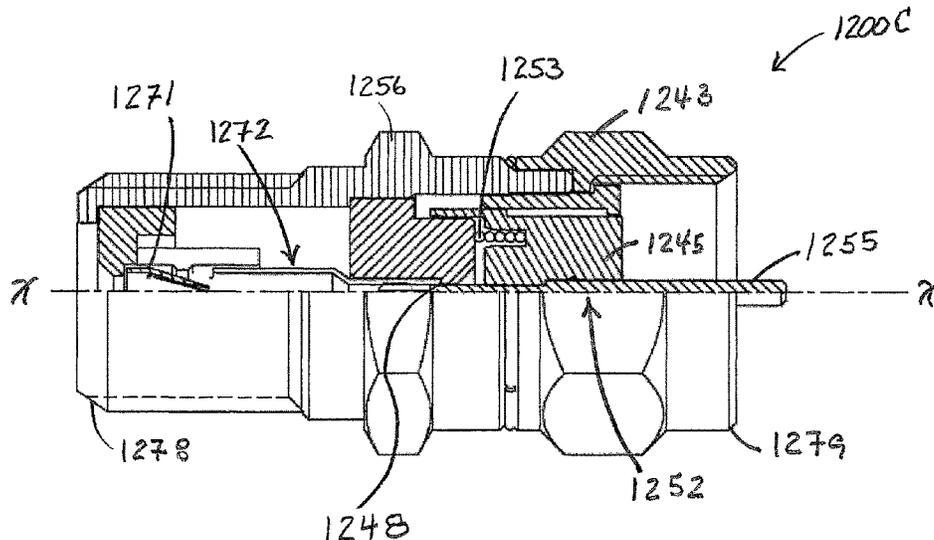


(56)

References Cited


U.S. PATENT DOCUMENTS

4,943,245	A *	7/1990	Lincoln	H01R 24/44	7,416,444	B1	8/2008	Lin	
				439/578	7,419,403	B1 *	9/2008	Paynter	H01R 9/0521
5,067,912	A *	11/1991	Bickford	H01R 24/40					439/578
				29/842	7,435,135	B2 *	10/2008	Wlos	H01R 4/564
5,166,477	A *	11/1992	Perin, Jr.	H01R 24/40					439/277
				174/113 C	7,448,906	B1 *	11/2008	Islam	H01R 9/05
5,183,412	A *	2/1993	Nagafuji	H01R 24/40					439/578
				439/578	7,488,210	B1 *	2/2009	Burris	H01R 24/44
5,383,798	A *	1/1995	Lin	H01R 9/0518					439/578
				439/578	7,607,942	B1 *	10/2009	Van Swearingen	B29C 45/16
5,455,548	A *	10/1995	Grandchamp	H01P 1/045					29/828
				174/28	7,645,161	B2 *	1/2010	Holliday	B21D 39/048
5,775,927	A	7/1998	Wider						439/578
5,802,710	A *	9/1998	Bufanda	H01R 9/05					439/578
				29/828	7,727,013	B1 *	6/2010	Paynter	H01R 9/0527
5,921,793	A	7/1999	Phillips						439/578
6,019,622	A	2/2000	Takahashi						439/578
6,123,581	A *	9/2000	Stabile	H01R 24/44					439/578
				439/578	7,736,180	B1 *	6/2010	Paynter	H01R 4/5083
6,224,407	B1	5/2001	Duquerroy et al.						439/441
6,250,960	B1 *	6/2001	Youtsey	H01R 9/0503					439/578
				439/578	7,798,848	B2 *	9/2010	Islam	H01R 4/5075
6,270,367	B1	8/2001	Bussard						439/578
6,290,520	B2	9/2001	Otsu						439/578
6,309,251	B1	10/2001	Tang						439/578
6,322,390	B1 *	11/2001	Takeuchi	H01R 24/542					439/578
				439/289	7,803,018	B1 *	9/2010	Islam	H01R 4/564
6,439,925	B1 *	8/2002	Lin	H01R 13/6277					439/578
				439/350	7,806,724	B2 *	10/2010	Paynter	H01R 9/0521
6,511,339	B1 *	1/2003	Huang	H01R 13/6275					439/578
				439/353	7,811,133	B2	10/2010	Gray	
6,551,136	B2 *	4/2003	Johnsen	H01R 24/52					439/578
				439/578	7,824,215	B2 *	11/2010	Islam	H01R 9/0527
6,575,786	B1 *	6/2003	Khemakhem	H01R 13/5804					439/578
				439/578	7,824,216	B2	11/2010	Purdy	
6,619,876	B2 *	9/2003	Vaitkus	F16D 1/112					439/578
				403/349	7,837,502	B2 *	11/2010	Van Swearingen	B29C 45/14639
6,709,289	B2 *	3/2004	Huber	H01R 13/6277					439/578
				439/352	7,918,687	B2 *	4/2011	Paynter	H01R 9/0521
6,712,644	B1 *	3/2004	DeCormier	H01P 1/045					439/578
				174/28	7,922,528	B2 *	4/2011	Jackson	H01R 24/44
6,845,822	B2 *	1/2005	Chau	E21B 7/046					439/578
				166/380	7,927,134	B2 *	4/2011	Paynter	H01R 9/0521
6,939,169	B2 *	9/2005	Islam	H01R 9/0521					439/578
				439/578	7,972,173	B1 *	7/2011	Hyzin	H01R 13/2421
6,981,895	B2 *	1/2006	Potega	H01R 24/58					439/578
				439/218	8,038,472	B2 *	10/2011	Montena	H01R 24/564
6,994,587	B2 *	2/2006	Buenz	H01R 9/0521					439/578
				439/578	8,142,223	B2 *	3/2012	Holliday	H01R 9/0518
7,144,271	B1 *	12/2006	Burris	H01R 13/5219					439/578
				439/578	8,172,617	B2	5/2012	Peng	
7,249,969	B2 *	7/2007	Paynter	H01R 9/0524					439/578
				439/578	8,187,033	B2	5/2012	Feldman et al.	
7,347,726	B2 *	3/2008	Wlos	H01R 13/6277					439/578
				439/578	8,277,247	B2 *	10/2012	Paynter	H01R 9/0521
7,347,727	B2 *	3/2008	Wlos	H01R 13/6277					439/578
				439/578	8,303,338	B2 *	11/2012	Chen	H01R 9/0518
				439/578					439/578
					8,419,468	B2	4/2013	Alrutz	
					8,506,325	B2	8/2013	Malloy et al.	
					8,585,438	B2	11/2013	Tang	
					8,777,658	B2 *	7/2014	Holland	H01R 24/46
									439/578
					2003/0129873	A1	7/2003	Heebe et al.	
					2007/0228839	A1	10/2007	Yang	
					2008/0057782	A1	3/2008	Berthet	
					2009/0011628	A1	1/2009	Purchon	
					2010/0221940	A1	9/2010	Hoyack et al.	
					2010/0255721	A1	10/2010	Purdy et al.	


\* cited by examiner

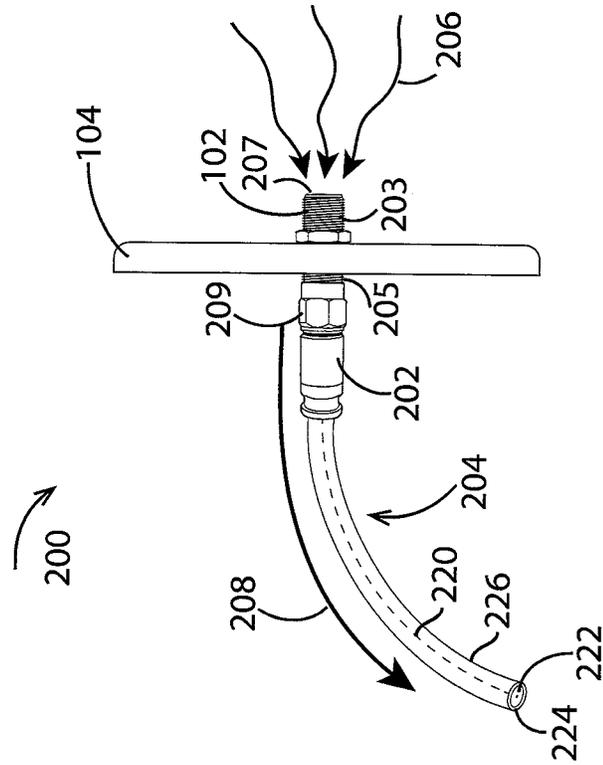


**Figure 2**  
**Prior Art**

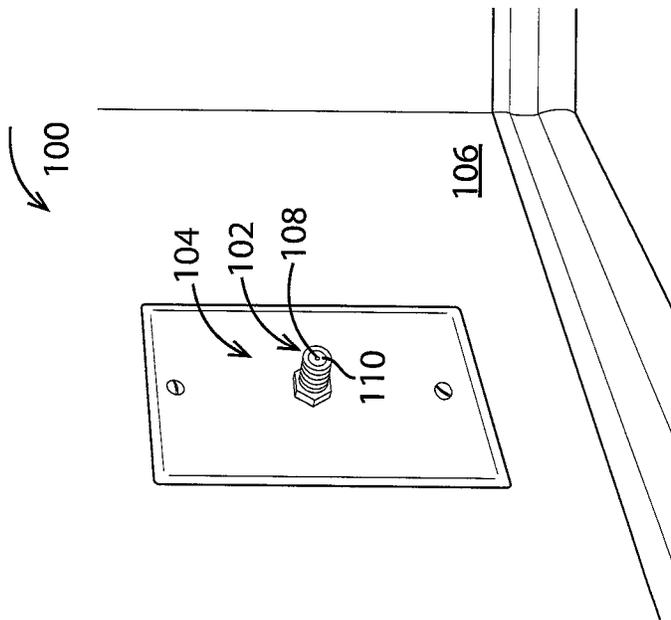

**Figure 1**  
**Prior Art**

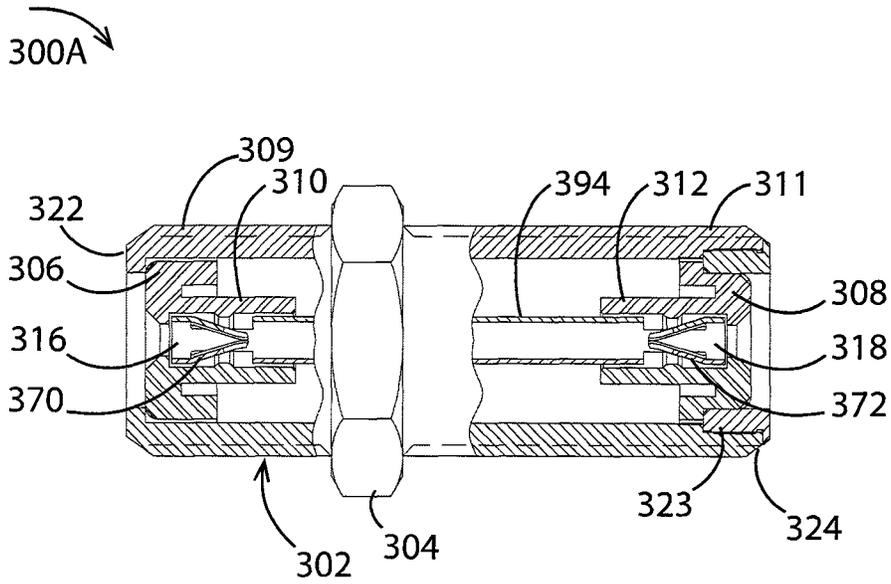

**Figure 3A**  
**Prior Art**

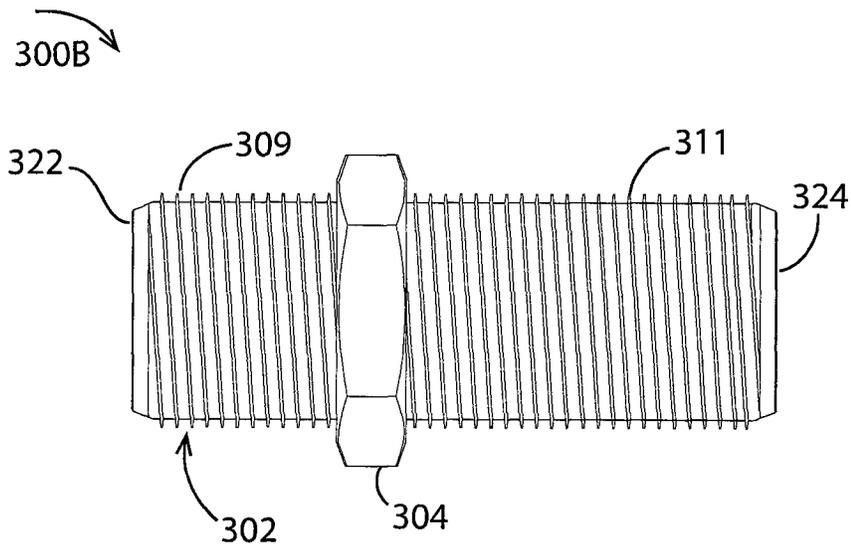

**Figure 3B**  
**Prior Art**

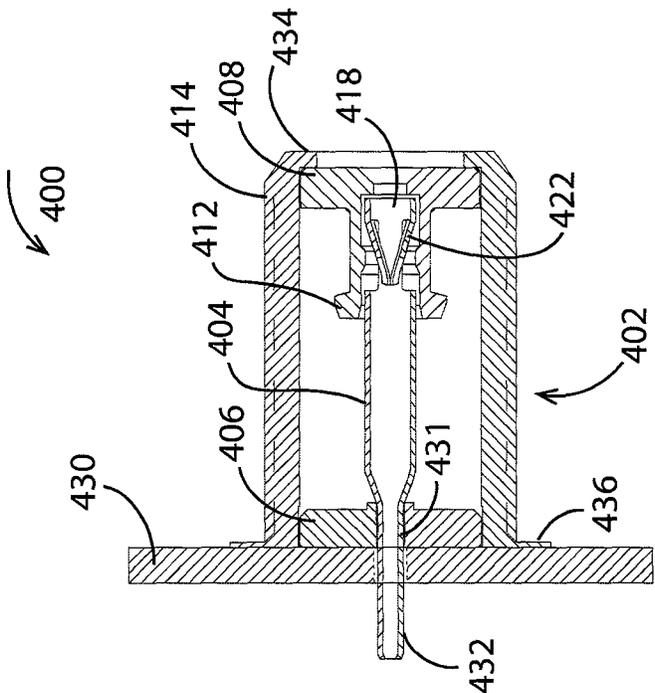


Figure 4  
Prior Art

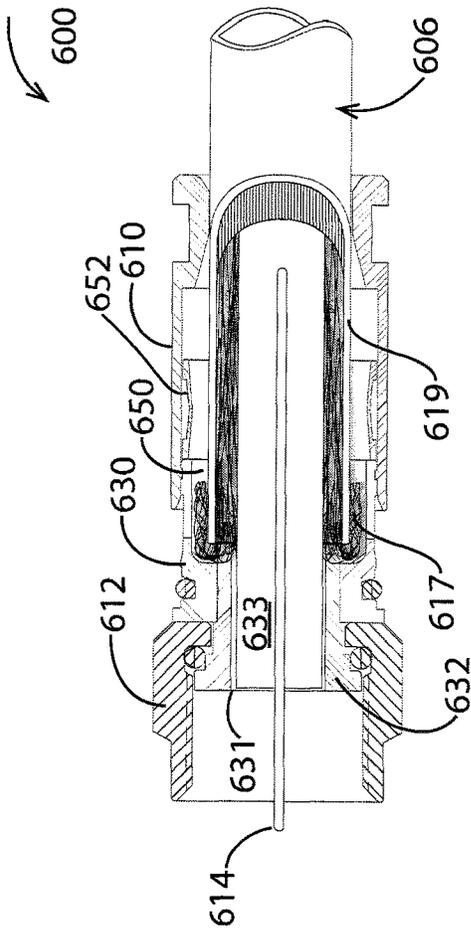


Figure 6  
Prior Art


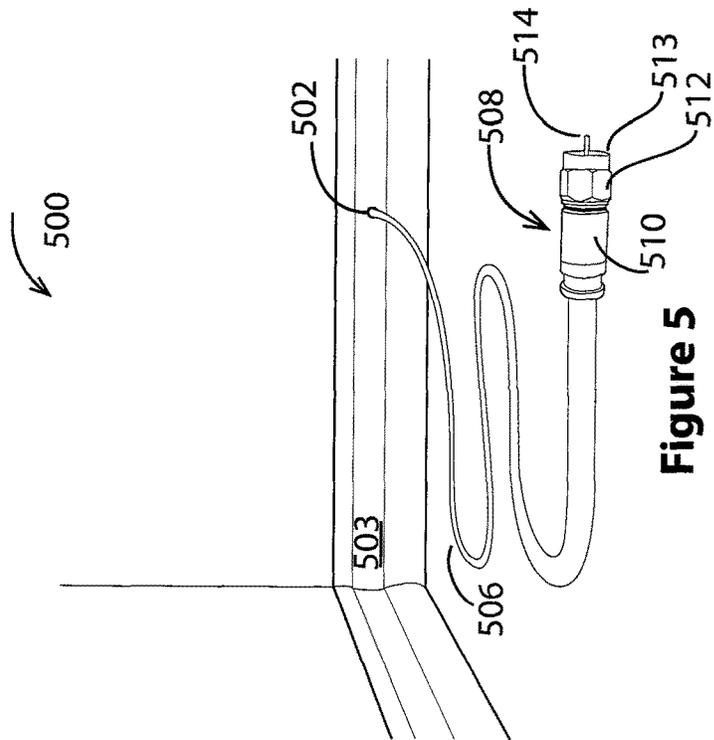


Figure 5  
Prior Art

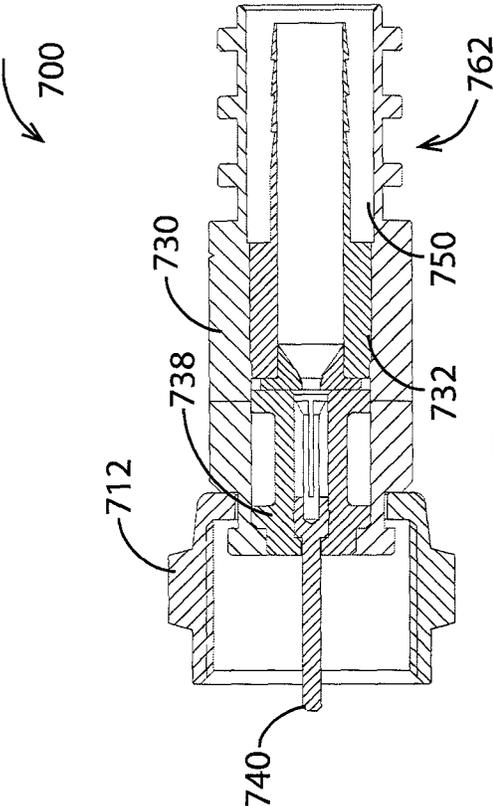

**Figure 7**  
**Prior Art**

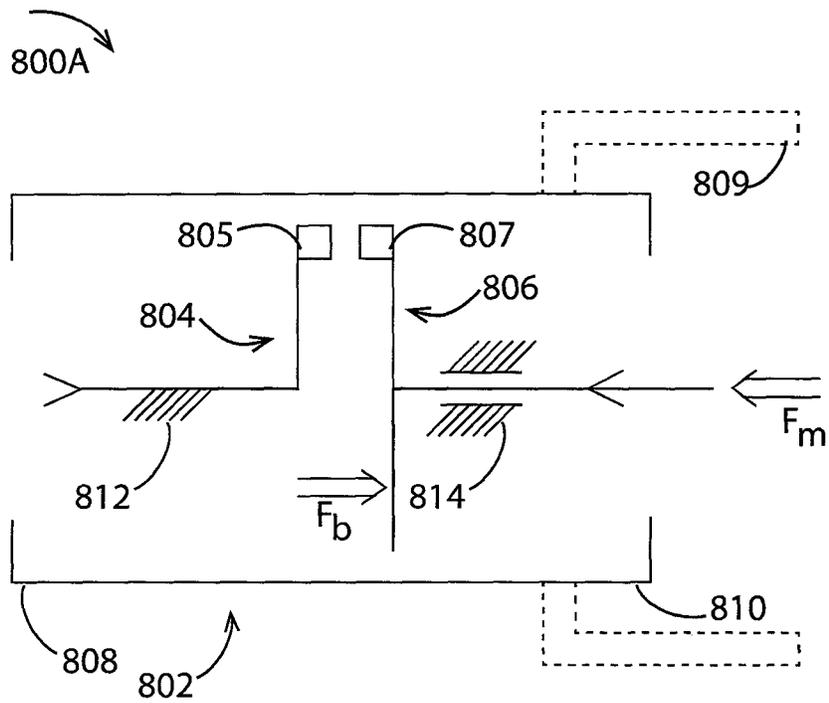


Figure 8A

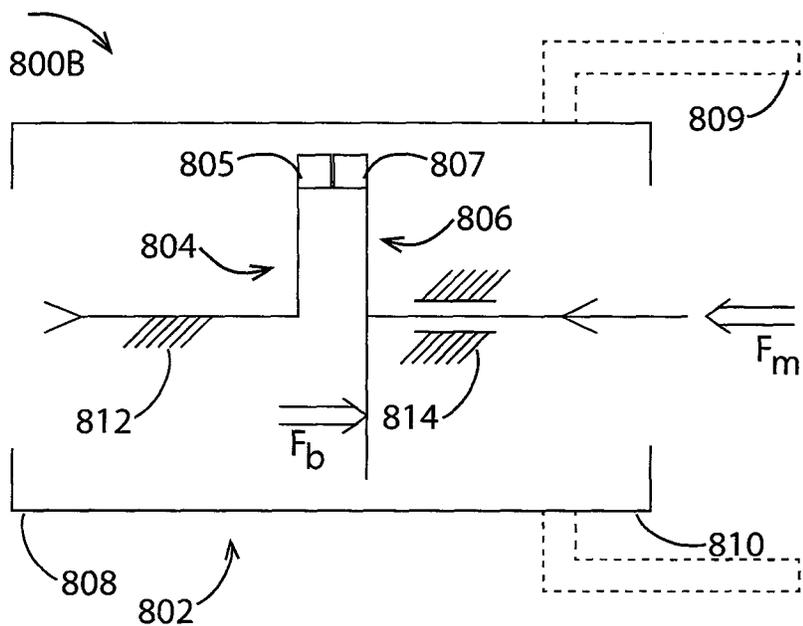


Figure 8B

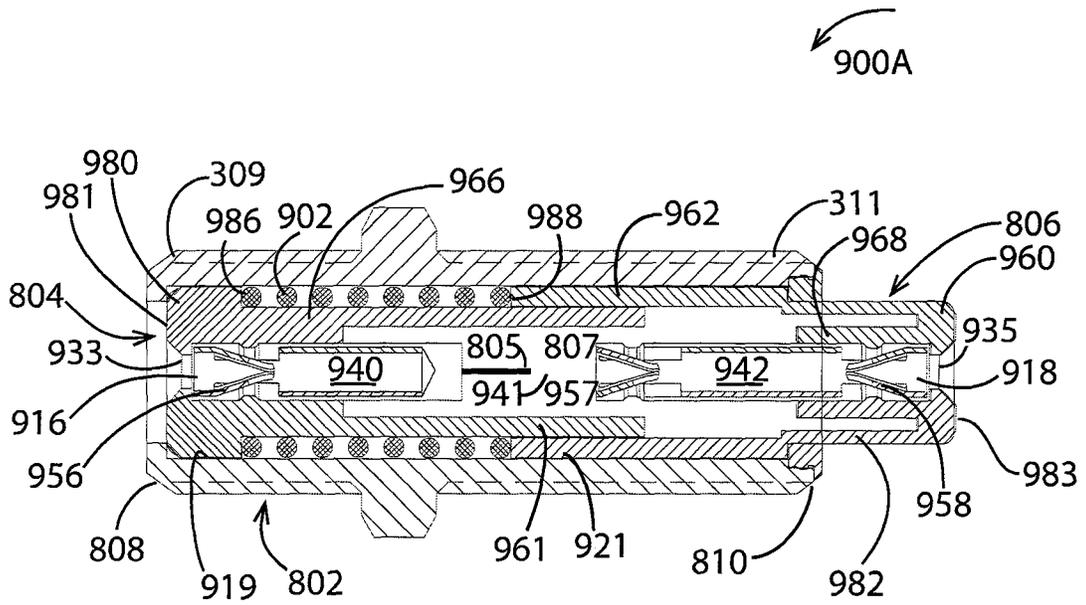


Figure 9A

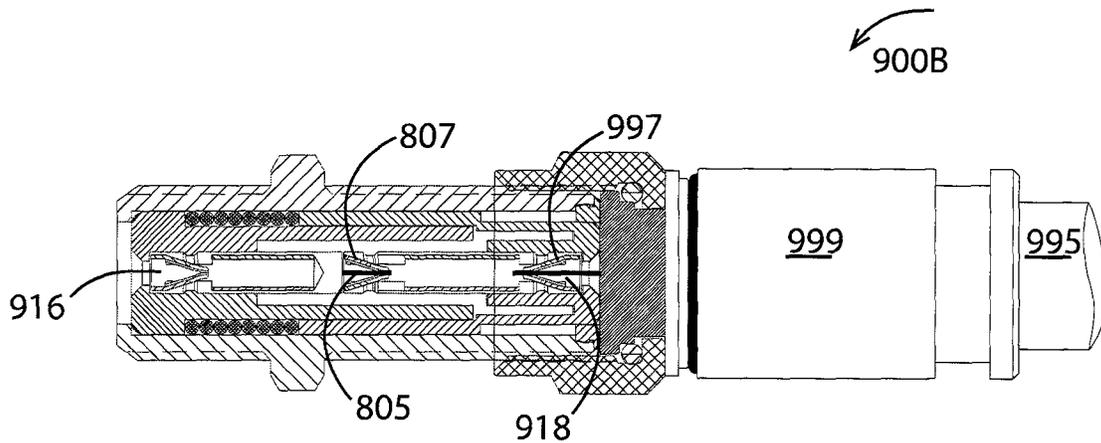


Figure 9B

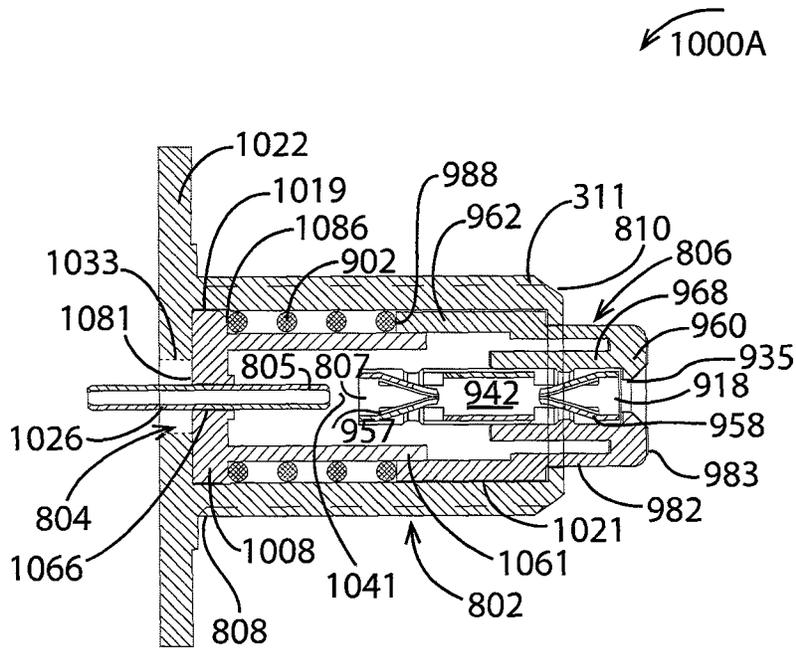


Figure 10A

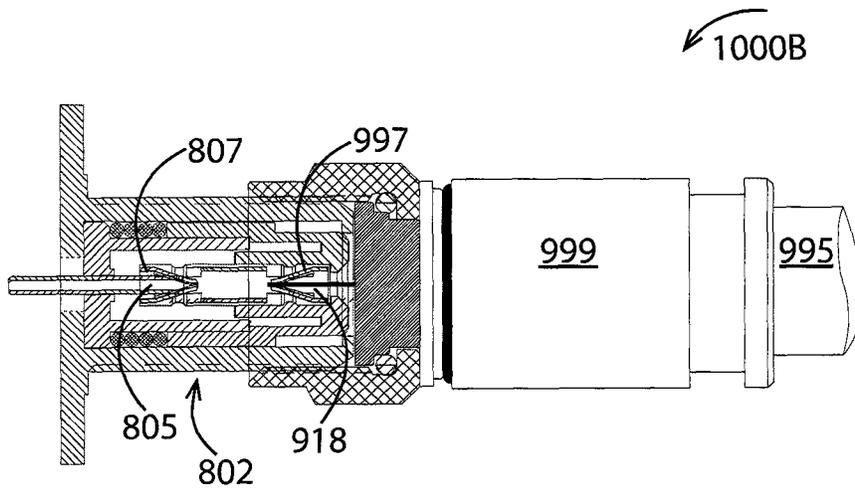


Figure 10B

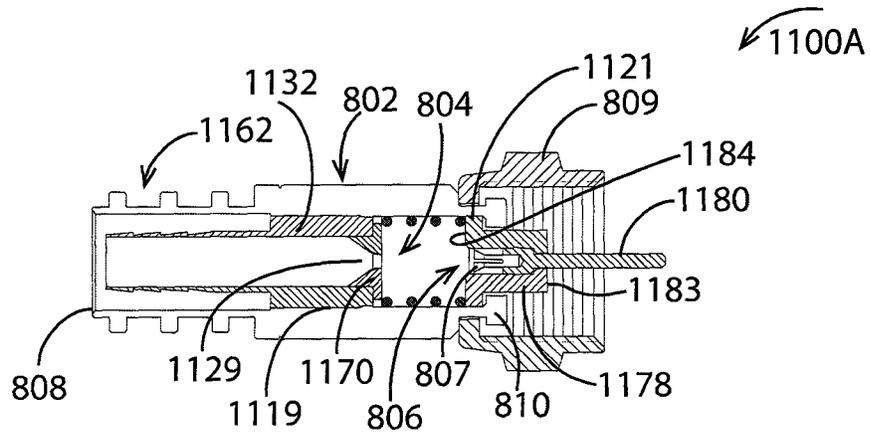


Figure 11A

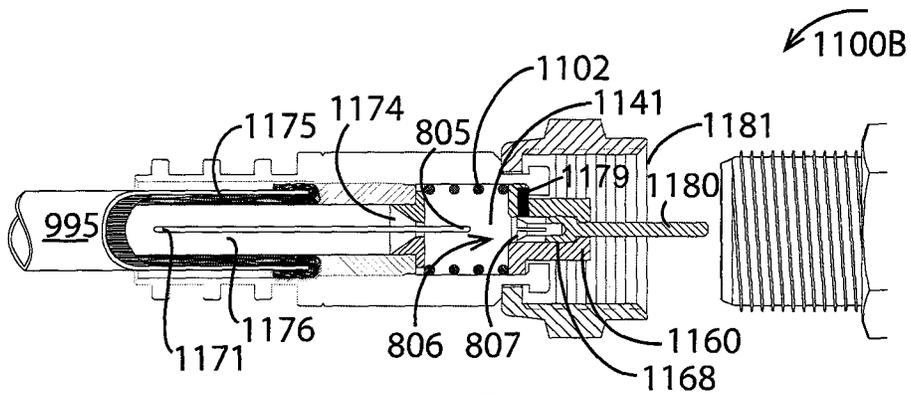


Figure 11B

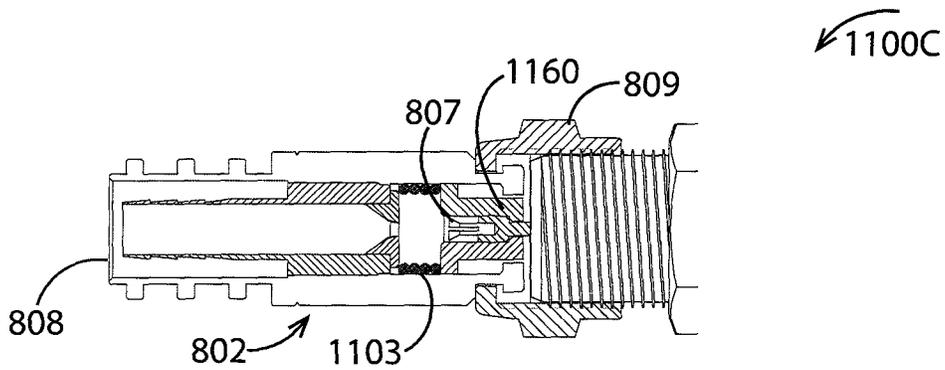


Figure 11C



FIGURE 12B

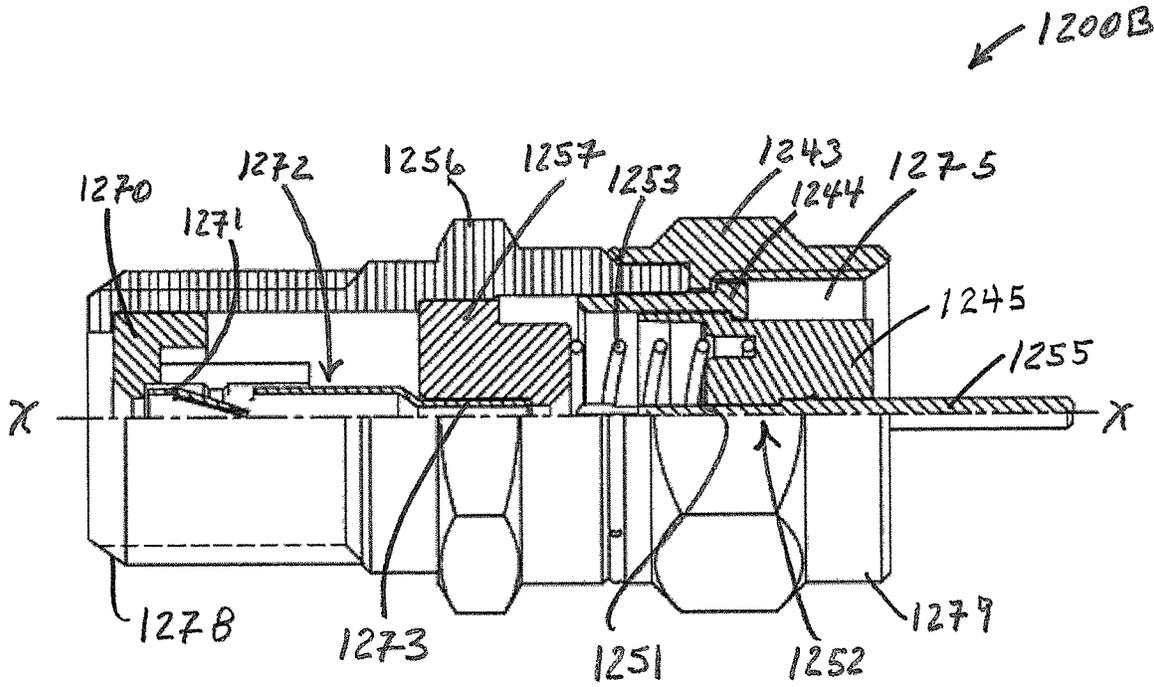
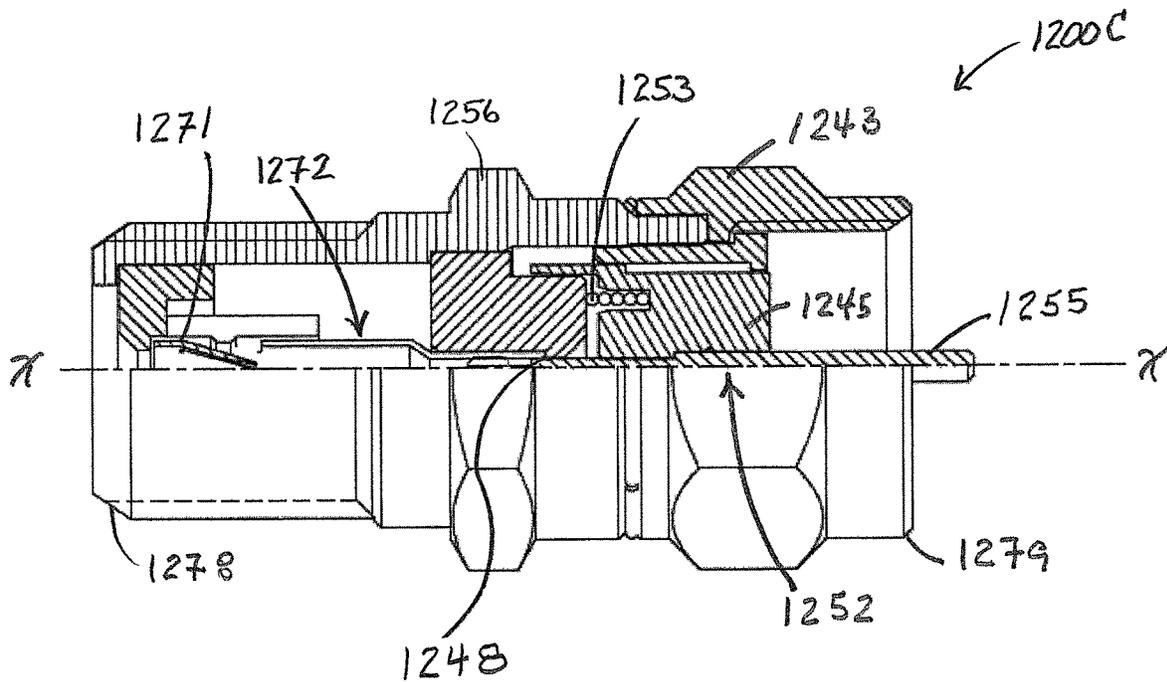


FIGURE 12C



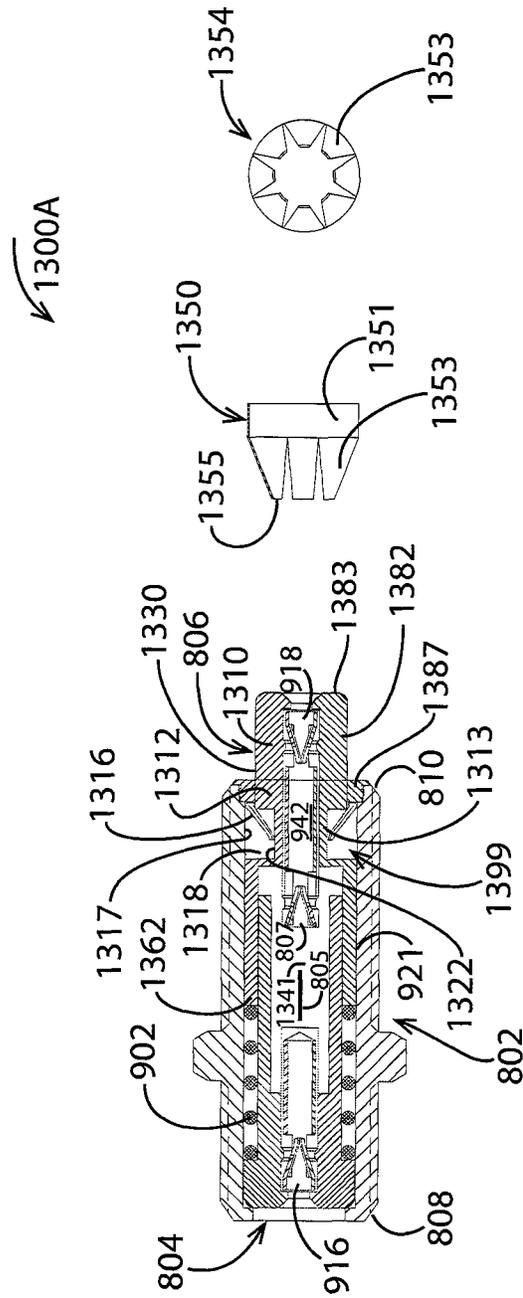


Figure 13A

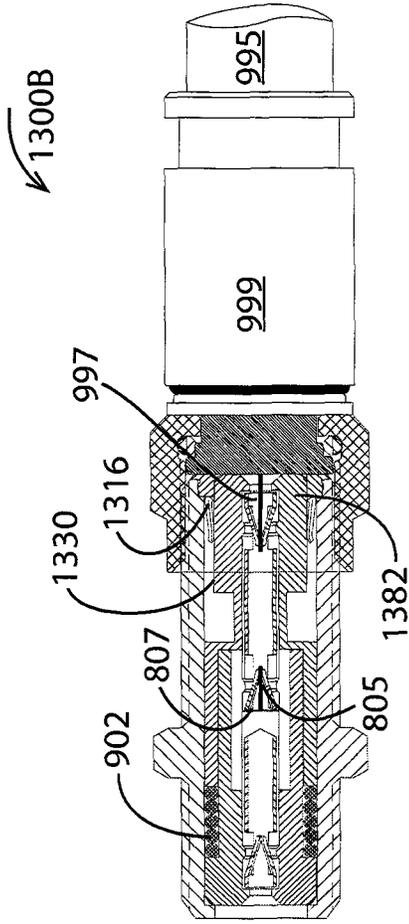


Figure 13B



FIGURE 13D

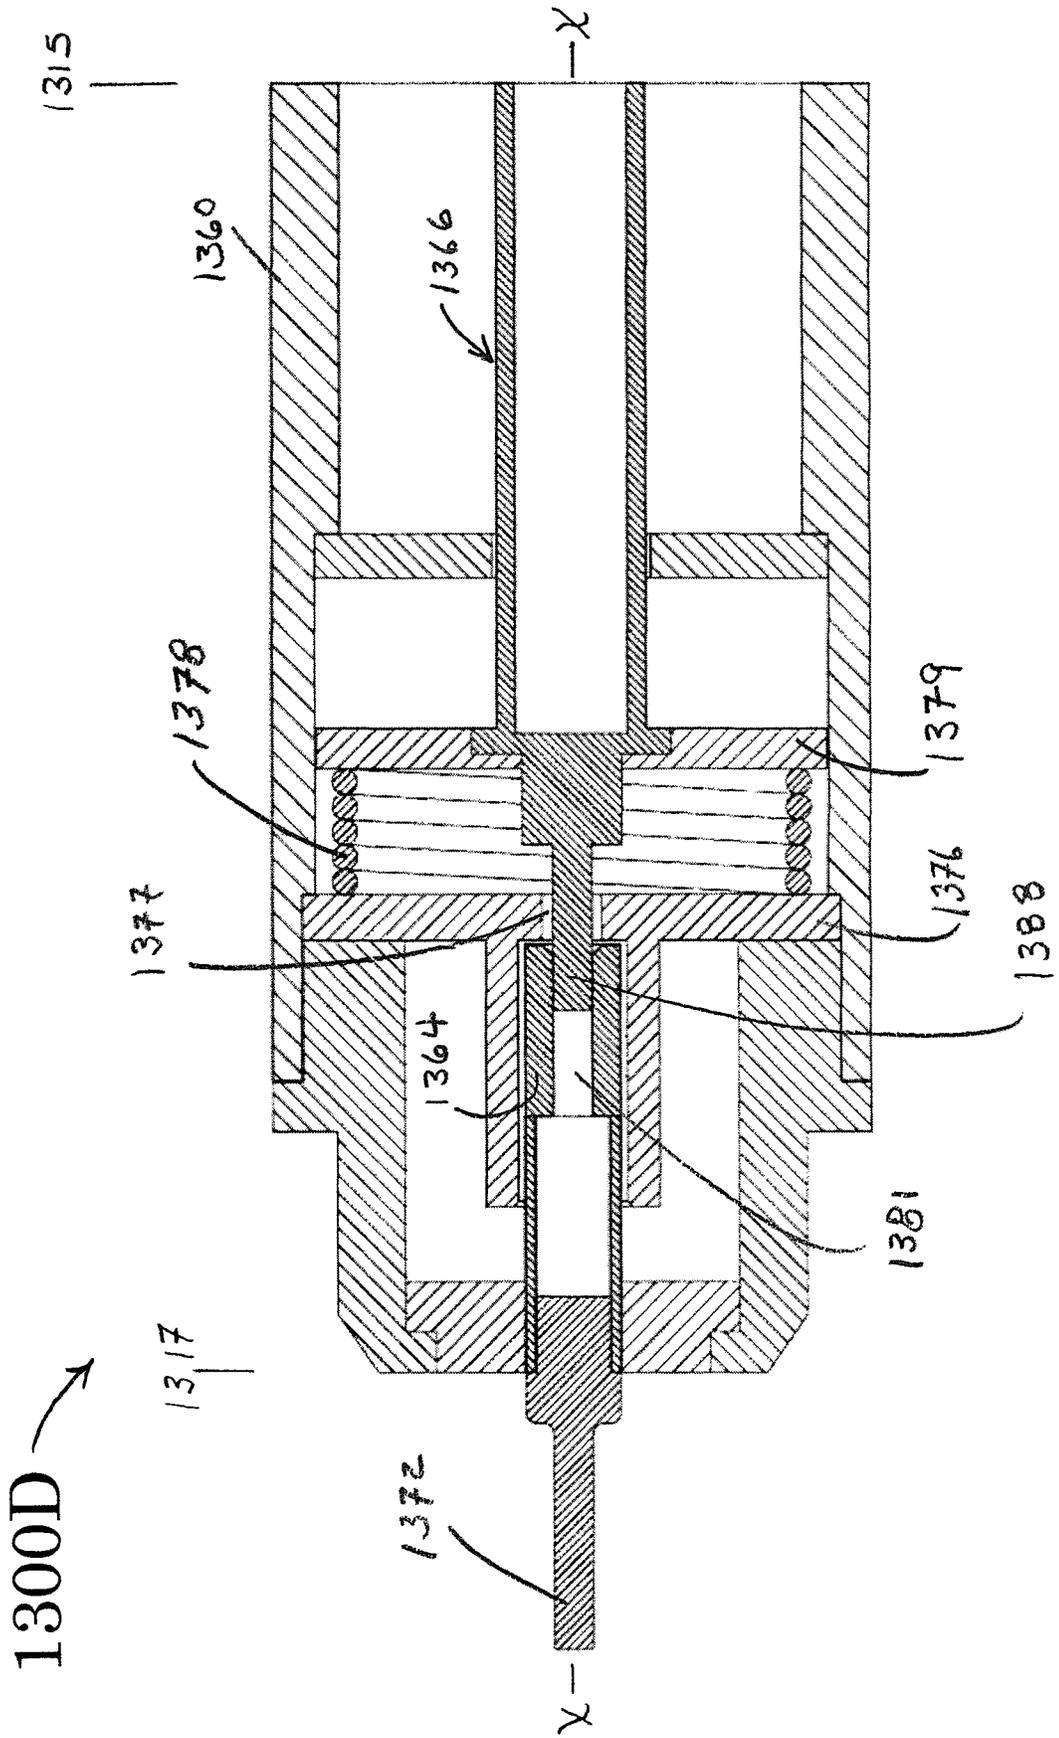




FIGURE 13F

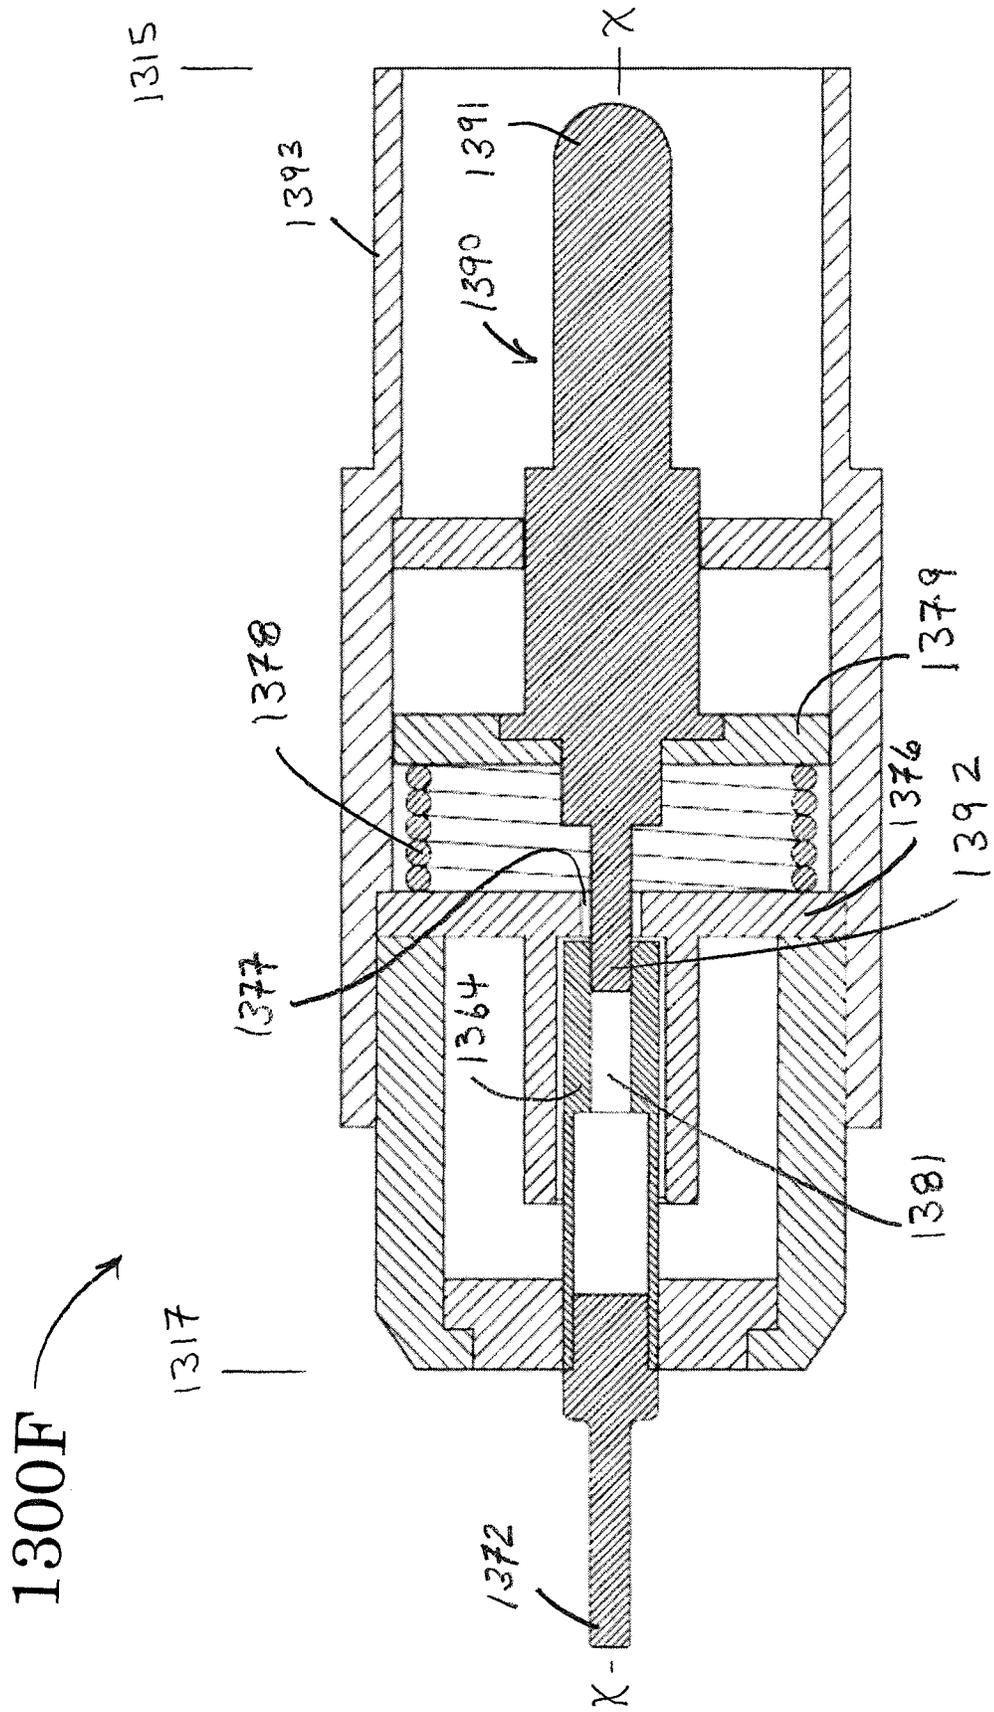


FIG. 13G

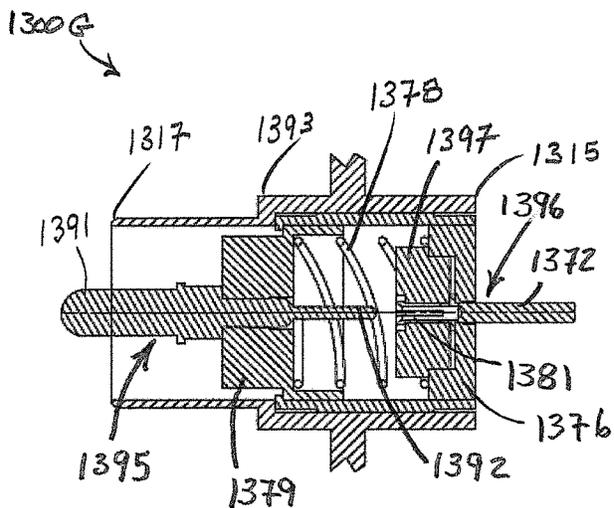


FIG. 13H

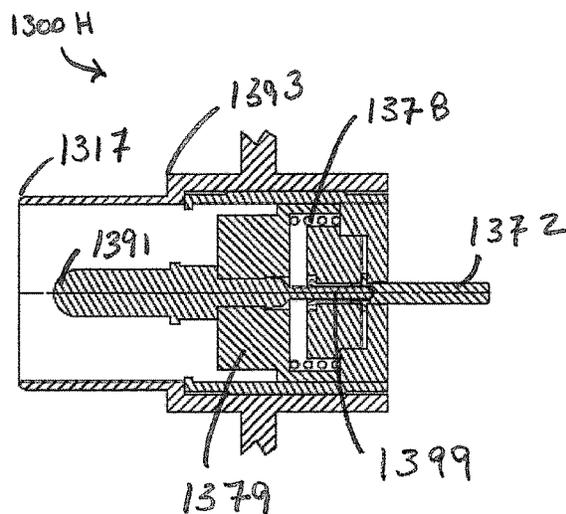


FIG. 13I

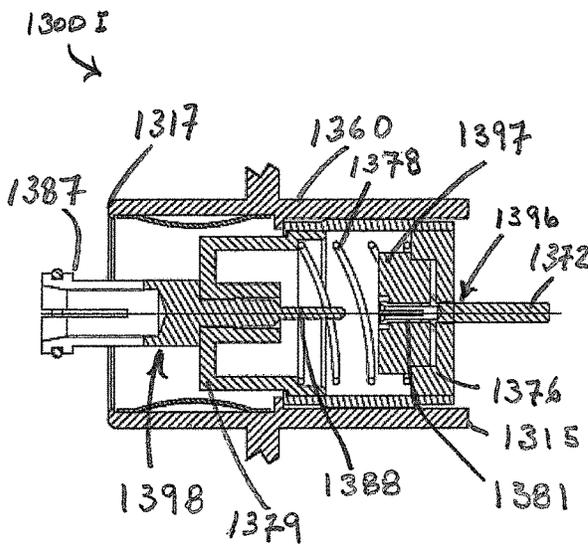
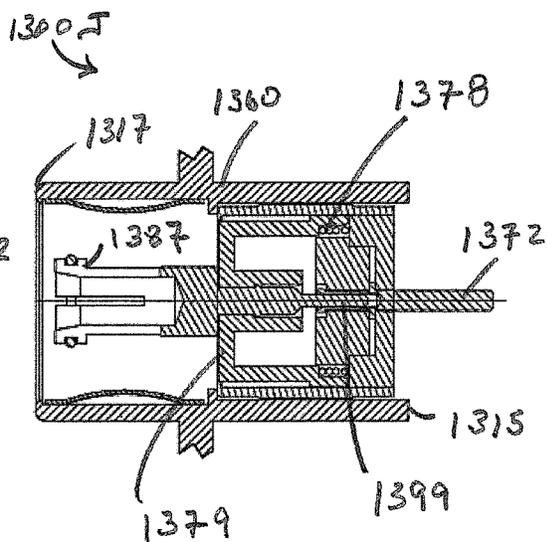


FIG. 13J



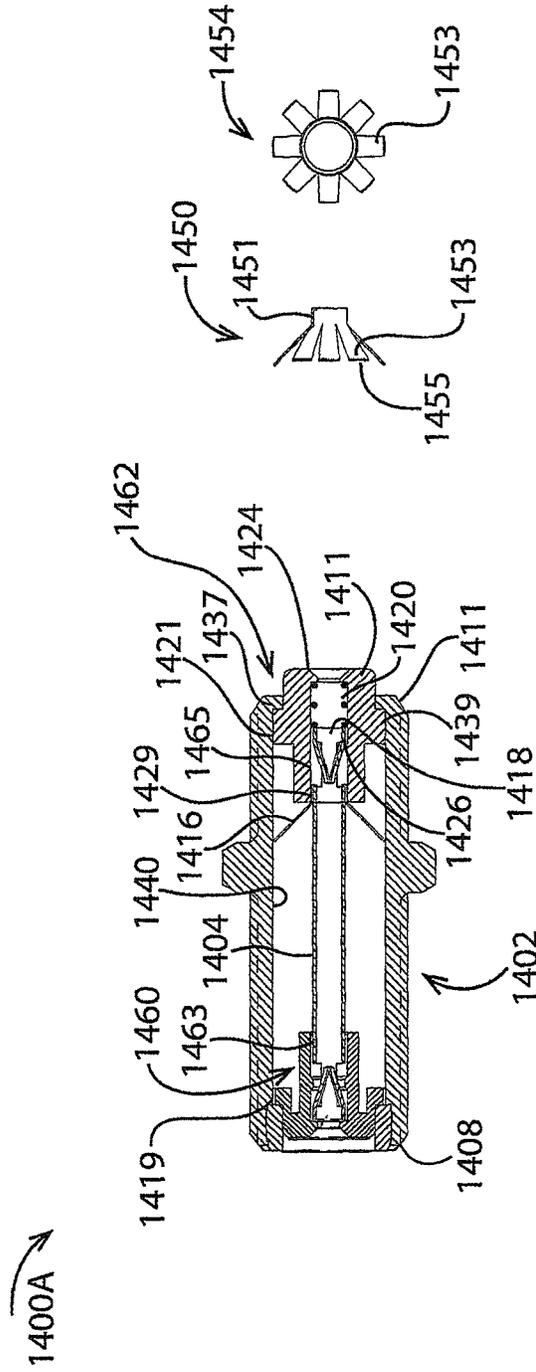


Figure 14A

1400B ↗

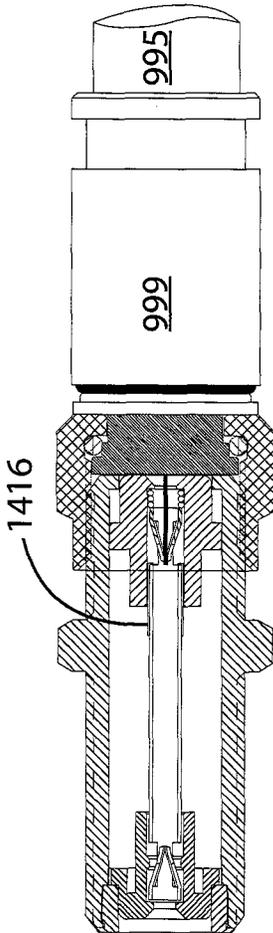


Figure 14B

1500 ↗

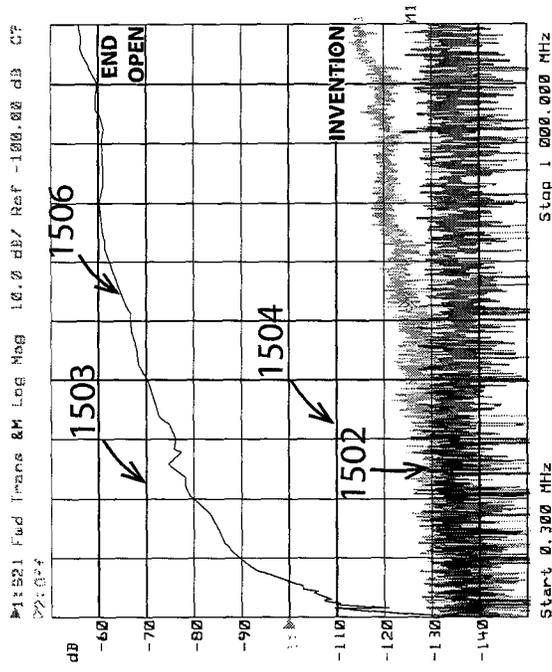


Figure 15

## SHIELDED COAXIAL CONNECTOR

## PRIORITY CLAIM

This application is a continuation of U.S. application Ser. No. 15/784,105 filed Oct. 14, 2017 which is a continuation of U.S. application Ser. No. 15/221,429 filed Jul. 27, 2016 now U.S. Pat. No. 9,793,660 which is a continuation-in-part of U.S. application Ser. No. 14/728,589 filed Jun. 2, 2015 now U.S. Pat. No. 9,407,050 which is a continuation of U.S. application Ser. No. 13/723,800 filed Dec. 21, 2012, now U.S. Pat. No. 9,048,600, which claims the benefit of U.S. Provisional Patent Application No. 61/612,922 filed Mar. 19, 2012 and entitled SHIELDED COAXIAL CONNECTOR. All of the above listed patents and/or patent applications are incorporated herein in their entireties and for all purposes.

## BACKGROUND OF THE INVENTION

## Field of the Invention

The invention relates to the field of manufactured radio frequency devices. More particularly, the present invention relates to a radio frequency shield for use in association with a coaxial cable connector.

## Discussion of the Related Art

In cable television and satellite television systems (“CATV”) reduction of interfering radio frequency (“RF”) signals improves signal to noise ratio and helps to avoid saturated reverse amplifiers and related optic transmission that is a source of distortion.

Past efforts have limited the ingress of interfering RF signals into CATV systems. These efforts have included increased use of traditional connector shielding, multi-braid coaxial cables, connection tightening guidelines, increased use of traditional splitter case shielding, and high pass filters to limit low frequency spectrum interfering signal ingress in active home CATV systems.

While it appears the industry accepts the status quo as satisfactory, there remain, in the inventor’s view, good reasons to develop improvements further limiting the ingress of interfering RF signals into CATV systems.

One significant location of unwanted RF signal and noise ingress is in the home. This occurs where the subscriber leaves a CATV connection such as a wall-mounted connector or coaxial cable drop connector disconnected/open. An open connector end exposes a normally metallicly enclosed and shielded signal conductor and can be a major source of unwanted RF ingress.

The F connector is the standard connection used for cable television and satellite signals in the home. For example, in the home one will typically find a wall mounted female F connector or a coaxial cable “drop” including a male F connector for supplying a signal to the TV set, cable set-top box, or internet modem. Notably, wall mounted female F connectors are connected via a coaxial cable terminated with male connectors at opposite ends.

Whether a CATV signal is supplied to a room via a drop cable or via a wall mounted connector, each one is a potential source of unwanted RF signal ingress. Wall mounted connectors can be left open or a coaxial cable attached to the wall mounted connector can be left open at one end. Similarly, drop cables terminated with a male F connector can be left open.

Multiple CATV connections in a home increase the likelihood that some connections will be left unused and open, making them a source of unwanted RF ingress. And, when subscribers move out of a home, CATV connections are typically left open, another situation that invites RF ingress in a CATV distribution system.

A method of eliminating unwanted RF ingress in a CATV system is to place a metal cap over each unused F connector in the home or, to place a single metallic cap over the feeder F port at the home network box. But, the usual case is that all home CATV connections are left active and open, a practice the industry accepts to avoid expensive service calls associated with new tenants and/or providing the CATV signal in additional rooms.

The inventor’s experience shows current solutions for reducing unwanted RF ingress resulting from open connectors are not successful and/or not widely used. Therefore, to the extent the CATV industry recognizes a need to further limit interfering RF ingress into CATV systems, it is desirable to have connectors that reduce RF ingress when they are left open.

## SUMMARY OF THE INVENTION

An inventive coaxial connector includes means for one or more of shielding against RF ingress and guarding against electrical hazards. In various embodiments, the inventive connector includes moving part internals and in various embodiments the internals provide a disconnect switch.

Various male connector embodiments and various female connector embodiments provide RF signal ingress protection when a connector is left open. Enhanced shielding is activated when the connector end is left open and deactivated when a mating connector is engaged.

In some female embodiments, a spring loaded nose such as an insulator passes through a connector body end for operating a disconnect switch within the body. In an open position, two center conductor contacts of the shielded connector are separated. This open circuit restricts RF signals from passing through the shielded connector. When a mating connector is engaged, the spring loaded insulator is pushed into the shielded connector body causing center conductor contacts to engage for passing RF signals. In the open position, where the center conductor is disconnected, RF signals received at the entry (open) end are restricted from passing through to connected systems such as CATV systems due to the open center conductor.

In some male embodiments with a pin type contact, the pin is fixed in a moving contact assembly that is biased away from a coaxial cable center conductor by a spring. Protruding from a body end and typically encircled by a fastener engaging the same body end, the pin is movable for engaging a moving contact of the moving contact assembly with the coaxial cable center conductor. When a mating connector is engaged, the spring loaded pin is pushed further into the body where it, and/or the moving contact, engages the center conductor of the coaxial cable to complete the center conductor circuit.

And, in some embodiments, a similar mechanical activation method is used to operate a shield curtain surrounding a center contact of the disconnected connector end. In a shield curtain embodiment, positioning and opening shield curtain slots is optimized to reduce passing signals for the most damaging spectrum bands such as the CATV data upstream spectrum of 5-42 MHz.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a prior art CATV wall plate with an F female connector or a splitter connector with a mated F female connector.

FIG. 2 shows a prior art CATV wall plate that is a source of ingress of interfering RF signals.

FIGS. 3A and 3B show a prior art standard F female splice (commonly called F-81) with F contacts on both ends.

FIG. 4 shows a prior art standard F female bulkhead coaxial connector (commonly called an F-61).

FIG. 5 shows a prior art CATV installation having a cable terminated with a male F connector.

FIG. 6 shows a prior art male F connector with a compression type cable attachment.

FIG. 7 shows a prior art male F connector with a crimp type cable attachment.

FIGS. 8A and 8B show a coaxial connector according to the current invention.

FIGS. 9A and 9B show a coaxial splice connector according to the current invention.

FIGS. 10A and 10B show a coaxial bulkhead connector according to the current invention.

FIGS. 11A, 11B, and 11C show a coaxial male connector according to the current invention.

FIGS. 12A, 12B, and 12C show coaxial adapter connectors according to the current invention.

FIGS. 13A and 13B show a second coaxial splice connector according to the current invention.

FIGS. 13C, 13D, 13E, and 13F show coaxial cable connectors for IEC use according to the current invention.

FIGS. 13G, 13H, 13I, and 13J show other IEC coaxial cable connectors according to the current invention.

FIGS. 14A and 14B show a third coaxial splice connector according to the current invention.

FIG. 15 indicates comparative performance of selected connectors.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The disclosure provided in the following pages describes examples of some embodiments of the invention. The designs, figures and description are non-limiting examples of the embodiments they disclose. For example, other embodiments of the disclosed device and/or method may or may not include the features described herein. Moreover, disclosed advantages and benefits may apply to only certain embodiments of the invention and should not be used to limit the disclosed invention.

As used herein, the term “coupled” includes direct and indirect connections. Moreover, where first and second devices are coupled, intervening devices including active devices may be located therebetween.

FIGS. 1-7 show prior art devices. Typical prior art CATV signal outlets are shown in FIGS. 1, 2, and 5 and typical coaxial cable connectors are shown in FIGS. 3, 4, 6, and 7.

FIG. 1 shows a front view of a wall mounted coaxial connector 100. The connector 102 is mounted on a wall plate 104 fixed to a room wall 106. As shown, the connector is a female F connector. A hole 108 in an insulator 110 of the connector 102 provides access to a CATV signal conductor 394 (see FIG. 3) within the connector.

FIG. 2 shows a side view of FIG. 1's wall mounted coaxial connector 200. Here, the female F connector 102 is shown as a female-female connector for splicing coaxial cable. Threads at opposed ends of the connector 203, 205

provide a means for attaching male F connectors to opposed splice ends 207, 209. A coaxial cable for carrying a CATV signal 204 is terminated with a male F connector 202 that threadingly engages an end 209 of the splice.

Typical coaxial cable features will be known to persons of ordinary skill in the art. For example, an embodiment includes a center conductor 220 surrounded by a dielectric material 222, the dielectric material being surrounded in turn by one or two shields 224 such as a metallic foil wrapped in a metallic braid. An outer insulative jacket 226 such as a polyvinylchloride jacket encloses the conductors.

As seen, the open end of the splice 207 provides an opportunity for unwanted RF ingress 208. In particular, unwanted RF ingress 206 is shown entering an exposed end of the splice 207 where it is conducted by a CATV signal conductor 304 through the connector and to a signal conductor 220 of the attached CATV coaxial cable.

FIG. 3A shows a cross-section of a splice 300A and FIG. 3B shows a side view of the splice of same splice 300B. Referring to both of the figures, the splice includes a cylindrical outer body 302 with a circumferential, hexagonal grip 304 between opposed first and second ends 322, 324 of the splice. Outer surfaces of the body are threaded, in particular, an outer surface between the first end and the grip ring is threaded 309 and an outer surface between the second end and the grip ring is threaded 311.

Within and at opposed ends of the cylindrical body 304 are insulators 306, 308, each having a central socket 310, 312 for receiving opposed ends 316, 318 of a tubular seizing pin 304. Resilient tines located in each end of the seizing pin 370, 372 provide a means for making a secure electrical contact with a conductor (not shown) inserted in either end of the seizing pin. Splice internals are typically fixed in place by rolling an end of the body 324. In some embodiments, rolling a body end 324 or an interference fit fixes an annular plug 323 adjacent to the second end insulator 312.

FIG. 4 shows a single ended female coaxial cable connector 400. An outer body 402 has front end 434 opposite a rear end 436 and threads on an external surface 414. The body also houses a front insulator 408 with a socket 412 for receiving a front end 418 of a tubular seizing pin 404. Resilient tines located in the front end of the seizing pin 422 provide a means for making a secure electrical contact with a conductor (not shown). A rear insulator 406 supports a rear portion of the seizing pin 431 while a rear most portion of the seizing pin 432 passes through a connector base 430 to which the first end of the connector body is fixed. In various embodiments, this type of connector is affixed to larger surfaces such as equipment rear panels.

FIG. 5 shows a coaxial cable “drop” within a room 500. As shown, a hole 502 penetrates a room baseboard 503 and a length of coaxial cable 506 enters the room through the hole. Such “drops” are typically terminated with male F connectors. In particular, a male F connector 508 has an outer shell 510 adjacent to a fastener 512 and a prepared end of the coaxial cable is inserted in the connector such that the central conductor 514 of the coaxial cable protrudes beyond a fastener free end 513.

FIG. 6 shows a compression type male F connector 600. A connector body 630 arranged concentrically about a post 632 provides an annular cavity 650 for receiving metal braid 617 and jacket 619 of a coaxial cable 606. The body and a fastener 612 are rotatably engaged. Passing through a hollow interior of the post 631 is coaxial cable dielectric 633 and coaxial cable center conductor 614. Cable fixation occurs when a connector outer shell 610 forces a collapsible ring 652 to press against the coaxial cable jacket as the shell

is slid toward a fastener **612** of the connector. As persons of ordinary skill in the art will recognize, this figure illustrates but one of many F type compression connectors.

FIG. 7 shows a crimp type male F connector utilizing a fixed pin **700**. A connector body **730** arranged concentrically about a post **732** provides an annular cavity **750** for receiving metal braid and jacket of a coaxial cable (not shown). An insulator **738** inserted in the body supports a center contact pin **740** and a fastener **712** rotatably engages the body. Cable fixation occurs when a crimp zone of the connector body **762** is forced against an outer jacket of a coaxial cable (not shown).

FIGS. **8-14** show shielded coaxial connectors in accordance with the present invention. In particular, these connectors incorporate internal moving parts for shielding and/or enhancing connector safety.

FIGS. **8A** and **8B** show schematic views of a shielded coaxial connector **800A**, **800B**. The connector includes a tubular body **802** having opposing ends **808**, **810**, at least one of which is for receiving a mating male or female coaxial cable connector. Some embodiments include a fastener **809** for engaging a female coaxial connector such as a port.

A stationery contact assembly **804** is near a first end of the body **808** and a movable contact assembly **806** is near a second end of the body **810**. The stationery contact assembly is at least partially within the body **802** and the movable contact assembly is only partially within the body such that a biasing force  $F_b$  acting on the movable contact assembly tends to separate a stationery contact **805** of the stationery contact assembly and a movable contact **807** of the movable contact assembly. In various embodiments, a front support **812** fixedly couples the stationery contact assembly to the body while a rear support enables motion of the moving contact relative to the body. For example, a sliding contact rear support **814** enables the movable contact to slide relative to the body. And, in various embodiments one or both of the front and rear supports provide an electrical insulating barrier between the body **802** and at least one of the contacts **805**, **807**.

A feature of this connector is seen in FIG. **8B** when the biasing force  $F_b$  is overcome by a moving force  $F_m$ , pushing the movable contact assembly **806** in the direction of the body's first end such that the contacts **805**, **807** press together. In various embodiments the moving force is supplied by a coaxial connector that engages the second end of the body **810**. Exemplary biasing force means include springs, spring-like materials, gas struts or springs, resilient materials, resilient structures, elastic materials, elastic structures, and the like.

FIGS. **9A** and **9B** show cross sectional views of a coaxial splice connector **900A**, **900B**. A connector body **802** having first and second ends **808**, **810** houses a stationery contact assembly **804** with a stationery contact **805**, and a movable contact assembly **806** with a movable contact **807**. A first end bore of the body **919** receives the stationery contact assembly and a second end bore of the body **921** receives the movable contact assembly. In various embodiments the bores **919**, **921** have similar or the same diameters and in some embodiments the bore is a through bore.

The stationery contact assembly **804** has a generally tubular shape and is fitted into the first body bore **919**. The contact assembly includes a stationery conductor assembly **940** and a stationery conductor assembly carrier **980**.

A first end of the carrier **981** is positioned near the first end of the body **808** and a second end of the carrier **961** extends into the body. A socket of the carrier **966** holds the conductor

assembly **940**. The conductor assembly **940** extends between and includes the stationery contact **805** at one end and an accessible contact **916** with inwardly directed tines **956** at an opposed end. A stationery entrance of the carrier **933** provides access to the accessible contact.

The movable contact assembly **806** has a generally tubular shape and is fitted into the second body bore **921**. The movable contact assembly includes a movable conductor assembly **942** and a movable conductor assembly carrier **982**.

A first end of the carrier **983** protrudes from the body **802** and a second end of the carrier **962** extends into the body. A socket of the carrier **968** holds the conductor assembly **942**. The conductor assembly **942** extends between and includes a) the movable contact **807** at one end with inwardly directed tines **957** and an accessible contact **918** with inwardly directed tines **958** at an opposed end. A movable entrance of the carrier **935** provides access to the accessible contact.

In various embodiments, the movable contact assembly **806** is separated from the stationery contact assembly **804** by a resilient device or material such as a spring. In an embodiment, a coil spring **902** is captured between an end of the movable carrier **988** and fixed surface such as a radial shoulder of the stationery carrier **986**. As skilled artisans will recognize, the function of springing the stationery and movable contact assemblies apart can be accomplished in other ways with similar effect. For example, the contact assemblies may interoperate via telescoping arrangement as shown or they may have no such engagement.

A feature of this connector is seen from FIGS. **9A** and **9B**. In particular, engaging a mating connector **999** with the second end of the splice **810** pushes a protruding nose **960** of the first contact assembly toward the first end of the splice body **802**. Moving with the contact assembly is the movable contact **807** which is seen in FIG. **9B** to engage the stationery contact **805** by traversing a gap **941**. This completes the circuit between the accessible contacts **916** and **918** of the splice. As shown, a center conductor **997** of an associated coaxial cable **995** is also engaged with the splice second end accessible contact **918**.

FIGS. **10A** and **10B** show cross sectional views of a single ended female coaxial connector **1000A**, **1000B**. A connector body **802** having first and second ends **808**, **810** houses a stationery contact assembly **804** with a stationery contact **805**, and a movable contact assembly **806** with a movable contact **807**. Supporting the connector body is a connector base **1022** that is fixed to the body's first end **808**.

A first bore of the body **1019** receives the stationery contact assembly **804** and a second bore of the body **1021** receives the movable contact assembly **806**. In various embodiments the bores **1019**, **1021** have similar or the same diameters and in some embodiments the bore is a single bore.

The stationery contact assembly **804** has a generally tubular shape and is fitted into the first body bore **1019**. The contact assembly includes a stationery conductor **1026** and a stationery conductor carrier **1008**.

A first end of the carrier **1081** is positioned near the first end of the body **808** and a second end of the carrier **1061** extends into the body. A socket of the carrier **1066** holds the conductor **1026**. The conductor **1026** extends through the carrier end **1081** and through a connector base passageway **1033**. The conductor's body enclosed end is the stationery contact **805**.

The movable contact assembly **806** has a generally tubular shape and is fitted into the second body bore **1021**. The

movable contact assembly includes a movable conductor assembly **942** and a movable conductor assembly carrier **982**.

A first end of the carrier **983** protrudes from the body **802** and a second end of the carrier **962** extends into the body. A socket of the carrier **968** holds the conductor assembly **942**. The conductor assembly **942** extends between and includes the movable contact **807** at one end and an accessible contact **918** with inwardly directed tines **958** at an opposed end. A movable entrance of the carrier **935** provides access to the accessible contact.

In various embodiments, the movable contact assembly **806** is separated from the stationery contact assembly **804** by a resilient device or material such as a spring. In an embodiment, a coil spring **902** is captured between an end of the movable carrier **988** and fixed surface such as a radial shoulder of the stationery carrier **1086**. As skilled artisans will recognize, the function of springing the stationery and movable contact assemblies apart can be accomplished in other ways with similar effect. For example, the contact assemblies may interoperate via telescoping arrangement as shown or they may have no such engagement.

A feature of this connector is seen in FIGS. **10A** and **10B**. In particular, engaging a mating connector **999** with the second end of the single ended female connector **810** pushes a protruding nose **960** of the first contact assembly toward the first end of the body **808**. Moving with the contact assembly is the movable contact **807** which is seen in FIG. **10B** to engage the stationery contact **805** by traversing a gap **1041**. This completes the circuit between the accessible contacts **918** and the stationery conductor **1026**. As shown, a center conductor **997** of an associated coaxial cable **995** is also engaged with the connector second end accessible contact **918**.

As skilled artisans will recognize, contact arrangements shown in FIGS. **9-10** are changed in different embodiments. For example, other contact arrangements include single piece male and female contacts such as pancake contacts, female binary contacts such as knife switch like female contacts, and other switch contact arrangements that will be appreciated by skilled artisans as suitable for this application(s).

FIGS. **11A-C** show cross sectional views of a crimp type male coaxial cable connector utilizing a fixed pin **1100A-C**. As persons of ordinary skill in the art will understand, the described moving and stationery contact assemblies may be implemented in other connectors including other male F type connectors having different structures for cable fixation.

FIG. **11A** shows the connector before a coaxial cable is inserted **1100A**. A connector body **802** extends between first and second connector ends **808**, **810** and a fastener **809** engages the second connector end. Near the first end of the connector is a crimp portion of the connector **1162**. The connector body houses a stationery contact assembly **804** with a stationery contact **805** (see FIG. **11B**) and a movable contact assembly **806** with a movable contact **807**.

A first bore of the body **1119** receives the stationery contact assembly **804** and a second bore of the body **1121** receives the movable contact assembly **806**. In various embodiments, the bores **1119**, **1121** have similar or the same diameters and in some embodiments the bore is a single bore.

FIG. **11B** shows the connector after a coaxial cable is inserted **1100B**. The stationery contact assembly **804** has a generally tubular shape and is fitted into the first body bore **1019**. The coaxial cable **995** is stabbed onto a hollow post

**1132** such that the post passes between a cable shielding braid **1175** and a cable dielectric **1176**. An annular collar **1170** is inserted in a mouth of the post **1129** near the body's second end **810**. The collar aperture **1174** is a passageway through which the coaxial center conductor **1171** passes. This free end of the coaxial cable center conductor is the stationery contact **805**.

The moving contact assembly **806** has a generally tubular shape and is fitted into the second body bore **1121**. This contact assembly includes a moving contact carrier **1178**, the moving contact **807**, and an elongated pin **1180**. The pin is electrically coupled to the moving contact and fixed to the carrier such that it projects beyond a fastener mouth **1181**.

A first end of the movable carrier **1183** protrudes from the body **802** and the second end of the carrier **1184** extends into the body. A socket of the carrier **1168** holds the moving contact **807** and the elongated pin **1180**.

In various embodiments, the movable contact assembly **806** is separated from the stationery contact assembly **804** by a resilient device or material such as a spring. In an embodiment, a coil spring **1102** is captured between an end of the movable carrier **1184** and a fixed surface such as a part of the stationery contact assembly **804**. As skilled artisans will recognize, the function of springing the stationery and movable contact assemblies apart can be accomplished in other ways with similar effect. For example, the contact assemblies may interoperate via telescoping arrangement as shown or they may have no such engagement.

A feature of this connector is seen in FIGS. **11A-C**. In particular, engaging a mating connector such as a female connector or splice end **1100C** with the second end of the fixed pin connector **810** pushes a protruding nose **1160** of the first contact assembly toward the first end of the body **808** while compressing the coil spring **1103**. Moving with the contact assembly is the movable contact **807** which is seen in FIG. **11C** to engage the stationery contact **805** by traversing a gap **1141**. This completes the circuit between the center conductor of the coaxial cable **1171** and the elongated pin **1180**. Note, the coaxial cable **995** is not shown in FIG. **11C** for clarity.

Embodiments of the invention are configured as adapters for use with existing coaxial connector connectors. For example, panel mounted coaxial connector ports can be protected against RF ingress using embodiments of the invention such as the adapter discussed below.

FIG. **12A** shows a cross sectional view of an adapter **1200A**. A connector body **802** having first and second ends **808**, **810** houses a stationery contact assembly **804** with a stationery contact **805**, and a movable contact assembly **806** with a movable contact **807**. At the first end of the connector is a fastener such as an internally threaded fastener **1209**.

A first bore of the body **1219** receives the stationery contact assembly **804** and a second bore of the body **1221** receives the movable contact assembly **806**. In various embodiments, the bores **1219**, **1221** have similar or the same diameters and in some embodiments the bore is a single bore.

The stationery contact assembly **804** has a generally tubular shape and is fitted into the first body bore **1219**. The contact assembly includes a stationery conductor **1226** and a stationery conductor carrier **1208**.

A first end of the carrier **1281** is positioned near the first end of the body **808** and a second end of the carrier **1261** extends into the body. A socket of the carrier **1266** holds the conductor **1226**. The conductor **1226** extends through the carrier end **1281** and in some embodiments through a

connector body annular end wall **1293**. The stationary conductor's enclosed end is the stationary contact **805**.

The movable contact assembly **806** has a generally tubular shape and is fitted into the second body bore **1221**. The movable contact assembly includes a movable conductor assembly **1242** and a movable conductor assembly carrier **1282**.

A first end of the carrier **1283** protrudes from the body **802** and a second end of the carrier **1262** extends into the body. A socket of the carrier **1268** holds the conductor assembly **1242**. The conductor assembly **1242** extends between and includes a) the movable contact **807** with inwardly directed tines **1257** at one end and b) an accessible contact **1218** with inwardly directed tines **1258** at an opposed end. A movable entrance of the carrier **1235** provides access to the accessible contact.

In various embodiments, the movable contact assembly **806** is separated from the stationary contact assembly **804** by a resilient device or material such as a spring. In an embodiment, a coil spring **1202** is captured between an end of the movable carrier **1288** and fixed surface such as a radial shoulder of the stationary carrier **1286**. As skilled artisans will recognize, the function of springing the stationary and movable contact assemblies apart can be accomplished in other ways with similar effect. For example, the contact assemblies may interoperate via telescoping arrangement as shown or they may have no such engagement.

Comparing this connector with the connector of FIGS. **10A** and **10B** illustrates a feature of this connector. In particular, engaging a mating connector **999** with the second end of the adapter **810** pushes a protruding nose **1260** of the first contact assembly toward the first end of the body **802**. Moving with the contact assembly is the movable contact **807** which engages the stationary contact **805** by traversing a gap **1241**. This completes the circuit between the accessible contacts **1218** and the stationary conductor **1026**.

FIGS. **12B-C** show a cross sectional view of an adapter in with an extended nose **1200B** and with a depressed nose **1200C**. As shown, a connector body **1251** includes a port end **1278** for mating with a male connector and an opposed fastener end **1279** for mating with a female connector. The body houses stationary **1272** and moving **1252** conductors which lie along a connector central axis x-x.

The moveable conductor **1252** is carried in a moving nose **1245** that is encircled by a fastener **1243**. A retainer ring **1244** inserted in the body includes an external shoulder for mating with the fastener and an internal shoulder for mating with the nose.

The moveable conductor **1252** has a first pin end **1251** and a second pin end **1255**. The first pin end is pointed toward the stationary contact **1272** and the second pin end projects from the fastener for mating with a female connector.

The stationary conductor **1272** has first and second socket ends **1271**, **1273**. The first socket end is supported by a first insulator **1270** at the port end **1278** and the second socket is supported by a second insulator **1257** located between the first insulator and the nose **1245**.

A spring such as a coil spring **1253** encircling the connector centerline x-x is located between the second insulator **1257** and the nose **1245**. The spring is for biasing the nose to project from the body **1256** into a fastener cavity **1275**.

As seen in FIG. **12C**, before the fastener **1243** engages a mating connector, the nose **1245** is fully extended and the stationary conductor **1272** is not mated with the moving conductor **1252**. And, as seen in FIG. **12C**, after the fastener

**1243** engages a mating connector, the nose **1245** is pressed into the body **1256** which compresses the spring **1253**.

When the nose **1245** is pressed into the body **1256**, the moving and stationary conductors **1272**, **1252** are, via respective pin **1251** and socket **1273** ends, mated **1248** such that electrical continuity for transporting a signal through the connector is provided from the moving connector second pin end **1255** to the stationary conductor first socket end **1271**.

FIGS. **13A** and **13B** show a second coaxial splice connector **1300A**, **1300B**. This connector is similar to the connector of FIGS. **9A** and **9B** and implements a disconnect switch including stationary and moving contact assemblies **940**, **942**. In addition, this connector implements a second shield using a retractable coaxial shield assembly **1399**.

The moving contact assembly **806** has a generally tubular shape and is fitted into a second bore of the body **921**. The moving contact assembly includes the moving conductor assembly **942** and a moving conductor assembly carrier **1382**. Adjacent to a first end of the carrier **1383** is a generally tubular nose **1310** protruding from the body **802**. A second end of the carrier **1362** has a generally tubular shape and is separated from the nose by a reduced diameter waist **1313**. The waist is, in various embodiments, made from one more materials including an insulating material(s).

Portions of the retractable coaxial shield assembly **1399** are formed by a coaxial shield spring **1316** and the moving conductor assembly carrier **806**. In various embodiments, the spring shield encircles one or both of the moving conductor assembly carrier **1382** and the conductor of the moving contact assembly **942**. Details of this spring are shown in detail views **1350** and **1354**. In particular, detail view **1350** shows the shield spring has a collar **1351** adjoining inwardly pointed fingers **1353** with finger tips **1355**. Detail view **1354** shows a view of the shield spring looking into the open collar end of the spring.

In various embodiments, the shield spring **1316** is mounted such that its fingers **1353** are moved and/or lifted up by movement of the conductor carrier nose **1310** toward the first end of the connector **808**. With the nose in an extended position, the spring finger tips **1355** are initially at rest against an outer surface of the waist **1322**. As the nose is pushed into the body, a shoulder of the moving contact assembly near the waist **1312** lifts the spring fingers out of a space above the waist **1318** and toward an inner surface of the body **1317**. In similar fashion, as the moving contact assembly returns to its earlier extended position, the spring fingers descend toward the waist until the finger tips rest on the waist outer surface.

In some embodiments, the shield spring collar **1351** encircles and touches the nose outer surface **1330**. And, in some embodiments the shield spring collar encircles the nose outer surface but does not touch the outer nose surface. In connector embodiments utilizing an annular end plug **1387**, the shield spring collar, encircles the plug in some embodiments while in others it lies at least partially within the plug.

Because the shield spring **1316** is an energy shunt, it is electrically conductive and there is electrical continuity between the shield spring and the body **802**. In addition, the distance between the moving conductor assembly **942** and the deployed finger tips of the shield spring **1355** as determined by a waist thickness is, in various embodiments, in the range of about 0.2 to 1.0 millimeters and in an embodiment about 0.5 millimeters. This separation distance or waste thickness is chosen to promote antenna like action of the spring shield with respect to the moving conductor assembly.

A feature of this connector is seen in FIGS. 13A and 13B. In particular, engaging a mating connector 999 with the second end of the splice 810 pushes a protruding nose 1310 of the movable contact assembly 806 toward the first end of the splice body 808. Moving with the movable contact assembly is the movable contact 807 which is seen to engage the stationery contact 805 by traversing a gap 1341. This completes the circuit between the accessible contacts 916 and 918 of the splice. A center conductor 997 of an associated coaxial cable 995 is also engaged with the splice second end accessible contact 918. Further, as explained above, the retractable coaxial shield 1316 is deployed while the protruding nose is extended and lifted away from the movable conductor assembly 942 when the protruding nose is pushed toward the connector's first end 808.

FIGS. 13C-F show connector embodiments of the present invention mateable with International Electrotechnical Commission ("IEC") type connectors 1300C, 1300D, 1300E, and 1300F.

FIGS. 13C and 13D show cross sectional views of a female coaxial cable connector 1300C, 1300D.

The connector has first and second ends 1315, 1317 and includes a hollow connector body 1360 having first and second ends 1361, 1362 and a central longitudinal axis x-x. The connector body houses a stationery contact assembly 1363 with a stationery contact 1364 and a moveable contact and/or moveable contact assembly 1365 with a moveable contact 1366. Generally opposed ends of the moveable contact form a movable contact pin 1388 and a movable contact center pin receiver 1387. Slidingly supporting the moving contact is a base 1367 supported by and fixed with respect to a connector body inner wall 1369. As shown, the moving contact passes through a central aperture of the base 1368.

The connector body 1360 contains a spring such as a coil spring 1378 that extends in a body middle section 1371 between stationery and moving spring plates 1376, 1379. The stationery spring plate includes a central aperture 1377 through which the moving contact pin 1388 moves to engage a bore 1381 of the stationery contact 1364. A stationery conductor 1372 is mated with and/or integral with the stationery contact 1364.

Opposite the spring side of the stationery spring plate 1382, a socket 1373 projects from the spring plate. The socket receives and supports the stationery contact 1364 such that the stationery contact bore 1381 is aligned with the moving contact pin 1388. A stationery contact housing 1374 surrounds the stationery contact and is at least partially inserted in a body end bore 1370 near the second end 1362 of the connector body 1360. A portion of the housing protruding from the connector body 1384 includes and/or is integral with a stationery contact distal end support 1375. An end support central aperture 1385 supports one or both of the stationery contact and the stationery conductor 1372.

Opposite the spring side of the moving spring plate 1386, a spring plate rest 1367 is fixed relative to and supported by the connector body inside wall 1369. Central apertures 1380, 1368 through the moving spring plate 1379 and through the rest 1367 provide support for the moving contact 1366 which passes through the apertures. In various embodiments, the rest aperture provides a sliding engagement with the moving contact.

A distal end of the moving contact includes a bore 1778 having a longitudinal centerline about coincident with the x-x axis. Insertion of a mating male connector (see for example the connector and center pin of the IEC male connector of FIG. 13E) into the first end 1361 of the female

connector body causes the female connector moving contact 1366 to be pushed toward the stationery contact 1364. Insertion of the male connector (not shown) into the female connector 1300C causes the moving contact pin 1388 to be inserted into the stationery contact bore 1381 such that electrical continuity is established between the stationery contact 1372 and the moving contact 1366.

FIG. 13D shows the connector of FIG. 13C when continuity through the connector center conductors is established 1300D. As seen, spring 1378 is compressed due to movement of the moving contact 1366 and the moving spring plate 1379 toward the stationery contact 1364. Here, moving contact pin 1377 passes through the stationery spring plate 1376 via aperture 1377. Electrical continuity between the moving contact and the stationery contact is established when the moving contact pin enters the stationery contact bore 1381 and contacts the stationery contact.

FIGS. 13E and 13F show cross sectional views of a male coaxial cable connector 1300E, 1300F.

The connector has first and second ends 1315, 1317 and includes a hollow connector body 1393 having first and second ends 1361, 1362 and a central longitudinal axis x-x. The connector body houses a stationery contact assembly 1363 with a stationery contact 1364 and a moveable contact and/or moveable contact assembly 1394 with a moveable contact 1390. Generally opposed ends of the moveable contact form a movable contact pin 1392 and a movable contact center pin 1391. Slidingly supporting the moving contact is a base 1367 supported by and fixed with respect to a connector body inner wall 1369. As shown, the moving contact passes through a central aperture of the base 1368.

The connector body 1393 contains a spring such as a coil spring 1378 that extends in a body middle section 1371 between stationery and moving spring plates 1376, 1379. The stationery spring plate includes a central aperture 1377 through which the moving contact pin 1392 moves to engage a bore 1381 of the stationery contact 1364. A stationery conductor 1372 is mated with and/or integral with the stationery contact 1364.

Opposite the spring side of the stationery spring plate 1382, a socket 1373 projects from the spring plate. The socket receives and supports the stationery contact 1364 such that the stationery contact bore 1381 is aligned with the moving contact pin 1392. A stationery contact housing 1374 surrounds the stationery contact and is at least partially inserted in a body end bore 1370 near the second end 1362 of the connector body 1393. A portion of the housing protruding from the connector body 1384 includes and/or is integral with a stationery contact distal end support 1375. An end support central aperture 1385 supports one or both of the stationery contact and the stationery conductor 1372.

Opposite the spring side of the moving spring plate 1386, a spring plate rest 1367 is fixed relative to and supported by the connector body inside wall 1369. Central apertures 1380, 1368 through the moving spring plate 1379 and through the rest 1367 provide support for the moving contact 1390 which passes through the apertures. In various embodiments, the rest aperture provides a sliding engagement with the moving contact.

A distal end of the moving contact includes a center pin such as a bull nose center pin 1391 having a longitudinal centerline about coincident with the x-x axis. Connection with a mating female connector (see for example the IEC female connector of FIG. 13C) causes the male connector moving contact 1390 to be pushed toward the stationery contact 1364. Mating of the connectors (not shown) causes the moving contact pin 1392 to be inserted into the stationery

nery contact bore **1381** such that electrical continuity is established between the stationary contact **1372** and the moving contact **1390**.

FIG. **13F** shows the connector of FIG. **13E** when continuity through the connector center conductors is established **1300F**. As seen, spring **1378** is compressed due to movement of the moving contact **1390** and the moving spring plate **1379** toward the stationary contact **1364**. Here, moving contact pin **1392** passes through the stationary spring plate **1376** via aperture **1377**. Electrical continuity between the moving contact and the stationary contact is established when the moving contact pin enters the stationary contact bore **1381** and contacts the stationary contact.

As skilled artisans will recognize, contact parts including the stationary conductor **1372**, stationary contact **1364**, and moving contact **1366**, **1390** will be made from one or more electrically conductive materials. And, as skilled artisans will recognize, electrically insulating materials will typically support these connector center conductors, polymer(s) for example might be used to fabricate the stationary contact end support **1375**, the stationary spring support plate **1376**, the moving spring support plate **1379**, and the rest **1367**. In various embodiments, the connector body **1360**, **1393** and stationary contact housing **1374** will be made from materials including electrically conductive materials to allow continuity of a ground signal through the connector. In an embodiment, metal(s) including copper form the stationary conductor **1372**, the stationary contact **1364**, and the moving contact **1366**, **1390**.

FIGS. **13G-J** show other IEC connectors **1300G-J** similar to the connectors of FIGS. **13C-F**.

FIG. **13G** shows a male IEC connector before mating **1300G** and FIG. **13H** shows the connector of FIG. **13G** after mating **1300H**. As shown, the connector has first and second opposed ends **1315**, **1317**, a hollow connector body **1393**, and a central longitudinal axis x-x. Lying along the connector centerline, the connector body houses a moving conductor **1395** and a stationary conductor **1396**. Connector parts within the connector body further include a moving spring plate **1379**, a stationary spring plate **1376**, a socket support **1397** which may be integral with the stationary spring plate, and a spring **1378**.

The moving conductor **1395** is carried by the moving spring plate **1379** and includes first and second pin ends **1391**, **1392**. The first pin end is selectively projecting from the connector body **1393** and the second pin end is for mating with the second conductor **1396**.

The stationary conductor **1396** is supported by one or both of the stationary spring plate **1376** and the socket support **1397** and includes a pin end **1372** and a socket end **1381**. The pin end is for fixedly projecting from the connector body and the socket end is for selectively mating with the moving conductor **1395** second pin end **1392**.

As seen in FIG. **13H**, when a mating connector (not shown) pushes the moving conductor **1391** and moving spring plate **1379** toward the stationary conductor **1396**, the moving conductor pin end **1392** mates **1399** with the stationary conductor socket end **1381** such that electrical continuity for transporting a signal through the connector is provided from the moving connector first pin end **1391** to the stationary conductor pin end **1372**.

FIG. **13I** shows a female IEC connector before mating **1300I** and FIG. **13H** shows the connector of FIG. **13I** after mating **1300J**. As shown, the connector has first and second opposed ends **1315**, **1317**, a hollow connector body **1360**, and a central longitudinal axis x-x. Lying along the connector centerline, the connector body houses a moving conduc-

tor **1398** and a stationary conductor **1396**. Connector parts within the connector body further include a moving spring plate **1379**, a stationary spring plate **1376**, a socket support **1397** which may be integral with the stationary spring plate, and a spring **1378**.

The moving conductor **1398** is carried by the moving spring plate **1379** and includes a first socket end **1387** and an opposed pin end **1388**. The socket end is selectively projecting from the connector body **1360** and the pin end is for mating with the second conductor **1396**.

The stationary conductor **1396** is supported by one or both of the stationary spring plate **1376** and the socket support **1397** and includes a pin end **1372** and a socket end **1381**. The pin end is for fixedly projecting from the connector body and the socket end is for selectively mating with the moving conductor **1398** pin end **1388**.

As seen in FIG. **13J**, when a mating connector (not shown) pushes the moving conductor **1387** and moving spring plate **1379** toward the stationary conductor **1396**, the moving conductor pin end **1388** mates **1399** with the stationary conductor socket end **1381** such that electrical continuity for transporting a signal through the connector is provided from the moving connector socket end **1387** to the stationary conductor pin end **1372**.

Turning now to FIGS. **1400A-B**, embodiments utilizing a retractable coaxial shield spring need not incorporate a disconnect switch. For example, FIGS. **14A** and **14B** show a third coaxial splice connector **1400A**, **1400B**. Like the connector of FIG. **13A** above, this third splice connector incorporates a retractable coaxial shield spring. However, it does not include a disconnect switch.

The connector body **1402** extends between first and second ends **1408**, **1410** and includes a seizing pin **1404** supported at the first end by a stationary carrier **1460** located in a first bore of the body **1419** and supported at the second end by a moving carrier **1462** located in a second bore of the body **1421**.

First and second contacts of the seizing pin **1416**, **1418** are inserted in opposed ends **1464**, **1466** of through holes in the stationary and moving carriers **1463**, **1465**. The seizing pin contact in the moving carrier **1418** is slidable in the through hole **1465** and is acted on by a spring **1420**. One end of the spring presses on an annular face of the moving contact face **1426**. Another end of the spring presses on an inwardly turned shoulder at a mouth of the moving carrier through hole mouth **1424**. Action of the spring tends to hold a moving carrier rim **1439** against an inwardly turned shoulder at a mouth of the body **1437**.

RF shielding is provided by a retractable coaxial shield spring **1416**. Details of this spring are shown in detail views **1450** and **1454**. In particular, detail view **1450** shows the shield spring has a collar **1451** adjoining outwardly pointed fingers **1453** with finger tips **1455**. Detail view **145r** shows a view of the shield spring looking into the open collar end of the spring.

In various embodiments, the shield spring **1416** is mounted such that its fingers **1453** are extended radially outward when a carrier nose **1411** is extended. When the nose is pressed into the body **1402**, it slides along the seizing pin and captures the shield spring fingers between the seizing pin and the bore of the moving carrier **1465**. In various embodiments, the shield spring collar is fixed with respect to the seizing pin such as by soldering, by collar mechanical features that interengage with seizing pin mechanical features, and the like.

As with the first coaxial shielding spring of FIG. **13A**, this second coaxial shielding spring is also electrically conduc-

15

tive. FIG. 14A shows the shielding spring deployed and establishing electrical continuity between the conductive connector body 1402 and the seizing pin 1404. FIG. 14B shows the shielding spring in a stored position alongside the seizing pin. As skilled artisans will recognize, contact arrangements shown above are changed in different embodiments. FIGS. 9A, 10A, 12, and 13A are examples where at least some contacts can be reversed. In particular, the stationery contact 805 shown in FIG. 10A is a male contact while the moving contact 807 of the same figure is a female contact; these contacts may be reversed such that the stationery contact is a female contact and the moving contact is a male contact.

FIG. 15 compares RF passing through open coaxial splices 1500. In particular, in a frequency range of 0.3 MHz to 1000 MHz, a prior art splice similar to the splice of FIG. 3A allows the RF ingress shown by trace 1506, an estimated -70 dB signal on average 1503. In the same frequency range, a splice similar to the inventive embodiment of FIG. 9A allows RF ingress shown by trace 1502, a signal generally below -110 dB 1504. As can be seen, a -40 dB improvement results from use of such a splice.

While various embodiments of the present invention have been described above, it should be understood that they are presented by way of example only, and not limitation. It will be apparent to those skilled in the art that various changes in the form and details can be made without departing from the spirit and scope of the invention. As such, the breadth and scope of the present invention should not be limited by the above-described exemplary embodiments, but should be defined only in accordance with the following claims and equivalents thereof.

What is claimed is:

1. A switched coaxial cable connector, the connector comprising:
  - a tubular connector body housing a spring;
  - a spring expanse where a first spring end bears a moving insulator and a second spring end opposite the first bears on a fixed insulator;
  - the moving insulator having a central bore and counterbore;
  - a moving electrical contact with a pin end, the counterbore for receiving a moving contact shoulder, the pin end passing through the bore into the spring expanse;
  - the fixed insulator having a central tubular boss on a side opposite the moving electrical contact pin end;
  - a fixed electrical contact with a pin end and a socket end, the socket end inserted in the central tubular boss; and,
  - the moving electrical contact pin end for removable insertion in the fixed electrical contact socket end for completing an electrical circuit through the connector.

16

2. The connector of claim 1 where the connector body conducts an electrical circuit ground and the contacts conduct an electrical circuit signal.

3. The connector of claim 2 where the moving electrical contact has a socket end opposite the pin end, the socket end protruding from a first end of the connector.

4. The connector of claim 3 further comprising: an insulator stop encircling the moving electrical contact and preventing the moving contact shoulder from leaving the counterbore.

5. The connector of claim 4 where the fixed electrical contact pin end protrudes from a second end of the connector.

6. The connector of claim 1 further comprising a connector body first counterbore for receiving the fixed insulator.

7. The connector of claim 6 further comprising a connector body second counterbore for receiving the insulator stop.

8. The connector of claim 7 further comprising: a stationary contact housing having an end for insertion in the connector body; and,

the stationary contact housing for pressing the fixed insulator toward the first counterbore.

9. The connector of claim 8 further comprising: a connector end insulator inserted in the stationary contact housing; and,

the connector end insulator encircling and supporting the fixed electrical contact.

10. The connector of claim 9 wherein the stationary contact housing encircles the central tubular boss.

11. A method of making a coaxial connector with an internal switch, the method comprising the steps of: providing a tubular connector body housing and a spring therein;

urging a moving insulator away from a fixed insulator using the spring;

holding a fixed electrical conductor in a fixed insulator tubular boss that extends away from the moving insulator;

carrying a moving electrical conductor with the moving insulator;

boring and counterboring the moving insulator to receive therethrough a pin end of the moving conductor such that a shoulder of the moving conductor is inserted in the counterbore; and,

inserting a socket end of the fixed electrical contact in the fixed insulator tubular boss;

wherein the moving electrical conductor pin is for removable insertion in the fixed electrical conductor socket for completing an electrical circuit through the connector.

\* \* \* \* \*