



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 160 367 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**15.02.2006 Bulletin 2006/07**

(51) Int Cl.:  
**D04H 3/03 (2006.01) D04H 3/16 (2006.01)**

(21) Application number: **01201819.8**

(22) Date of filing: **15.05.2001**

(54) **Matting of low density thermoplastic material and high voids index, and a device and process for its production**

Fasermatte mit erhöhtem Hohlraumindex aus thermoplastischen Filamenten niedriger Dichte, Vorrichtung und Verfahren

Matelas fibreux ayant un indice élevé d'espaces vides, à partir de filaments thermoplastiques de faible densité, installation et procédé de fabrication

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(30) Priority: **29.05.2000 IT RE000060**

(43) Date of publication of application:  
**05.12.2001 Bulletin 2001/49**

(73) Proprietor: **Greenvision Ambiente S.P.A.  
42020 San Polo d'Enza (Reggio Emilia) (IT)**

(72) Inventor: **Siniscalco, Andrea,  
c/o Italdreni S.R.L.  
I-42020 San Polo d'Enza (Reggio Emilia) (IT)**

(74) Representative: **Corradini, Corrado et al  
Studio Ing. C. CORRADINI & C. S.r.l.  
4, Via Dante Alighieri  
42100 Reggio Emilia (IT)**

(56) References cited:  
**IT-B- 1 245 428 US-A- 4 212 692  
US-A- 4 252 590 US-A- 4 351 683**

**EP 1 160 367 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** This invention relates to flexible panels or matting consisting of a plurality of entangled thermoplastic polymer filaments partly bonded together at their points of contact.

**[0002]** This type of article has been known for some time and has found application in numerous technical sectors, such as soil drainage, protection against erosion, concrete reinforcement, the support and reinforcement of polymer or thermosetting foams, and the reinforcement of resins, mixes and conglomerates.

**[0003]** Such matting can be produced by two different processes, namely a so-called wet process and a so-called dry process, which give rise to products of different geometry and different mechanical characteristics.

**[0004]** These known processes are described in Italian Patents 883371, 1061875, 1257665 and US 42 1269, to which reference should be made for further information.

**[0005]** With the wet process, non-stretched monofilament matting is obtained of virtually parallelepiped shape with flat sides, whereas with the so-called dry process the matting can present at least one profiled surface, for example with protuberances.

**[0006]** The surface profiling is obtained by dropping the filaments onto a surface provided with projections, for example a rotating cylindrical surface, or a translating web presenting a plurality of geometrical projections.

**[0007]** It has been observed that by using the dry process, matting is obtained with mechanical characteristics substantially better than those of matting obtained by the wet process, and moreover the presence of said protuberances in the final product is useful in all those applications in which the purpose of the matting is substantially to retain a material, such as soil or polymer foam, which lies above it or is partially embedded in it.

**[0008]** For these reasons, in the environmental field, matting obtained by the dry process is currently used presenting at least one profiled surface, it being generally positioned on inclined ground and then covered with soil.

**[0009]** To improve soil consolidation it is current practice to cover this with a grass layer, so that the grass roots act as a further soil retention element.

**[0010]** Such matting has however shown various drawbacks in this application.

**[0011]** A first drawback lies in the fact that the known products have a poor capacity for copenetration by cultivatable soil, because of the fact that said projections are partially impermeable to soil passage.

**[0012]** Hence after installation, the product presents practically empty spaces below each protuberance. In this manner air cells are created within said spaces which are deleterious to the development of the root system of the grass layer, the roots of which become dry and die on contact with the air.

**[0013]** In addition, depending on the inclination of the slope on which the matting is used, it can happen that one side of said projections lies in a horizontal position,

or even inclined downwards, hence compromising the soil retention capacity of the product, which is its basic requirement.

**[0014]** An object of the present patent is to overcome the said drawbacks within the framework of a reliable low-cost solution.

**[0015]** This and further objects are attained according to the invention by a flexible matting of low density and high voids index, the surface of which comprises a plurality of close-apart protuberances, said protuberances being hollow and provided with at least one open side in such a manner as to define a pocket or chamber to receive the material, such as soil, with which the matting is covered when installed.

**[0016]** Said matting is obtained by a dry process of the aforesaid type, using as the filament reception surface a translating surface provided with projections.

**[0017]** According to the invention, said projections present at least one portion inclined to the direction of movement of the surface at the moment of impact by the filament.

**[0018]** Said inclined portion is preferably flat, its inclination to the direction of movement being defined by the angle  $\alpha$  subtended between the surface and the direction perpendicular to the direction of movement.

**[0019]** In the case of a non-flat portion the angle  $\alpha$  is that subtended between the tangential plane at the point considered and said perpendicular direction.

**[0020]** The translating surface carrying the projections is preferably a rotating cylindrical surface.

**[0021]** In this case an angle  $\beta$  is defined subtended in the anticlockwise direction between the diametrical horizontal plane of the cylinder and the diametrical plane passing through the point of impact of the filaments.

**[0022]** In the case of a horizontal flat translating surface the angle  $\beta$  is obviously zero.

**[0023]** The filament falling velocity is indicated by  $V_C$  and the translation velocity of the surface and relative projections is indicated by  $V_P$ .

**[0024]** These velocities are always considered as vectors.

**[0025]** For the required result to be achieved, the vectorial difference between  $V_C$  and  $V_P$  must be represented by a resultant vector

$$V_R = V_C - V_P$$

which is directed in such a manner as not to intersect at least an inclined portion of the translating surface.

**[0026]** In other words the vector  $V_R$  which expresses the relative velocity of the vertically falling filament to said inclined portion must be directed against said inclined portion with a positive angle of incidence close to zero or with a negative angle of incidence.

**[0027]** In this respect, if the angle of incidence is zero, the filaments slide parallel to the inclined portion and lie

without entanglement, this also happening for very small angles of incidence, i.e. close to zero.

**[0028]** The constructional and operational characteristics of the invention will be apparent from the ensuing description of a preferred embodiment thereof given by way of non-limiting example and illustrated in the accompanying drawings.

**[0029]** The described embodiment relates to a cylindrical translating surface provided with square-based pyramidal projections the walls of which constitute inclined portions of the translating surface, but is also suitable for a flat translating surface for which the angle  $\beta$  is considered equal to zero.

**[0030]** Figure 1 is a perspective view of a first embodiment of the product of the invention.

**[0031]** Figure 2 is a schematic perspective view of the production plant of the invention.

**[0032]** Figure 3 shows a first schematic configuration of the plant of the invention.

**[0033]** Figure 4 shows a second possible configuration of the production plant of the invention.

**[0034]** Figure 5 is an enlarged view of diagrams showing the velocities of the filaments and of the translating surface of Figure 3 and Figure 4 for various values of the angle  $\beta$ .

**[0035]** Figure 6 shows a further possible configuration of the plant of the invention.

**[0036]** Figures 1 to 4 show the matting 1, the surface of which consists of a plurality of protuberances 2, aligned along several parallel rows and inclined at an angle of between  $30^\circ$  and  $45^\circ$  to the sides of the matting. Specifically, said protuberances 2 are hollow and present an open side defining a chamber 3 for receiving the material with which the matting is generally covered when installed.

**[0037]** The matting 1 is produced by the plant 4 shown in Figure 2, comprising a die 5 provided with a plurality of holes aligned along several parallel rows, through which the filaments of thermoplastic material are extruded. The thermoplastic material is fed to the die via a usual extruder, not shown, at a temperature of between  $160^\circ\text{C}$  and  $270^\circ\text{C}$ .

**[0038]** Said extruder is fed in its turn by a usual hopper, not shown as it is of known type.

**[0039]** The theoretical filament extrusion velocity is between 10 and 15 m/min, and preferably about 12 m/min.

**[0040]** However the actual falling velocity  $V_C$  of the filament is from 1 to 1.5 times greater because of the stretching of the filament and the consequent reduction in its cross-section.

**[0041]** Below the die 5 there is provided a rotating cylinder 8 having its axis parallel to the rows of holes in the die, and presenting on its outer surface a plurality of square-based right pyramids 9 of height preferably between 20 and 50 mm.

**[0042]** As can be seen from the figure, the pyramids are disposed in mutually aligned rows in the manner of a helix of predetermined inclination, preferably of be-

tween  $30^\circ$  and  $45^\circ$  to the horizontal axis of the cylinder 8.

**[0043]** To obtain the matting 1 with at least one open side for passage of the material, the vertical falling velocity  $V_C$  of the filaments must be regulated, relative to the translation velocity  $V_P$  of the inclined wall of the pyramids, such that the vectorial difference between the two is a vector  $V_R$  having a direction and sense such as not to encounter the wall.

**[0044]** Figure 5 shows the velocity diagrams for the two cases of  $\beta = 90^\circ$  and  $\beta = 120^\circ$  in a roller of diameter 200 mm provided with pyramidal cusps with a square base of side 15 mm and having a height of 25 mm, with an angle at their vertex of  $40^\circ$  and an angle  $\alpha$  of  $20^\circ$ .

**[0045]** The actual falling velocity  $V_C$  of the filament has been assumed to be 20 m/min, and the modulus of the velocity  $V_P$  to be 4 m/min.

**[0046]** From the graphical calculation it can be seen that with  $\beta = 120^\circ$ , the resultant  $V_R$  is substantially parallel to the front face of the pyramid in the direction of motion, which means that said face does not encounter the falling filaments, and is hence substantially open.

**[0047]** If the filament falling velocity  $V_C$  is decreased, or the modulus of the pyramid wall translation velocity  $V_P$  is increased, the resultant  $V_R$  becomes directed towards the wall, which is hence closed.

**[0048]** With  $\beta = 90^\circ$ , the graphic calculation shows that  $V_R$  cuts both the front wall and the rear wall of the pyramid, which are hence closed.

**[0049]** In order for one of these walls, and in this case the rear wall, to be open,  $V_C$  must be decreased or  $V_P$  increased; the graph shows with dashed lines that vector  $V'_R$  starting from which the wall begins to remain open. For this, the value of  $V_P$  is 6 m/min.

**[0050]** Figure 4 shows the particular case in which  $\beta = 0^\circ$ . In this case, as  $V_C$  is perpendicular to  $V_P$ , the relationship between the modules which has to be respected is the following:

$$V_C \leq V_P [\cos \alpha / \sin \alpha]$$

i.e.

$$V_C \leq V_P \cdot \cot \alpha$$

**[0051]** Figure 6 shows the limiting case in which  $\beta = 180^\circ$ . In this case, as in the case in which  $\beta = 0^\circ$ , the front and rear walls in the direction of movement are always empty.

**[0052]** Those inclined portions of the projections from which

$$V_R = V_C - V_P$$

is distanced are not struck by the filaments, which hence deposit in a non-interlaced condition, and leave said portions substantially permeable to the passage of the material.

**[0053]** In contrast, on those portions of the projections opposite the preceding, a thickened structure of interlaced filaments is created which is impermeable to passage of the material. In this manner a chamber open on one side is defined, in the manner of a pocket, for receiving the material with which the matting 1 is covered.

**[0054]** It should be noted that the matting 1 of the invention can also be obtained by replacing the cylinder 8 with a translating surface on which there are disposed a plurality of pyramids 9, or projections of any type provided they are suitable for the purpose.

**[0055]** The velocity diagram appropriate for this configuration is that of Figure 4 referred to  $\beta = 0^\circ$ .

**[0056]** In this latter case said translating surface is preferably inclined to the horizontal plane by an angle of between  $0^\circ$  and  $\alpha^\circ$ , to facilitate the phenomenon.

### Claims

1. Matting of interlaced and entangled filaments of low-density thermoplastic material, the matting having a high voids index and comprising a plurality of hollow protuberances arranged in several parallel rows, **characterised in that** at least a part of said protuberances presents at least one open portion, defined by non-interlaced filaments, such as to create a chamber for receiving the material with which the matting is intended to be covered.
2. Matting as claimed in claim 1, **characterised in that** said protuberances are without their lower base.
3. Matting as claimed in claim 1, **characterised in that** said hollow protuberances are positioned alongside each other in adjacent parallel rows.
4. A device for manufacturing entangled monofilament matting provided with protuberances having at least one portion not occupied by the filaments according to claim 1, comprising a die of vertical axis for extruding parallel alignments of said filaments, a rotating cylinder positioned below said die and having its axis horizontal and parallel to said alignments, and a series of projections regularly distributed on said cylinder having at least one portion inclined to the direction of movement of the surface at the moment of impact by the filament, **characterised in that** the distance between the cylinder axis and the mean vertical plane in which the filaments fall is chosen such that the vector  $V_R$ , resulting from the difference between the vector  $V_C$ , namely the velocity of the vertical fall of the filament, and the vector  $V_P$ , namely the velocity of translation of the inclined portion, cuts the inclined portion at an angle equal to zero or at a negative angle such that said inclined portion does not encounter the falling filaments.
5. A device as claimed in claim 4, **characterised in that** said projections are arranged in rows mutually aligned in the manner of a helix.
6. A device as claimed in claim 5, **characterised in that** said helix along which the projections are arranged has an inclination of between  $30^\circ$  and  $45^\circ$  to the cylinder axis.
7. A device as claimed in any one of claims 4 to 6, **characterised in that** said projections are right pyramids.
8. A device as claimed in claim 7, **characterised in that** the base of said pyramids is square.
9. A device as claimed in claim 8, **characterised in that** the bases of said pyramids have at least one side in common with the adjacent pyramids.
10. A process for producing matting of interlaced and entangled filaments of low-density thermoplastic material according to claim 1, comprising the steps of extruding a thermoplastic material through the die and collecting the vertically falling extruded filaments on a translating surface provided with a plurality of profiled projections having at least one portion inclined to the direction of movement of the surface at the moment of impact by the filament, **characterised in that** the vector  $V_R$  which expresses the relative velocity of the vertically falling filament, resulting from the difference between the vector  $V_C$ , namely the velocity of the vertical fall of the filament, and the vector  $V_P$ , namely the velocity of translation of the inclined portion, to said inclined portion is directed against said inclined portion with an angle equal to zero or at a negative angle such that said inclined portion does not encounter the falling filaments.
11. A process as claimed in claim 10, **characterised in that** said translating surface is a flat conveyor belt on which a plurality of right pyramidal projections are disposed.
12. A process as claimed in claim 11, **characterised in that** the translation velocity  $V_P$  of the belt is related to the vertical falling velocity  $V_C$  of the filament by the following relationship:
 
$$V_C \leq V_P[\cos\alpha/\sin\alpha]$$
 where  $\alpha$  is the half-angle at the vertex of the pyra-

mids.

13. A process as claimed in claim 12, **characterised in that** said belt is preferably inclined to the horizontal plane by an angle between  $0^\circ$  and  $\alpha^\circ$ .

### Revendications

1. Natte de filaments entrelacés et entremêlés d'une matière thermoplastique de faible densité, la natte ayant un indice élevé de vides et comprenant plusieurs protubérances creuses disposées en plusieurs lignes parallèles, **caractérisée en ce qu'**une partie au moins des protubérances présente au moins une partie ouverte délimitée par des filaments non entrelacés, afin qu'une chambre de logement de la matière dont la natte est destinée à être recouverte soit créée.
2. Natte selon la revendication 1, **caractérisée en ce que** les protubérances sont dépourvues de base inférieure.
3. Natte selon la revendication 1, **caractérisée en ce que** les protubérances creuses sont disposées les unes le long des autres dans des lignes parallèles adjacentes.
4. Dispositif de fabrication d'une natte monofilament emmêlée ayant des protubérances qui possèdent au moins une partie qui n'est pas occupée par les filaments selon la revendication 1, comprenant une filière d'axe vertical destinée à extruder des alignements parallèles des filaments, un cylindre rotatif disposé sous la filière et ayant son axe horizontal et parallèle aux alignements, et une série de saillies réparties régulièrement sur le cylindre et ayant au moins une partie inclinée vers la direction de déplacement de la surface au moment de l'impact du filament, **caractérisé en ce que** la distance comprise entre l'axe du cylindre et le plan vertical médian dans lequel tombent les filaments est choisi de manière que le vecteur  $V_R$ , résultant de la différence entre le vecteur  $V_C$ , désignant la vitesse de chute verticale du filament, et le vecteur  $V_P$ , désignant la vitesse de translation de la partie inclinée, coupe la partie inclinée avec un angle égal à zéro ou un angle négatif tel que la partie inclinée ne rencontre pas les filaments qui tombent.
5. Dispositif selon la revendication 4, **caractérisé en ce que** les saillies sont disposées par lignes alignées mutuellement à la manière d'une hélice.
6. Dispositif selon la revendication 5, **caractérisé en ce que** l'hélice le long de laquelle sont disposées les saillies a une inclinaison comprise entre  $30^\circ$  et

$45^\circ$  par rapport à l'axe du cylindre.

7. Dispositif selon l'une quelconque des revendications 4 à 6, **caractérisé en ce que** les saillies sont des pyramides droites.
8. Dispositif selon la revendication 7, **caractérisé en ce que** la base des pyramides est un carré.
9. Dispositif selon la revendication 8, **caractérisé en ce que** les bases des pyramides ont au moins un côté en commun avec les pyramides adjacentes.
10. Procédé de production d'une natte de filaments entrelacés et entremêlés d'une matière thermoplastique de faible densité selon la revendication 1, comprenant des étapes d'extrusion d'une matière thermoplastique par la filière et de collecte des filaments extrudés qui tombent verticalement sur une surface mobile en translation ayant plusieurs saillies profilées qui ont au moins une partie inclinée vers la direction de déplacement de la surface au moment de l'impact du filament, **caractérisé en ce que** le vecteur  $V_R$  qui représente la vitesse relative du filament tombant verticalement, résultant de la différence entre le vecteur  $V_C$ , qui désigne la vitesse de chute verticale du filament, et le vecteur  $V_P$ , qui désigne la vitesse de translation de la partie inclinée, par rapport à la partie inclinée est dirigé vers la partie inclinée avec un angle égal à zéro ou un angle négatif tel que la partie inclinée ne rencontre pas les filaments qui tombent.
11. Procédé selon la revendication 10, **caractérisé en ce que** la surface du déplacement en translation est une courroie transporteuse plate sur laquelle sont disposées plusieurs saillies en forme de pyramide droite.
12. Procédé selon la revendication 11, **caractérisé en ce que** la vitesse de déplacement en translation  $V_P$  de la courroie est liée à la vitesse de chute verticale  $V_C$  du filament par la relation suivante :
 
$$V_C \leq V_P (\cos \alpha / \sin \alpha)$$

$\alpha$  étant le demi-angle au sommet des pyramides.
13. Procédé selon la revendication 12, **caractérisé en ce que** la courroie est inclinée de préférence par rapport au plan vertical d'un angle compris entre  $0^\circ$  et  $\alpha^\circ$ .

## Patentansprüche

1. Fasermatte (1) aus verflochtenen und verwickelten Fäden aus thermoplastischem Werkstoff mit niedriger Dichte, wobei die Fasermatte (1) einen hohen Hohlraumindex und eine Vielzahl von in mehreren parallelen Reihen angeordneten, hohlen Höckern (2) aufweist, **dadurch gekennzeichnet, dass** mindestens ein Teil der Höcker (2) mindestens einen offenen Abschnitt aufweist, der durch nicht verflochtene Fäden festgelegt ist, um eine Kammer zur Aufnahme des Werkstoffes zu schaffen, mit dem die Fasermatte (1) bedeckt werden soll.
2. Fasermatte (1) nach Anspruch 1, **dadurch gekennzeichnet, dass** die Höcker (2) ohne ihre untere Basis ausgebildet sind.
3. Fasermatte (1) nach Anspruch 1, **dadurch gekennzeichnet, dass** die hohlen Höcker (2) aneinander entlang in aneinander angrenzenden, parallelen Reihen positioniert sind.
4. Vorrichtung zur Herstellung von verwickelter Monofilamentfasermatte (1), die mit Höckern (2) versehen ist, die mindestens einen Abschnitt aufweisen, der nicht von den Fäden belegt ist, nach Anspruch 1, die eine Matrize (5) mit Vertikalachse, um parallele Anordnungen der Fäden zu extrudieren, einen sich drehenden Zylinder (8), unter der Matrize (5) positionierten, dessen Achse horizontal und parallel zu den Anordnungen verläuft, und eine Reihe von regelmäßig auf dem Zylinder (8) angeordneten Vorsprüngen aufweist, die mindestens einen Abschnitt aufweisen, der zum Zeitpunkt des Auftreffens des Fadens in die Bewegungsrichtung der Oberfläche geneigt ist, **dadurch gekennzeichnet, dass** der Abstand zwischen der Zylinderachse und der mittleren Vertikalenebene, in welche die Fäden fallen, so ausgewählt ist, dass der Vektor  $V_R$ , der aus der Differenz zwischen dem Vektor  $V_C$ , nämlich der Geschwindigkeit des vertikalen Falles des Fadens, und dem Vektor  $V_P$ , nämlich der Translationsgeschwindigkeit des geneigten Abschnittes, resultiert, den geneigten Abschnitt in einem Winkel gleich Null oder in einem negativen Winkel so schneidet, dass der geneigte Abschnitt nicht auf die fallenden Fäden trifft.
5. Vorrichtung nach Anspruch 4, **dadurch gekennzeichnet, dass** die Vorsprünge in zueinander ausgerichteten Reihen in der Art einer Spirale angeordnet sind.
6. Vorrichtung nach Anspruch 5, **dadurch gekennzeichnet, dass** die Spirale, entlang welcher die Vorsprünge angeordnet sind, eine Neigung zwischen  $30^\circ$  und  $45^\circ$  zu der Zylinderachse aufweist.
7. Vorrichtung nach einem der Ansprüche 4 bis 6, **dadurch gekennzeichnet, dass** die Vorsprünge reguläre bzw. gerade Pyramiden (9) sind.
8. Vorrichtung nach Anspruch 7, **dadurch gekennzeichnet, dass** die Basis der Pyramiden (9) quadratisch ist.
9. Vorrichtung nach Anspruch 8, **dadurch gekennzeichnet, dass** die Basen der Pyramiden (9) mindestens eine Seite gemeinsam mit den angrenzenden Pyramiden (9) aufweisen.
10. Verfahren zur Herstellung einer Fasermatte (1) aus verflochtenen und verwickelten Fäden aus thermoplastischem Werkstoff mit niedriger Dichte nach Anspruch 1, welches die Schritte des Extrudierens eines thermoplastischen Werkstoffes durch die Matrize (5) und das Sammeln der vertikal fallenden, extrudierten Fäden auf einer sich verschiebenden Oberfläche umfasst, die mit einer Vielzahl von profilierten Vorsprüngen versehen ist, die mindestens einen Abschnitt aufweisen, der zum Zeitpunkt des Auftreffens des Fadens in die Bewegungsrichtung der Oberfläche geneigt ist, **dadurch gekennzeichnet, dass** der Vektor  $V_R$ , der die relative Geschwindigkeit des vertikal fallenden Fadens ausdrückt, die aus der Differenz zwischen dem Vektor  $V_C$ , nämlich der Geschwindigkeit des vertikalen Falles des Fadens, und dem Vektor  $V_P$ , nämlich der Translationsgeschwindigkeit des geneigten Abschnittes, zu dem geneigten Abschnitt resultiert, gegen den geneigten Abschnitt in einem Winkel gleich Null oder in einem negativen Winkel so ausgerichtet wird, dass der geneigte Abschnitt nicht auf die fallenden Fäden trifft.
11. Verfahren nach Anspruch 10, **dadurch gekennzeichnet, dass** die sich verschiebende Oberfläche ein flaches Förderband ist, auf dem eine Vielzahl von regulären bzw. geraden pyramidalen Vorsprüngen angeordnet ist.
12. Verfahren nach Anspruch 11, **dadurch gekennzeichnet, dass** die Translationsgeschwindigkeit  $V_P$  des Bandes mit der vertikalen Fallgeschwindigkeit  $V_C$  des Fadens durch das folgende Verhältnis in Verbindung steht:
 
$$V_C \leq V_P [\cos \alpha / \sin \alpha]$$
 wobei  $\alpha$  der Halbwinkel am Scheitelpunkt der Pyra-

miden ist.

13. Verfahren nach Anspruch 12,  
**dadurch gekennzeichnet, dass**  
das Band vorzugsweise in einem Winkel zwischen  $0^\circ$  und  $\alpha^\circ$  zu der Horizontalebene geneigt ist.

10

15

20

25

30

35

40

45

50

55

7

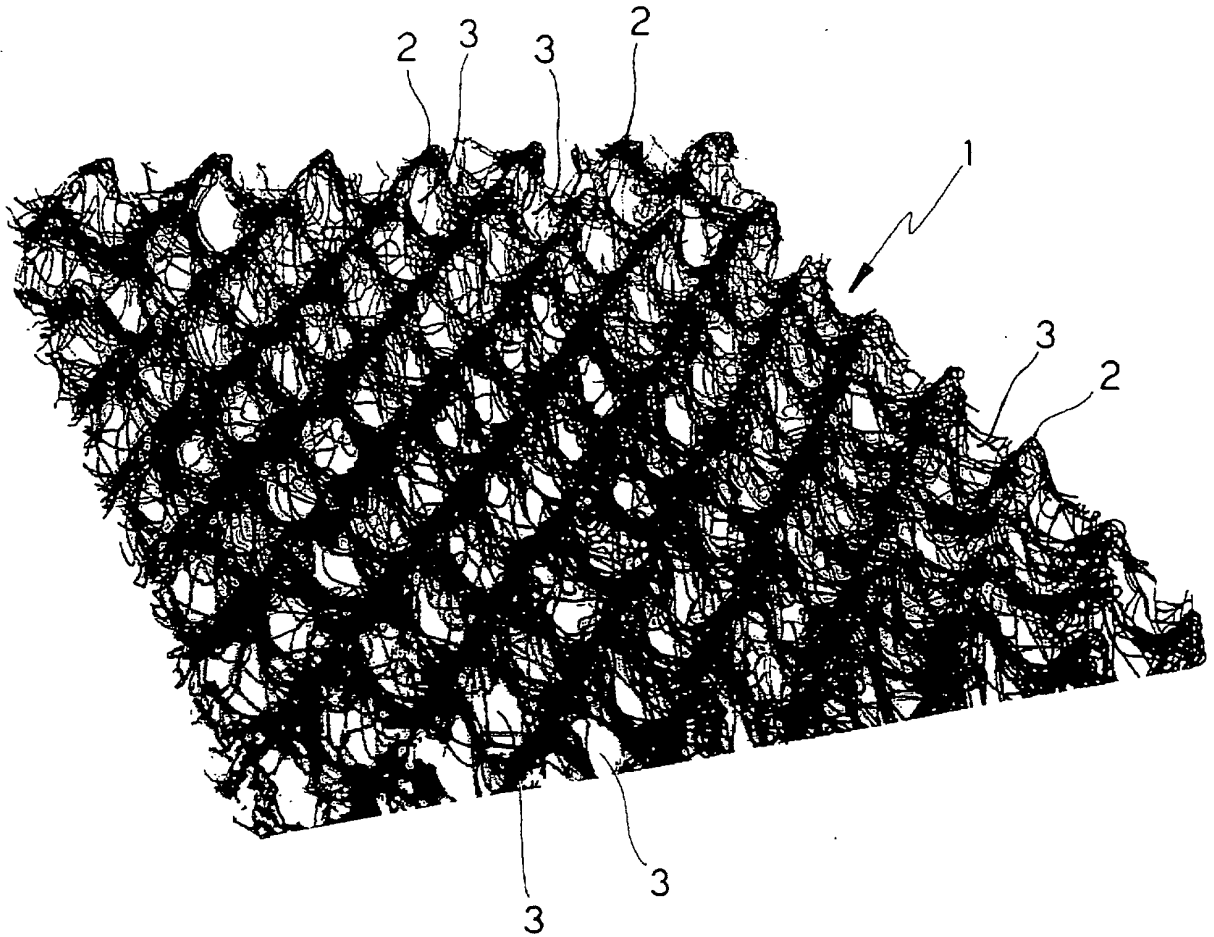


FIG.1

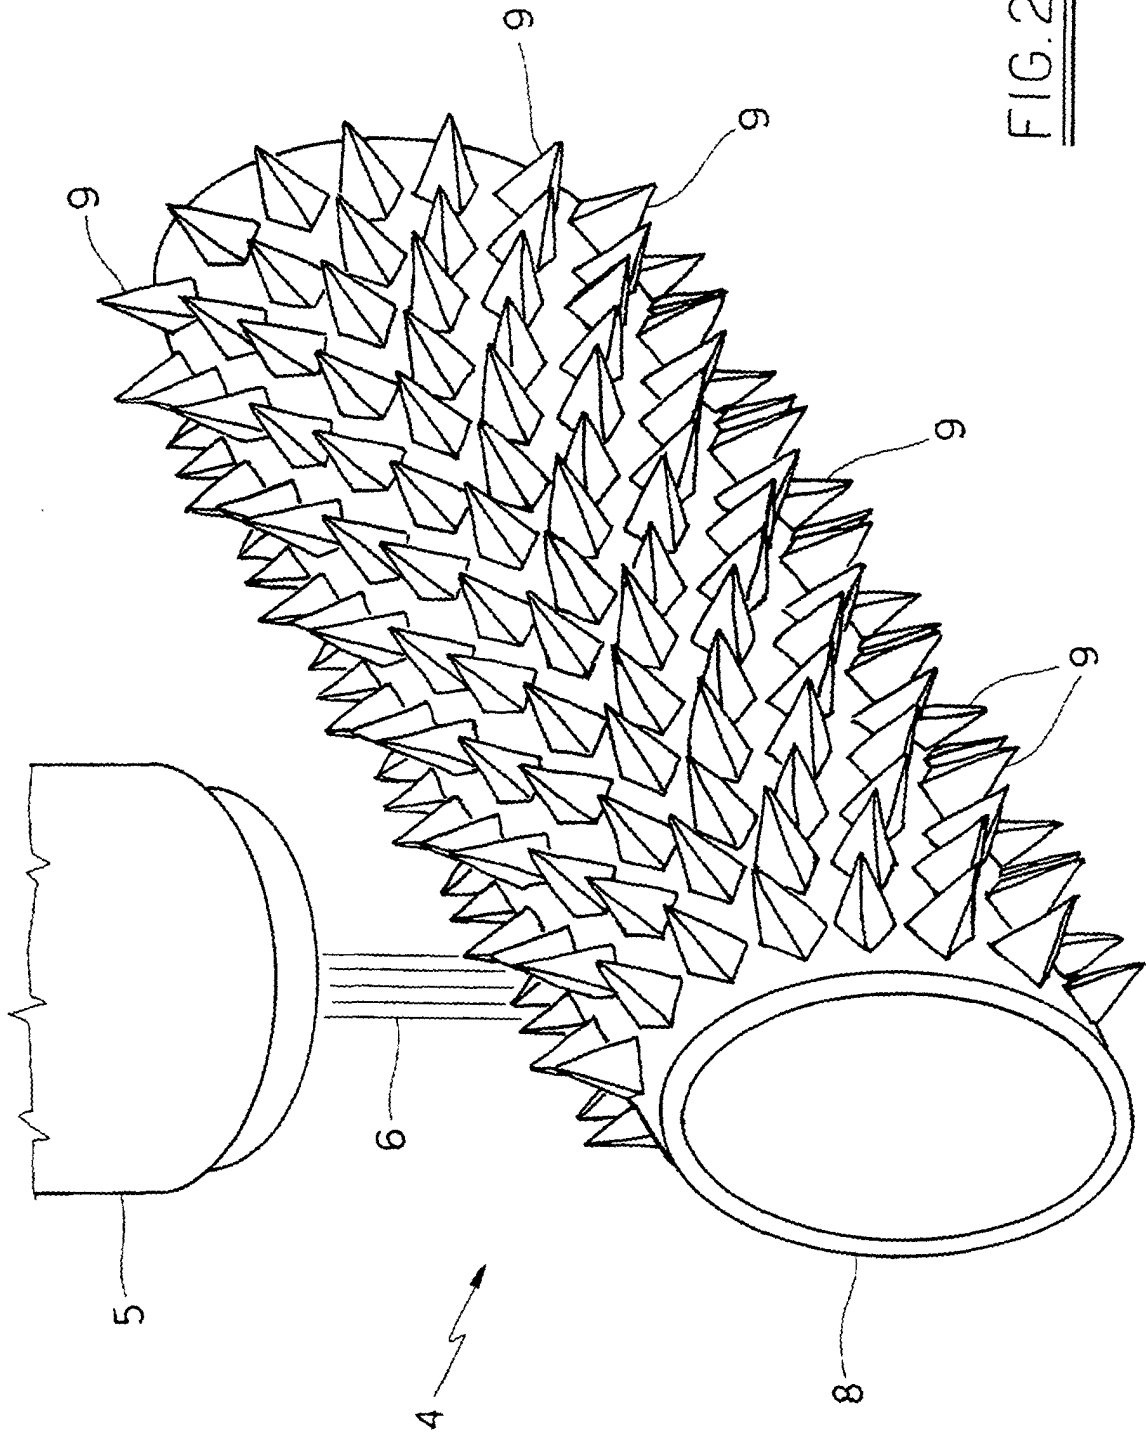


FIG. 2

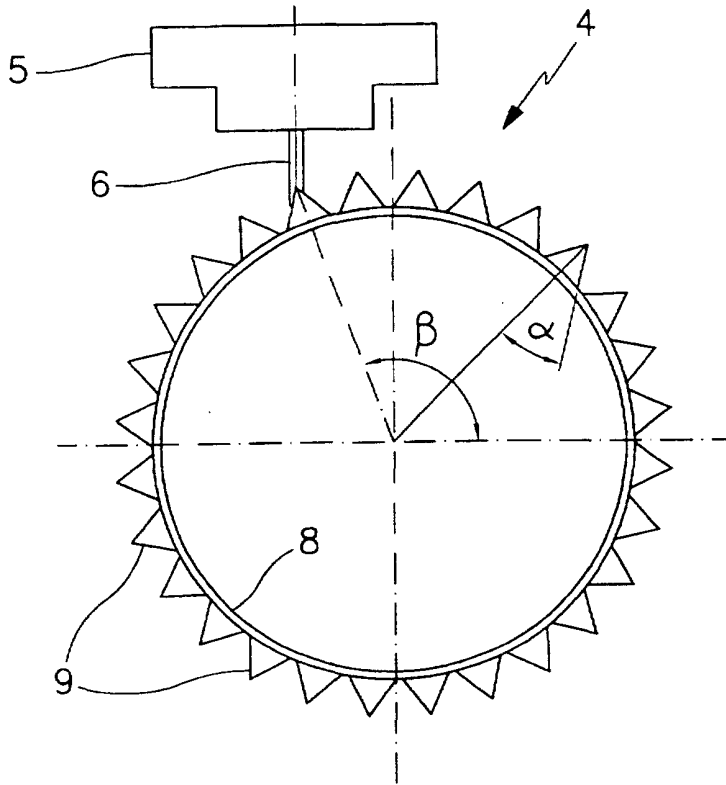


FIG. 3

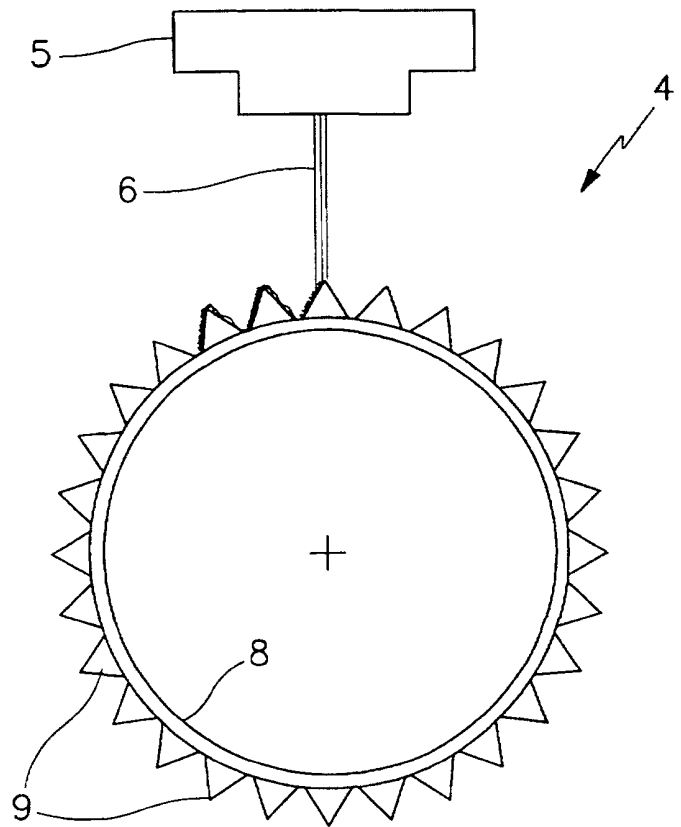
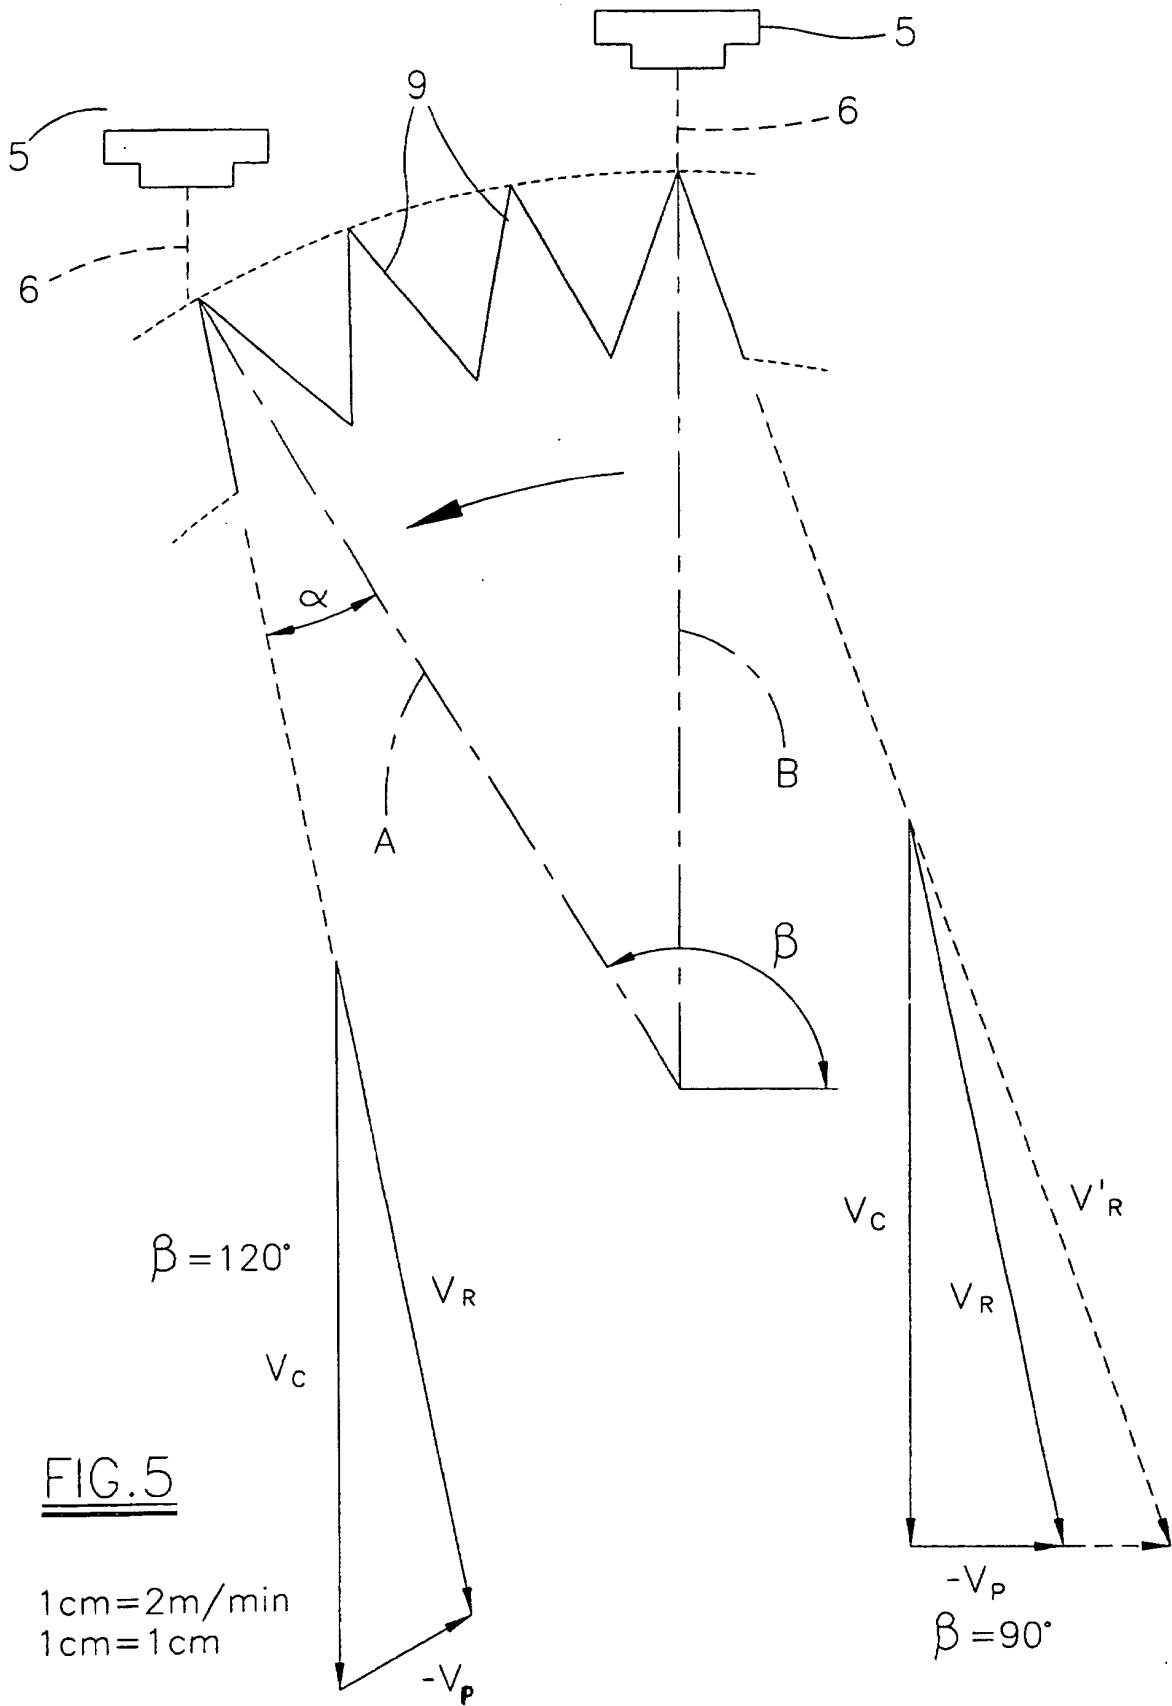


FIG. 4



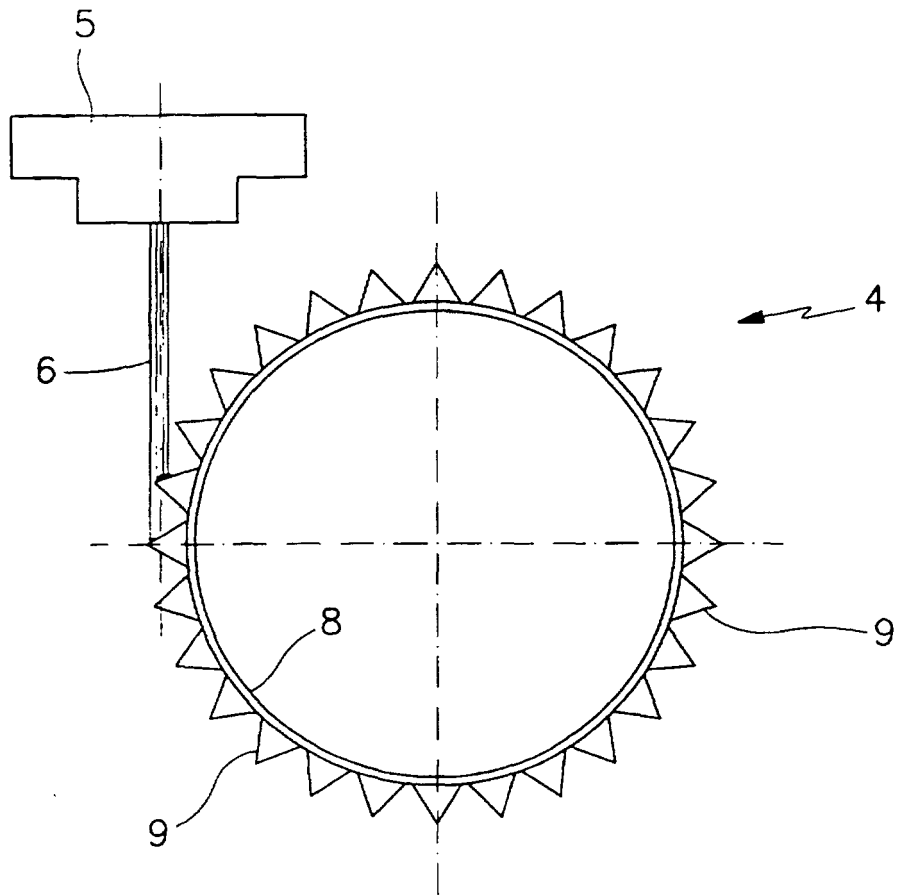


FIG.6