



(51) International Patent Classification:

A61B 17/22 (2006.01) A61B 17/221 (2006.01)

(21) International Application Number:

PCT/US2018/025208

(22) International Filing Date:

29 March 2018 (29.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/477,545 03 April 2017 (03.04.2017) US

(71) Applicant: **C.R. BARD, INC.** [US/US]; c/o Bard Peripheral Vascular, Inc., 1625 West 3rd Street, Tempe, AZ 85281 (US).

(72) Inventor: **PARMENTIER, William**; 1420 N. Roadrunner Drive, Gilbert, AZ 85234 (US).

(74) Agent: **DORISIO, Andrew, D.**; c/o Bard Peripheral Vascular, Inc., 1625 West 3rd Street, Tempe, AZ 85281 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))

(54) Title: ULTRASONIC ENDOVASCULAR CATHETER WITH EXPANDABLE PORTION

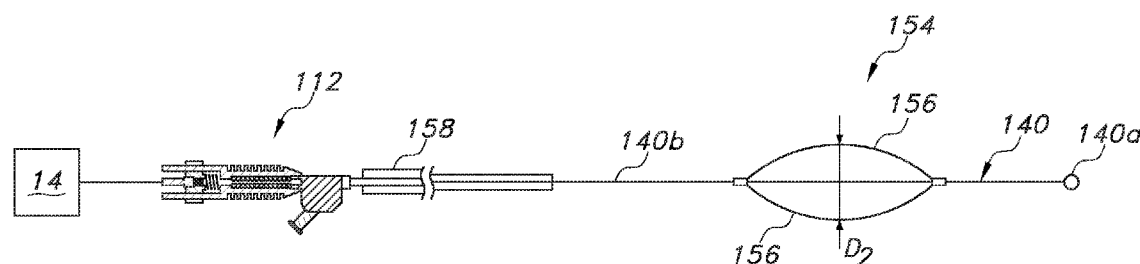


FIG. 7

(57) Abstract: An apparatus for performing an endovascular procedure using ultrasonic energy includes a catheter comprising a wave guide including an expandable portion for delivering the ultrasonic energy from a source for performing the endovascular procedure. The expandable portion may comprise a plurality of wires formed of a shape memory material. A retractable sheath may be provided for receiving the plurality of wires in the non-deployed position and for being withdrawn to expose the wires in the deployed position. A linear actuator for moving the plurality of wires in a longitudinal direction or a rotary actuator for rotating the plurality of wires may also be provided.



ULTRASONIC ENDOVASCULAR CATHETER
WITH EXPANDABLE PORTION

TECHNICAL FIELD

[0001] This document relates generally to the art of endovascular procedures and, more particularly, to an ultrasonic endovascular catheter for performing a medical procedure, such as an atherectomy or thrombectomy, using an expandable portion.

BACKGROUND

[0002] Ultrasonic catheters have been proposed. An example of such a catheter is shown in U.S. Patent No. 7,540,852, the disclosure of which is fully incorporated herein by reference. While this catheter achieves the desired result of providing enhanced disruption of blood vessel obstructions, the present disclosure proposes certain modifications or improvements to enhance the results achieved during an endovascular procedure in terms of clearing an obstruction from a vessel (such as, for example, an atherectomy for removing atherosclerosis from a blood vessel, or for crossing an occlusion).

SUMMARY

[0003] According to the disclosure, an apparatus is provided for performing an endovascular procedure to enhance the results achieved during an endovascular procedure in terms of clearing an obstruction from a vessel.

[0004] In one embodiment, the apparatus comprises an ultrasonic transducer and a catheter comprising a wave guide for delivering the ultrasonic energy from the transducer for performing the endovascular procedure. The wave guide includes an expandable portion, which may be self-expanding as noted herein, and thus enhances the transmission of energy for clearing a blockage or obstruction.

[0005] In one embodiment, the expandable portion includes a first, smaller diameter in a retracted state and a second, larger diameter in a deployed state. The expandable portion may comprise one or more self-expanding wires extending at least partially along an external surface of the wave guide, and may comprise a shape memory material. The one or more wires may

include a proximal portion attached to the wave guide, a distal portion attached to the wave guide, and an intermediate portion detached from the wave guide. In some embodiments, the wave guide includes a tip, and the expandable portion is spaced proximally from the tip. The catheter may further include a retractable sheath for receiving the expandable portion in a retracted state. An actuator may also be provided for actuating the wave guide.

[0006] According to a further aspect of the disclosure, an apparatus for performing an endovascular procedure using a source of ultrasonic energy is provided. The apparatus includes a catheter including a waveguide for transmitting the ultrasonic energy from the source. The wave guide may include a core having a tip and an expandable portion supported by the core and positioned proximally of the tip.

[0007] In one embodiment, the expandable portion comprises one or more self-expanding wires, each including a proximal portion attached to the core, a distal portion attached to the core, and an intermediate portion detached from the core. The one or more wires may comprise a shape memory material. The catheter may further include a retractable sheath for receiving the expandable portion in a retracted state, as well as an actuator for actuating the wave guide.

[0008] Still a further aspect of the disclosure pertains to an apparatus for performing an endovascular procedure. The apparatus comprises a catheter that does not carry a balloon, and a wave guide including a core and a plurality of wires fixedly mounted to the core. The wires are expandable from a non-deployed position at least partially closer to the core to a deployed position at least partially spaced from the core.

[0009] In some embodiments, an actuator for actuating the plurality of wires is provided. The actuator may comprise: (1) an ultrasonic transducer for exciting or vibrating the plurality of wires; (2) a linear actuator for moving the plurality of wires in a longitudinal direction; and (3) a rotary actuator for rotating the plurality of wires. The catheter may further include a retractable sheath for receiving the plurality of wires in the non-deployed position and being withdrawn to expose the wires in the deployed position. The wave guide may include a tip, and the plurality of wires are spaced proximally of the tip.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

[0010] The accompanying drawing figures incorporated herein and forming a part of the specification, illustrate several aspects of the endovascular catheter with an expandable portion

and, together with the description, serve to explain certain principles thereof. In the drawing figures:

[0011] Figure 1 is a schematic view of a prior art catheter system;

[0012] Figure 2 is a side view illustrating a general layout of a prior art catheter;

[0013] Figure 3 is a partially cross-sectional, partially cutaway view of a catheter including an ultrasonic wave guide;

[0014] Figure 4 is a perspective view of a distal end of the catheter with a sheath;

[0015] Figure 5 is a perspective view of the distal end of the catheter with the sheath retracted and the expandable portion deployed;

[0016] Figure 6 is a side view of the catheter with the expandable portion retracted within the sheath;

[0017] Figure 7 is a side view of the catheter with the expandable portion deployed;

[0018] Figure 8 is a side view of the catheter including a motor;

[0019] Figure 9 is a side view illustrating the rotation of the expandable portion by the motor; and

[0020] Figure 10 is a cutaway, partially cross-sectional side view illustrating one method of using the disclosed catheter.

[0021] Reference will now be made in detail to the presently disclosed embodiments of the inventive aspects of the ultrasonic endovascular catheter with an expandable portion, examples of which are illustrated in the accompanying drawing figures.

DETAILED DESCRIPTION

[0022] Ultrasound or ultrasonic catheters provide for disruption of occlusions in blood vessels, such as, for example, plaques, clots, lesions, or like objects that hinder blood flow. Catheters generally include a catheter body (shaft), an ultrasonic energy transmission member disposed within the catheter body and a distal head coupled with the energy transmission member and disposed at or near the distal end of the catheter body. The ultrasonic wave guide transmits ultrasonic energy from an actuator, such as an ultrasonic transducer, to the distal end of the catheter, causing it to vibrate and, thus, disrupt, dissolve, or debulk vascular occlusions (which procedures are generally called atherectomies or thrombectomies). A number of improved features of such an ultrasonic catheter are outlined more fully in the following description.

[0023] Referring now to Figure 1, one embodiment of an ultrasonic catheter system 20 includes an ultrasound or ultrasonic catheter 10 and an energy source 16 (which may comprise an ultrasonic generator). Catheter 10 includes a distal end 26 for disrupting occlusions, a catheter shaft or body 27, and a proximal connector 12 for coupling catheter 10 with an ultrasonic transducer 14. Ultrasonic transducer 14 is coupled with source 16 via a connector 28, and generator is coupled with a control, such as a foot-actuated on/off switch 18 via another connector 29. Source 16 provides energy to transducer 14 and, thus, to ultrasonic catheter 10.

[0024] Catheter 10 further includes an ultrasonic wave guide (or “core wire”—not shown in Figure 1) that extends through the catheter body 27 and transmits energy from the transducer 14 to the distal end 26. Some embodiments of catheter 10 include a guidewire, which in Figure 1 is shown as a so-called “rapid exchange” guidewire 13 and guidewire port, while other embodiments include a proximal guidewire port for over the wire guidewire delivery. In some embodiments, transducer 14 further includes a coupler 15 for coupling the catheter 10 to transducer 14. Connectors 28, 29 may comprise an electric cord or cable or any other suitable connecting devices for coupling on/off switch 18, source 16 and transducer 14. In an alternative embodiment, on/off switch 18 is located on source 16.

[0025] In addition to proximal connector 12, ultrasonic catheter 10 may include one or more other various components, such as a Y-connector 11 including a fluid inlet port 17 (or aperture) for passage of irrigation fluid. Inlet port 17 may be removably coupled with an irrigation tube 24, which in one embodiment may be coupled with a fluid refrigerator 30. The refrigerator 30 may, in turn, be coupled with a fluid container 32 via a connector tube 34. This arrangement may be used for introducing one or more fluids into catheter 10. Fluid may be used to cool any part of the device, such as the ultrasonic wave guide, thus helping reduce wear and tear on the catheter 10. In some embodiments, fluid inlet port 17 is located farther proximally on proximal connector 12, to allow fluid to be applied within connector 12. In some embodiments, refrigerated fluid is used, while in other embodiments irrigation fluid may be kept at room temperature. In various embodiments, oxygen supersaturated fluid, lubricious fluid, or any other suitable fluid or combination of fluids may be used, and again, such fluids may be refrigerated or kept room temperature. In an alternative embodiment to that shown in Figure 1, refrigerator 30 and fluid container 32 are combined in one unit.

[0026] Generally, catheter 10 may include any suitable number of side-arms or ports for passage of a guidewire, application of suction, infusing and/or withdrawing irrigation fluid, dye and/or the like, or any other suitable ports or connections. Also, ultrasonic catheters 10 per the disclosure may be used with any suitable proximal devices, such as any suitable ultrasonic transducer 14, energy source 16, coupling device(s) and/or the like. Therefore, the exemplary embodiment shown in Figure 1 and any following descriptions of proximal apparatus or systems for use with ultrasonic catheters 10 should not be interpreted as limiting the scope of the appended claims.

[0027] Referring now to Figure 2, an enlarged view of catheter 10 is shown. Proximal connector 12, Y-connector 11, inlet port 17, catheter body 27, distal end 26 and guidewire 13 are all shown. Catheter body 27 is generally a flexible, tubular, elongate member, having any suitable diameter and length for reaching a vascular occlusion for treatment. In one embodiment, for example, catheter body 27 preferably has an outer diameter of between about 0.5 mm and about 5.0 mm. In other embodiments, as in catheters intended for use in relatively small vessels, catheter body 27 may have an outer diameter of between about 0.25 mm and about 2.5 mm. Catheter body 27 may also have any suitable length. As discussed briefly above, for example, some ultrasonic catheters have a length in the range of about 150 cm. However, any other suitable length may be used without departing from the scope of the present disclosure.

[0028] Referring now to Figure 3, a proximal portion of one embodiment of an ultrasonic catheter 110 is shown in cross-section, which as can be appreciated does not carry a balloon in the illustrated example. An ultrasonic wave guide 140 extends from a sonic connector 152 distally to a distal end (not shown) of catheter 110. A catheter body 127 of catheter 110 is shown only in part in this figure, whereas catheter body may extend distally to (or near) the distal end of catheter 110, as shown in Figure 4, with the wave guide 140 also extending a particularly long distance (e.g., 30 centimeters or greater, and typically between about 15 centimeters and 30 centimeters). The catheter body 127 may be a constant diameter, or may have a variable diameter from the proximal to the distal end (such as, for example, wider in diameter at the proximal end near the point of entering the vasculature than at the distal end).

[0029] Catheter 110 also includes a proximal housing 112 (or “proximal connector”), having an inner bore 144 (or “inner cavity”) in which sonic connector 152, a portion of ultrasonic wave guide 140 and one or more vibration absorbers 150 reside. Housing 112 is coupled with a Y-

connector 111, which includes a fluid inlet port 117 (or aperture), and Y-connector 111 is coupled with catheter body 127.

[0030] In various embodiments, housing 112 may suitably include one or more surface features 142 for increasing the overall surface area of the outer surface of housing 112. Increased surface area enhances the ability of housing 112 to dissipate heat generated by ultrasonic wave guide 140 out of catheter 110. Surface features 142 may have any suitable size or shape, such as ridges, jags, undulations, grooves or the like, and any suitable number of surface features 142 may be used. Additionally, housing 112 may be made of one or more heat dissipating materials, such as aluminum, stainless steel, any other conductive metal(s), or any suitable non-metallic conductive material(s).

[0031] In most embodiments, ultrasonic wave guide 140, such as core wire extends longitudinally through a lumen of catheter body 127 to transmit ultrasonic energy from an ultrasonic transducer 14 (not shown in Figures 2 and 3), connected to the proximal end of proximal housing 112, to the distal end of catheter 110. Wave guide 140 may be formed of any material capable of effectively transmitting ultrasonic energy from the ultrasonic transducer 14 to the distal end of catheter body 127, including but not limited to metals such as pure titanium or aluminum, titanium or aluminum alloys, or shape memory materials (such as Nitinol), and may be coated (such as using a polymeric material). The wave guide 140 may be a solid material, or may be woven, braided or formed of helical strands. Again, additional details of ultrasonic wave guides 140 may be found in the documents incorporated by reference. Similarly, reference may be made to the incorporated references for descriptions of housing 112, sonic connector 152, vibration absorbers 150, Y-connector 111 and the like. For example, housing 112 and other features are described in U.S. Patent No. 7,335,180, the disclosure of which is incorporated herein by reference.

[0032] Ultrasonic wave guide 140 typically passes from a sonic connector 152, through bore 144 and Y-connector 111, and then through catheter body 127. Fluid inlet port 117 is in fluid communication with a lumen in Y-connector, which is in fluid communication with a lumen extending through catheter body 127. Thus, fluid introduced into fluid inlet port 117 is typically free to flow into and through catheter body 127 to contact ultrasonic wave guide 140. Fluid may flow out of catheter body 127 through apertures in the distal head (not shown) or through any other suitable apertures or openings, such as apertures located in catheter body 127 itself. Any

suitable fluid may be passed through fluid inlet port 117 and catheter body 127, such as refrigerated fluid, lubricious fluid, drug-containing fluid, super-saturated saline or contrast/saline mixture, or the like. Cooling and/or lubricating ultrasonic wave guide 140 may reduce friction and/or wear and tear of ultrasonic wave guide 140, thus prolonging the useful life of ultrasonic catheter 110 and enhancing its performance.

[0033] Referring now to Figures 4, 5, 6, and 7, it can be understood that the catheter 110 may be provided with an expandable portion 154 at a distal end for aiding in clearing a blockage or obstruction in a vessel. The expandable portion 154 may comprise one or more wires 156, which may be attached directly to the wave guide 140 at the proximal and distal end, such as by swaging, welding, or other secure form of connection. In the illustrated embodiment, four such wires are provided, and thus create an open framework when expanded. The positioning of the expandable portion 154 may be substantially proximal of a tip 140a of the wave guide for reasons better understood upon reviewing the following description.

[0034] The one or more wires 156 of the expandable portion 154 may comprise a material capable of changing state or shape based on a change in ambient condition, such as temperature. For example, the one or more wires 156 may comprise a shape memory material, such as Nitinol. Thus, in a normal or retracted state, the one or more wires 156 overlie and are located close to or in contact with an external surface of a core 140b of the wave guide 140, and when expanded (which may be done selectively by controlling the ambient temperature) are spaced apart from the core 140b. As can be appreciated from Figures 6 and 7, this provides the expandable portion 154 with a first, smaller diameter D_1 when retracted and a second, larger diameter D_2 when deployed. From the below discussion, it can be understood that this increased or expanded diameter may be useful in increasing or enhancing the transmission of energy (such as from the ultrasonic transducer 14) for clearing or debulking a lesion or thrombus. The length and number of the wires 156 may be selected depending on the desired use or outcome (e.g., fewer wires or a shorter length for smaller vessels, and the opposite for larger ones).

[0035] In use, and with reference to Figure 4, the wave guide 140 may be substantially covered by a retractable sheath 158 for purposes of insertion into a vessel with the expandable portion 154 retracted. In the arrangement shown, the tip 140a of the wave guide 140 may be exposed from the distal end of the sheath 158, and thus may be used to transmit ultrasonic energy for clearing a blockage in the conventional manner. When the sheath 158 is retracted or withdrawn

to expose the distal end of the wave guide 140, the expandable portion 154 may automatically expand as a result of the shape memory material of the one or more wires 156 being exposed and form the deployed or expanded configuration shown (possibly with the addition of a temperature-controlled fluid, such as saline, via the sheath). Ultrasonic energy applied to the wave guide 140 may thus travel not only through the core 140b, but also to the one or more wires 156 in a transverse direction. This enhances the ability of the catheter 110 to clear the blockage, potentially reducing the procedure time and avoiding the need for multiple passes.

[0036] As noted above, the expandable portion 154 is spaced from the tip 140a in a proximal direction. Thus, in one particular manner of use, the tip 140a may be initially advanced into a blockage to aid in clearing an initial opening or “pilot” path for the wave guide 140. The expandable portion 154 in the deployed condition may then be used to aid in clearing the remainder of the blockage surrounding the pilot path as the wave guide 140 is advanced. In this manner, the blockage may be substantially cleared in a single pass, and without the need for prolonging the procedure.

[0037] Instead of or in addition to the use of ultrasonic energy, the catheter 110 may also be adapted for use in connection with a different type of actuator or source of energy. Referring now to Figures 8 and 9, the wave guide 140 or wire may employ an actuator that both vibrates the wave guide through the application of ultrasonic energy, such as from transducer 14, and also causes it to rotate (note arrow R) about its longitudinal axis X, such as through the application for rotational motion to the transducer or any structure connected to the wave guide. In one embodiment, this may be achieved by providing an integral, rotary motor 164 as part of the ultrasonic transducer 14 (which may include the sonic connector 152 therein, or the wave guide 140 may be crimped directly onto the horn of the transducer). Power for the motor 164 may be supplied via a pair of wires 166, 168 (one to ground, one to positive) for causing relative rotation of the wave guide 140, which may be connected to an energy source, such as a power supply 170 for powering both the motor 164 and the transducer 14 (but separate sources could be used, including for example, integral batteries to avoid the need for external wires).

[0038] As illustrated, the wires 166, 168 if present may be twisted to allow for the relative rotation without creating binding problems. The rotation of the wave guide 140 may be continuous in one direction, or may be bi-directional (including a rotation of less than 360 degrees in each direction, such that the wave guide may be caused to oscillate about the

longitudinal axis X). Control of the rotation may be provided by an associated controller 172 for controlling the power supply 170, which may reverse the flow of current to the motor 164 according to a pre-programmed operation or as a result of manual control provided by a clinician to control the relative direction and amount of rotation. Using the controller 172, the rotation may also be selectively turned on and off, while the vibratory energy is on, or the rotation may be provided while the vibratory energy is turned off. Further details of such an arrangement may be found in U.S. Patent Application Ser. No. 15/388,335, the disclosure of which is incorporated herein by reference.

[0039] Referring now to Figure 10, one method of using the catheter is illustrated in connection with a thrombectomy. The wave guide 140 may be ultrasonically excited using transducer 14 and advanced through a first thrombus B₁. The sheath 158 may be withdrawn to expose and allow for actuation of the expandable portion 154, which may also be used to destroy the thrombus via the transmission of ultrasonic energy. To remove any dislodged material, aspiration may be achieved using suction applied to the sheath 158, as indicated by action arrows A.

[0040] As can be further appreciated, the tip 140a in view of its position distal of the expandable portion 154 may also be advanced into and possibly through a second downstream thrombus B₂. Thus, the arrangement is capable of clearing multiple blockages in a simultaneous fashion. It can also be appreciated that the tip 140a tends to direct the energy primarily in a longitudinal direction L, whereas the expandable portion 154 directs the energy in a transverse direction T as well.

[0041] In summary, an improved catheter 110 includes a self-expanding expandable portion 154 for applying energy for the enhanced treatment of blockages during an endovascular procedure. The expandable portion 154 may comprise one or more wires 156 fabricated of a shape memory material. In connection with a retractable sheath 158, the expandable portion 154 may be selectively deployed or used for transmitting energy for assisting in clearing the blockage, such as from an ultrasonic transducer 14 or other form of actuator (such as motor 164).

[0042] This disclosure may be considered to relate to the following items:

1. An apparatus for performing an endovascular procedure, comprising:
an ultrasonic transducer; and

a catheter comprising a wave guide for delivering the ultrasonic energy from the transducer for performing the endovascular procedure, the wave guide including an expandable portion.

2. The apparatus of item 1, wherein the expandable portion includes a first, smaller diameter in a retracted state and a second, larger diameter in a deployed state.

3. The apparatus of item 1 or item 2, wherein the expandable portion comprises one or more self-expanding wires extending at least partially along an external surface of a core of the wave guide.

4. The apparatus of item 3, wherein the one or more self-expanding wires include a proximal portion attached to the wave guide, a distal portion attached to the wave guide, and an intermediate portion detached from the wave guide.

5. The apparatus of any of items 1-4, wherein the expandable portion comprises a shape memory material.

6. The apparatus of any of items 1-5, wherein the wave guide includes a tip, and the expandable portion is spaced proximally from the tip.

7. The apparatus of any of items 1-6, wherein the catheter further comprises a retractable sheath for receiving the expandable portion in a retracted state.

8. The apparatus of any of items 1-7, further including an actuator for actuating the wave guide.

9. The apparatus of item 8, wherein the actuator is selected from the group comprising a linear motor, a rotational motor, and a combination of the two.

10. An apparatus for performing an endovascular procedure using an ultrasonic transducer, comprising:

a catheter including a waveguide for transmitting the ultrasonic energy from the source, the wave guide comprising a core including a tip and an expandable portion supported by the core and positioned proximally of the tip.

11. The apparatus of item 10, wherein the expandable portion comprises one or more self-expanding wires, each including a proximal portion attached to the core, a distal portion attached to the core, and an intermediate portion detached from the core.

12. The apparatus of item 10 or item 11, wherein the one or more wires comprise a shape memory material.

13. The apparatus of any of items 10-12, wherein the catheter further comprises a retractable sheath for receiving the expandable portion in a retracted state.

14. The apparatus of any of items 10-13, further including an actuator for actuating the wave guide.

15. The apparatus of item 14, wherein the actuator is selected from the group comprising a linear motor, a rotational motor, or a combination of the two.

16. An apparatus for performing an endovascular procedure, comprising:
a catheter that does not carry a balloon; and
a wave guide including a core and a plurality of wires fixedly mounted to the core, the wires being expandable from a non-deployed position at least partially closer to the core to a deployed position at least partially spaced from the core.

17. The apparatus of item 16, further including an actuator for actuating the plurality of wires selected from the group comprising: (1) an ultrasonic transducer for vibrating the plurality of wires; (2) a linear actuator for moving the plurality of wires in a longitudinal direction; and (3) a rotary actuator for rotating the plurality of wires.

18. The apparatus of item 16 or item 17, wherein the catheter further comprises a retractable sheath for receiving the plurality of wires in the non-deployed position and for being withdrawn to expose the wires in the deployed position.

19. The apparatus of item 16, item 17, or item 18, wherein the wave guide includes a tip, and the plurality of wires are spaced proximally of the tip.

[0043] The foregoing description has been presented for purposes of illustration. It is not intended to be exhaustive or to limit the embodiments to the precise form disclosed. Obvious modifications and variations are possible in light of the above teachings. All modifications and variations are within the scope of the appended claims when interpreted in accordance with the breadth to which they are fairly, legally and equitably entitled.

WHAT IS CLAIMED:

1. An apparatus for performing an endovascular procedure, comprising:
an ultrasonic transducer; and
a catheter comprising a waveguide for delivering the ultrasonic energy from the transducer for performing the endovascular procedure, the wave guide including an expandable portion.
2. An apparatus for performing an endovascular procedure using an ultrasonic transducer, comprising:
a catheter including a waveguide for transmitting the ultrasonic energy from the source, the wave guide comprising a core including a tip and an expandable portion supported by the core and positioned proximally of the tip.
4. The apparatus of claim 1 or claim 2, wherein the expandable portion includes a first, smaller diameter in a retracted state and a second, larger diameter in a deployed state.
5. The apparatus of any of the foregoing claims, wherein the expandable portion comprises one or more self-expanding wires extending at least partially along an external surface of a core of the wave guide.
6. The apparatus of any of the foregoing claims, wherein the one or more self-expanding wires include a proximal portion attached to the wave guide, a distal portion attached to the wave guide, and an intermediate portion detached from the wave guide.
7. The apparatus of claim any of the foregoing claims, wherein the expandable portion comprises a shape memory material.
8. The apparatus of any of the foregoing claims, wherein the wave guide includes a tip, and the expandable portion is spaced proximally from the tip.

9. The apparatus of any of the foregoing claims, wherein the catheter further comprises a retractable sheath for receiving the expandable portion in a retracted state.

10. The apparatus of any of the foregoing claims, further including an actuator for actuating the wave guide.

11. The apparatus of claim 10, wherein the actuator is selected from the group comprising a linear motor, a rotational motor, and a combination of the two.


12. An apparatus for performing an endovascular procedure, comprising:
a catheter that does not carry a balloon; and
a wave guide including a core and a plurality of wires fixedly mounted to the core, the wires being expandable from a non-deployed position at least partially closer to the core to a deployed position at least partially spaced from the core.

13. The apparatus of claim 12, further including an actuator for actuating the wave guide.

14. The apparatus of claim 13, wherein the actuator is for actuating the plurality of wires selected from the group comprising: (1) an ultrasonic transducer for vibrating the plurality of wires; (2) a linear actuator for moving the plurality of wires in a longitudinal direction; and (3) a rotary actuator for rotating the plurality of wires.

15. The apparatus of any one of claims 12-15, wherein the catheter further comprises a retractable sheath for receiving the plurality of wires in the non-deployed position and for being withdrawn to expose the wires in the deployed position.

16. The apparatus of any one of claims 12-15, wherein the wave guide includes a tip, and the plurality of wires are spaced proximally of the tip.

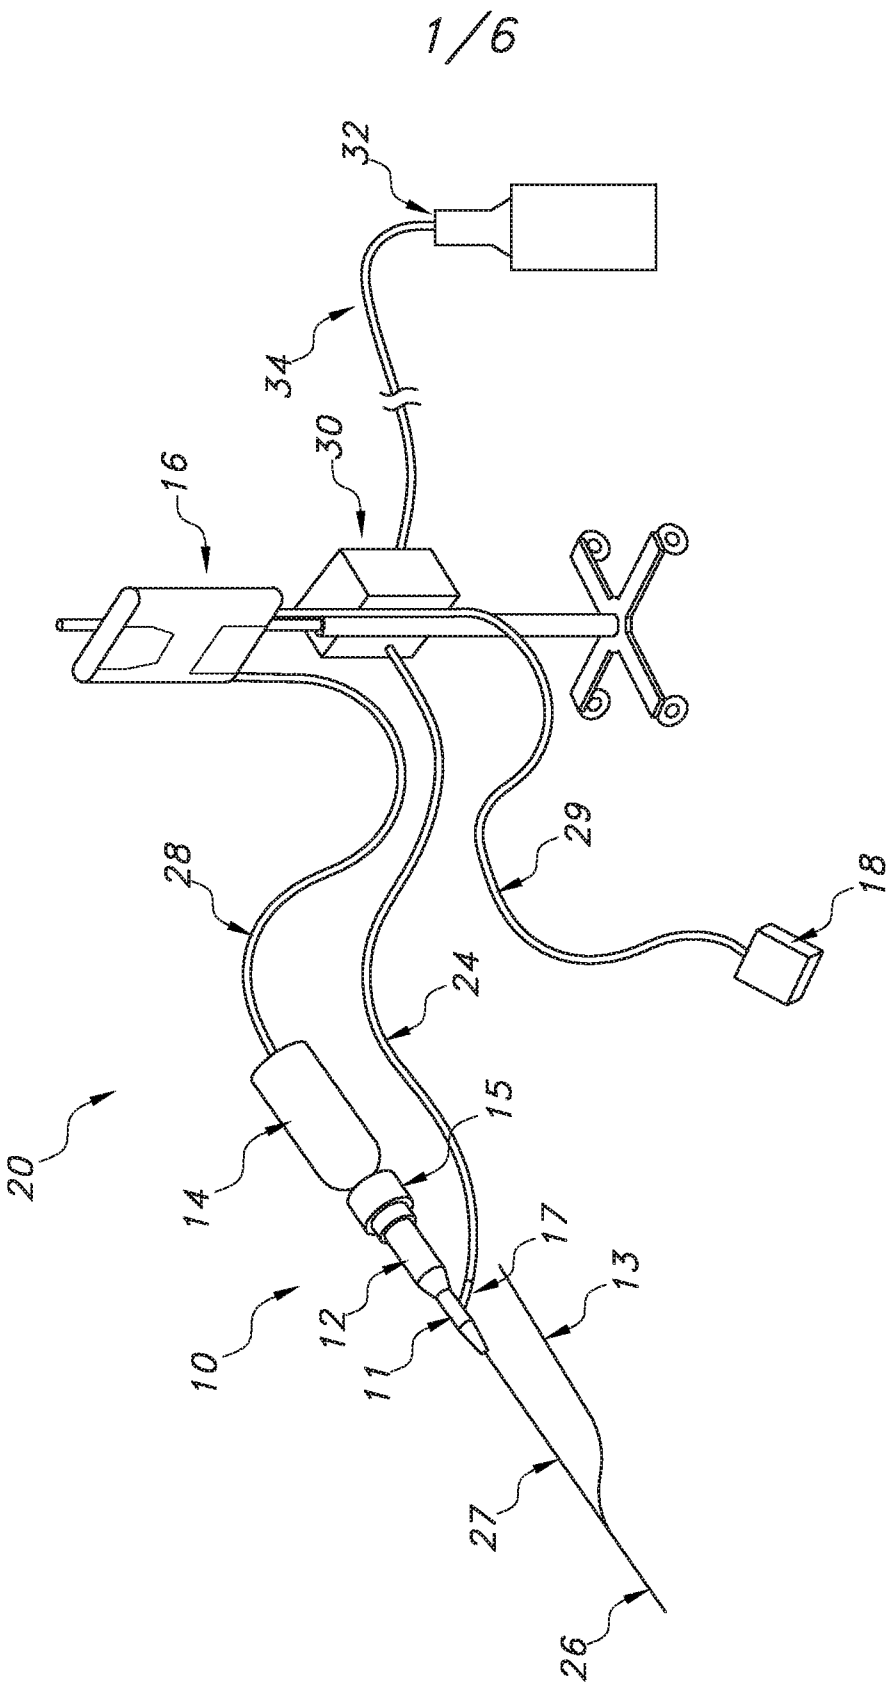

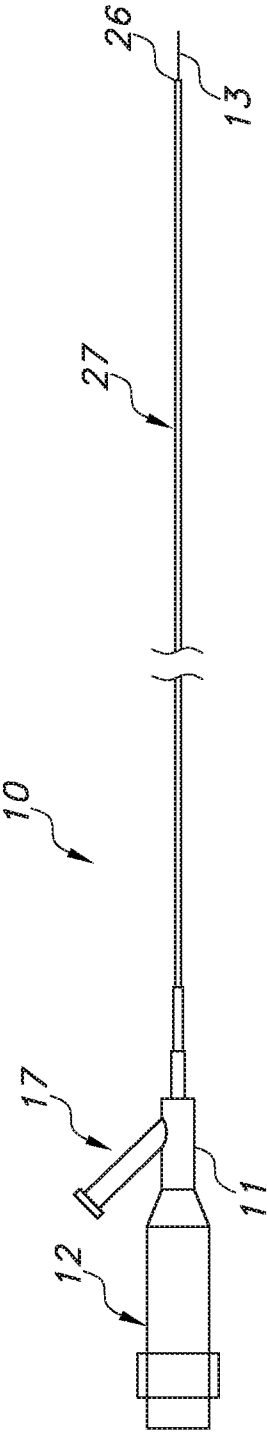


FIG. 2
(PRIOR ART)

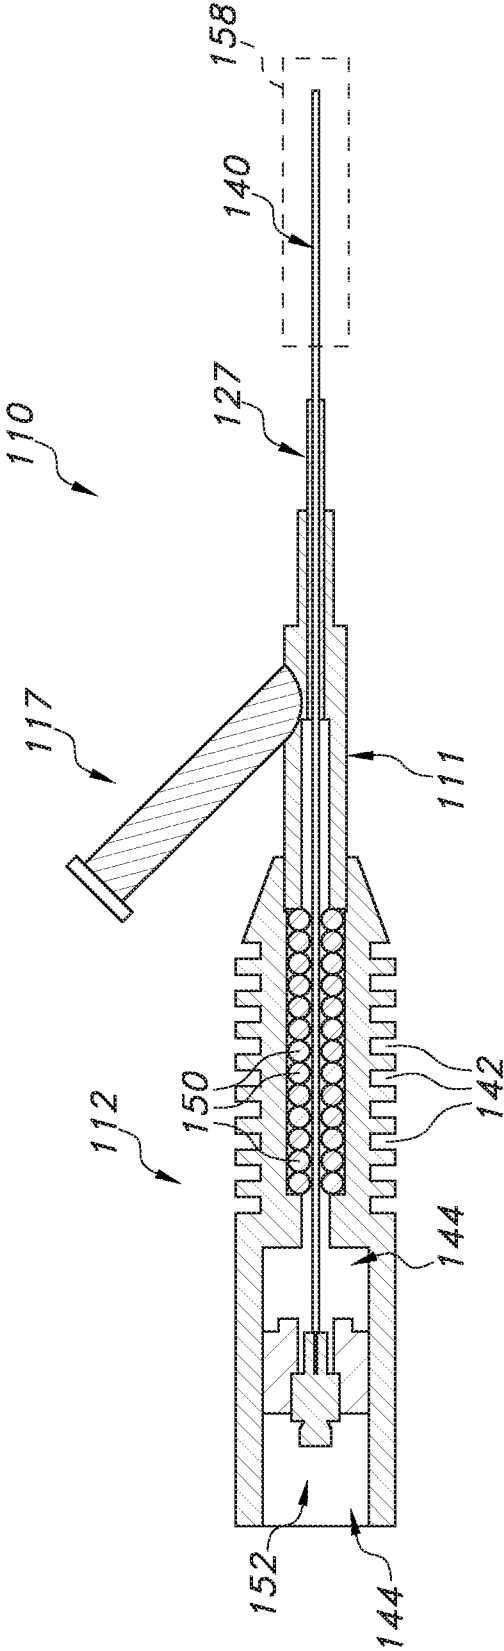


FIG. 3
(PRIOR ART)

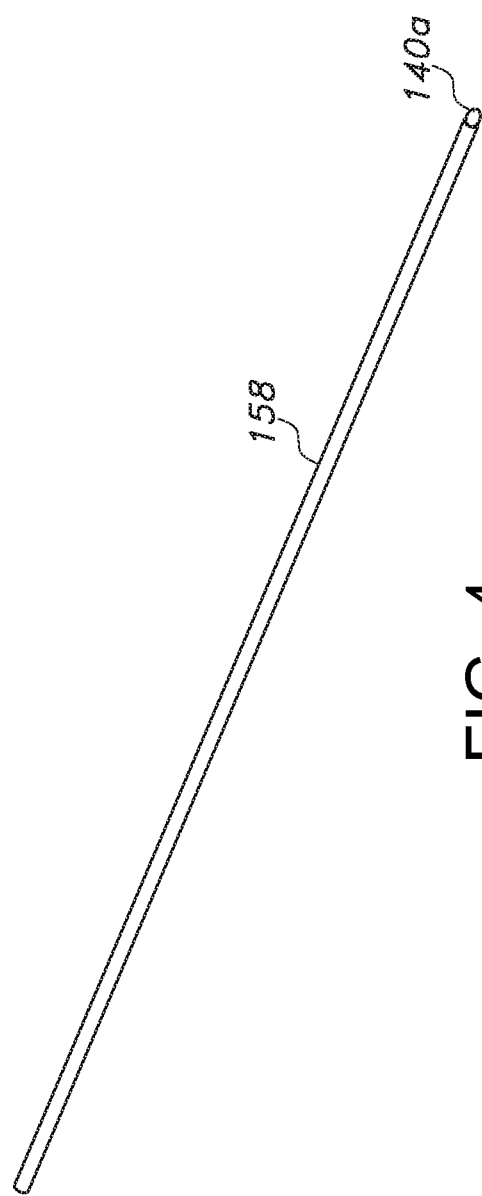


FIG. 4

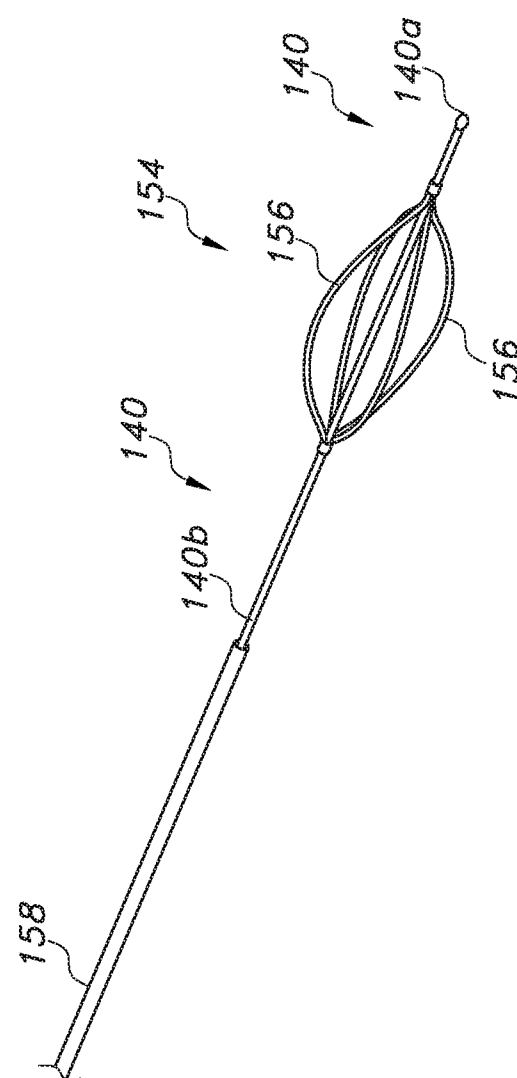


FIG. 5

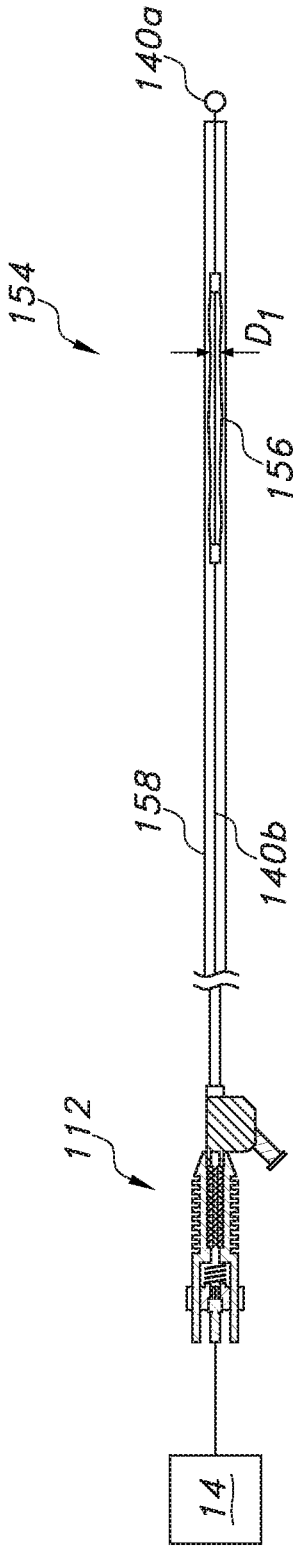


FIG. 6

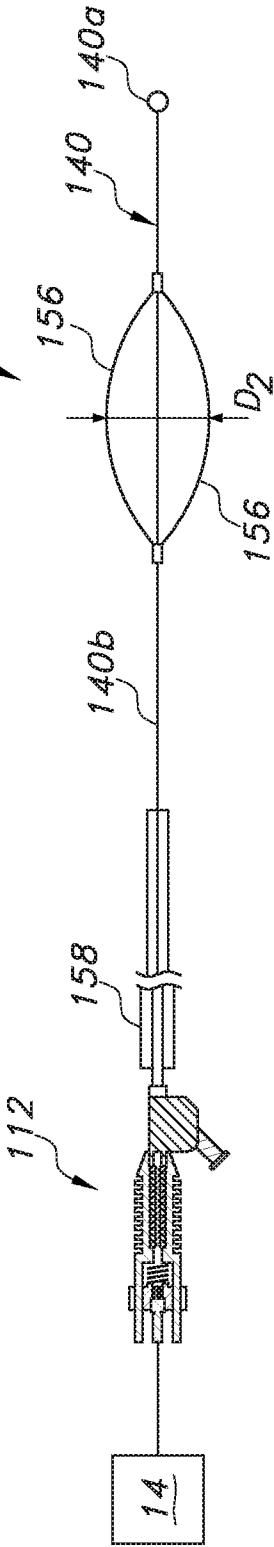


FIG. 7

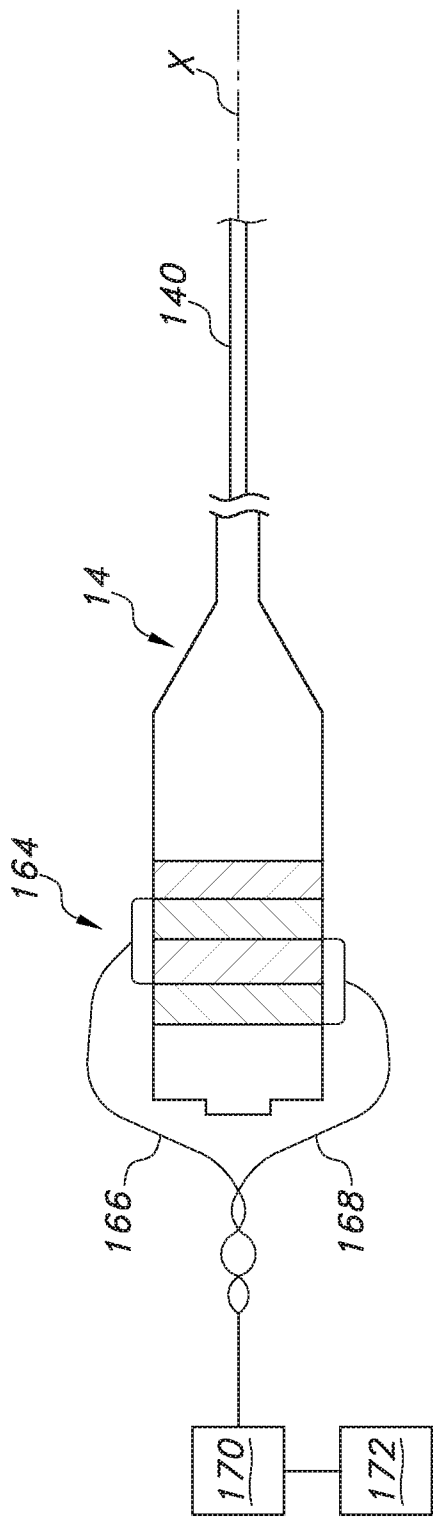


FIG. 8

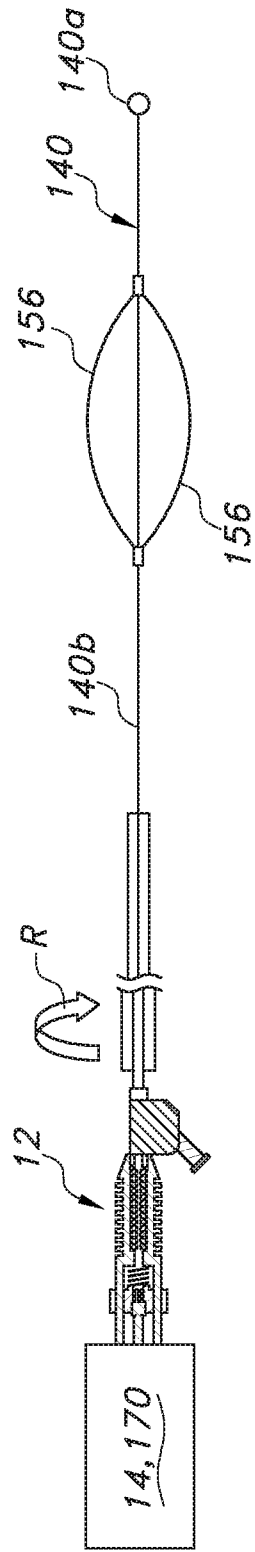


FIG. 9

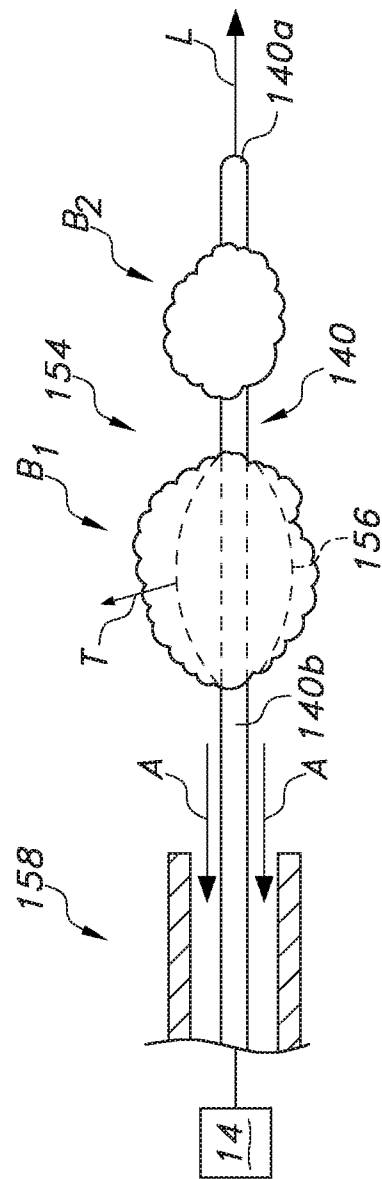


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/025208

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B17/22 A61B17/221
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 101 46 011 A1 (ZIMMERMANN KLAUS [DE]) 3 April 2003 (2003-04-03) abstract paragraphs [0021] - [0036]; figures 1-11 -----	1,2,4-16
X	WO 2005/112770 A1 (OMNISONICS MEDICAL TECH [US]; HARE BRADLEY A [US]; RABINER ROBERT A [U] 1 December 2005 (2005-12-01) abstract page 4, line 14 - line 29 page 9, line 7 - page 22, line 16; figures 1-20 -----	1,2, 4-11, 13-16
X	WO 2014/105754 A1 (FLOWCARDIA INC [US]) 3 July 2014 (2014-07-03) abstract paragraphs [0032] - [0068]; figures 1-7 ----- -/-	1,2,4-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 June 2018

Date of mailing of the international search report

18/06/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ioanovici, T

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2018/025208

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 403 324 A (CIERVO DONALD J [US] ET AL) 4 April 1995 (1995-04-04) abstract column 3, line 49 - column 5, line 51; figures 1-2	1-16
A	----- US 2015/105715 A1 (PIKUS MICHAEL J [US] ET AL) 16 April 2015 (2015-04-16) abstract paragraphs [0040] - [0046], [0061] - [0069]; figures 2-7	1-16
A	----- US 2013/060169 A1 (YAMADA NORIHIRO [JP] ET AL) 7 March 2013 (2013-03-07) abstract paragraphs [0102] - [0109]; figures 11-12 -----	1-16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/025208

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 10146011	A1	03-04-2003	NONE
WO 2005112770	A1	01-12-2005	EP 1746939 A1 31-01-2007 JP 2007536985 A 20-12-2007 WO 2005112770 A1 01-12-2005
WO 2014105754	A1	03-07-2014	CN 105188830 A 23-12-2015 EP 2938386 A1 04-11-2015 JP 6333851 B2 30-05-2018 JP 2016501679 A 21-01-2016 US 2015343191 A1 03-12-2015 WO 2014105754 A1 03-07-2014
US 5403324	A	04-04-1995	NONE
US 2015105715	A1	16-04-2015	NONE
US 2013060169	A1	07-03-2013	JP 5253673 B2 31-07-2013 JP WO2012063825 A1 12-05-2014 US 2013060169 A1 07-03-2013 WO 2012063825 A1 18-05-2012