

(43) International Publication Date
12 February 2015 (12.02.2015)(51) International Patent Classification:
H04W 76/00 (2009.01)(21) International Application Number:
PCT/EP2014/001996(22) International Filing Date:
21 July 2014 (21.07.2014)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13360023.9 9 August 2013 (09.08.2013) EP(71) Applicant: ALCATEL LUCENT [FR/FR]; 148/152 route
de la Reine, F-92100 Boulogne-Billancourt (FR).(72) Inventors: WORRAL, Chandrika, K.; Alcatel-Lucent
Telecom Ltd, The Quadrant, Stonehill Green, Westlea,
Swindon, SN5 7DJ (GB). PALAT, Sudeep, K.; Alcatel-Lucent
Telecom Ltd, The Quadrant, Stonehill Green,
Westlea, Swindon, SN5 7DJ (GB).(74) Agent: SARUP, David Alexander; Alcatel-Lucent Tele-
com Ltd., Intellectual Property Business Group, Christch-
urch Way, Greenwich, London SE10 0AG (GB).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

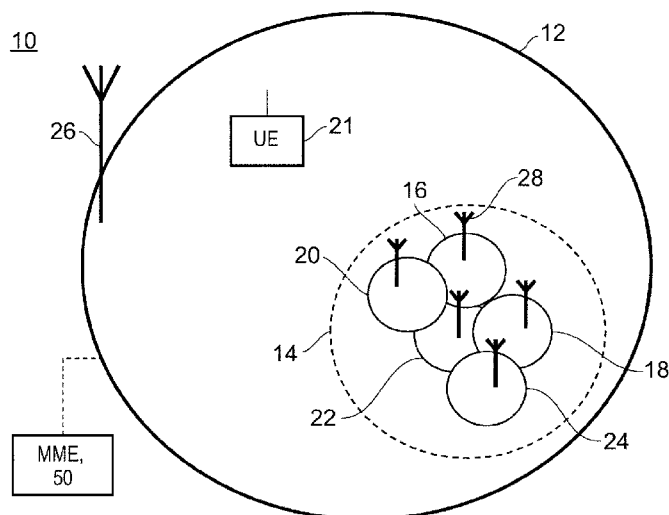
(54) Title: METHOD AND SYSTEM FOR INITIATING DATA TRANSMISSION, A PRIMARY NODE, SECONDARY NODE,
UE AND COMPUTER PROGRAM PRODUCT

FIG. 1

(57) Abstract: A method, in a radio communication
system, for initiating data transmission on a user
plane between user equipment (UE) in dual con-
nectivity with a primary node and a secondary node
of the system after bearer modification, comprising
transmitting a request for traffic offloading from the
secondary node to the primary node, the request ori-
ginating from either of the primary or secondary
nodes, ceasing transmission to the UE from the sec-
ondary node in response to a first predefined param-
eter or action; and initiating data transmission to
the UE from the primary node over a radio interface
of the system in response to a second predefined
parameter or action.

METHOD AND SYSTEM FOR INITIATING DATA TRANSMISSION, A PRIMARY
NODE, SECONDARY NODE, UE AND COMPUTER PROGRAM PRODUCT

5

TECHNICAL FIELD

The present invention relates to a method, in a radio communication system comprising a user equipment in dual connection with a primary node and a secondary node, a telecommunications system, a primary node, a secondary node and to a user equipment.

10

BACKGROUND

Small Cells are low power, low-cost base stations that are able to provide cellular service in residential or enterprise environments, with a typical coverage range of tens of metres. They have auto-configuration and self-optimization capabilities that enable a simple plug and play deployment, and are designed to automatically integrate themselves into an existing macrocellular network. Small cells, often referred to as pico cells, or metro cells, typically use a customer's broadband internet connection, for example DSL, cable or the like, as backhaul towards the macrocellular network. Support of non-ideal backhaul (with one way latency of few milliseconds to few tens of milliseconds) between small cells and between small cell and macro cells is considered as the typical deployment scenario.

Small cell deployment for handling capacity needs in high traffic areas, such as hot spot areas, is an area of investigation. A proposal for handling capacity needs in high traffic areas is to provide dual connectivity support for user equipment. Dual connectivity support allows a User Equipment (UE) to be concurrently connected to a macro cell and a small cell, or to two small cells for example. A UE can thus be connected to and served by more than one cell at a time. Dual connectivity support is considered as a way to enable offloading of traffic when required.

30

SUMMARY

According to an example, there is provide a method, in a radio communication system, for initiating data transmission on a user plane between user equipment (UE) in dual connectivity with a primary node and a secondary node of the system after bearer modification, comprising transmitting a request for traffic offloading from the secondary node to the primary node, the request originating from either of the primary or secondary nodes, ceasing transmission to the UE from the secondary node in response to a first predefined parameter or action and initiating data transmission to the UE from the primary node over a radio interface of the system in response to a second predefined parameter or action. The first predefined parameter is a period

of time, N, from the request for traffic offloading after which transmission from the secondary node to the UE ceases. Transmission to the UE from the secondary node ceases in response to the first parameter or action relating to a time period following receipt of an acknowledgement message from the UE acknowledging receipt of the request for traffic offloading, or on receipt
5 of a radio resource control (RRC) reconfiguration complete message, or upon receipt of an indication from the primary node that the UE has been reconfigured. Data transmission can be initiated from the primary node in response to the second parameter or action relating to receipt of an uplink data packet from the UE to the primary node, or receipt of an indication of receipt of the RRC reconfiguration complete message sent by the UE. In the event that the UE
10 continues to receive data from the secondary node after bearer modification, the UE discards such data received from the secondary node.

According to an example, there is provide a radio telecommunication system comprising a primary node, a secondary node, a UE in dual connectivity with the primary node and a
15 secondary node of the system and an MME for the system, the system operable to transmit a request for traffic offloading from the secondary node to the primary node, the request originating from either of the primary or secondary nodes, cease transmission to the UE from the secondary node in response to a first predefined parameter or action and initiate data transmission to the UE from the primary node over a radio interface of the system in response to
20 a second predefined parameter or action. The first predefined parameter is a period of time, N, from the request for traffic offloading after which transmission from the secondary node to the UE ceases. Transmission to the UE from the secondary node ceases in response to the first parameter or action relating to a time period following receipt of an acknowledgement message from the UE acknowledging receipt of the request for traffic offloading, or on receipt of a radio
25 resource control (RRC) reconfiguration complete message, or upon receipt of an indication from the primary node that the UE has been reconfigured. Data transmission can be initiated from the primary node in response to the second parameter or action relating to receipt of an uplink data packet from the UE to the primary node, or on receipt of or indication of receipt of the RRC reconfiguration complete message sent by the UE. In the event that the UE continues to
30 receive data from the secondary node after bearer modification, the UE discards such data received from the secondary node.

According to an example, there is provide a primary node of a radio telecommunication system as provided above, operable in a dual connectivity link with a UE. According to an example,
35 there is provide a secondary node of a radio telecommunication system as provided above, operable in a dual connectivity link with a UE.

According to an example, there is provide a UE in dual connectivity with a primary node (26) and a secondary node of a system as provided above. According to an example, there is provide a UE in dual connectivity with a primary node and a secondary node of a system, the UE operable in accordance with the method provided above.

5

According to an example, there is provide a computer program product, comprising a computer usable medium having computer readable program code embodied therein, said computer readable program code adapted to be executed to implement a method, in a radio communication system, for initiating data transmission between UE in dual connectivity with a primary node and a secondary node of the system after bearer modification as provided above.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments will now be described, by way of example only, with reference to the accompanying drawings, in which:

15

Figure 1 is a schematic representation of a heterogeneous telecommunications system according to an example;

20

Figure 2 is a schematic representation of a legacy handover procedure;

Figure 3 is a schematic representation of a process according to an example;

Figure 4 is a schematic representation of a process for data forwarding according to an example;

25

Figure 5 is a schematic representation of a process according to an example;

Figure 6 is a schematic representation of a further process according to an example;

30

Figure 7 is a schematic representation of a further process according to an example;

Figure 8 is a schematic representation of CN based bearer split according to an example; and

Figure 9 is a schematic representation of RAN level bearer split according to an example.

35

DETAILED DESCRIPTION

Example embodiments are described below in sufficient detail to enable those of ordinary skill in the art to embody and implement the systems and processes herein described. It is important to understand that embodiments can be provided in many alternate forms and should not be construed as limited to the examples set forth herein.

5

Accordingly, while embodiments can be modified in various ways and take on various alternative forms, specific embodiments thereof are shown in the drawings and described in detail below as examples. There is no intent to limit to the particular forms disclosed. On the contrary, all modifications, equivalents, and alternatives falling within the scope of the appended claims should be included. Elements of the example embodiments are consistently denoted by the same reference numerals throughout the drawings and detailed description where appropriate.

10

The terminology used herein to describe embodiments is not intended to limit the scope. The articles “a,” “an,” and “the” are singular in that they have a single referent, however the use of the singular form in the present document should not preclude the presence of more than one referent. In other words, elements referred to in the singular can number one or more, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises,” “comprising,” “includes,” and/or “including,” when used herein, specify the presence of stated features, items, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, items, steps, operations, elements, components, and/or groups thereof.

15

20

Unless otherwise defined, all terms (including technical and scientific terms) used herein are to be interpreted as is customary in the art. It will be further understood that terms in common usage should also be interpreted as is customary in the relevant art and not in an idealized or overly formal sense unless expressly so defined herein.

25

Figure 1 is a schematic representation of a heterogeneous telecommunications system 10 comprising a macro cell 12 and a cluster of small cells 14 and an mobility management entity (MME) 50. The cell 12 and respective ones of the cells in the cluster of small cells 14 are served by E-UTRAN Node Bs, also known as Evolved Node Bs (herein “eNB”, also interchangeably referred to as “nodes”) which form the hardware that is connected to the radio communication network that communicates directly with mobile handsets, known as user equipment (UE).

30

35

The cluster of small cells 14 comprises a first small cell 16, a second small cell 18, a third small cell 20, a fourth small cell 22 and a fifth small cell 24. The small cells are distributed geographically to provide an area of coverage within the macro cell 12. UE 21 may roam through the network 10. When the user equipment is located within the macro cell 12, communications may be established between the user equipment and the macro cell base station 26 over an associated radio link. If the user equipment is located geographically within one of the small cells 16, 18, 20, 22 and 24, communications may be established between the user equipment and the base station of the associated small cell over an associated radio link. It will be appreciated that Figure 1 shows only an example heterogeneous network and that a plurality of macro cells may be provided, more or less than five small cells may be provided and a plurality of small cell clusters may be provided.

As described above, within the macro cell 12, there is provided multiple small cell base stations which provide a plurality of small cells 16, 18, 20, 22, and 24. The small cells provide local communications coverage for a user in their vicinity. As a user equipment comes within range of a small cell, such as the first small cell 16, a handover may occur between the base station 26 of the macro cell and the base station 28 of the small cell, such as when the base station of the small cell detects that user equipment has come within range. Likewise, as a user equipment comes within range of a different small cell, a handover may occur between the base station of the current small cell and the base station of the new small cell when the base station of the new small cell detects that user equipment has come within range.

In order to handle the capacity needs of a high traffic area, a user equipment in the telecommunications network 10 of Figure 1 may be provided with dual connectivity support. That is, a user equipment may be connected to both the macro cell 12 and the small cell 16. Also, it should be appreciated that a user equipment may be dual connected to small cell 16 and any of the other small cells 18 to 24.

Dual connectivity as described with reference to figure 1 can be used to enable offloading of traffic via small cell when required. For example, a data flow associated with a specific service in use by the user equipment can be offloaded to a small cell in high traffic areas that may otherwise cause the macro cell 12 to become overloaded for example.

For efficient scheduling support the traffic offloading decision can be made at the radio access network (RAN) and take into account parameters such as channel quality and RAN load information. Thus improved load balancing could be achieved with dual connectivity. More

over the offloading trigger may be initiated by the macro eNB or small cell eNB (eg: based on the cell load).

Due a number of reasons, a legacy handover (HO) procedure could not be used for traffic
5 offloading bearer management. These reasons are that, for example, in dual connectivity only
the macro eNB has a connection to the MME and the offloading decision may be taken by one
eNB while the data is been served by the other eNB. For example, a macro eNB may make the
decision to modify the offloaded bearer while the bearers are served by the small cell. These
issues impact how to establish a user data transmission for offloaded bearers and how to
10 minimize the data interruption during the bearer modification or offloaded decision change. In
an example, there is provided a method and system for initiating data transmission after bearer
modification. The procedure is designed to minimize the data plane interruptions.

Figure 2 is a schematic representation of a legacy handover procedure. A problem area which is
15 relevant to the user plane transfer with regards to the bearer modification is circled and marked
1. When the macro eNB makes the decision to offload traffic via a small cell, ie: the
corresponding RB for the EPS bearer is established between the small cell and the UE, the
legacy data forwarding and PDCP Sequence Number status transfer mechanism can be re-used.
The same legacy mechanism cannot be used when the offloaded traffic over the small cell is
20 modified such as to be served via the macro cell.

Figure 3 is a schematic representation of a method according to an example, which illustrates
one embodiment of how data forwarding and Sequence Number status transfer is enabled for
the Down Link traffic when the traffic is moved from a small cell to a macro cell. Figure 3
25 assumes that the UE only has one RRC protocol communicating to the macro eNB RRC.
Therefore all RRC messages are transmitted/terminated at the macro eNB.

A: data transmission to the UE

Upon transmission of the offloading response by the small cell eNB, the cell continues
30 transmitting the data to the UE over small cell for a period of time, N. The period, N, in an
example is provided to the small cell from the macro eNB together with a traffic offloading
request message. In another embodiment, N can be negotiated between the small cell and
macro cell during the small cell configuration. The time period is to account for the
transmission delay of information of bearer modification to the UE. Therefore, it may include
35 backhaul delay, over air transmission delay, estimated time to receive a RLC ACK and the UE
processing delay for the L3 message and so on. Allowing the data transmission over the old path
for a period N reduces the possibility of data interruption.

In another embodiment, the small cell; may stop transmission of data transmission to the UE after receiving an L2 acknowledgement from the UE of receipt of the Reconfiguration message + UE processing delay for cases where the source cell is transmitting the reconfiguration message to the UE. Alternatively, the small cell may stop transmission on receipt of RRC Reconfiguration complete message if this message is sent to the small cell. In another option, the small cell may stop transmission upon an indication from the macro cell that UE has successfully reconfigured.

10 The UE may continue to receive data over the small cell even after reconfiguration of bearer to the macro cell. In this case, the UE shall discard any data that is received from the small cell.

B: SN status transfer and data forwarding

Upon transmission of the offloading response by the small cell eNB, in one embodiment, the cell transmits the SN status report based on the current PDCP status at the small cell. Data forwarding starts immediately upon the transmission of the offloading response by the small cell starting from the data indicated by the SN status report.

In another embodiment, SN status report is computed accommodating the amount of data which can be transmitted during predefined N time period. The period, N, in an example is provided to the small cell from the macro eNB together with a traffic offloading request message. In another embodiment, N can be negotiated between the small cell and macro cell during the small cell configuration. The time period is to account for the transmission delay of information of bearer modification to the UE. Therefore, it may include backhaul delay, over air transmission delay, estimated time to receive a RLC ACK and the UE processing delay for the L3 message and so on. Allowing the data transmission over the old path for a period N reduces the possibility of data interruption. Remaining data is forwarded after account for estimated data transmission for the N period.

30 The data transmission from the target cell to the UE can start once it knows the UE has performed the reconfiguration and is ready to receive data from the target cell. This can be triggered by the reception of any UL packet from the UE in the target cell confirming the reconfiguration. Specific examples for these could be synchronisation request preamble, completion of UL synchronisation procedure or reception of PDCP status PDU from the UE or any other UL data (in case of moving a bearer to an already configured small cell). Another possibility is reception of RRC connection reconfiguration complete message at the small cell over X2 from the macro cell.

Another embodiment of method for data forwarding and SN transfer for DL data transmission is illustrated in Figure 4. Similarly to the embodiment of Figure 3, it is assumed that single RRC entity at the network and offloaded EPS bearer is terminates at the small cell eNB.

5

As the data forwarding starts early, the data interruption can be minimized. Upon the reception of RRC connection reconfiguration complete message, the macro eNB may inform the small cell of the complete of bearer modification, thus the small cell eNB stops the data transmission to the UE.

10

PDCCP SN transfer is also modified. Three different methods of providing the PDCCP status of the modified bearers to the macro eNB is shown in figure 5, where the source cell is the small cell and the target cell is the macro cell. The PDCCP status PDU informs the small cell which PDCCP PDUs were received over the macro cell. The small cell and UE discards data that is duplicated (received over both cells). Figure 5 illustrates the three different methods for SN status transfer illustration in Figure 5 uses UL transmission as an example. In a first method, PDCCP status is provided to the macro eNB by the UE together with RRC connection reconfiguration complete message. In the second method, upon the reception of RRC connection reconfiguration complete message, the macro eNB request the SN transfer from the small cell eNB for the modified bearers. In a third method, the small cell provides the SN transfer after a period of time, N, upon transmission of the offloading request response message. N is account for information transfer delay and may be provided to the small cell by the macro eNB.

15

Figure 6 is a schematic representation of a process according to an example, illustrating the DL offload bearer modification considering two RRCs located respectively at the macro and small cell eNBs. The UE communicates RRC messages to both macro and small cell eNBs. Note that the data forwarding and SN transfer is similar to the legacy procedure considering that the traffic is served by the decision making eNB prior to the bearer modification, i.e. small cell eNB makes the decision for bearer modification of the bearers served by the small cell eNB.

20

Figure 7 is a schematic representation of UL offloaded bearer modification considering two RRCs located respectively at the macro and small cell eNBs. The UE communicates RRC messages to both macro and small cell eNBs. Note that the data forwarding and SN transfer is similar to the legacy procedure considering that the traffic is served by the decision making eNB prior to the bearer modification, i.e. small cell eNB makes the decision for bearer modification of the bearers served by the small cell eNB.

25

30

Note that the embodiments are explained based on CN based bearer split. CN based bearer split is illustrated in figure 8. S1-MME interface is between the MME and the macro eNB while S1-U interface for offloaded bearers are between the S-GW and the small cell. S1-U interface for bearers served by the macro cell is between the S-GW and the macro cell. The illustration shows a single S-GW however in practice small cell and macro cell may also be served by different S-GW.

However, the methods for data forwarding and SN transfer to minimize data interruption is equally applicable to other user plane architectures where RAN level bearer split is used for example. RAN level bearer split is illustrated in figure 9.

The present inventions can be embodied in other specific apparatus and/or methods. The described embodiments are to be considered in all respects as illustrative and not restrictive. In particular, the scope of the invention is indicated by the appended claims rather than by the description and figures herein. All changes that come within the meaning and range of equivalency of the claims are to be embraced within their scope.

CLAIMS

1. A method, in a radio communication system, for initiating data transmission on a user plane between user equipment (UE) in dual connectivity with a primary node and a secondary node of the system after bearer modification, comprising:
5 transmitting a request for traffic offloading from the secondary node to the primary node, the request originating from either of the primary or secondary nodes;
ceasing transmission to the UE from the secondary node in response to a first predefined parameter or action; and
10 initiating data transmission to the UE from the primary node over a radio interface of the system in response to a second predefined parameter or action.
2. A method as claimed in claim 1, wherein the first predefined parameter is a period of time, N, from the request for traffic offloading after which transmission from the secondary node to the UE ceases.
15
3. A method as claimed in claim 1, wherein transmission to the UE from the secondary node ceases in response to the first parameter or action relating to a time period following receipt of an acknowledgement message from the UE acknowledging receipt of the request for traffic offloading, or on receipt of a radio resource control (RRC) reconfiguration complete message, or upon receipt of an indication from the primary node that the UE has been reconfigured.
20
4. A method as claimed in any preceding claim, wherein data transmission can be initiated from the primary node in response to the second parameter or action relating to receipt of an uplink data packet from the UE to the primary node, or receipt of an indication of receipt of the RRC reconfiguration complete message sent by the UE.
25
5. A method as claimed in any of claims 2 to 4, wherein, in the event that the UE continues to receive data from the secondary node after bearer modification, the UE discards such data received from the secondary node.
30
6. A radio telecommunication system (10) comprising:
a primary node (26);
35 a secondary node (16, 18, 20, 22, 24);
a UE (21) in dual connectivity with the primary node (26) and a secondary node (16, 18, 20, 22, 24) of the system (10); and

- an MME (50) for the system;
the system operable to transmit a request for traffic offloading from the secondary node to the primary node, the request originating from either of the primary or secondary nodes;
cease transmission to the UE from the secondary node in response to a first predefined
5 parameter or action; and
initiate data transmission to the UE from the primary node over a radio interface of the system in response to a second predefined parameter or action.
7. A system as claimed in claim 6, wherein the first predefined parameter is a period of
10 time, N, from the request for traffic offloading after which transmission from the secondary node to the UE ceases.
8. A system as claimed in claim 6, wherein transmission to the UE from the secondary
15 node ceases in response to the first parameter or action relating to a time period following receipt of an acknowledgement message from the UE acknowledging receipt of the request for traffic offloading, or on receipt of a radio resource control (RRC) reconfiguration complete message, or upon receipt of an indication from the primary node that the UE has been reconfigured.
- 20 9. A system as claimed in any of claims 6 to 8, wherein data transmission can be initiated from the primary node in response to the second parameter or action relating to receipt of an uplink data packet from the UE to the primary node, or on receipt of or indication of receipt of the RRC reconfiguration complete message sent by the UE.
- 25 10. A system as claimed in any of claims 6 to 9, wherein, in the event that the UE continues to receive data from the secondary node after bearer modification, the UE discards such data received from the secondary node.
- 30 11. A primary node (26) of a radio telecommunication system (10) as claimed in any of claims 6 to 10, operable in a dual connectivity link with a UE (21).
12. A secondary node (16, 18, 20, 22, 24) of a radio telecommunication system (10) as claimed in any of claims 6 to 10, operable in a dual connectivity link with a UE (21).
- 35 13. A UE (21) in dual connectivity with a primary node (26) and a secondary node (16, 18, 20, 22, 24) of a system (10) as claimed in any of claims 6 to 10.

14. A UE (21) in dual connectivity with a primary node (26) and a secondary node (16, 18, 20, 22, 24) of a system (10), the UE (21) operable in accordance with the method as claimed in any of claims 1 to 5.
- 5 15. A computer program product, comprising a computer usable medium having computer readable program code embodied therein, said computer readable program code adapted to be executed to implement a method, in a radio communication system, for initiating data transmission between UE in dual connectivity with a primary node and a secondary node of the system after bearer modification as claimed in any of claims 1 to 5.

10

1/9

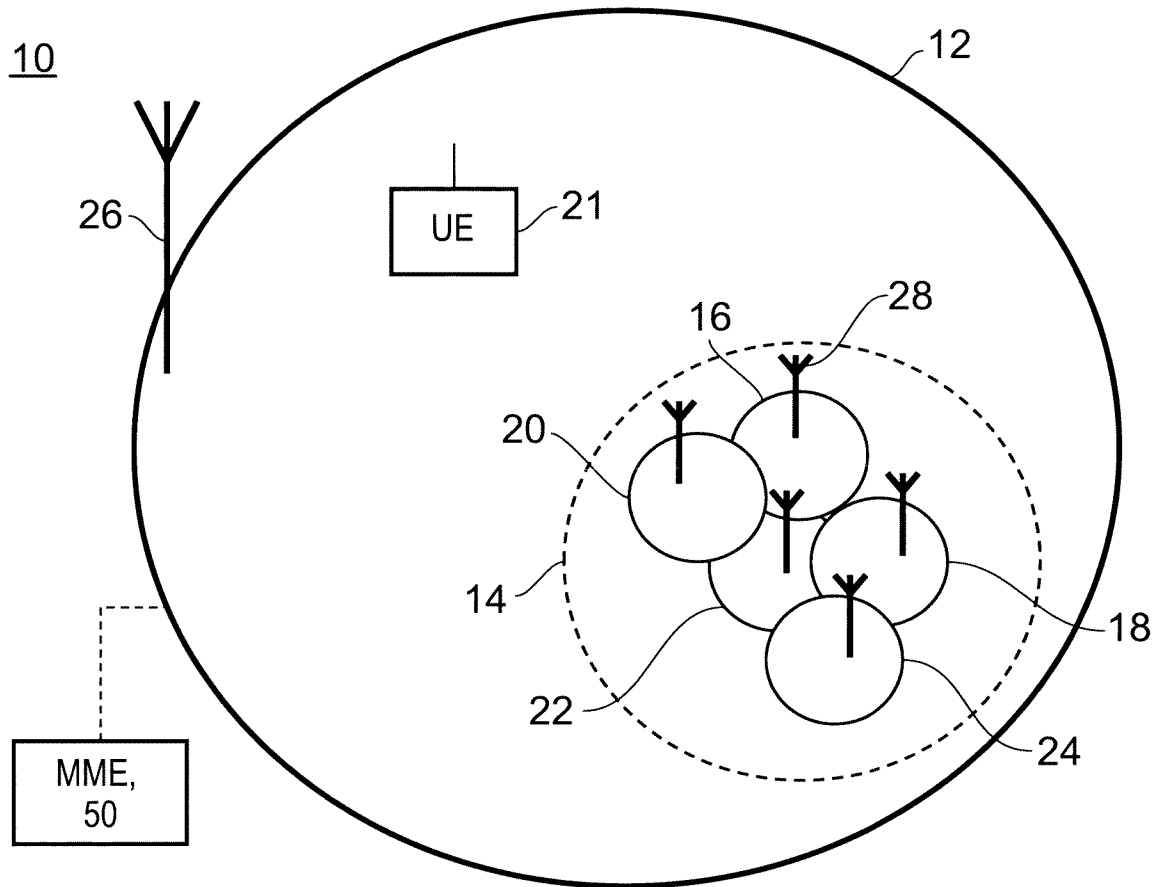


FIG. 1

2/9

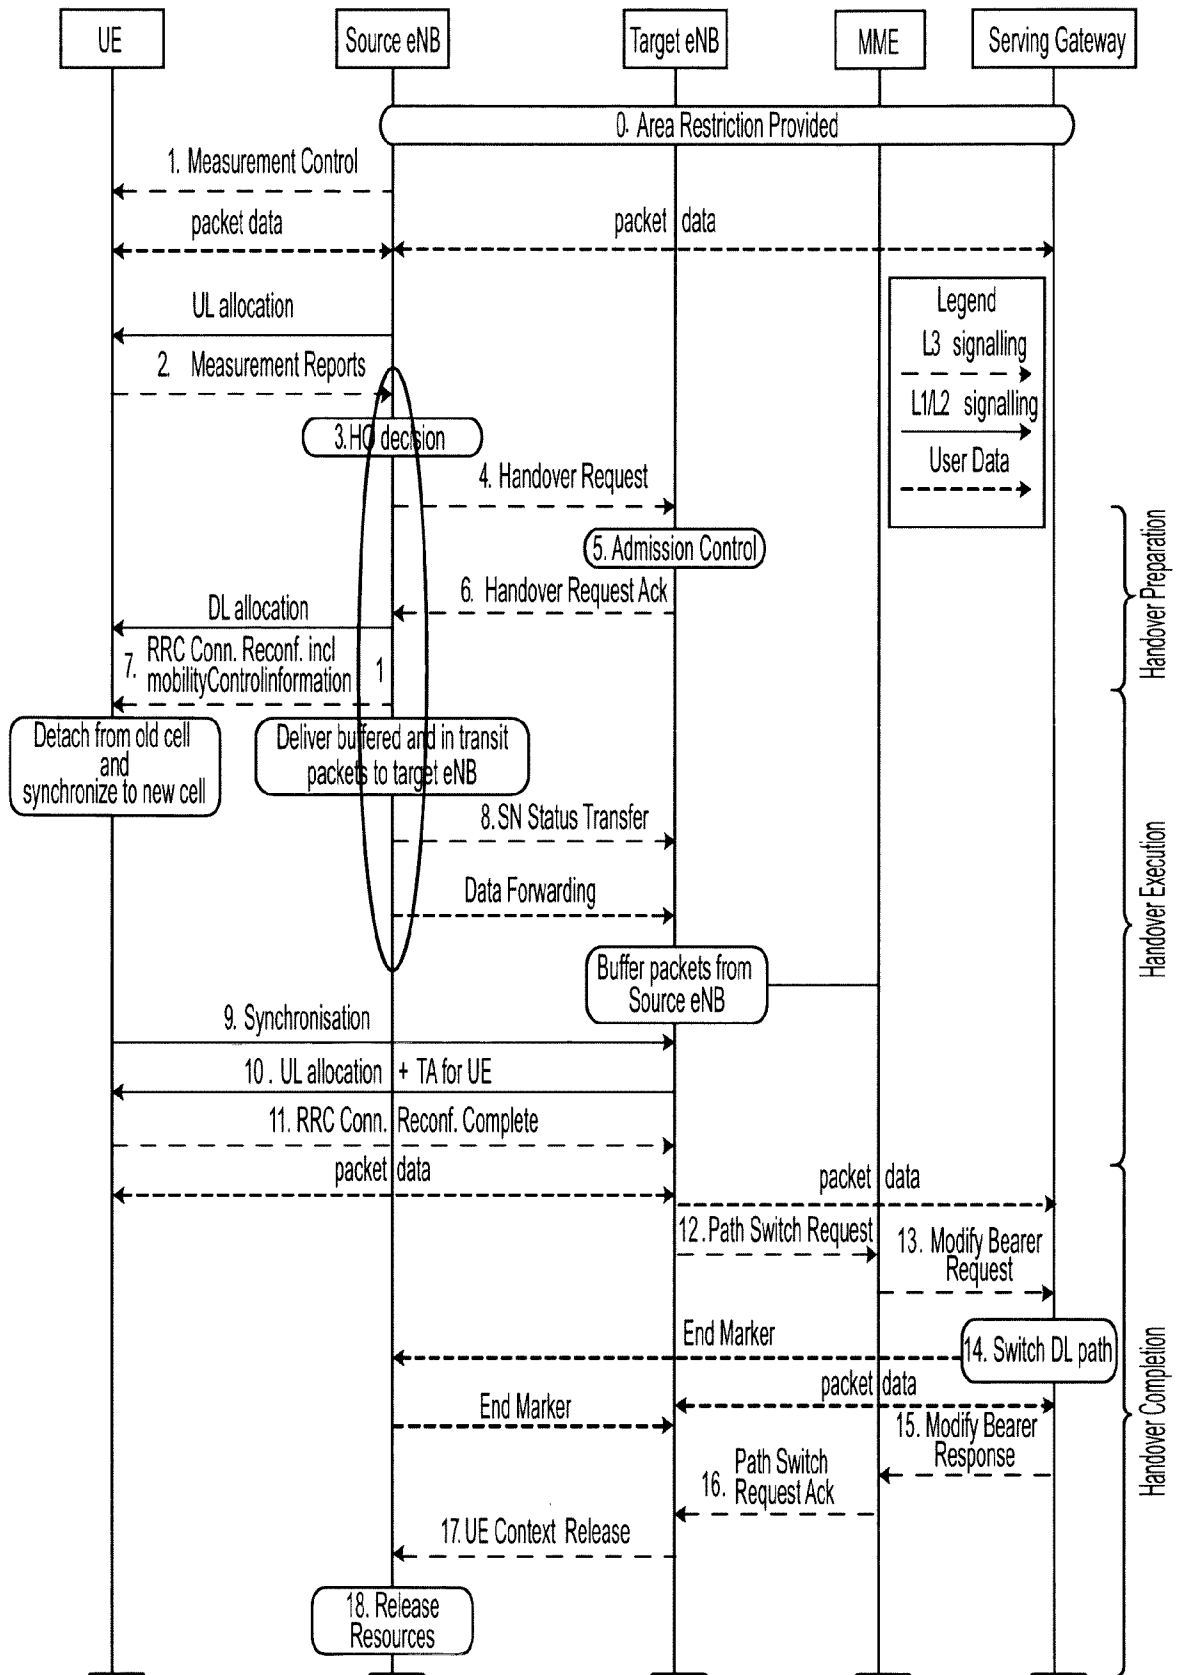


FIG. 2

3/9

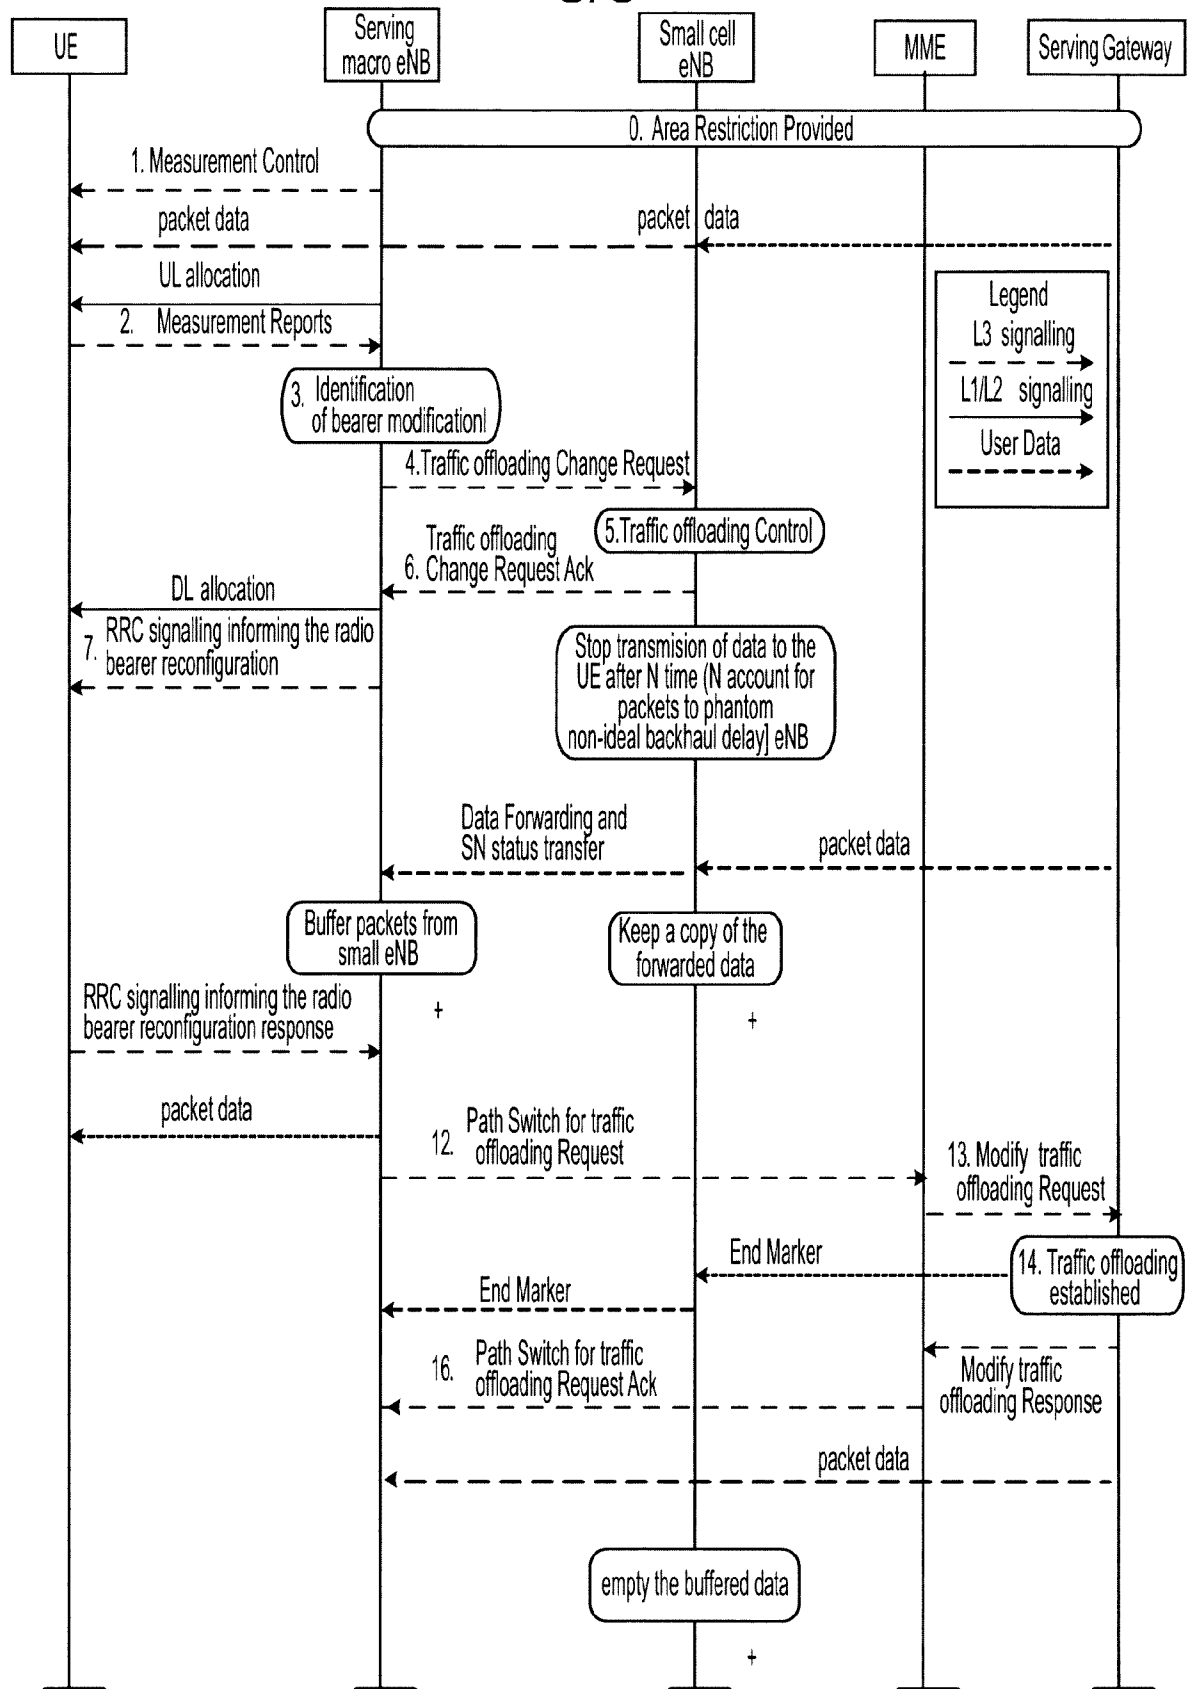


FIG. 3

4/9

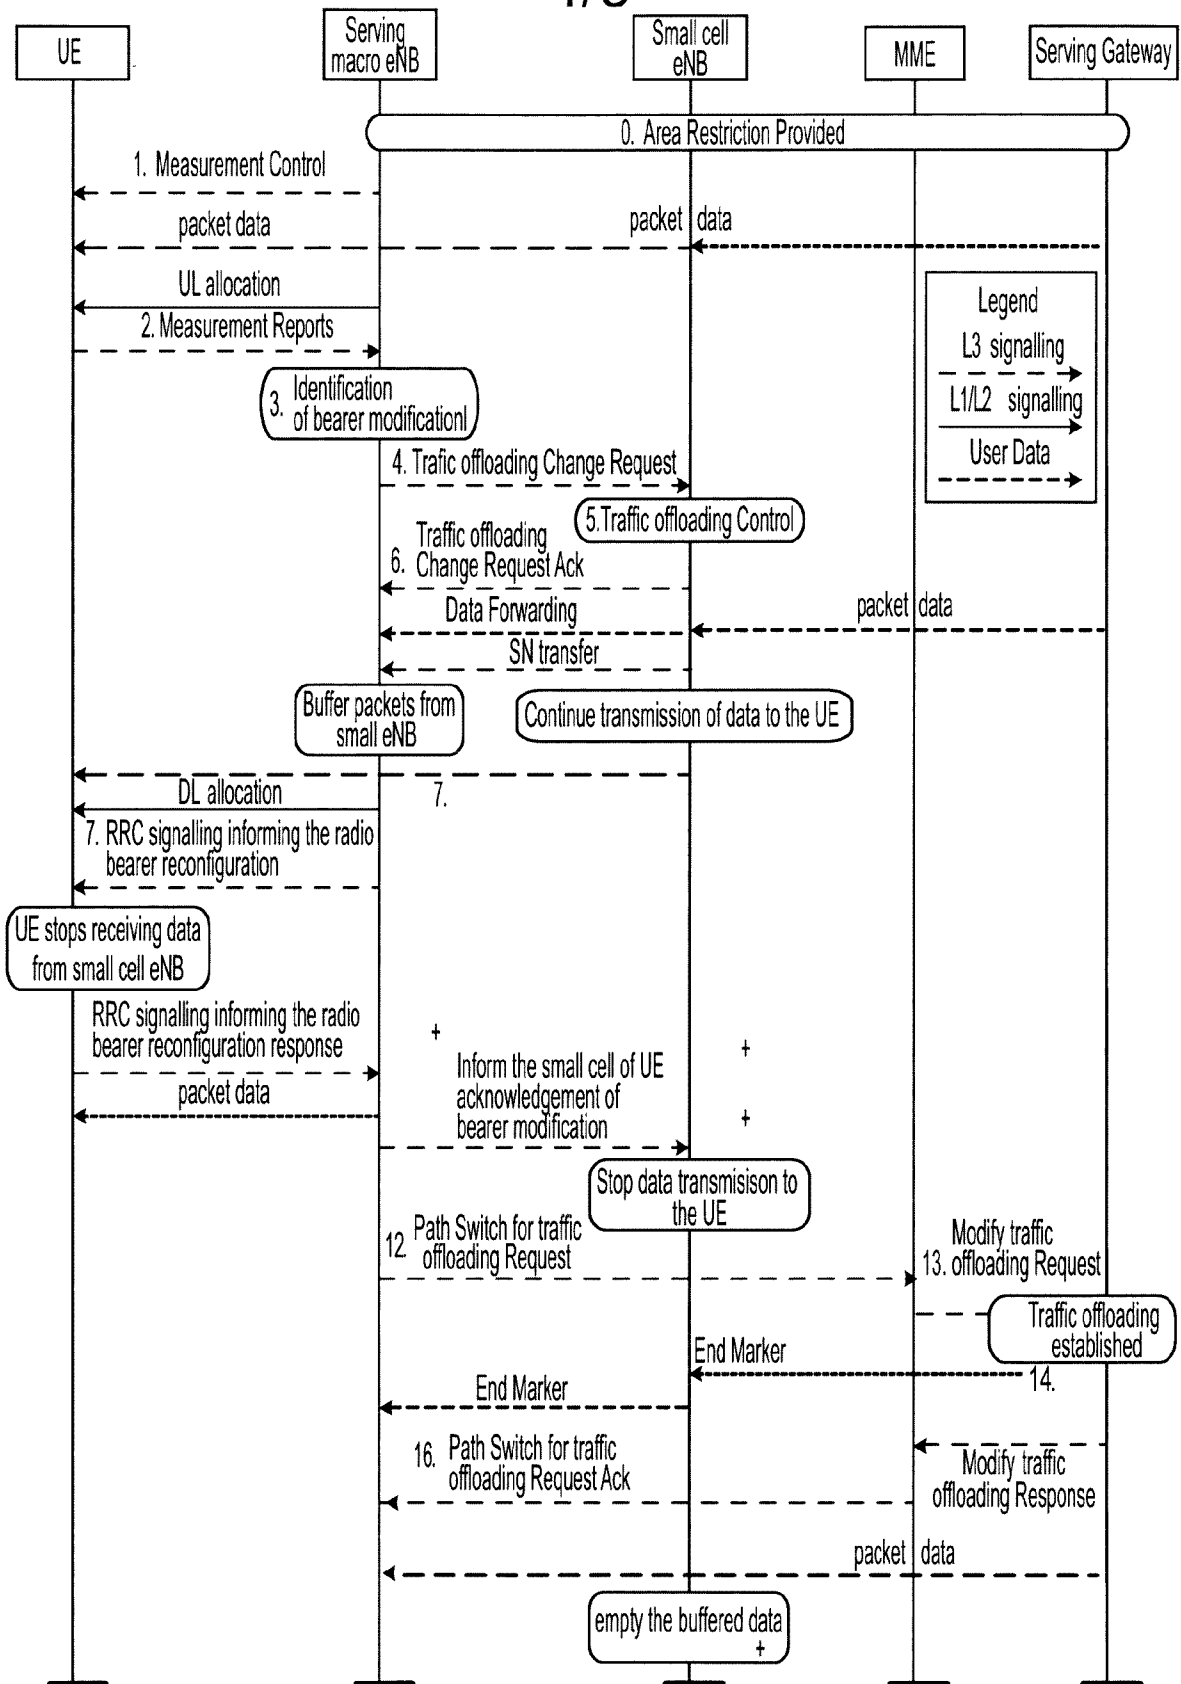


FIG. 4

5/9

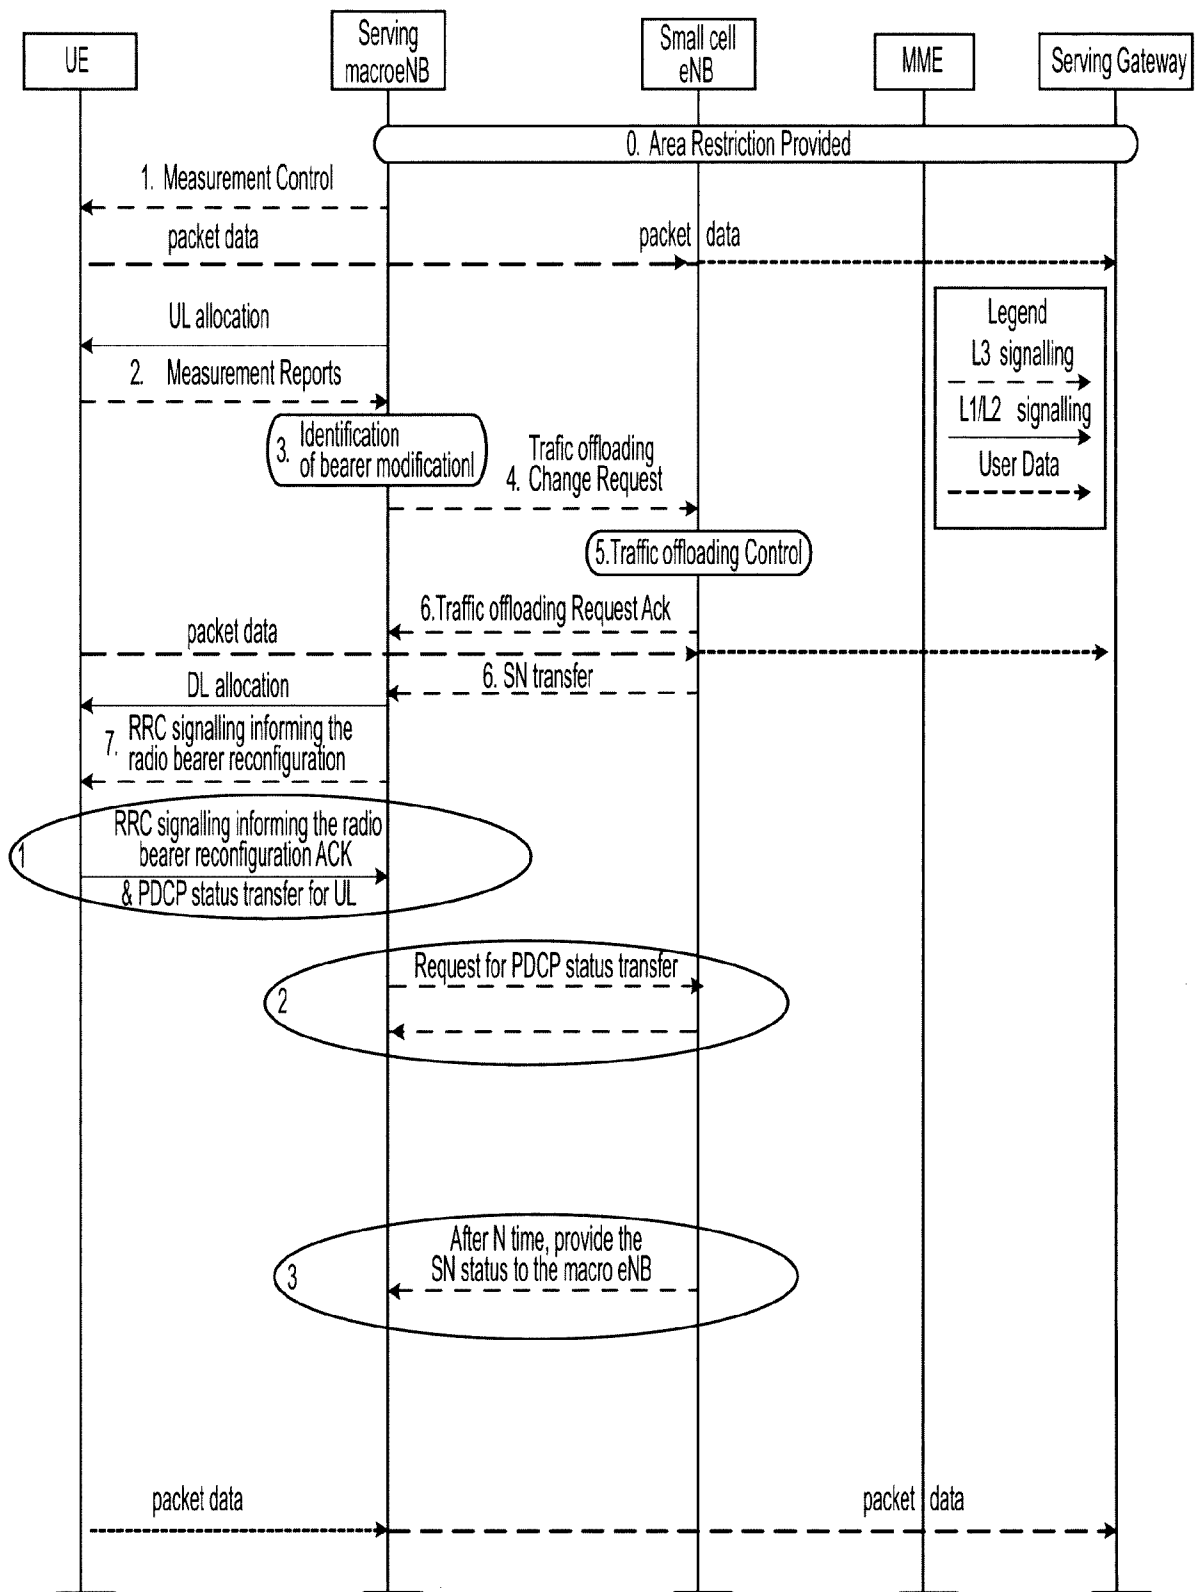


FIG. 5

6/9

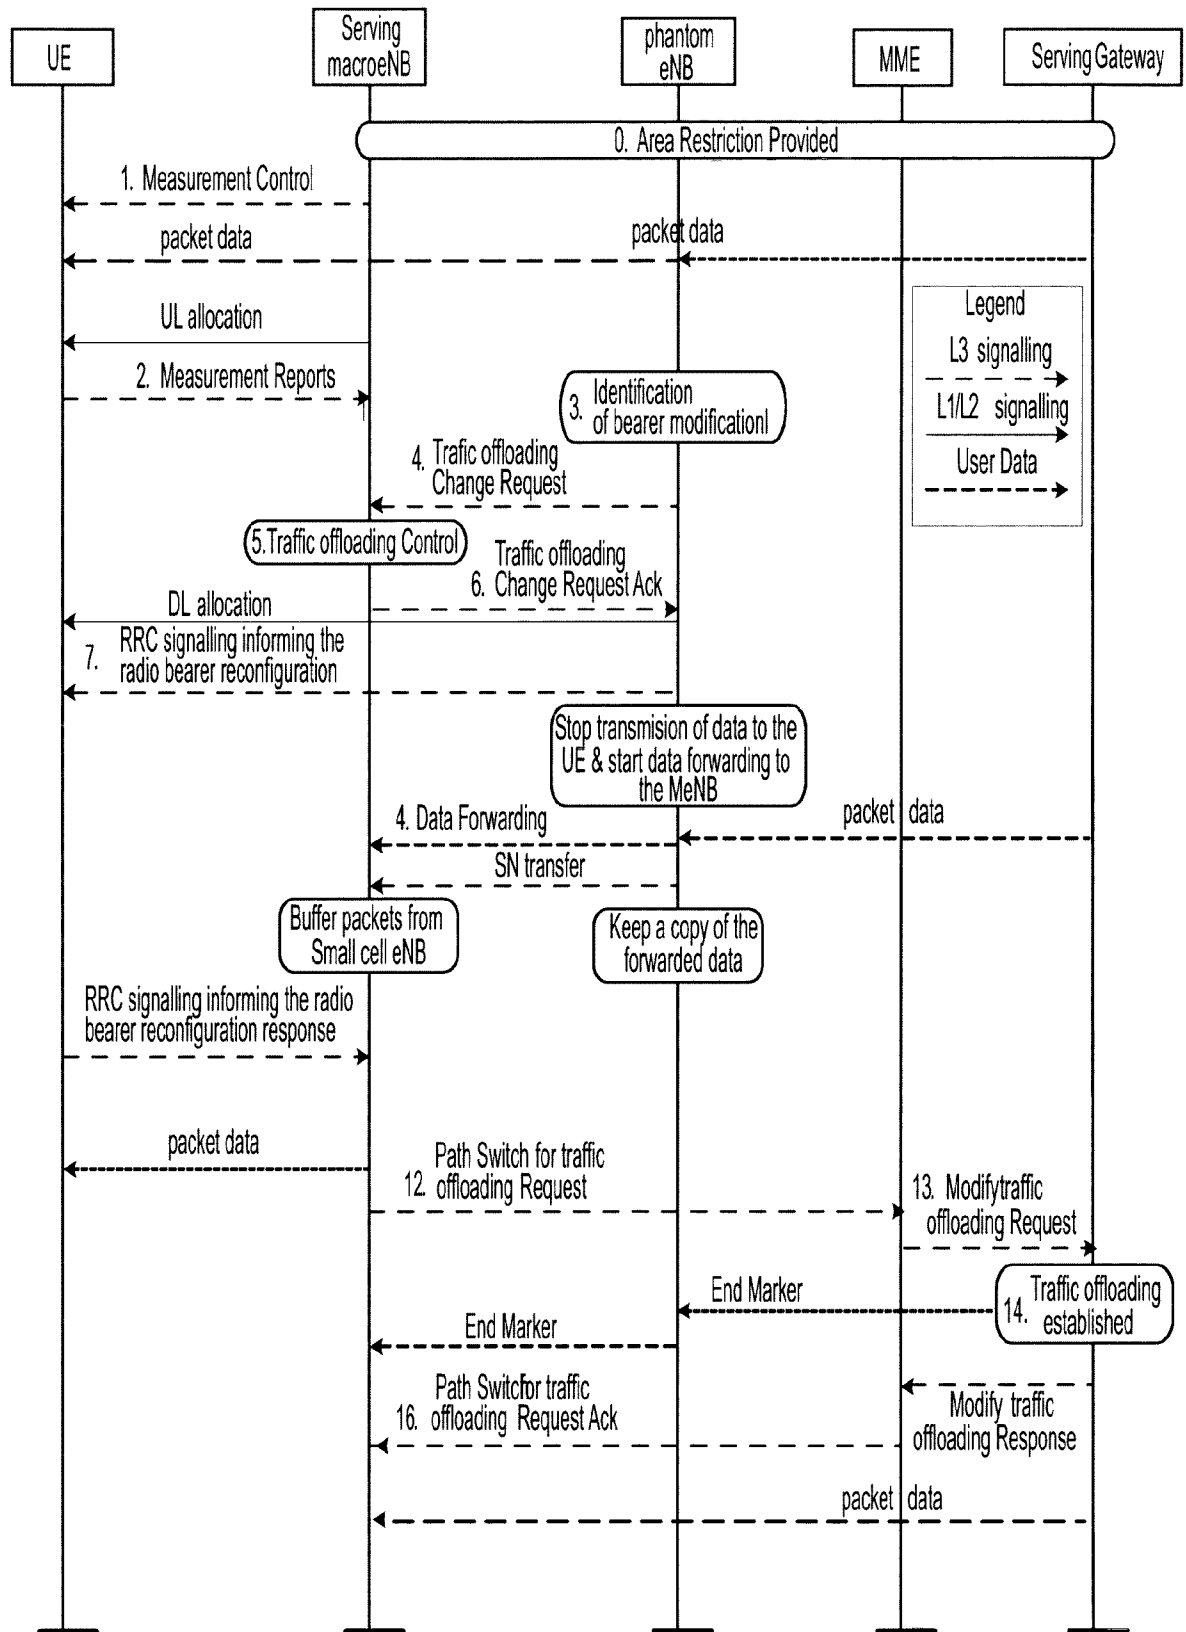


FIG. 6

7/9

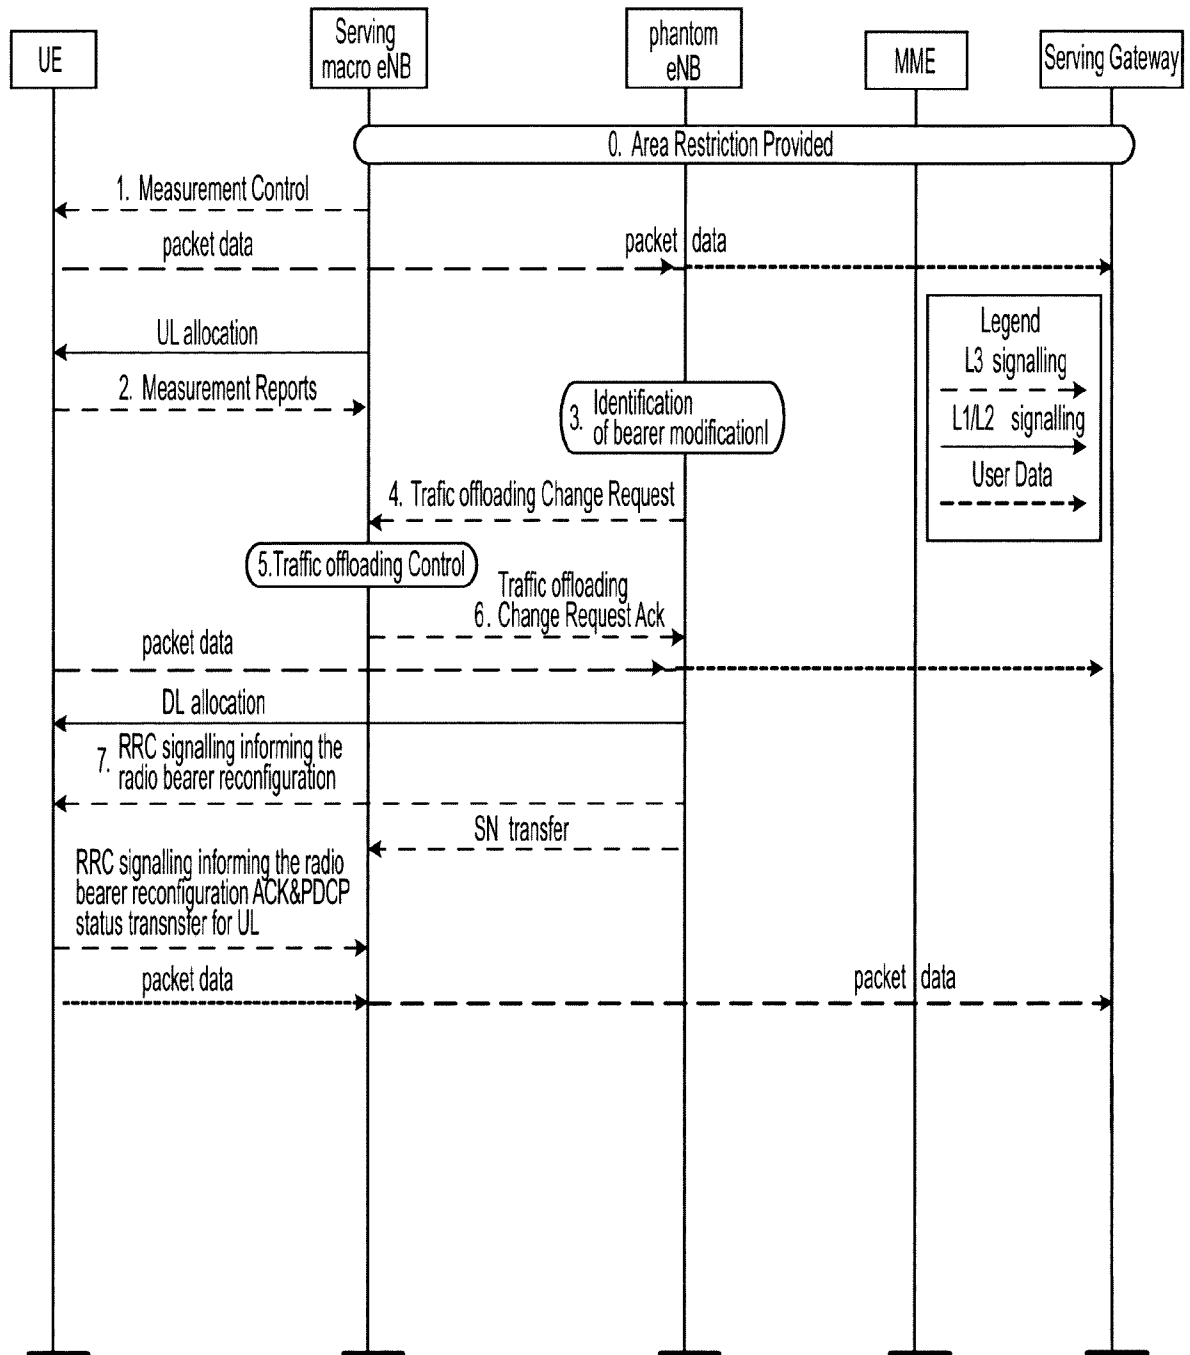


FIG. 7

8/9

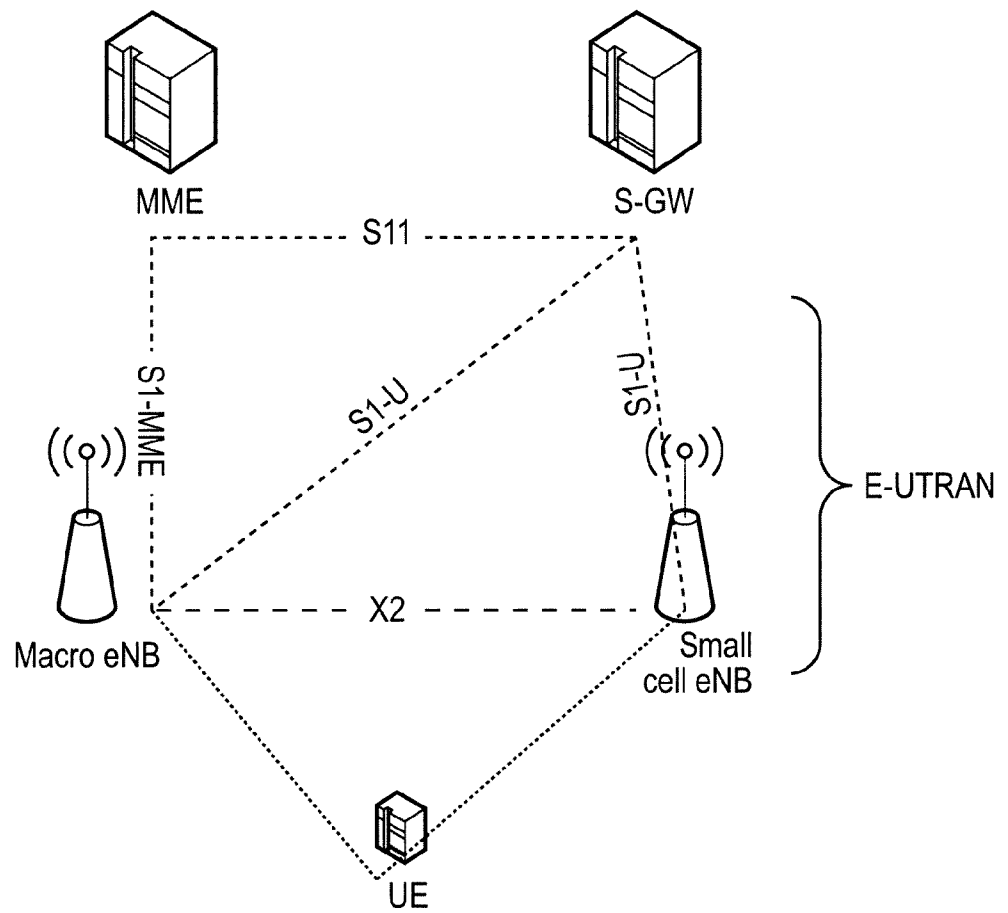


FIG. 8

9/9

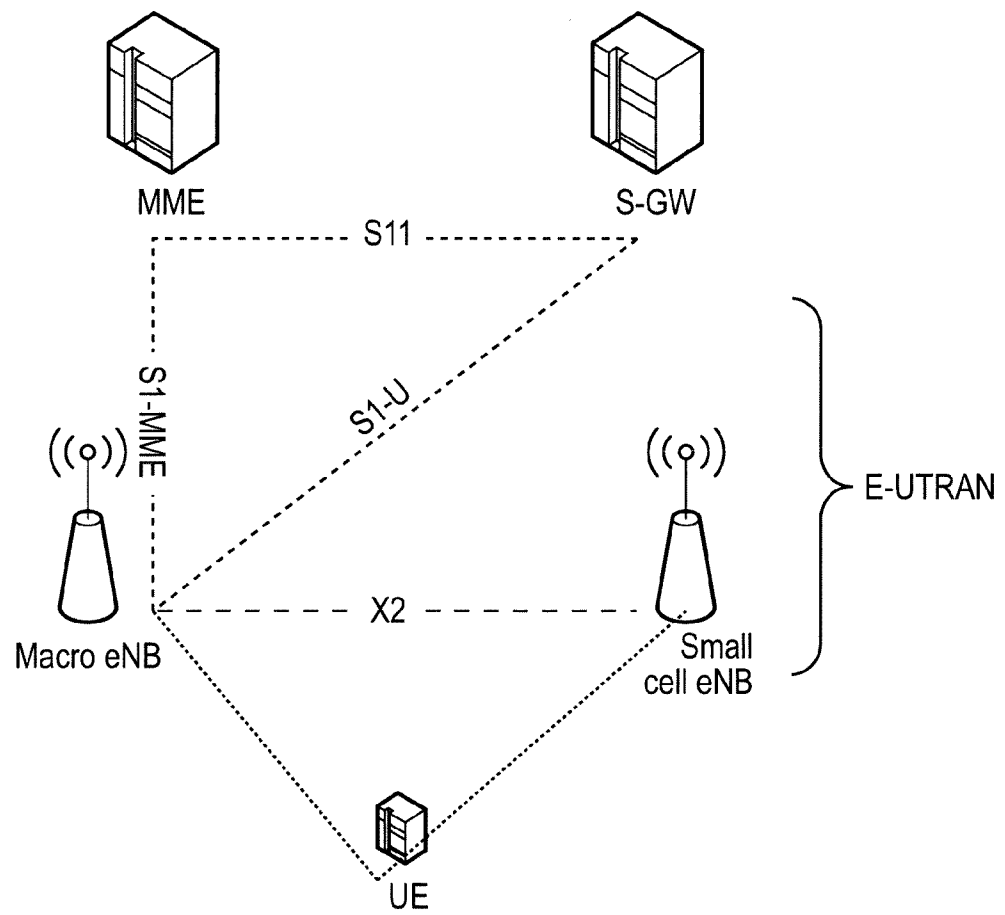


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/001996

A. CLASSIFICATION OF SUBJECT MATTER
INV. H04W76/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BROADCOM CORPORATION: "Mobility for dual connectivity", 3GPP DRAFT; R2-130990 MOBILITY FOR DUAL CONNECTIVITY, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE , vol. RAN WG2, no. Chicago, USA; 20130415 - 20130419 6 April 2013 (2013-04-06), XP050699404, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG2_RL 2/TSGR2_81bis/Docs/ [retrieved on 2013-04-06] figures 2-4 paragraph [0003] ----- -/--	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 October 2014

Date of mailing of the international search report

09/10/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Chimet, Dan

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2014/001996

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ERICSSON ET AL: "Impact of small cell enhancements to RRC functions", 3GPP DRAFT; R2-131672 IMPACT OF SMALL CELL ENHANCEMENTS TO RRC FUNCTIONS, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX , vol. RAN WG2, no. Fukuoka, Japan; 20130520 - 20130524 11 May 2013 (2013-05-11), XP050700023, Retrieved from the Internet: URL:http://www.3gpp.org/ftp/tsg_ran/WG2_RL2/TSGR2_82/Docs/ [retrieved on 2013-05-11] figure 1 paragraph [02.5] -----	1-15