

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 May 2008 (08.05.2008)

PCT

(10) International Publication Number
WO 2008/053144 A1

(51) International Patent Classification:
G02B 26/02 (2006.01)

(74) Agent: LEE, Brenda, J.; Kodak Limited, Patent Department (W160-G), Headstone Drive, Harrow, Middlesex HA1 4TY (GB).

(21) International Application Number:
PCT/GB2007/003883

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 15 October 2007 (15.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0621635.2 31 October 2006 (31.10.2006) GB

(71) Applicant (for all designated States except US): EASTMAN KODAK COMPANY [US/US]; 343 State Street, Rochester, New York 14650-2201 (US).

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and


(75) Inventors/Applicants (for US only): BOWER, Christopher [GB/GB]; 4 Warwick Drive, Ely., Cambridgeshire, CB6 3EN (GB). RIDER, Christopher [GB/GB]; 4 Ashmead Drive, Hardwick, Cambridgeshire CB3 7XT (GB). FYSON, John [GB/GB]; "Tortworth", 8 Meynell Crescent, Hackney, London E9 7AS (GB). SIMISTER, Elizabeth [GB/GB]; 7 Harford Drive, Watford, Hertfordshire WD17 3DQ (GB). CLARKE, Andrew [GB/GB]; 64 Barton Road, Haslingfield, Cambridgeshire CB3 7LL (GB).

Published:
— with international search report




WO 2008/053144 A1

(54) Title: DISPLAY ELEMENTS



A



B

(57) Abstract: A device comprises one or more dielectric layers, one side of the layer or layers being conductive. A hydrophobic layer is provided on the other side of the dielectric layer. First and second fluids are located on the surface of the hydrophobic layer, the fluids being immiscible with each other. The first fluid comprises at least one ionic liquid. The conductive layer and first fluid are arranged such that they can be electrically connected.

DISPLAY ELEMENTS

FIELD OF THE INVENTION

The present invention relates to the field of display elements, in particular
5 to elements making use of the electrowetting principle.

BACKGROUND OF THE INVENTION

There is a need to make low cost displays. One way to make displays
inexpensive is to make them roll-to-roll. This implies that displays can be made
10 on a large scale using traditional methods of coating and not requiring vacuum
evaporation steps or the like. Some displays rely on the use of expensive liquid
crystals, perhaps with a number of additional filter members such as polarizers
and light coupling films. Avoiding the use of liquid crystal might be seen to be
advantageous. One technology that might give means of roll-to roll manufacturing
15 and without the need for liquid crystals is a display based on electrowetting on a
flexible support.

A basic electrowetting optical element is described in EP1069450,
“Optical element and optical device having it”. A further refinement to this
concept using said element to create a pixel as part of an electrowetting display
20 device is described in WO2004104670 “Display Device”. These devices switch
when a potential is applied that causes a conducting solution to push aside a non-
conducting oil that is usually coloured with a dye or pigment. When the voltage is
removed the liquids relax and the oil covers the whole pixel again.

The manufacture of a low cost electrowetting display on a support requires
25 air-tight sealing of the two-phase liquid system between two electrodes. The seal
not only confines the liquids within the display, but is also required to prevent
evaporative loss of the two liquid phases, particularly the water phase, since this
has the larger volume and surrounds the oil phase. The water phase is required to
have a large electrical conductance. This is normally achieved by the addition of
30 salt such as KCl.

- 2 -

SUMMARY OF THE INVENTION

According to the present invention there is provided a device comprising one or more dielectric layers, one side of the layer or layers being conductive, a hydrophobic layer on the opposing side of the dielectric layer, a first and a second fluid located on the surface of the hydrophobic layer, the fluids being immiscible with each other, the first fluid comprising at least one ionic liquid, and means for electrically connecting the conductive layer and the first fluid.

Preferably the support is flexible. However it will be understood by those skilled in the art that it is not necessary for the support to be flexible.

10

ADVANTAGEOUS EFFECT OF THE INVENTION

Using an ionic liquid to replace the water phase solves the problem of requiring an airtight seal, due to the extremely low volatility of the ionic liquid. The ionic liquid does not evaporate. The seal need only be sufficient to confine the two liquid phases within the display. A further advantage of the invention is that the ionic liquid by its nature is intrinsically highly conductive. The ionic liquid has higher conductivity than using water with added ions. Therefore no additional salt need be added. In addition, the molecular structure can be tuned to optimise other properties such as viscosity, interfacial tension and immiscibility. Furthermore, the device construction is simplified and avoids problems such as crystallisation of any dissolved salt.

15
20

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described with reference to the accompanying drawing in which:

25

Figures 1A and 1B illustrate the basic minimum requirements to create an electrowetting element; and

Figure 2 is a graph illustrating change in area of an oil drop against voltage.

30

- 3 -

DETAILED DESCRIPTION OF THE INVENTION

The basic minimum requirements to create an electrowetting pixel element or device on a support are shown in Figure 1. A layer of hydrophobic material 1 is provided. This layer 1 has low surface energy. The material may be
5 amorphous Teflon fluoropolymer AF1600 (Dupont) or a similar material. A layer 2 is provided below layer 1. Layer 2 is a support, which in this embodiment also acts as a dielectric layer. The device may include more than one dielectric layer. Layer 3 is a conducting layer that forms the bottom electrode. In this embodiment the layer 3 is a layer of sputter coated platinum of approximately 10nm thickness.
10 It will be appreciated by those skilled in the art that any other suitable material may be used. A droplet of oil 4 such as decane is placed on top of this layered structure. The structure need not be planar. For instance a textured structure could be fabricated to take advantage of superhydrophobicity effects. The droplet 4 is coloured using an oil-soluble, water-insoluble dye such as Oil Blue. The
15 droplet is dielectric with low conductivity. A conducting liquid 5 is placed on top of the oil droplet. The conducting liquid is immiscible with the oil droplet. The conducting liquid is usually water with ions dissolved therein. In the absence of applied voltage between the conducting layer 3 and an electrode in contact with the conductive liquid (not shown) the oil drop 4 spreads to cover the hydrophobic
20 layer 1. This is illustrated in Figure 1A. When either a DC or AC voltage is applied between the lower conducting layer 3 and the electrode the area of the oil drop in contact with the hydrophobic layer 1 decreases and the contact angle of the oil droplet increases, i.e. the interface between the droplet 4 and the conductive liquid 5 changes. This can be seen in Figure 1B. The change in
25 contact angle is described by the Young-Lippman equation,

$$\cos\theta = \cos\theta_0 + \frac{\epsilon V^2}{2\gamma_{LV} d}$$

where θ_0 is contact angle in the absence of applied voltage and θ the voltage dependent contact angle, ϵ the dielectric constant of the layers of thickness d , and γ_{LV} is the interfacial tension between the oil and water solutions.

5 Example

An experiment using the arrangement as described above was used. In accordance with the invention the conductive water phase was replaced by an ionic liquid, in this example Ethyl Methylimidazole dicyanamid (EMIM DCA). It will be understood by those skilled in the art that any suitable ionic liquid may be used. The ionic liquid used has a low viscosity, is highly conductive and is non-volatile. The change in area of the decane drop with applied DC voltage is shown in Figure 2.

In a preferred embodiment the support layer is flexible. However this is not an essential feature of the invention. The support layer may equally be rigid. Possible rigid supports include glass and silica, metal, silicon or any other semiconductor material. It will be understood by those skilled in the art that any suitable material may be used for the support layer.

The conductive liquid may be a single ionic liquid or it may be a mixture of more than one ionic liquid. Alternatively the conductive liquid may be an ionic liquid in combination with other non-ionic liquids. An ionic liquid is defined as salts or mixtures of salts whose melting point is below 100° C. (P. Wasserscheid, W. Keim, *Angew. Chem.* (2001), 112, 3926). Liquid salts of this type known from the literature consist of anions, such as halostannates, haloaluminates, hexafluorophosphates or tetrafluoroborates combined with substituted ammonium, phosphonium, pyridinium or imidazolium cations. Further examples might include the use of cations such as; quaternary ammonium; phosphonium cation; imidazolium cation; pyridinium cation; pyrazolium cation and triazolium cation. Further examples may include the use of anions such as; halides, bis(perfluoroalkylsulphonyl)amides, alkyltosylates und aryltosylates,

- 5 -

perfluoroalkyltosylates, nitrates, sulphates, hydrogensulphates, alkylsulphates and
arylsulphates, perfluoroalkylsulphates, sulphonates, alkylsulphonates and
arylsulphonates, perfluorinated alkylsulphonates and arylsulphonates,
alkylcarboxylates and arylcarboxylates, perfluoroalkylcarboxylates, perchlorates,
5 tetrachloroaluminates, saccharinates, in particular dicyanamide, tetrafluoroborate,
hexafluorophosphate and phosphate.

The dye in the oil may be a liquid or a pigment.

Using the ionic liquid on top of the decane + dye drop meant that the
system was not destroyed by evaporation and was stable for several days. In
10 contrast, a similar experiment using water + 0.1M KCL as the conductive liquid
top layer was only stable for a period of order tens of minutes, due to evaporation
of the water.

The invention has been described in detail with reference to preferred
embodiments thereof. It will be understood by those skilled in the art that
15 variations and modifications can be effected within the scope of the invention.

CLAIMS

1. A device comprising one or more dielectric layers, one side of the layer or layers being conductive, a hydrophobic layer on the opposing side of the dielectric layer, a first and a second fluid located on the surface of the hydrophobic layer, the fluids being immiscible with each other, the first fluid comprising at least one ionic liquid, and means for electrically connecting the conductive layer and the first fluid.
5
2. A device as claimed in claim 1 wherein the one or more dielectric layers are flexible.
10
3. A device as claimed in claim 1 or 2 wherein the ionic liquid has low viscosity.
4. A device as claimed in claim 1, 2 or 3 wherein the ionic liquid has a low molecular weight.
15
5. A device as claimed in any of claims 1 to 4 wherein the dielectric layer and the hydrophobic layer are formed of the same material.
20
6. A device as claimed in any preceding claim wherein both fluids are liquids.
7. A device as claimed in any preceding claim wherein the liquid layer is divided by partition means into a number of individual elements each of which contains the two fluids and whereby the first fluid in each element is individually electrically addressable.
25
8. A device as claimed in any preceding claim wherein the entire device is flexible.
30

- 7 -

9 A display device comprising at least one device as claimed in any preceding claim.

10. A method of providing an indicator or display comprising
5 providing one or more dielectric layers, one side of the layer or layers being
conductive, providing a hydrophobic layer on the opposing side of the dielectric
layer, providing a first and a second fluid on the surface of the hydrophobic layer,
the fluids being immiscible with each other and the first fluid comprising at least
one ionic liquid, and applying a potential between the conductive layer and the
10 first fluid such that the interface between the first and second fluid changes.

11. A method as claimed in claim 10 wherein the one or more dielectric layers provided are flexible.

1/2

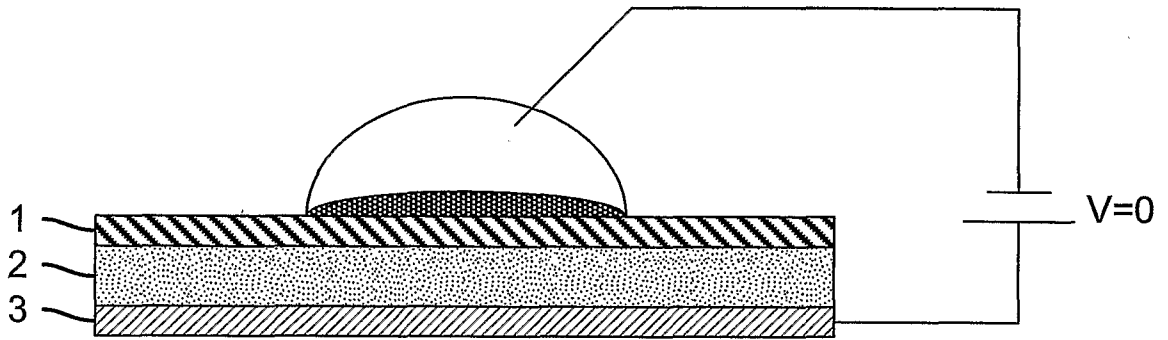


FIG. 1A


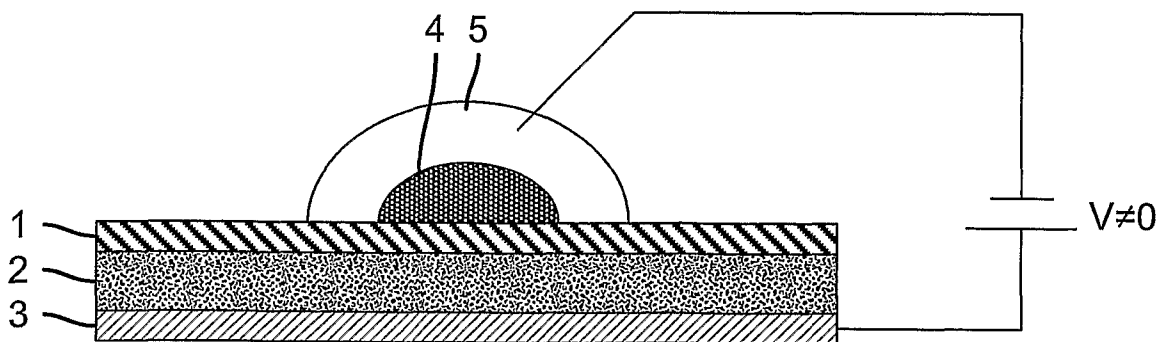


FIG. 1B

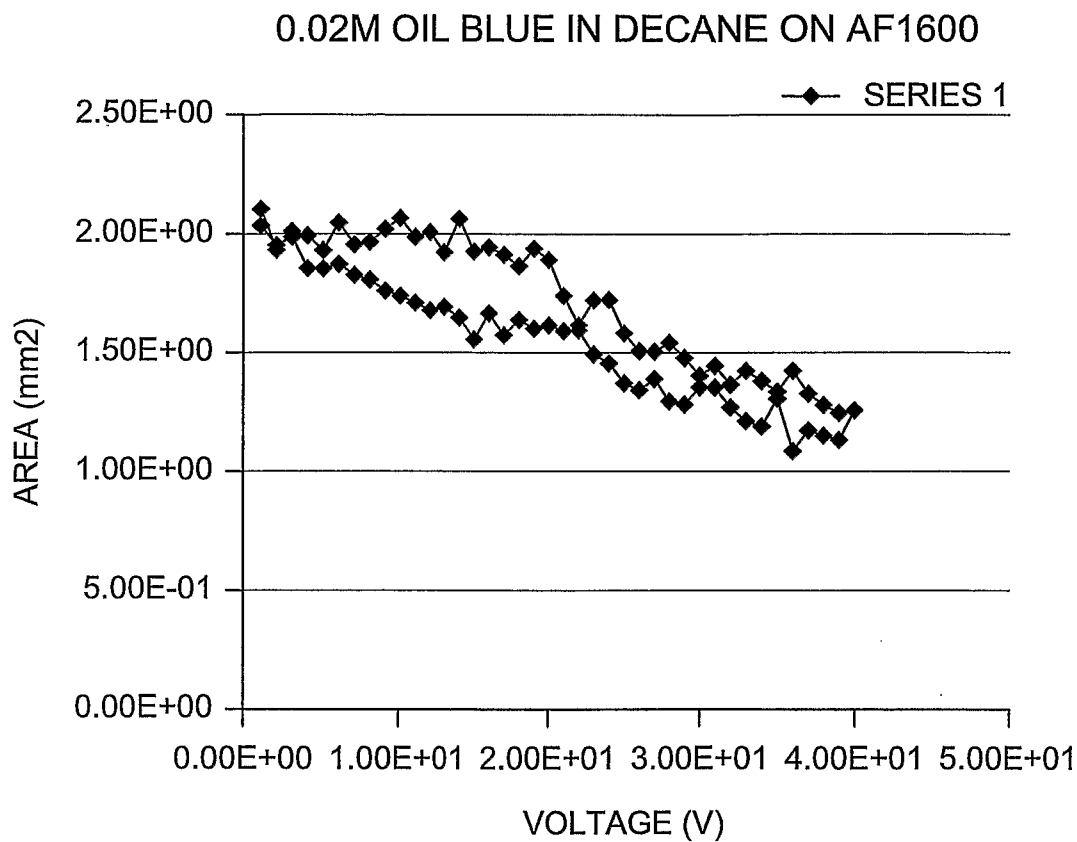

CHANGE IN AREA OF DECANE + OIL BLUE UNDER ETHYL METHYLIMIDAZOLE DICYANAMID.

FIG. 2

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2007/003883

A. CLASSIFICATION OF SUBJECT MATTER INV. G02B26/02		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) G02B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2006/132927 A1 (YOON FRANK C [US]) 22 June 2006 (2006-06-22) paragraphs [0032] - [0037]	1,3-6,9, 10 2,7,8,11
Y	US 2002/154380 A1 (GELBART DANIEL [CA]) 24 October 2002 (2002-10-24) paragraph [0029]	2,8,11
Y	WO 2005/006029 A (KONINKL PHILIPS ELECTRONICS NV [NL]; KUIPER STEIN [NL]; FEENSTRA BOKKE) 20 January 2005 (2005-01-20) abstract	7
A	EP 1 069 450 A (CANON KK [JP]) 17 January 2001 (2001-01-17) cited in the application abstract	1,10
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents :		
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family	
Date of the actual completion of the international search <p style="text-align: center; font-weight: bold;">15 January 2008</p>	Date of mailing of the international search report <p style="text-align: center; font-weight: bold;">23/01/2008</p>	
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer <p style="text-align: center; font-weight: bold;">Mollenhauer, Ralf</p>	

INTERNATIONAL SEARCH REPORT

International application No

PCT/GB2007/003883

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2005/096065 A (EASTMAN KODAK CO [US]; WELFARE ELOISE [GB]; CLARKE ANDREW [GB]) 13 October 2005 (2005-10-13) page 3, lines 19,20 -----	1,10
A	ROQUES-CARMES T ET AL: "Liquid behavior inside a reflective display pixel based on electrowetting" JOURNAL OF APPLIED PHYSICS, AMERICAN INSTITUTE OF PHYSICS. NEW YORK, US, vol. 95, no. 8, 15 April 2005 (2005-04-15), pages 4389-4396, XP002329483 ISSN: 0021-8979 the whole document -----	1,10
P,A	WO 2007/071904 A (EASTMAN KODAK CO [US]; BOWER CHRISTOPHER [GB]; RIDER CHRISTOPHER [GB];) 28 June 2007 (2007-06-28) the whole document -----	1-11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/GB2007/003883

Patent document cited in search report	A1	Publication date	Patent family member(s)	Publication date
US 2006132927	A1	22-06-2006	NONE	
US 2002154380	A1	24-10-2002	NONE	
WO 2005006029	A	20-01-2005	CN 1823283 A JP 2007519025 T KR 20060034700 A US 2006279848 A1	23-08-2006 12-07-2007 24-04-2006 14-12-2006
EP 1069450	A	17-01-2001	US 6449081 B1	10-09-2002
WO 2005096065	A	13-10-2005	CN 1938631 A EP 1730573 A1 JP 2007531035 T US 2007144888 A1	28-03-2007 13-12-2006 01-11-2007 28-06-2007
WO 2007071904	A	28-06-2007	NONE	