



(51) International Patent Classification:

A61B 17/00 (2006.01) A61F 2/84 (2006.01)
A61F 2/82 (2006.01)

(21) International Application Number:

PCT/EP2010/063135

(22) International Filing Date:

7 September 2010 (07.09.2010)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

09169672.4 7 September 2009 (07.09.2009) EP
61/240,273 7 September 2009 (07.09.2009) US

(72) Inventor; and

(71) Applicant : JÖNSSON, Anders [SE/SE]; Igelkottsvägen
99, S-16757 Bromma (SE).

(74) Agent: KRAHBICHLER, Erik; Krahbichler Intellectual
Property Advisors AB (KIPA), Box 1065, S-25110 Hels-
ingborg (SE).

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

(54) Title: DEVICE, KIT AND METHOD FOR CLOSURE OF A BODY LUMEN PUNCTURE

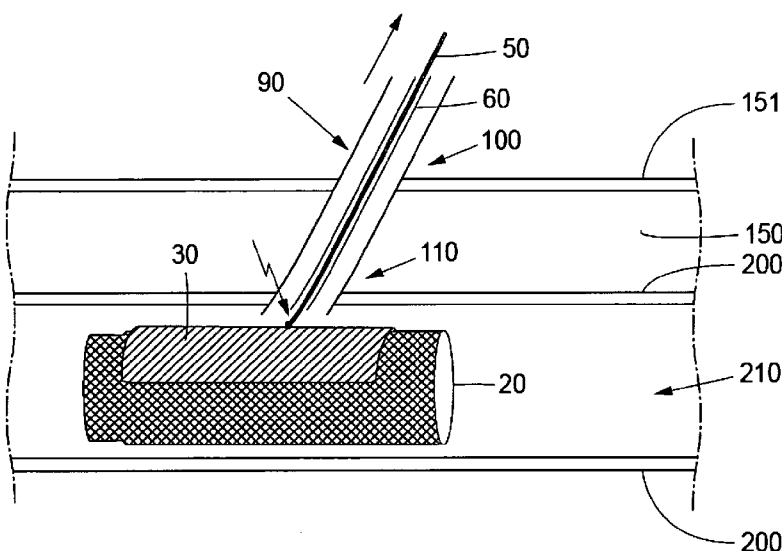

(57) Abstract: A medical device and method for closure of a puncture in a body lumen are disclosed. The device has an aggregate (10) of a support structure (20) and a substantially fluid tight patch member (30) attached thereto at an attachment unit (40). The aggregate has a first, temporary delivery shape, for delivery to an interior of said body lumen and to be subsequently subjected to a change of shape to a second shape, which is a tubular shape. When delivered in said body lumen, the patch member is arranged radially outside of said tubular support structure and arranged towards an inner tissue wall of the body lumen. The aggregate is the detached from a delivery device and said puncture is intraluminally closed in a leakage tight manner, advantageously supported by a physiological pressure of a body fluid in said body lumen. The device may biodegrade over time.

Fig. 7G

DEVICE, KIT AND METHOD FOR CLOSURE OF A BODY LUMEN PUNCTURE**Field of the Invention**

5 This invention pertains in general to the field of medical devices and methods for closure of punctures in body lumina, such as a vessel, in a patient. More particularly, the invention relates to the field of sealing apertures created by medical procedures that pierce the walls of blood vessels in living tissue.

Background of the Invention

10 During certain types of medical surgery or treatment, an introducer is used to access the vascular system of a patient. The introducer is inserted through the wall of a blood vessel in order to obtain access to the vascular system and may thereafter be used for guiding medical instruments such as catheters, guide wires and the like.

15 After completion of the medical procedure, there will be an incision or a wound in the wall of the blood vessel corresponding to the size of the introducer. The bleeding from the wound, which is a result of such a surgical operation, can be stopped by applying direct pressure on the wound. However, applying direct pressure on the wound will require assistance of medical personnel and may also restrict the flow of blood through the vessel. Ischemia may occur and can lead to serious consequences.

20 In cases of puncturing the femoral arteries, the required time may be as long as about 45 minutes or more and in some cases re-bleeding occurs if the patient is not in rest. Bleeding from a vessel puncture in a substantially sized blood vessel can be severe.

25 A variety of methods and devices have been suggested for replacing the traditional method disclosed above, some of which involve introducing chemical compounds which act as homeostasis catalysts or as adhering agents, whilst others aim at introducing various forms of plugging members into the puncture.

30 Sealing devices in form of sealing plugs in the cutaneous channel at the puncture site outside the vessel are known, e.g. from US patent application 2009/0054926 or European patent EP 1349501. However, the blood pressure inside the vessel may press the plug out of position before a reliable sealing has occurred.

35 Other sealing devices in form of double button type fasteners that are affixed to each other, in the type of an outside member and inside member in relation to the lumen and a crosspiece arranged across the puncture opening, both inside and outside of the vessel wall are known, e.g. from US patent 7,488,340, or US patent 7,572,274. The outside member and inside member are brought in a locked configuration upon assembly and compress the vessel wall tissue around the puncture opening.

However, such button type sealing devices may not seal off the puncture optimally.

For instance, such button type devices may restrict the lumen and blood flow therein. The inside member of the device protruding into the blood vessel often substantially restricts the patency of the lumen. This is in particular the case for small diameter lumen, such as at peripheral vessels. A protruding member may also lead to a turbulent flow, which might cause secondary effects, such as creation of thrombosis or embolies.

Furthermore, the devices may damage the vessel wall, in particular in the case of peripheral vessels, such as the arteria subclavia, the arteria axillaris, which for instance are accessed in the region of the clavicle, or the arteria radialis for access in the arm, which all are brittle vessels.

The aforementioned double sided tissue compression of the vessel wall causes a pressure onto the wall tissue, which brings about a number of issues.

For instance, the vessel wall may be damaged when the applied compression or pressure is too high. Necrotic tissue may be built up. The vessel wall may be structurally weakened. The vessel wall may get damaged by the device. A rupture of the vessel wall may occur. As a consequence, a dissection may occur, i.e. a bleeding out of the vessel wall into surrounding tissue of the vessel.

For instance arteriosclerotic vessel are conventionally difficult to seal off. Arteriosclerotic vessels are brittle, conventional sealing devices have difficulties to find hold or damage the brittle vessel wall, the lumen diameter is already reduced and may be further reduced by members of the known sealing devices protruding into the lumen, etc.

When the applied compression or pressure is too low, i.e. the button device is put in place too loose, pressure damages are avoided. However, a leakage may then occur.

Leakage of blood from the puncture site is not desired, and should be avoided.

In particular repeated puncture, e.g. necessary during intensive treatment periods, of such anatomically sensitive vessels, may lead to damage of the vessel.

WO2006/034114 discloses thin film devices implantable within a human subject for occlusion of an aneurysm or body vessel. The devices are movable from an elongated, collapsed configuration for delivery to a deployed configuration within the body. Such an occlusion device includes a thin film mesh attached to a carrying frame. The carrying frame is moveable between a collapsed configuration and an expanded configuration. The thin film mesh can include a plurality of slits, slots and/or pores that typically vary in degree of openness as the carrying frame moves between the collapsed and the expanded configurations. The occlusion device is transluminally positioned within the blood vessel so that the thin film mesh substantially reduces or completely blocks blood flow to a diseased portion of a blood vessel. However, a puncture itself is needed to deploy this device into the vessel as it is not suitable to be delivered itself through an opening to be closed,

US2009/0143815 discloses a device for sealing a puncture opening in a wall of a blood vessel that includes a base frame including a first bi-stable material having a first stable state corresponding to a delivery configuration of the base frame, in which the base frame is retracted to have a relatively smaller overall profile, and a second stable state corresponding to a deployed configuration of the base frame, in which the base frame is extended to have a relatively larger overall profile. The base frame is sized to engage an interior surface of the blood vessel wall when in the deployed configuration. A sealing section is coupled axially as a section to the base frame and includes a second bi-stable material having a first stable state corresponding to an initial configuration of the sealing section, in which the sealing section permits fluid flow, and a second stable state corresponding to a barrier configuration of the sealing section, in which the sealing section prevents fluid flow. The sealing section in the barrier configuration is sized to block fluid flow through the puncture opening when the base frame is in the deployed configuration. However, this device is difficult to deliver as deployment of the base frame is not controllable. Thus, the base frame may expand and engage the vessel wall before the sealing section is correctly positioned. Moreover, this device may migrate along the vessel with too low self expansion pressure of the base frame. The device may also migrate into the vessel wall and damage the latter at too high self expansion force of the base frame. Reliable sealing is thus difficult to achieve with this device. Moreover, a structure as disclosed in US2009/0143815 is traumatic in relation to the vessel wall, in particular at the tissue surrounding the puncture opening.

It is an object of the present invention to provide a novel and inventive device for closure and sealing of a puncture or incision formed in a blood vessel or in other body organs. A further object of the invention is to provide a puncture closure method, in embodiments utilizing the sealing device. The medical arts would benefit from a device that allows for the sealing of blood vessel wall punctures that are created at the termination of a tissue tract that passes through intervening tissues between the vessel wall puncture and a puncture through the skin. It would be preferred if the device was self-securing and small in size so as to be introduced without the need to enlarge the tissue tract beyond the size needed to perform the primary medical procedure.

Hence, an improved medical device or methods for closure of a puncture in a body lumen would be advantageous, and in particular allowing for increased flexibility, and/or patient-friendliness would be advantageous. Advantageously the solution should be atraumatic in relation to the vessel wall, in particular at the tissue surrounding the puncture opening to provide a reliable sealing.

Summary of the Invention

Accordingly, embodiments of the present invention preferably seek to mitigate, alleviate or eliminate one or more deficiencies, disadvantages or issues in the art, such as the above-identified, singly or in any combination by providing a device, a kit and a method according to the appended patent claims.

According to a first aspect of the invention, a medical device is provided. The medical device is adapted for closure of a puncture in a body lumen, such as a vessel, in a patient. The device comprises an aggregate of a) a support structure having a first shape, which is a temporary delivery shape, for delivery to an interior of the body lumen and to be subsequently subjected to a change of shape to a second shape, which is a tubular shape, when delivered in the body lumen, and b) a substantially fluid tight patch member attached to the support structure, which patch member is at least partly arranged radially outside of the tubular support structure and at least partly arranged towards an inner tissue wall of the body lumen at a site of the puncture of the body lumen when the support structure has the second, tubular shape, such that the puncture is sealed off by the aggregate.

More particularly, a medical device for closing a puncture in a body lumen from the inside thereof, such as a vessel, in a patient, is provided. The device comprises an elongate delivery unit having a distal end; and an aggregate of a support structure having a first shape, which is a temporary delivery shape, for delivery to an interior of the body lumen through the puncture and to be subsequently controllably subjected to a change of shape to a second shape, which is a tubular shape, when delivered in the body lumen, and a patch member attached to the support structure at an intermediate portion between two opposite ends thereof. The distal end of the elongate delivery unit is radially releasably attached to the aggregate at an attachment position intermediate between ends of the patch member and detachable therefrom upon deployment of the aggregate in the body lumen. The patch member is sized and shaped for arranging it towards an inner tissue wall of the body lumen at a site of the puncture of the body lumen and extending over a puncture opening. The delivery unit extends in a direction radially from the aggregate through the opening, such that the puncture is controllably sealed off by the patch when drawing the delivery device in a direction out of the puncture and tightening the patch over the opening before the change of shape of the support structure.

In embodiments the device comprises an elongate delivery unit and a detachment unit detachably, wherein the delivery unit is connected to the aggregate by means of the detachment unit for delivery thereof to the interior of the body lumen, and for detachment of the aggregate upon the delivery to the interior of the body lumen; wherein the elongate delivery unit preferably comprises a delivery catheter, and/or a delivery wire releasably attached to the aggregate.

According to another aspect of the invention, a medical procedure is provided in form of a method. The method is a method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device. The method comprises deploying an aggregate of a support structure and a patch member in the body lumen through a puncture opening in the body lumen at the puncture site, wherein the patch member is a substantially fluid tight patch member attached to the support structure, and wherein the deploying comprises delivering the support structure in a temporary delivery shape to an interior of the body lumen, subsequently subjecting the support

structure to a change of shape to a second shape, which is a tubular shape, in the body lumen, and thus arranging the patch member at least partly radially outside of the tubular support structure and at least partly towards an inner tissue wall of the body lumen the site of the puncture of the body lumen when the support structure has the second, tubular shape, and thus permanently sealing off the puncture from inside the body lumen by the aggregate.

According to another aspect, a method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device, is provided. The method comprises providing a patch member arranged on an outside of a tubular support structure and attached to the support structure at an intermediate portion between ends thereof; and an elongate delivery unit having a distal end, wherein the distal end thereof is radially releasably attached to the support structure or the patch member at an intermediate position between ends of the patch member and detachable therefrom upon delivery; wherein the patch member is arranged radially outside of the tubular support structure only at a partial radial section and axial section thereof and arrangeable towards an inner tissue wall of the body lumen at a site of the puncture of the body lumen when the support structure has the second, tubular shape, such that the puncture is sealed off by the patch of the device held by the support structure in the body lumen at the site.

According to another aspect, a method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device, is provided. The method comprises providing a medical device for closing the puncture in the body lumen from the inside thereof, the method comprising providing an elongate delivery unit having a distal end; and an aggregate of a support structure having a first shape, which is a temporary delivery shape, for delivery to an interior of the body lumen through the puncture and to be subsequently controllably subjected to a change of shape to a second shape, which is a tubular shape, when delivered in the body lumen, and a patch member attached to the support structure at an intermediate portion between two opposite ends thereof; wherein the distal end of the elongate delivery unit is radially releasably attached to the aggregate at an attachment position intermediate between ends of the patch member and detachable therefrom upon deployment of the aggregate in the body lumen; arranging the patch member towards an inner tissue wall of the body lumen at a site of the puncture of the body lumen and extending over a puncture opening, and drawing the delivery device in a direction out of the puncture and tightening the patch thereby controllably sealing off the puncture by the patch; and initiating the change of shape of the support structure for anchoring the aggregate at the puncture site in the vessel; and releasing the delivery device from the aggregate.

In embodiments, the method comprises releasably attaching an elongate delivery unit to the aggregate for delivery thereof to the interior of the body lumen, and detaching the aggregate upon the delivery to the interior of the body lumen; wherein the elongate delivery unit preferably comprises a delivery catheter, and/or a delivery wire releasably attached to the aggregate.

Further embodiments of the invention are defined in the dependent claims, wherein features for the second and subsequent aspects of the invention are as for the first aspect *mutatis mutandis*.

Some embodiments of the invention provide for safe anchoring of a puncture closing or sealing device with minimal risk of migration in a body lumen. The device is anchored against the vessel wall from the inside thereof. The device does thus not migrate or get washed away from the puncture site. The anchoring may be enhanced, e.g. by anchoring units or members, such as barbs, hooks, protrusions, or other means, such as tissue glue. Also, a protrusion into the puncture opening, e.g. an attachment or detachment device, arranged in the puncture opening remaining there after delivery, avoids a longitudinal migration or wash away. In addition, barbs extending through the patch, even at the puncture opening i.e. without engaging tissue of the body lumen surrounding the puncture opening, provide for a reliable fixation of the patch member to the support structure.

Some embodiments of the invention provide for self removing devices that leave a vessel wall with no remaining device after a certain period of time. This is for instance achieved by bioabsorbable or bioresorbable material. Such material may be applied both in the support structure and/or the patch member.

Some embodiments of the invention provide for a reduced risk of narrowing of the body lumen at the closed or radially sealed off puncture opening. The devices of embodiments have a low profile in radial direction. Some embodiments of the invention thus provide for avoidance of a turbulent flow in the body lumen downstream the puncture site. Thus secondary effects are avoided, such as creation of thrombosis or embolies.

Some embodiments of the invention provide for minimized or eliminated shortcomings of known sealing devices, such a minimized or eliminated risk for damaging brittle lumen tissue, such as vessel tissue, e.g. of the arteria subclavia, or the arteria axillaris. The device and method of embodiments may be applied to body lumen, which conventionally could not be sealed off with known devices.

Some embodiments of the invention avoid a manipulation of the vessel wall. For instance arteriosclerotic vessel walls are advantageously sealed off at puncture sites.

Some embodiments of the invention provide for intraluminal devices, which apply a radially outwardly oriented force, thus minimizing the risk of arterial vessel wall manipulation.

Some embodiments of the invention avoid a squeezing of the vessel wall tissue, thus providing for reduced risk of tissue damage of the vessel wall.

Some embodiments provide for devices that are not substantially extending into lumen. The devices are flat, i.e. have a substantially lesser profile than the diameter of the body lumen in which they are anchored. The devices have a low profile in radial direction. This provides for avoiding turbulent flow at the puncture site when it is sealed off.

Some embodiments of the invention provide for a quick procedure for sealing a puncture site. The devices of embodiments are applied in a short time. There is no need to wait for hardening of chemical sealing agents. Conventional techniques, including the Seldinger technique, may be a basis for introducing embodiments of the device into the body lumen.

5 Some embodiments of the invention provide for biocompatible devices reducing potential irritation or other implications of the puncture site.

Embodiments of the invention provide for an effective avoidance of bleeding when the puncture site is sealed off by means of devices according to embodiments.

10 Some embodiments of the invention also provide for devices that apply no double sided compression of a body lumen for sealing a puncture opening.

Embodiments of the invention provide for an effective atraumatic sealing of such puncture. This is for instance provided by a patch contacting tissue wall surrounding the puncture opening. The patch provides at the same time for a reliable sealing of the puncture as it extends over the opening from inside the vessel.

15 Embodiments provide for a reliable controllability of the sealing process as the patch is arranged in the device to be positioned against the tissue wall surrounding the puncture opening and across the opening before it is anchored in the vessel by the support structure and released from a delivery device. The patch prevents that blood leaves the vessel at the puncture site through the puncture opening and a percutaneous puncture channel. The puncture channel is a tissue tract
20 communicating with the blood vessel.

Embodiments provide for the use of an introducer for the positioning and deployment of the puncture sealing device. An introducer already positioned in the patient for a surgical procedure is left in place for delivery of the puncture sealing device. This is in particular advantageous from a clinical perspective, providing for user acceptance of the device, and cost efficiency as the introducer
25 is useable even during closing of the puncture site.

Embodiments provide for a device that is self-securing and small in size, and to be introduced without the need to enlarge the tissue tract (herein also called puncture channel) beyond the size needed to perform a primary medical procedure.

30 It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

Brief Description of the Drawings

35 These and other aspects, features and advantages of which embodiments of the invention are capable of will be apparent and elucidated from the following description of embodiments of the present invention, reference being made to the accompanying drawings, in which

Fig. 1 is a view from above showing a schematic illustration of an embodiment of an aggregate for sealing a puncture;

Fig. 2 is a frontal view showing a schematic illustration of the aggregate of Fig. 1 attached to a delivery wire;

5 Fig. 3A is a lateral view of the aggregate of Fig. 2;

Fig. 3B is a lateral cross sectional view of the aggregate of Fig. 2 in a delivery catheter;

Fig. 4 is a view from above showing a schematic illustration of another embodiment of an aggregate for sealing a puncture in a first shape;

10 Fig. 5 is a lateral view showing a schematic illustration of the embodiment of Fig. 4 in a second shape;

Fig. 6 is a cross sectional view of the aggregate of Fig. 4 in its first shape attached to a delivery device;

Figs. 7A-7J are schematic views illustrating a method of sealing a puncture site by means of a sealing device of the type shown in Figs. 1 and 2;

15 Figs. 8A-8D are schematic views illustrating a method of sealing a puncture site by means of a sealing device of the type shown in Figs. 4 and 5.

Description of embodiments

20 Specific embodiments of the invention will now be described with reference to the accompanying drawings. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. The terminology used in the detailed description of the embodiments illustrated in the accompanying drawings is not intended to be limiting of the invention.

25 In the drawings, like numbers refer to like elements.

The following description focuses on embodiments of the present invention applicable to a blood vessel and in particular to a peripheral blood vessel. However, it will be appreciated that the invention is not limited to this application but may be applied to many other punctured blood vessels or body lumen, including for example those of the urinary tract, or the gastrointestinal tract, including

30 bile ducts or liver vessels or ducts, or of kidney vessels or ducts, or the central nervous system, etc. However, embodiments do not include devices for treatment of defects in intra cardiac structures, such as atrial appendices, atrial or ventricular septal defects, as these are not body lumina within the meaning of this application.

35 Now turning to the Figures 1-3 an embodiment of the invention is described in more detail. Fig. 1 is a view from above showing a schematic illustration of an embodiment of an aggregate 10 of a medical device for closure of a puncture in a body lumen, such as a vessel, in a patient. Fig. 2 is a

frontal view showing a schematic illustration of the aggregate 10 of Fig. 1 attached to a delivery wire. Fig. 3A is a lateral view of the aggregate 10 of Fig. 2. Fig. 3B is a lateral cross sectional view of the aggregate 10 of Fig. 2 in a delivery catheter 60.

The medical sealing device is adapted for delivery through the puncture site itself, into to
5 the interior of the body lumen, for deployment therein.

The medical device for closure or sealing of the puncture in the body lumen comprises the aggregate 10, which comprises a support structure 20 and a patch member 30.

The support structure 20 has a first shape, which is a temporary delivery shape, for delivery to an interior of the body lumen. Here, the first shape is a radially compressed shape and
10 the support structure 20 is a collapsible tubular structure.

The tubular support structure 20 is expandable from the first shape, when subsequently subjected to a change of shape, to a second shape. The second shape is a tubular shape. The aggregate is adapted to change shape from the first shape to the second shape when delivered in the body lumen. The aggregate is deployed in the body lumen, and engages the lumen wall of the
15 body lumen for a secure anchoring or fixation therein, avoiding a migration in longitudinal direction of the device along the lumen.

The tubular shape of the support structure 20 may be a net-like shape formed of closed loops, or a mesh shape of a braided, woven or knitted fabric. The support structure may be produced by suitably laser cutting a solid tube to provide a strut structure. The support structure may be
20 provided in form of a stent like tubular member. The support structure may be self expandable. Alternatively, or in addition, the support structure may be expandable by expanding units, such as an inflatable balloon. When self-expandable, expansion may be controllable as described below. Expansion by expanding units renders the change of shape controllable as such.

The anchoring may be enhanced, e.g. by anchoring members, such as barbs, hooks,
25 protrusions, or other means, such as tissue glue comprised in the aggregate 10. Either, or both, the support structure 20 and the patch member 30 may comprise such radially outwardly arranged anchoring members. The anchoring members engage with the wall tissue of the body lumen, and may protrude into the surrounding tissue. Anchoring members may also protrude from the support structure through the patch member at the puncture opening, thus keeping it reliably in place in
30 addition to the radially outwardly oriented anchoring force thereof.

In the embodiment, the support structure 20 is made of a resilient material and is self expanding, and wherein the first shape is tubular of a smaller diameter than the second, tubular shape. A restriction unit may be provided for restricting resiliency based expansion until the patch is positioned over the puncture opening.

35 Alternatively, or in addition, the support structure 20 may be made of shape memory material, such as a shape memory polymer, or a shape memory alloy, such as NiTiInol. A restriction

unit may be provided for restricting shape memory based expansion until the patch is positioned over the puncture opening.

5 The patch member 30 is substantially fluid tight. This may be implemented by providing the patch member 30 of a suitable fabric. Alternatively, the patch member 30 may be provided in form of a solid membrane material.

The patch member is made of a tissue friendly material. The patch member is not necessarily 100% fluid tight, depending on the application. For instance, blood coagulation may occur upon deployment in the patch member providing for a sufficient sealing to stop a bleeding out of the puncture.

10 The patch member is semi rigid. The patch member is thus adapted to get into apposition with the tissue wall of the body lumen and conform to the structure thereof. This provides for easy deployment and a reliable sealing, e.g. upon retracting the delivery wire.

The patch member may even be stretched or partly drawn into the puncture channel, like a thick paper tissue.

15 The patch member is atraumatically held into position over the puncture opening by an elongate delivery device attached to the sealing device within the surface covered by the patch member. Thus the puncture member is fixatable over the puncture opening by drawing the delivery device in a direction out of the patient.

20 The support structure may then be fully deployed to a tubular shape in the body lumen, Such release of the support structure to the tubular shape may be initiated by active user operated and controlled means, e.g. a tether, electrically, etc Alternatively, the release of the support structure to the tubular shape may be initiated automatically, e.g. after a certain time in contact with body fluids. The time is suitably chosen such that reliable positioning of the patch member is provideable for sealing the puncture before the change of shape is initiated. Alternatively, or in addition, the
25 change of shape may be provided partly upon release in the body vessel, and then finalized to the fully tubular shape upon user operation or automatically after a suitable time.

Upon final deployment of the support structure, the device is released from the delivery device and left in-situ.

30 The patch member 30 is attached to the support structure 20. Attachment is made on at least one defined point of the support structure 20, as illustrated at attachment point 40 for a delivery device in the Figures.

35 The patch member 30 is arranged radially outside of the tubular support structure along a portion of the tubular structure, when the support structure has its second shape. The patch member is adapted to fit over the puncture opening 110, thus being supported by the support structure providing a fluid tight sealing of a puncture site 100. The patch member is thus at least partly arranged towards an inner tissue wall of the body lumen at a site of the puncture of the body lumen

when the support structure has the second, tubular shape, such that the puncture is sealed off by the aggregate 10.

The patch member itself is non-tubular and has a longitudinal extension shorter than a length of the support structure in the expanded diameter. Further, the patch member has an extension shorter than a circumference of the support structure in the expanded diameter at the puncture site. The patch member is thus arrangeable radially outside of the tubular support structure only at a partial radial section and axial section thereof. This has the advantage that migration along the body vessel is prevented, as anchoring is provided by the support structure outside of the patch member when in contact with wall tissue, even in an axial portion along its length at the puncture opening.

In embodiments, the patch is not a so called "thin film" (only several microns thick). A thin film would not be suitable for attachment of a delivery unit due to lacking structural strength.

The patch member has in some implementations for instance a thickness of 0,1mm to 1mm, depending on the application site of the device. The patch thickness should not substantially reduce the channel cross section of the body lumen when the device is implanted therein.

As can be seen in Fig. 1 and Fig. 2, the patch member may be attached to the support structure at a single location only. Preferably, this is a central location where also the attachment unit 40 is located.

The periphery of the patch member is thus not attached to the support member. In this manner, an expansion of the support structure is not hindered by the attached patch member.

The conformable patch member thus conforms to the inner of the tissue wall of the body vessel. Upon the change of shape it is anchored in that position from the inside of the vessel by the support structure.

As shown in Fig. 1, the elongate delivery unit is a delivery wire 50 releasably attached to the device 10, at a position between two opposite ends of the device, at a distal end of the delivery wire. 50. The delivery wire 50 is attached to the device 10 at an area covered by the patch member 30. Preferably, the delivery wire is attached to the device centrally at the patch member. This provides for a symmetrical arrangement. Alternatively, asymmetrical attachment arrangements may be provided, e.g. depending on requirements of the puncture site to be sealed off.

The delivery wire is sufficiently rigid to push the sealing devices through a catheter and/or an introducer to the body vessel through the puncture channel.

As shown in Fig. 1, the delivery wire 50 is going through the patch member 30 and is releasably attached to the support structure. Alternatively, or in addition, the delivery wire may be attached to the patch member, which then in turn is attached to the support member.

The delivery device is retractable through the channel of the puncture out of the patient. This retraction is done after detachment when the aggregate of patch and support structure is deployed and seals the puncture from inside the body lumen.

The elongate delivery unit may further comprise a separate delivery catheter insertable through an introducer positioned in the puncture. The catheter is not attached to the aggregate, but merely facilitates delivery thereof.

In embodiments, the device's support structure 20 has a diameter in the second, tubular shape that is, at least slightly, larger than a diameter of the body lumen at the puncture site. In this manner the support structure 20 is devised to anchor the aggregate 10 in an interior of a body lumen 210 at the puncture site 100. The patch member 30 is arranged to extend over the puncture opening 110 in the body lumen 210 at the puncture site 100 for the closure of the puncture. Also, in this manner, the expanded shape of the aggregate 10, because it has a diameter larger than that of the lumen, will somewhat expand the wall of the body lumen 210 radially outwards. In this manner, the aggregate is radially outwardly oriented in relation to the natural diameter of the inner body lumen – it is “recessed”, pushing the lumen wall outside. This improves anchoring on the one hand, but also provides a large opening of the body lumen at the puncture site upon sealing with the aggregate 10.

As shown in Fig. 2, the device further comprises an elongate delivery unit and an attachment unit 40 for temporary attaching the delivery unit to the aggregate 10. The delivery unit may comprise a delivery wire 50 and a delivery catheter sheath 60, as described above with reference to Fig. 1. The delivery unit is elongate. At its distal end, the delivery unit is connected to the aggregate 10 by means of the attachment unit 40, which might comprise a detachment unit for controlled release. When assembled, the aggregate is ready for delivery to the interior of the body lumen. Detachment of the aggregate upon the delivery to the interior of the body lumen may be made in various ways, such as by releasing a threaded attachment, activating a detachment means, such as a thermally, electrically, chemically initiated detachment, etc.

In another example, the proximal portion of the delivery wire 50 may be cut off. This is preferably made as close to the distal attachment position as possible.

In another examples, the delivery device may include a gripper or forceps like tool at the end of the delivery device. The attachment unit may then be shaped matingly to allow for a reliable engagement with the tool. The attachment unit may be spherically shaped, allowing for the pivoted movement during delivery. When the tool is locked, e.g. by a sleeve put over the forceps or gripper, a flexible deployment is provided with a reliable delivery without the risk of unintentionally losing the device into the body lumen. Detachment may be controlled from the outside of the patient, e.g. by withdrawing the locking sleeve and then opening the gripper or forceps.

In some embodiments, the delivery wire 50 is connected to the aggregate 10 at the attachment unit 40 by releasably threaded attachment. The detachment unit is a threaded unit such that the aggregate is detachable from the delivery unit by unscrewing the delivery wire 50 from the aggregate 10. This may leave a protruding attachment unit 40 in the puncture opening, as will be seen below, which advantageously contributes to the anchoring of the aggregate 10 at the puncture site 100 for a reliable sealing. As shown in the figures, the thread is arranged in a radial direction

outward from the support structure. The radial direction is substantially perpendicular to a longitudinal axis of the sealing device. As e.g. shown in Fig. 7H, the detachment unit may extend radially from the support structure for being received in the puncture opening, and also in the puncture channel.

5 In embodiments, the support structure 20 and/or the patch member 30 are made of a biodegradable and/or bioresorbable material.

The support structure 20 is for instance made of a polymer material, or stainless steel, a titanium alloy or a magnesium alloy. The support structure 20 may be provided in form of a wire structure.

10 The patch member 30 is for instance made of a biopolymer, or a metal alloy like the aforementioned. The patch member 30 is provided as a fabric. In other examples, the patch member 30 may be provided additionally or alternatively as a solid membrane. The patch member is semi rigid. The patch member is thus adapted to get into apposition with the tissue wall of the body lumen and to conform to the structure thereof.

15 The material has a suitable degradation rate under physiological conditions in order to make the aggregate become degraded or absorbed when the puncture has healed completely.

Suitable biocompatible polymer materials are e.g. described in published US patent application US 2008/0095823, or PCT application PCT/EP2006/062400, which are incorporated by reference herein in their entirety for all purposes. Biocompatible polymer materials comprise polymer
20 compositions with controlled degradation rates, such as polyhydroxyalkanoate.

In some embodiments, the support structure 20 and/or the patch member 30 comprise a pharmaceutical agent.

25 The pharmaceutical agent is for instance adapted to prohibit a thickening of a wall of the body lumen, such as any one in the group of cyclosporine, taxiferol, rapamycin and tacrolimus. Thus, a reduction of the lumen diameter is further prevented and a flow through the lumen maintained, even during a healing phase of the puncture.

The pharmaceutical agent may comprise an anti-coagulation agent, such as Heparin or an anti-thrombotic agent. Thus, the passage of the lumen is effectively kept open, and thrombosis at or
30 downstream the puncture site is prevented.

The patch member 30 may comprise a fibrosis promoting agent. This provides for an accelerated healing process for finalizing the final, biological sealing of the puncture quicker. The patch member 30 may comprise a scar reducing agent. In this manner, scars at the puncture site
100 are effectively reduced, which is of interest for cosmetic treatment. A fibrosis promoting agent or
35 scar reducing agent is preferably arranged at the patch member 30 such that it is oriented towards the vessel wall, more preferably towards the puncture opening. This may be implemented by having

the agent as a coating or a surface layer on a side of the patch member 30 oriented in this manner when the aggregate 10 is deployed.

5 The pharmaceutical agent may include any one in the group of an endothelia growth promoting agent, such as Endothelium Growth Factor. This provides for an improved growth of a thin layer of endothelia over the aggregate in the inner of the body lumen. This layer of endothelia further supports sealing of the puncture opening. Once a layer of endothelia has built up, biodegradation of the aggregate may be initiated, e.g. controlled by a delayed biodegradation after deployment.

10 The pharmaceutical agent may comprise an anti-pathogenic agent, or an anti-infectious agent, such as Nitric Oxide. This provides for a more reliable healing of the puncture.

Any of the aforementioned agents may be present in an arbitrary suitable combination at the aggregate 10.

15 The sealing device of embodiments comprises at least one element to activate or deactivate the change of shape, such as a connection element of the support structure that is arranged such that a connection formed by the connection element between a first and second part of the support element. The connection element is configured to break when the connection element is subjected to a specific external influence, such as stress, temperature, moisture, biodegradation, or absorption. Such connection elements are in detail describe in PCT/EP2006/062403, which is
20 incorporated by reference herein in its entirety for all purposes. Thus, the change of shape and engagement with the tissue structure is controllable.

The sealing device of certain embodiments has a support structure 20 that is bistable between a first state of minimum energy and a second state of minimum energy, whereby the change of shape, in use, is obtained as a movement between the first state of minimum energy and
25 the second state of minimum energy. Bistable devices, however for different application than sealing devices, are for instance disclosed in US patent application US 2002/0142119 or US patent application US 2004/0193247, which are incorporated by reference herein in their entirety for all purposes.

30 The body lumen is in specific embodiments a peripheral blood vessel, and the puncture is a percutaneous puncture of the blood vessel. More particularly, the blood vessel is an arterial, high blood pressure, blood vessel to be sealed off at a puncture site, preferably after a finished surgical procedure involving the use of intra body access through the puncture, e.g. via an introducer unit. The device is thus in specific embodiments an intravascular closure device. More particularly, the puncture is a blood vessel wall puncture at the termination of a tissue tract that passes through
35 intervening tissues between the vessel wall puncture and a puncture through the skin.

As for instance can be seen in Fig. 7H, the attachment unit 40 or detachment unit is arranged at the aggregate 10 such that the tubular support structure 20 is arranged symmetrically in longitudinal direction in the body lumen 210 in relation to the puncture site.

A kit comprises the afore described sealing device and an introducer sheath 90.

5

Figs. 7A-7J are schematic views illustrating a method of sealing a puncture site by means of a sealing device of the type shown in Figs. 1 and 2.

In the method an aggregate 10 of a support structure 20 and a patch member 30 are deployed in the body lumen 210 through a puncture opening 110 in the body lumen 210 at the puncture site 100.

10

An introducer 90 having a port 94 at an exterior cap at a proximal end 92 is shown inserted in a puncture in Fig. 7A. The distal end of the introducer is in communication with the proximal end 92, and inserted through the skin surface 151, the surrounding tissue 45, and the body lumen wall tissue 200.

15

To gain access to the body lumen, the Seldinger technique is employed. This involves placing a small gauge hollow needle through the skin at about a 30 degree angle to intersect the desired lumen. The needle is known to have punctured a blood vessel wall when blood exits the needle at the proximal end. A guidewire is inserted through the needle into the vessel and the needle is removed. A dilator with a lumen sized to fit the guidewire has a leading tapered end and an outside diameter sized to fit closely in an introducer sheath 90 placed over it. The introducer sheath size 90 is selected to accommodate the catheters anticipated to be used in the procedure. The introducer sheath 90 and tapered dilator are advanced together over the guidewire through the skin and into the vessel. The dilator and guidewire are then removed, since the vascular pathway from outside the body through the sheath and into the vessel have been established. A self sealing stretchable valve may be provided at the proximal end 92 of the introducer sheath 90, which minimizes blood loss from the introducer sheath during the procedure.

20

25

When a procedure performed via this port in the patient's body is finished, the puncture has to be sealed.

According to embodiments of the sealing method, the support structure 20 is delivered in a temporary delivery shape to the interior of the body lumen 210 through the introducer 90, as illustrated in Fig. 7B.

30

In Fig. 7C, the aggregate 10 is advanced through the introducer 90, together with the catheter 60 and the delivery wire 50. 18. The aggregate 10 is attached to the delivery unit by screwing the delivery wire 50 to connect it to the aggregate 10 by releasably threaded attachment.

35

Later on, the aggregate 10 is detached from the delivery unit by unscrewing the delivery wire 50 from the aggregate 10, as described further below.

Then, the delivery catheter 60 is partly withdrawn, releasing the aggregate into the body lumen, while still attached to the delivery wire 50 at the attachment unit 40, as illustrated in Fig. 7D. Further, the introducer and the delivery catheter are further withdrawn, such as illustrated in Fig. 7E. The delivery wire 50 is withdrawn, such that the attachment point 40 is drawn to the puncture site 110. The aggregate 10 is thus suitably rotated and pivoted in relation to the delivery wire 40, as illustrated in Figs. 7E and 7F. The patch member is automatically aligned centrally in relation to the puncture opening 110. The correct pivotal movement may be ensured by a rotation of the guide wire 50.

The elongate delivery unit is thus radially releasably attached to the aggregate. Attachment may be made via a hinge, swivel or pivoting means at the attachment point to the aggregate.

In this manner, the tightness of the body fluid leaking out of the puncture is controlled by the patch drawn against the opening.

At the same time, the support structure 20 is controllably subjected to a change of shape to a second shape, which is a tubular shape, in the body lumen. This change of shape may for instance be provided by resiliently expanding the support structure 20 when it is released out a protective sheath, restricting the support structure 20 from expanding during delivery. Alternatively, or in addition, the support structure 20 may change its shape based on a shape memory effect, e.g. initiated by the body temperature of the fluid in the body lumen 210. The change of shape is illustrated in Figs. 7D-7H.

The change of shape may be activated or de-activated by means of at least one connection element of the support structure that is arranged such that a connection formed by the connection element between a first and second part of the support element is configured to break when the connection element is subjected to a specific external influence, such as stress, temperature, moisture, biodegradation, or absorption.

The change of shape may be obtained by transforming the support structure from a bistable first state of minimum energy in the first shape to a second state of minimum energy in the second shape, by a movement between the first state of minimum energy and the second state of minimum energy.

The illustrated method comprises expanding the support structure to a diameter in the second, tubular shape that is larger than a diameter of the body lumen at the puncture site. Further, the support structure is anchored in the interior of the body lumen at the puncture site, whereby the patch member is arranged to extend over the puncture opening in the body lumen at the puncture site for the closure of the puncture. The anchoring may be enhanced, e.g. by anchoring members, such as barbs, hooks, protrusions, or other means, such as tissue glue.

The method may comprise self expanding the support structure 20 in the body lumen 210 upon delivery therein. Preferably this is done when the patch is suitably positioned and sealing tightness is achieved.

Thus, the support structure upon the change of shape is holding the aggregate in the body lumen at the puncture site extending over the patch member radially between the tissue wall and the support structure in the second, tubular shape. The patch member is overlappingly contacting the inner tissue wall of the body lumen and is extending over the puncture opening.

5 The patch member may be made to partly extend into the puncture channel at the puncture opening. This may provide for a particular quick and reliable sealing of the puncture.

Hence, the puncture opening is initially closed with the patch member before the support member changes shape to the tubular shape.

10 The method comprises retracting the delivery device upon detaching from the device through a channel of the puncture out of the patient.

Hence, the support structure upon the change of shape is holding the aggregate in the body lumen at the puncture site extending over the patch member radially between the tissue wall and the support structure in the second, tubular shape.

15 The patch member is overlappingly contacting the inner tissue wall of the body lumen and is extending over the puncture opening.

The method may comprise drawing the patch member partly into the tissue tract from the puncture opening.

20 In certain medical procedures, the puncture channel may additionally be closed by injecting or inserting a clotting induction agent such as collagen that encourages clotting in the puncture channel.

The method may comprise initially closing the puncture opening with the patch member before the support member changes shape to the tubular shape.

The method may comprise retracting the delivery device upon detaching from the device through a channel of the puncture out of the patient.

25 The patch member is thus arranged radially outside of the tubular support structure, towards an inner of tissue wall 200 of the body lumen 210 at the puncture site 100 of the body lumen when the support structure has the second, tubular shape, and thus the aggregate 10 is permanently sealing off the puncture from inside the body lumen by the aggregate.

30 The sealing effect of the aggregate 10 is supporting or enhanced by a physiological pressure of a body fluid in the body lumen onto the patch member, pressing it against the tissue wall 200 of the body lumen 210.

Thus, an intra-luminal leakage tight sealing of the puncture is obtained.

35 The method may comprise delivering a pharmaceutical agent, as those described above, from the aggregate 10 at the puncture site to the body lumen 210.

The elongate delivery unit releasably attached to the aggregate 10 for delivery thereof to the interior of the body lumen 210 is then detached from the aggregate, leaving the aggregate securely in place, as illustrated in Fig. 7H.

5 The puncture channel through the vessel wall 200 and the surrounding tissue, as well as the outer skin will heal, as illustrated in Fig. 7H.

The method may further comprise biodegrading the aggregate 10 when deployed in the body lumen at a degradation rate under physiological conditions. When the aggregate 10 is made of a biodegradable or bioresorbable material, the puncture site will be reliably sealed, without any remainders of the aggregate 10 at the previous puncture site, as shown in Fig. 7J. The aggregate 10
10 may be provided to start to biodegrade when endothelium has covered the aggregate installed in the body lumen.

The method and device facilitate re-puncturing the body-lumen 210 at the puncture site 100 by re-enforcing the lumen wall 210 of the body lumen 210 and supporting a patency of body
15 lumen.

Both the support structure 20 and the patch member 30 are penetratable by a needle tip when a new puncture of the body lumen 210 is desired after sealing of the puncture site 100.

When the aggregate 10 is absorbed or degraded, the previous puncture site is also available for a new puncture.

20 In embodiments, the body lumen is an arterial blood vessel. In particular, the body lumen is a peripheral blood vessel, and the puncture is a percutaneous puncture of the body vessel, wherein the device is an intravascular closure or sealing device for a vascular puncture.

The peripheral blood vessel is in particular an arteria subclavia, or an arteria axillaris of the
25 patient. The puncture site is in particular in a region of a clavicle of the patient.

In embodiments, the body lumen is the patient's aorta, including the ascendant or descendent aorta, or branch vessel of the aorta.

A further embodiment of the device and method of the invention is illustrated in Figs. 4-6
30 and 8A-8D. Fig. 4 is a view from above showing a schematic illustration of another embodiment of an aggregate 10 for sealing a puncture, in a first shape. The first shape is in this embodiment an elongate shape, which is substantially straight.

The support structure is made of a resilient material and/or a shape memory material, such as a shape memory polymer or a shape memory metal or alloy thereof. The second, tubular shape is
35 a helically coiled shape of the support structure 20. Fig. 5 is a lateral view showing a schematic illustration of the embodiment of Fig. 4 in the second shape.

Fig. 6 is a cross sectional view of the aggregate 10 of Fig. 4 in its first shape attached to a delivery wire 50 in its first shape. Like the above described embodiments, the aggregate 10 may be restricted in this first shape by a catheter sheath.

5 The patch member 30 is an elongate strip of fluid tight material. The patch member is attached to the support structure 30 along a portion of its length. The length of the patch member is at the most equal to the entire length of the support structure 30.

The patch member 30 may be put like a sock over the elongate support structure 20.

The patch member extends like a collar from the support structure.

10 The patch member may have a plurality of patch sub units (not shown) arranged along the length of the elongate support member. The patch units, e.g. of fabric, are arranged at a distance from each other such that they are arranged in the same radial direction at the attachment point of the delivery device distal end at the tubular support structure in the second, tubular coiled shape.

15 When the support structure is in its second shape, the patch member is arranged overlapping itself to provide a fluid tight structure. The patch member may overlap on the inside or the outside of the tubular structure. In this manner, a fluid tight structure of overlapping strips 31 at each turn or winding of the helical coil making up the tubular structure, is provided, as illustrated in Fig. 5.

20 The minimum length of patch member is such that it extends along so many windings that longitudinally extend over the puncture opening and a bit further, in order to provide a reliable sealing thereof.

The width of the patch member 30 is determined by the pitch of the helical coil, and is larger than the distance between two windings of the latter. Thus the distance between the windings is bridged, and by the overlapping sections of adjacent windings, a continuous fluid tight structure is provided along the tubular support structure.

25 The width may also vary along the length of the patch member 30. For instance the end section may narrow down. The middle section may have a larger width to provide a larger overlap. The longitudinal width variation may be chosen suitably depending on various parameters, such as the anatomical structure of the body lumen at the puncture site, the pressure of a body fluid at the puncture site, etc.

30 Figs. 8A-8D are schematic views illustrating a method of sealing a puncture site by means of a sealing device of the type shown in Figs. 4 to 6.

35 Introduction of the delivery assembly of Fig. 6 into the body lumen at the puncture site is made similar as described above with reference to Figs. 7A-7E and is not repeated to avoid redundancy.

The method comprises transforming the support structure 20 of Fig. 4-6 from the first elongate delivery shape, to the second, tubular shape, which is a helically coiled shape of the

support structure, wherein the transforming is based on an elasticity or shape memory effect of the support structure 20.

Fig. 8A shows the aggregate 10 attached to the delivery wire when deployed at the puncture site 100 and during transformation from the first to the second shape. The delivery wire 50 is withdrawn, thus arranging the attachment unit 40 in the puncture opening and centering the device longitudinally in relation to the opening. This is illustrated in Fig. 8B, where the strips 31 are shown in full overlap and the guide wire detached from the aggregate 10.

When the coiled tubular member has section that are not covered by overlapping strips 31 at its en section or end sections, this provides an enhanced anchoring of the aggregate in the tissue wall 200 of the body lumen as the support member may at least partly migrate into the tissue wall.

In Fig. 8C and 8D, like in Figs. 7I and 7J, the puncture site is shown healed and the device resorbed, respectively.

While several embodiments of the present invention have been described and illustrated herein, those of ordinary skill in the art will readily envision a variety of other means and/or structures for performing the functions and/or obtaining the results and/or one or more of the advantages described herein, and each of such variations and/or modifications is deemed to be within the scope of the present invention as defined by the patent claims.

For instance the attachment unit 40 may be integrated in the patch member 30, e.g. in form of a loop, ring, etc. The attachment unit may be non-protruding. The attachment unit may be part of the delivery unit and removed therewith upon closure of the puncture.

Alternatively to the expansion of the aggregate as described above and illustrated in the Figs., the aggregate may be first drawn towards the puncture opening 110, such that the patch member 30 abuts around the opening. The expansion of the support member may then be controllably initiated. For instance the tubular expansion may be suitably triggered, e.g. by breaking connection points by a suitable external influence.

Different method steps than those described above, even merely in a different order. The different features and steps of the invention may be combined in other combinations than those described. The scope of the invention is only limited by the appended patent claims.

CLAIMS

1. A medical device for closing a puncture in a body lumen from the inside thereof, such as a vessel, in a patient, said device comprising

5 an elongate delivery unit having a distal end; and an aggregate of

a support structure having a first shape, which is a temporary delivery shape, for delivery to an interior of said body lumen through said puncture and to be subsequently controllably subjected to a change of shape to a second shape, which is a tubular shape, when delivered in said body lumen, and

10 a patch member attached to said support structure at an intermediate portion between two opposite ends thereof; wherein

said distal end of said elongate delivery unit is radially releasably attached to said aggregate at an attachment position intermediate between ends of said patch member and detachable therefrom upon deployment of said aggregate in said body lumen;

15 wherein said patch member is sized and shaped for arranging it towards an inner tissue wall of said body lumen at a site of said puncture of said body lumen and extending over a puncture opening, and

20 wherein said delivery unit extends in a direction radially from said aggregate through said opening, such that said puncture is controllably sealed off by said patch when drawing said delivery device in a direction out of said puncture and tightening said patch over said opening before said change of shape of said support structure.

2. The device of claim 1, wherein said support structure upon said change of shape is provided for holding said aggregate in said body lumen at said puncture site extending over said patch member radially between said tissue wall and said support structure in said second, tubular shape.

3. The device according to any preceding claim, wherein said distal end of said elongate delivery unit is radially releasably attached to said aggregate support structure or said patch member.

4. The device according to any preceding claim, wherein said patch member is for overlappingly contacting said inner tissue wall of said body lumen and is shaped and sized to extend over said puncture opening.

35 5. The device according to any preceding claim, wherein said patch member is arranged on an outside of said tubular support structure.

6. The device according to any preceding claim, wherein said patch member is arranged radially outside of said tubular support structure only at a partial radial section and axial section thereof.

5

7. The device according to any preceding claim, wherein said patch member extends partly into said puncture channel at said puncture opening.

10

8. The device according to any preceding claim, wherein said patch member is a fabric patch member.

9. The device according to any preceding claim, wherein said patch member is for initially closing said puncture opening

15

10. The device according to any preceding claim, further comprising a detachment unit, wherein said delivery unit is connected to said device for delivery thereof to said interior of said body lumen through said puncture, and for detachment of said device upon said delivery to said interior of said body lumen;

20

11. The device of claim 10, wherein said elongate delivery unit comprises a delivery wire releasably attached to said device, at a position between two opposite ends of said device, at a distal end of said delivery wire.

25

12. The device of claim 11, wherein said delivery wire is attached to said device at an area covered by said patch member.

13. The device of claim 12, wherein said delivery wire is attached to said device centrally at said patch member.

30

14. The device of claim 13, wherein said delivery wire is going through said patch member and releasably attached to the support structure.

15. The device of any of claims claim 10-14, wherein said delivery device upon detaching is retractable through a channel of said puncture out of said patient.

35

16. The device of any of the preceding claims, wherein said elongate delivery unit further comprises a delivery catheter insertable through an introducer positioned in said puncture,

17. The device of any of claims 11-16, wherein said delivery wire is connected to said device by releasably threaded attachment, wherein said detachment unit is a threaded unit such that the aggregate is detachable from said delivery unit by unscrewing said delivery wire from said aggregate.

18. The device of claim 17, wherein said thread is arranged in a radial direction outward from said support structure.

19. The device of any of claims 10-18, wherein said detachment unit extends radially from said support structure for positioning in said puncture opening.

20. The device of any of the previous claims, wherein said elongate delivery unit is radially releasably attached to said aggregate via a hinge, swivel or pivoting means at said attachment point.

21. The device of any of the previous claims, wherein said support structure and/or said patch member is made of a biodegradable and/or bioresorbable material.

22. , The device of claim 21, wherein said support structure is made of a polymer material, or a magnesium alloy, which has a degradation rate under physiological conditions.

23. The device of claim 21 or 22, wherein said patch member is made of a biopolymer, wherein said material has a degradation rate under physiological conditions.

24. The device of any of claims 1-23, wherein said support structure and/or said patch member comprises a pharmaceutical agent;
wherein said agent is adapted to prohibit a thickening of a wall of the body lumen.

25. The device of claim 24, wherein said agent is comprised in the group of cyclosporine, taxiferol, rapamycin or tacrolimus,

26. The device of any of claims 1-25, wherein said support structure and/or said patch member comprises a pharmaceutical agent; and wherein said agent is included in the group of an endothelia growth promoting agent, an anti-coagulation agent, a fibrosis promoting agent, a scar reducing agent, an anti-thrombotic agent, an anti-pathogenic agent, an anti-infectious agent, or an arbitrary combination thereof.

27. The device of claim 26, wherein said agent is Nitric Oxide.

28. The device of claim 27, wherein said Nitric oxide is provided in said patch material, or as a coating on said device for elution from said device upon contact with a body fluid.

5

29. The device according to any preceding claim, wherein said tubular shape of said support structure is a net-like shape formed of closed loops, or a mesh shape of a braided, woven or knitted fabric.

10 30. The device of any of claims 21-23, wherein said aggregate is adapted to start to biodegrade when endothelia has covered said aggregate installed in said body lumen.

31. The device according to any preceding claim, wherein said support structure comprises at least one anchoring unit.

15

32. The device of any of claims 1-31, wherein said support structure has a diameter in said second, tubular shape that is larger than a diameter of said body lumen at said puncture site, such that said support structure is devised to anchor said aggregate in said interior of said body lumen at said puncture site, whereby said patch member is arranged to extend over a puncture opening in said body lumen at said puncture site for said closure of said puncture.

20

33. The device of any of claims 1-32, wherein said support structure is made of a resilient material and is self expanding, and wherein said first shape is tubular of a smaller diameter than said second, tubular shape, and a restriction unit for restricting said expansion until said patch is positioned over said puncture opening.

25

34. The device of any of claims 1-32, wherein said support structure is made of a resilient material and/or a shape memory material, such as a shape memory polymer, wherein said first shape is an elongate shape, and wherein said second, tubular shape is a helically coiled shape of said support structure, and a restriction unit for restricting said expansion until said patch is positioned over said puncture opening.

30

35. The device of claim 34, wherein said support structure has a first elongate shape and said patch member comprises a plurality of patch units arranged along its length, wherein said fabric patch units are arranged in the same radial direction at said attachment point of said delivery device distal end at said tubular support structure in said second, tubular coiled shape.

35

36. The device of any of claims 1-35, wherein said patch member is substantially fluid tight.

37. The device of any of claims 1-35, wherein said patch member has a mesh size to reduce a flow of body fluid out of said puncture opening, such as to promote coagulation of blood in said patch member.

5

38. The device of any of claims 1-37, wherein said device comprises at least one controllable element for controlling, including activating or de-activating, said change of shape.

39. The device of claim 38, wherein said controllable element is a connection element of said support structure that is arranged such that a connection formed by said connection element between a first and second part of said support element is configured to break when said connection element is subjected to a specific external influence, such as stress, temperature, moisture, biodegradation, or absorption.

40. The device of any of claims 1-39, wherein said body lumen is a peripheral blood vessel, and said puncture is a percutaneous puncture of said body vessel, and wherein said device is an intravascular closure device.

41. The device of any of the preceding claims, said support structure comprising anchoring elements for extending into said tissue, as well as through said patch member.

42. A kit comprising said device of any of claims 1-40, and an introducer sheath insertable through said puncture for use both during a surgical procedure performed through said introducer sheath and during closing off of said puncture by means of said device.

25

43. A method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device, said method comprising

deploying an aggregate of a support structure and a patch member in said body lumen through a puncture opening in said body lumen at said puncture site, wherein said patch member is attached to said device, and wherein said deploying comprises

delivering said support structure in a temporary delivery shape to an interior of said body lumen,

subsequently subjecting said support structure to a change of shape to a second shape, which is a tubular shape of a larger cross sectional dimension than said temporary delivery shape, in said body lumen, and thus

35

arranging said patch member at least partly radially outside of said tubular support structure and at least partly towards an inner tissue wall of said body lumen at said site of said puncture of said body lumen when said support structure has said second, tubular shape, and thus permanently sealing off said puncture from inside said body lumen by said aggregate.

5

44. A method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device, said method comprising

providing a patch member arranged on an outside of a tubular support structure and attached to said support structure at an intermediate portion between ends thereof; and

10

an elongate delivery unit having a distal end, wherein said distal end thereof is radially releasably attached to said support structure or said patch member at an intermediate position between ends of said patch member and detachable therefrom upon delivery; wherein said patch member is arranged radially outside of said tubular support structure only at a partial radial section and axial section thereof and arrangeable towards an inner tissue wall of said body lumen at a site of

15 said puncture of said body lumen when said support structure has said second, tubular shape, such that said puncture is sealed off by said patch of said device held by said support structure in said body lumen at said site.

20 45. A method of closure of a puncture in a body lumen, such as a vessel, in a patient, by a medical device, said method comprising providing a medical device for closing said puncture in said body lumen from the inside thereof, said method comprising

providing an elongate delivery unit having a distal end; and an aggregate of

25 a support structure having a first shape, which is a temporary delivery shape, for delivery to an interior of said body lumen through said puncture and to be subsequently controllably subjected to a change of shape to a second shape, which is a tubular shape, when delivered in said body lumen, and

a patch member attached to said support structure at an intermediate portion between two opposite ends thereof; wherein

30 said distal end of said elongate delivery unit is radially releasably attached to said aggregate at an attachment position intermediate between ends of said patch member and detachable therefrom upon deployment of said aggregate in said body lumen;

arranging said patch member arranging towards an inner tissue wall of said body lumen at a site of said puncture of said body lumen and extending over a puncture opening, and

35 drawing said delivery device in a direction out of said puncture and tightening said patch thereby controllably sealing off said puncture by said patch; and

initiating said change of shape of said support structure for anchoring said aggregate at said puncture site in said vessel; and

releasing said delivery device from said aggregate.

46. The method of claim 45, wherein said support structure upon said change of shape is holding said aggregate in said body lumen at said puncture site extending over said patch member
5 radially between said tissue wall and said support structure in said second, tubular shape.

47. The method according to any preceding claim 43-46, wherein patch member is overlappingly contacting said inner tissue wall of said body lumen and is extending over said puncture opening.
10

48. The method according to any preceding claim 43-47, comprising extending said patch member partly into a puncture channel at said puncture opening.

49. The method according to any preceding claim 43-48, comprising at least partly initially closing said puncture opening with said patch member before said support member changes shape to the tubular shape.
15

50. The method according to any preceding claim 43-49, comprising retracting said delivery device upon detaching from said device through a channel of said puncture out of said patient.
20

51. The method of claim 16, comprising releasably attaching an elongate delivery unit to said aggregate for delivery thereof to said interior of said body lumen, and detaching said aggregate upon said delivery to said interior of said body lumen; wherein said elongate delivery unit comprises a delivery wire releasably attached to said aggregate.
25

52. The method of claim 51, wherein said attaching comprises screwing said delivery wire to connect it to said aggregate by releasably threaded attachment, and detaching said aggregate from said delivery unit by unscrewing said delivery wire from said aggregate.
30

53. The method of any of claims 43-52, further comprising biodegrading said aggregate when deployed in said body lumen at a degradation rate under physiological conditions.

54. The method of any of claims 43-53, comprising expanding said support structure to a diameter in said second, tubular shape that is larger than a diameter of said body lumen at said puncture site, and thus
35

anchoring said support structure in said interior of said body lumen at said puncture site, whereby said patch member is arranged radially outside said support structure to extend over said puncture opening in said body lumen at said puncture site for said closure of said puncture.

5 55. The method of any of claims 43-54, comprising self expanding said support structure in said body lumen upon delivery therein, which support structure is made of a resilient material and is self expanding, wherein said first shape is tubular collapsed or compressed, and from said first shape of a first tubular diameter to said second, tubular shape, in a second tubular diameter that is larger than said first diameter.

10 56. The method of any of claims 43-54, wherein said support structure is made of a resilient material and/or a shape memory material, such as a shape memory polymer, wherein said first shape is an elongate shape, and wherein said second, tubular shape is a helically coiled shape of said support structure, and removing said restriction for said expansion when said patch is
15 positioned over said puncture opening.

57. The method of any of claims 43-54, wherein said support structure has a first elongate shape and said patch member comprises a plurality of patch units arranged along its length, and upon said change of shape arranging said fabric patch units, in a longitudinal direction of said device
20 adjacent each other, in the same radial direction at said attachment point of said delivery device distal end at said tubular support structure in said second, tubular coiled shape.

58. The method of any of claims 43-57, comprising promoting coagulation of blood in said patch member based on a mesh size thereof to reduce a flow of body fluid out of said puncture
25 opening.

59. The method of any of claims 43-57, comprising controlling, including activating or de-activating, said change of shape.

30 60. . The method of any of claims 43-54, comprising transforming said support structure, which is made of a resilient material and/or a shape memory material, such as a shape memory polymer, from said first shape which is an elongate shape, to said second, tubular shape, which is a helically coiled shape of said support structure, wherein said transforming is based on an elasticity or shape memory effect of said support structure.

35 61. The method of claim 59, comprising activating or de-activate said change of shape by means of a connection element of said support structure that is arranged such that a connection

formed by said connection element between a first and second part of said support element is configured to break when said connection element is subjected to a specific external influence, such as stress, temperature, moisture, biodegradation, or absorption.

5 62. The method of any of claims 43-61, comprising supporting said closure by physiological pressure of a body fluid in said body lumen onto said patch member against a wall of said body lumen for an intra-luminal leakage tight closure of said puncture.

10 63. The method of any of claims 43-62, comprising arranging said aggregate such that said tubular support structure is arranged symmetrically in said body lumen in relation to said puncture site.

15 64. The method of any of claims 43-63, comprising performing said delivering through an introducer sheath at said puncture site, wherein said introducer is removed from said puncture site upon deployment of said aggregate of said device.

20 65. The method of any of claims 43-64, comprising delivering a a pharmaceutical agent from said aggregate at said puncture site to said body lumen, said method comprising prohibiting a thickening of a wall of said body lumen, wherein said agent is adapted to prohibit a thickening of a wall of the body lumen, such as any one in the group of ciclosporin, taxiferol, rapamycin and tacrolimus.

25 66. The method of any of claims 43-65,; comprising delivering a a pharmaceutical agent from said aggregate at said puncture site to said body lumen, said agent comprising an agent for promoting endothelia growth over said aggregate, wherein said agent includes any one in the group of an endothelia growth promoting agent, such as Endothelium Growth Factor;

 promoting fibrosis at said puncture opening by a fibrosis promoting agent at a side of said patch member oriented towards said puncture opening when deployed;

30 or cosmetically preventing or reducing scar tissue at said puncture site reduction by a scar reducing agent;

 or preventing or reducing infection by an anti-pathogenic agent or anti-infectious agent, such as Nitric Oxide;

 or preventing coagulation of a body fluid in said body lumen by an anti-coagulation agent, such as Heparin;

35 or preventing thrombosis in said body lumen by an anti-thrombotic agent.

67. The method of any of claims 43-66, comprising facilitating re-puncturing said body-lumen at said puncture site by re-enforcing a wall of said body lumen and supporting a patency of body lumen.

5 68. The method of claim 67, wherein said body lumen is an arterial blood vessel.

69. The method of any of claims 43-68, wherein said body lumen is a peripheral blood vessel, and said puncture is a percutaneous puncture of said body vessel, and wherein said device is an intravascular closure device.

10

70. The method of claim 69, wherein said peripheral blood vessel is an arteria subclavia, or an arteria axillaris.

15

71. The method of claim 70, wherein said puncture site is in a region of a clavicle of said patient.

72. The method of any of claims 43-68, wherein said body lumen is the patient's aorta, including the ascendant or descendent aorta, or branch vessel of said aorta.

20

73. The method of any of claims 43-67, wherein said body lumen is comprised in the urinary tract, or gastrointestinal tract including bile ducts or liver or kidneys, the lymphatic system, or the central nervous system.

25

74. The method of any of claims 43-73, wherein said medical device is a device according to any of claims 1-42.

1/17

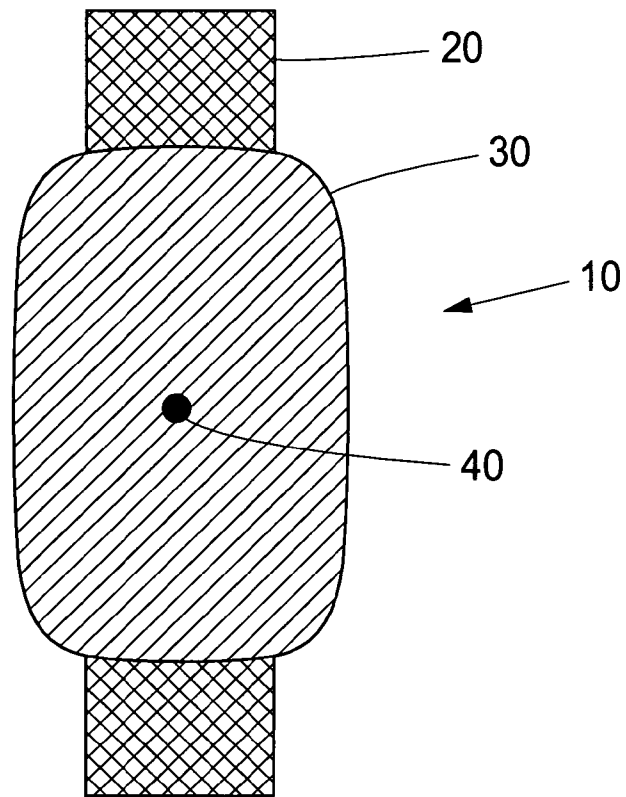


Fig.1

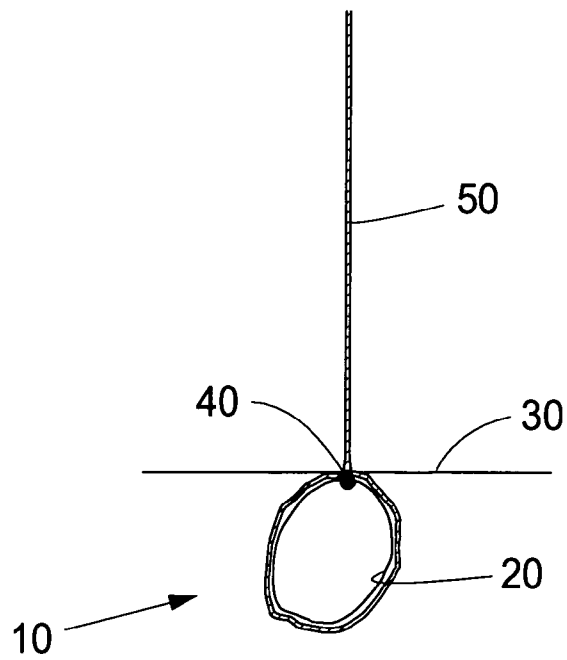


Fig.2

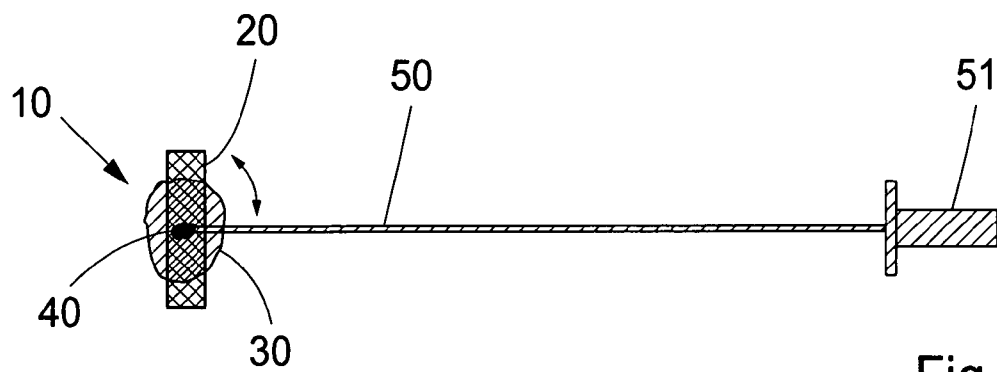


Fig.3A

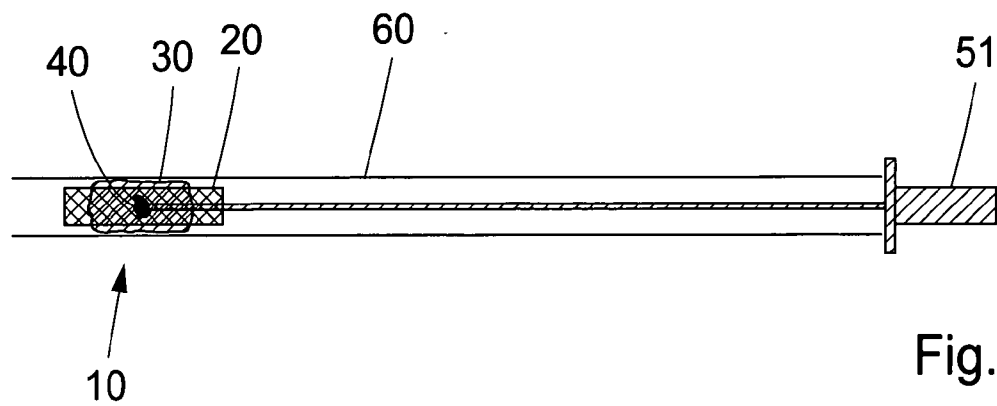


Fig.3B

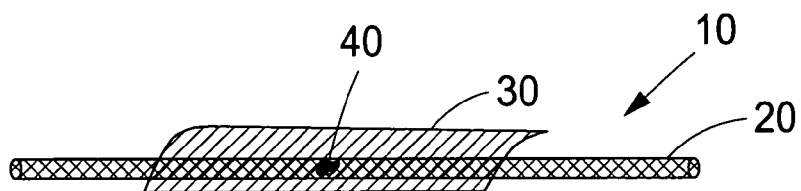


Fig.4

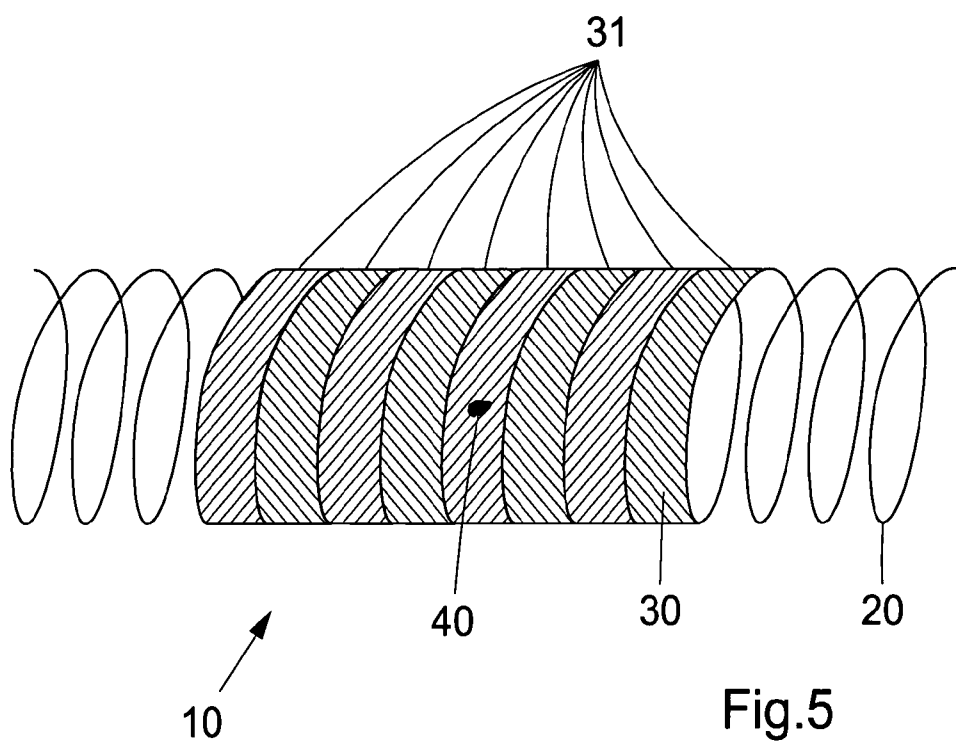


Fig.5

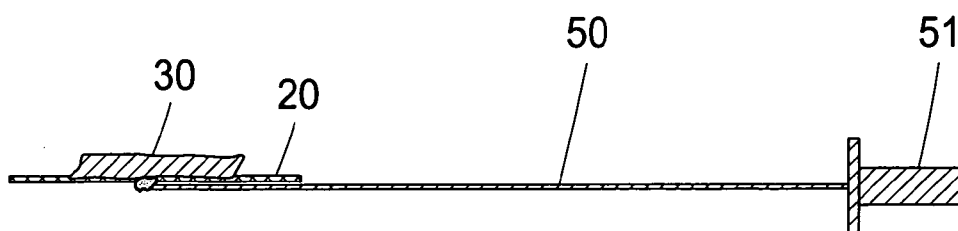


Fig.6

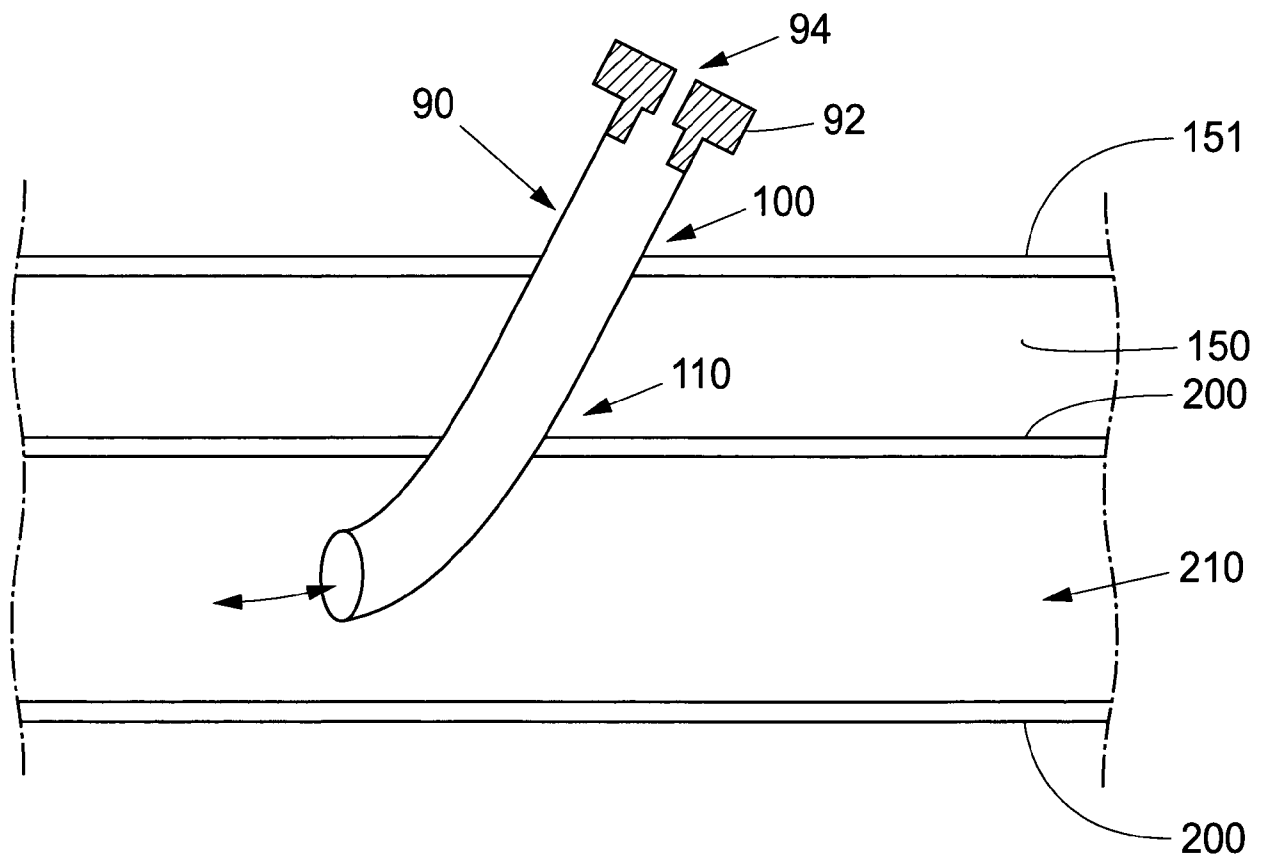


Fig. 7A

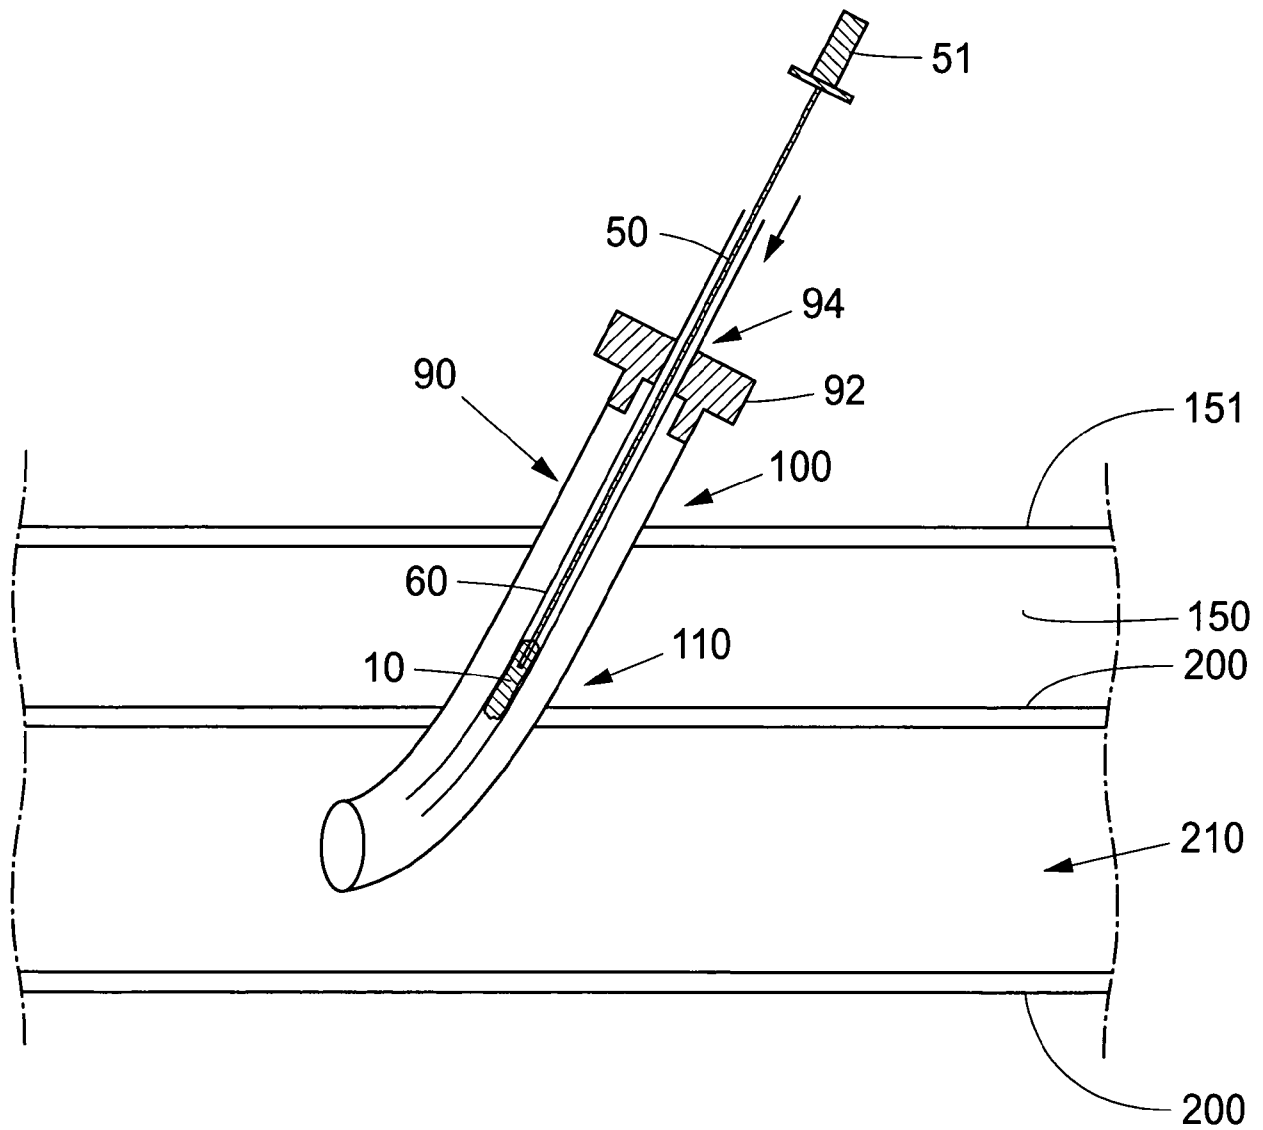


Fig. 7B

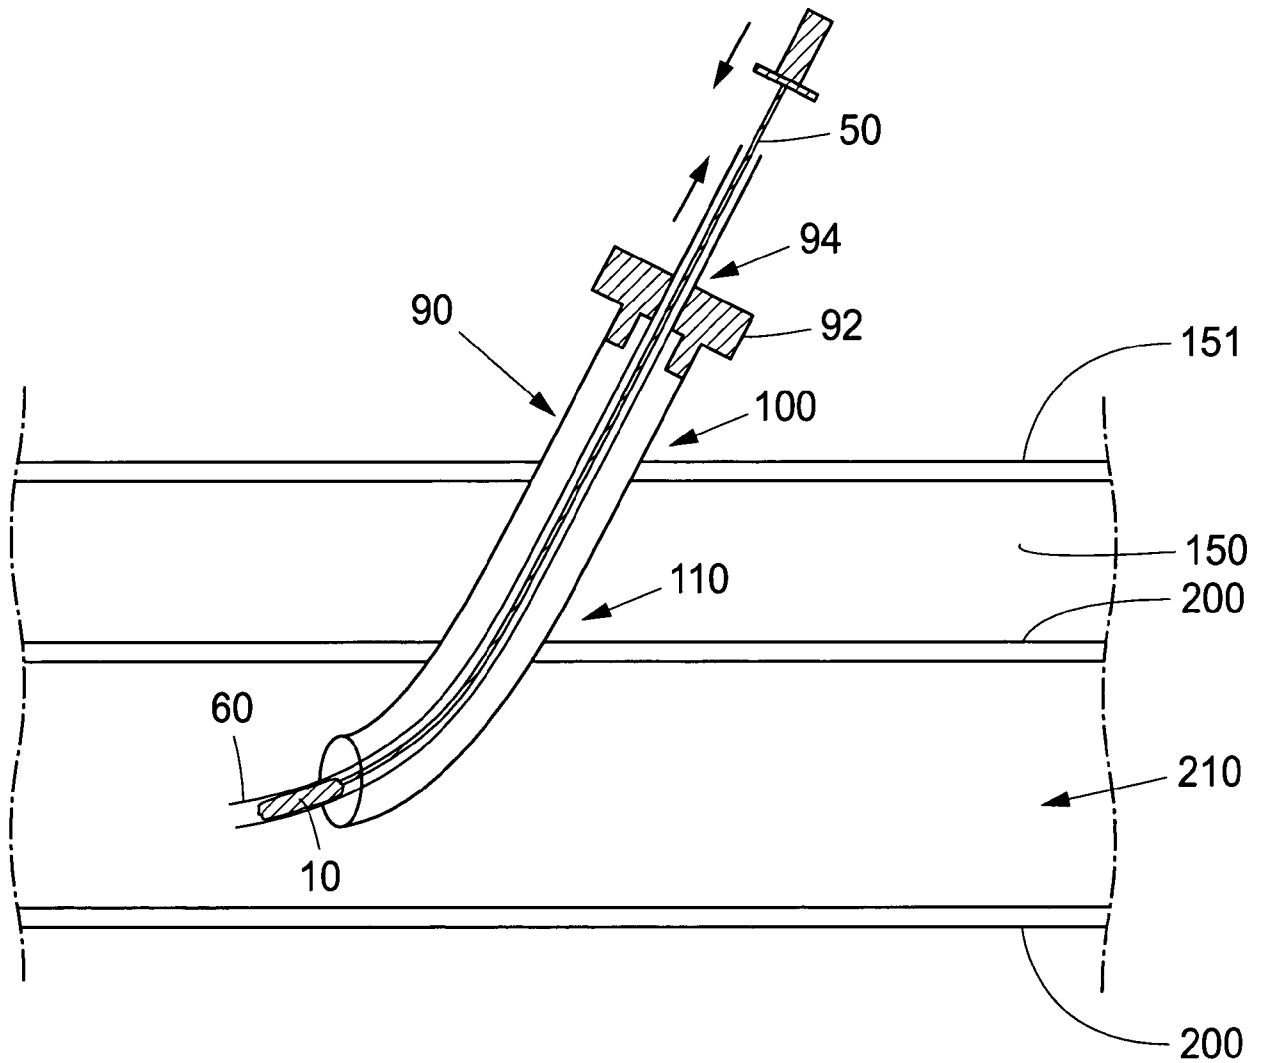


Fig. 7C

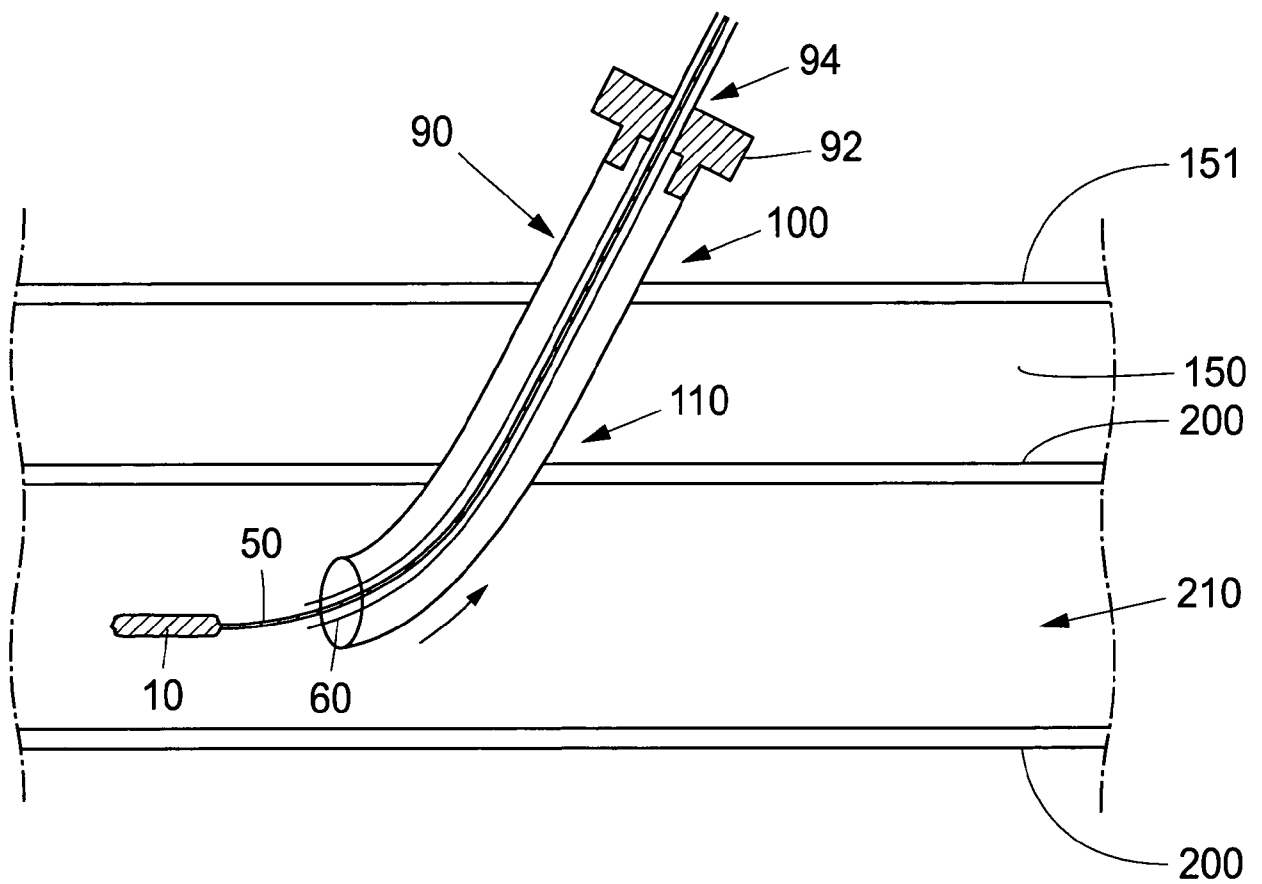


Fig. 7D

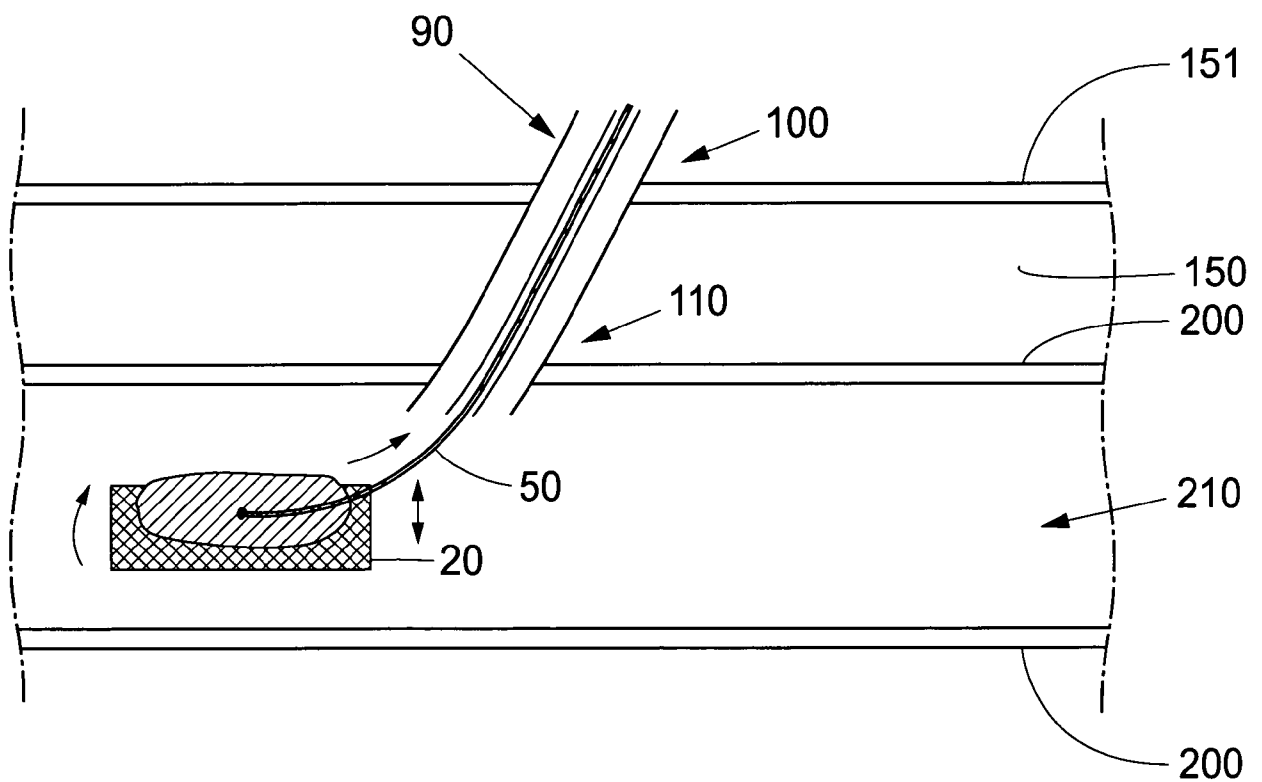


Fig. 7E

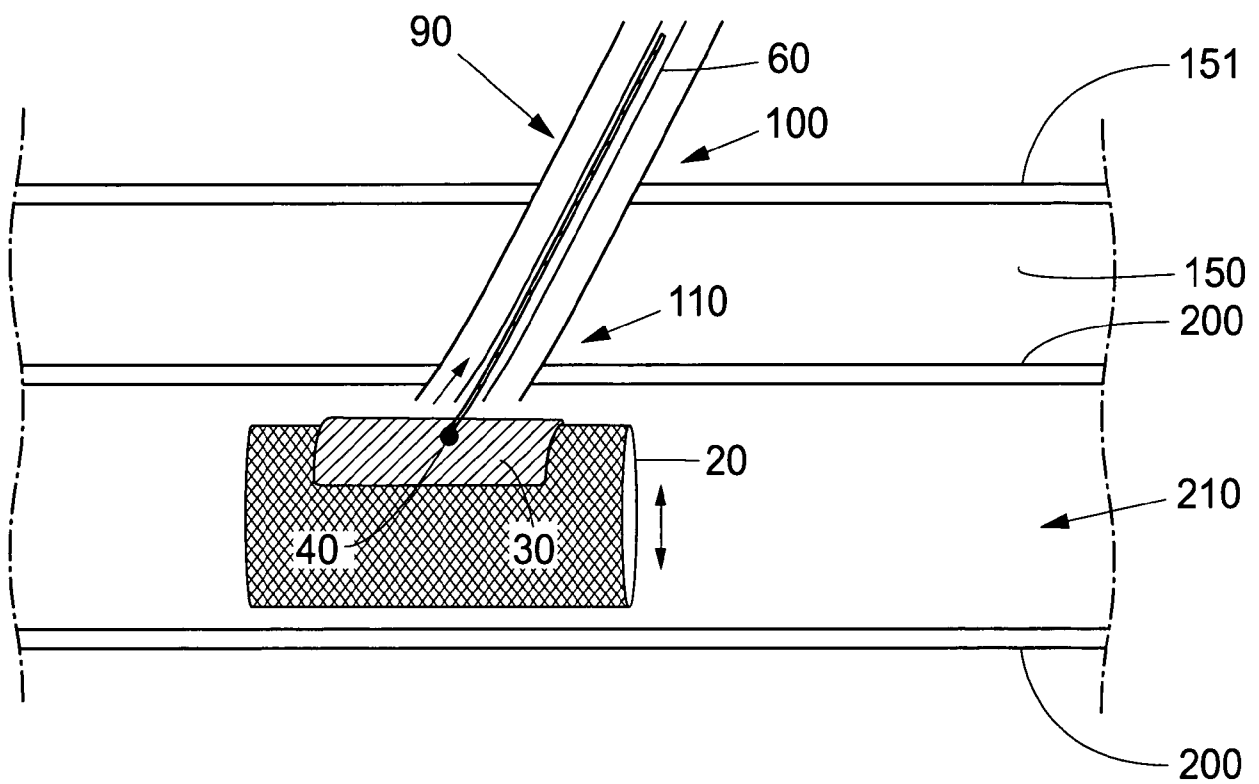


Fig. 7F

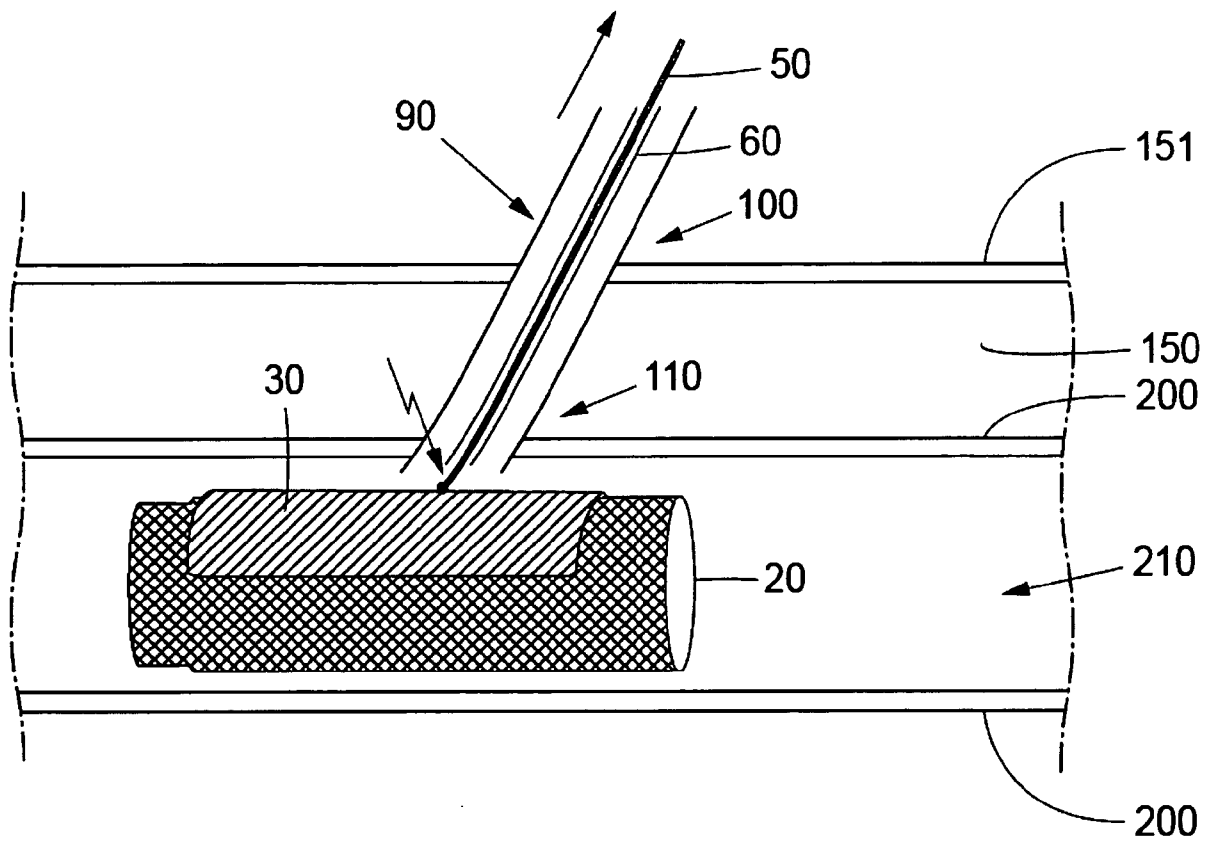


Fig. 7G

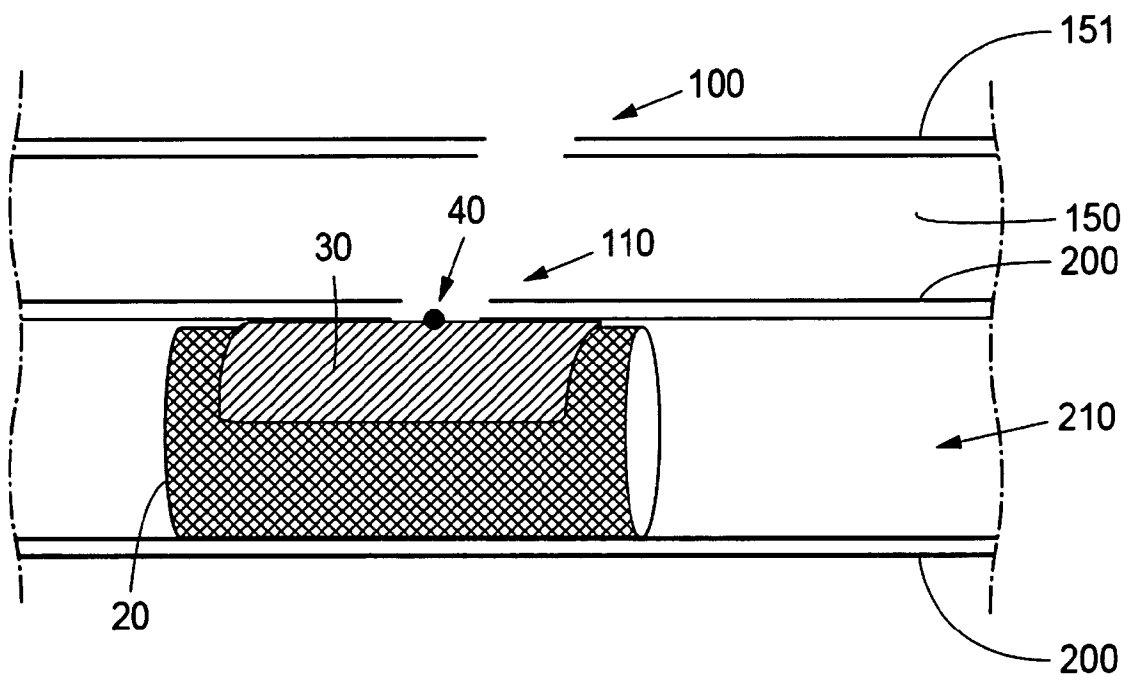


Fig. 7H

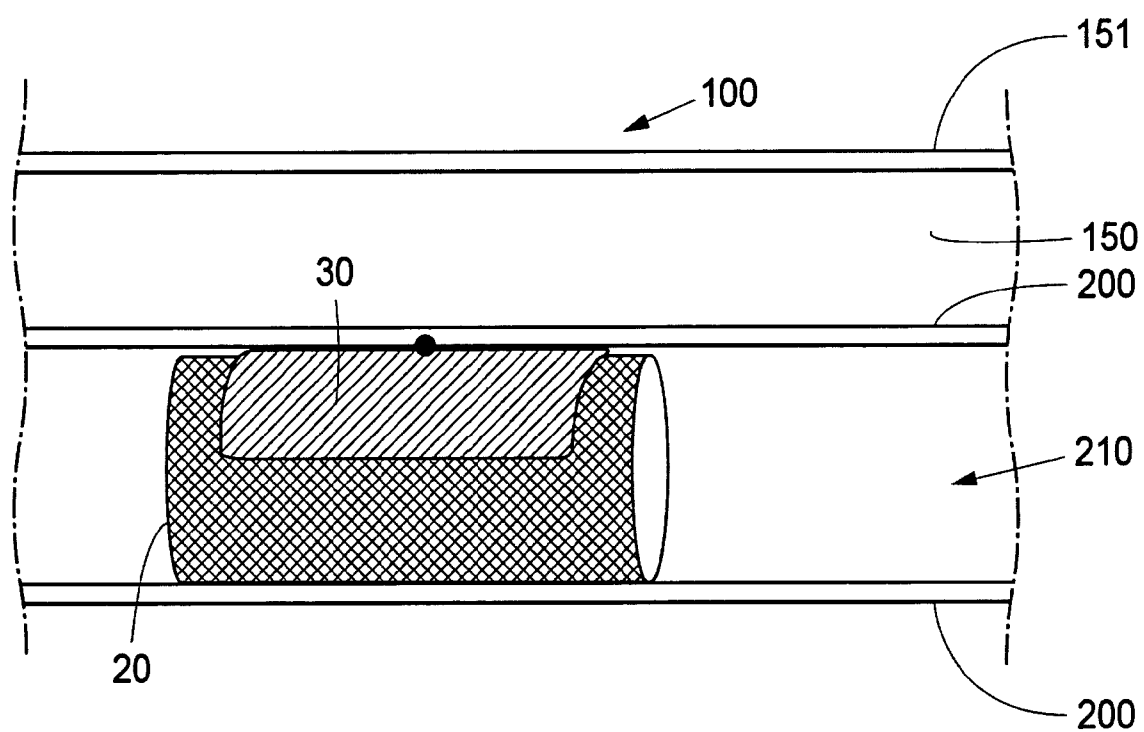


Fig. 7I

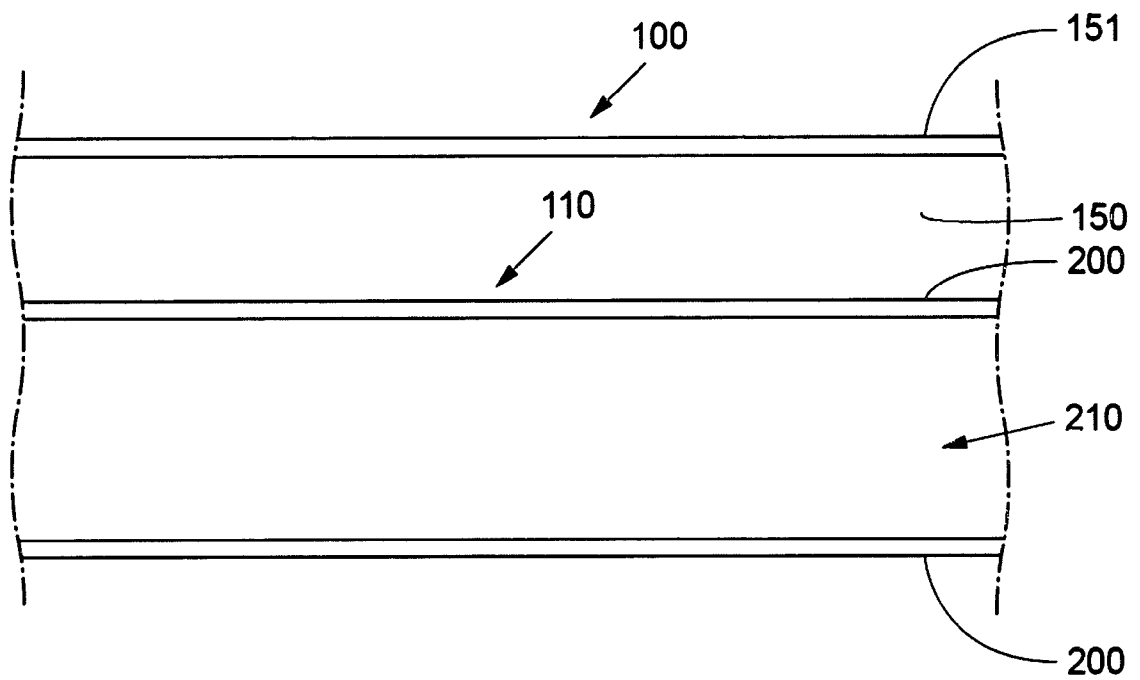


Fig. 7J

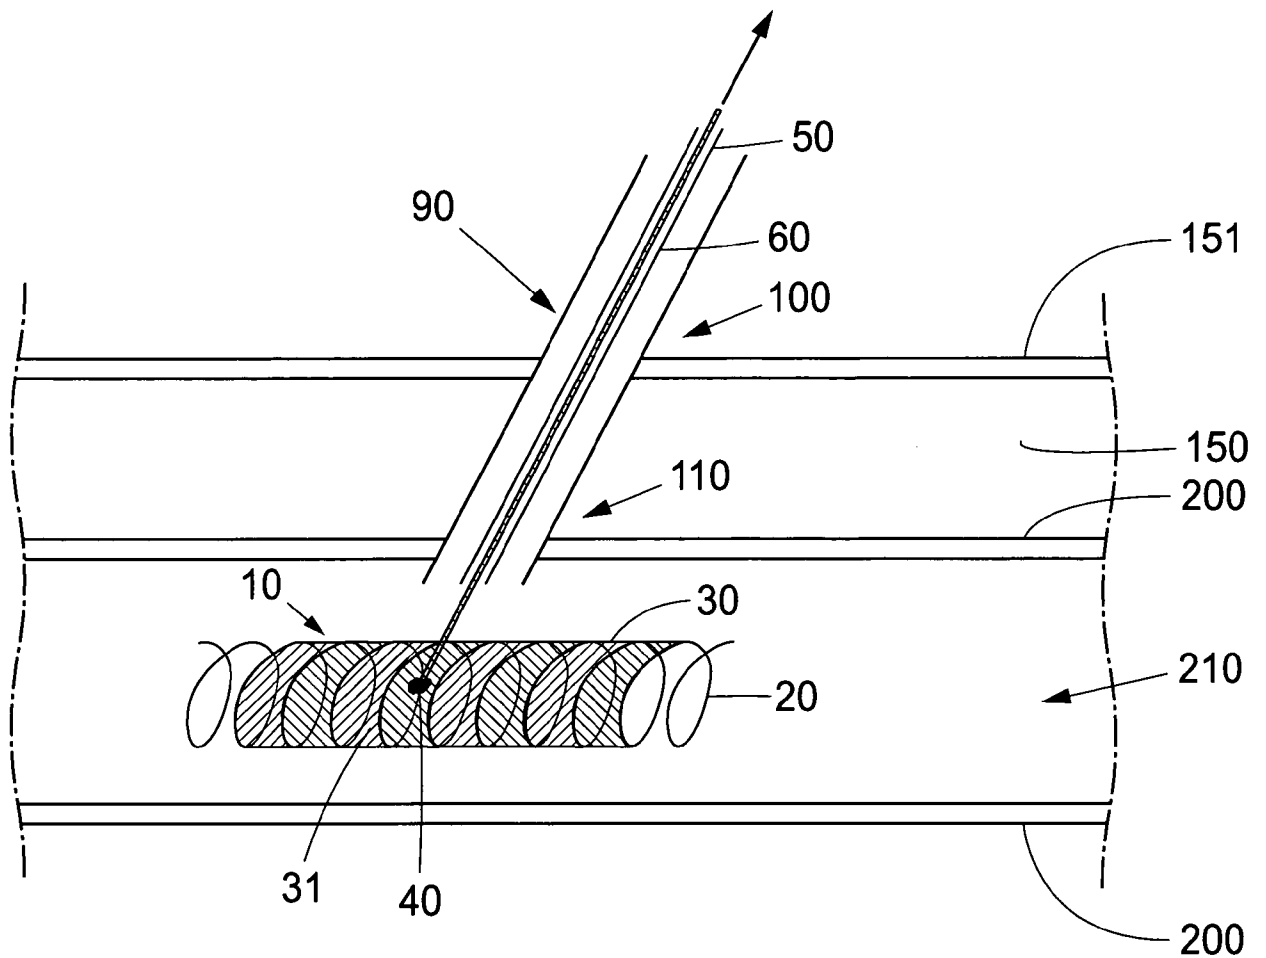


Fig. 8A

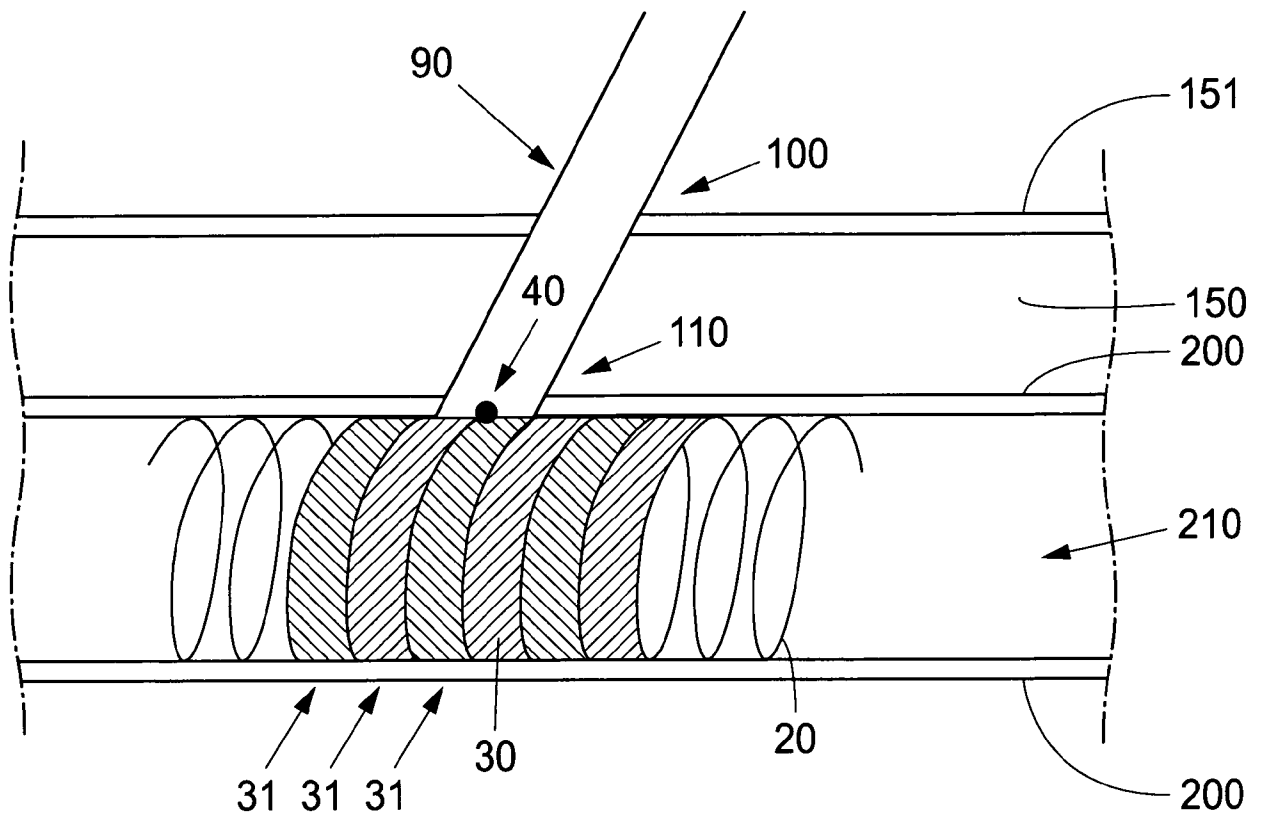


Fig. 8B

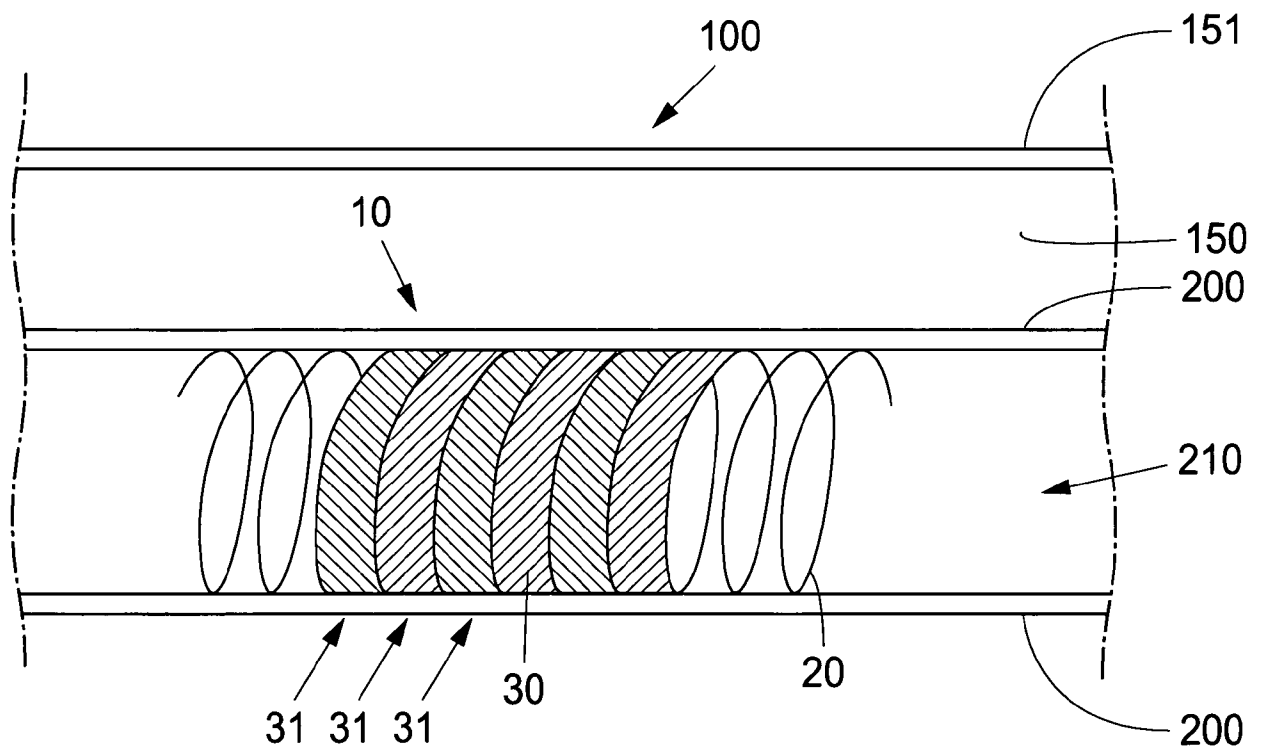


Fig. 8C

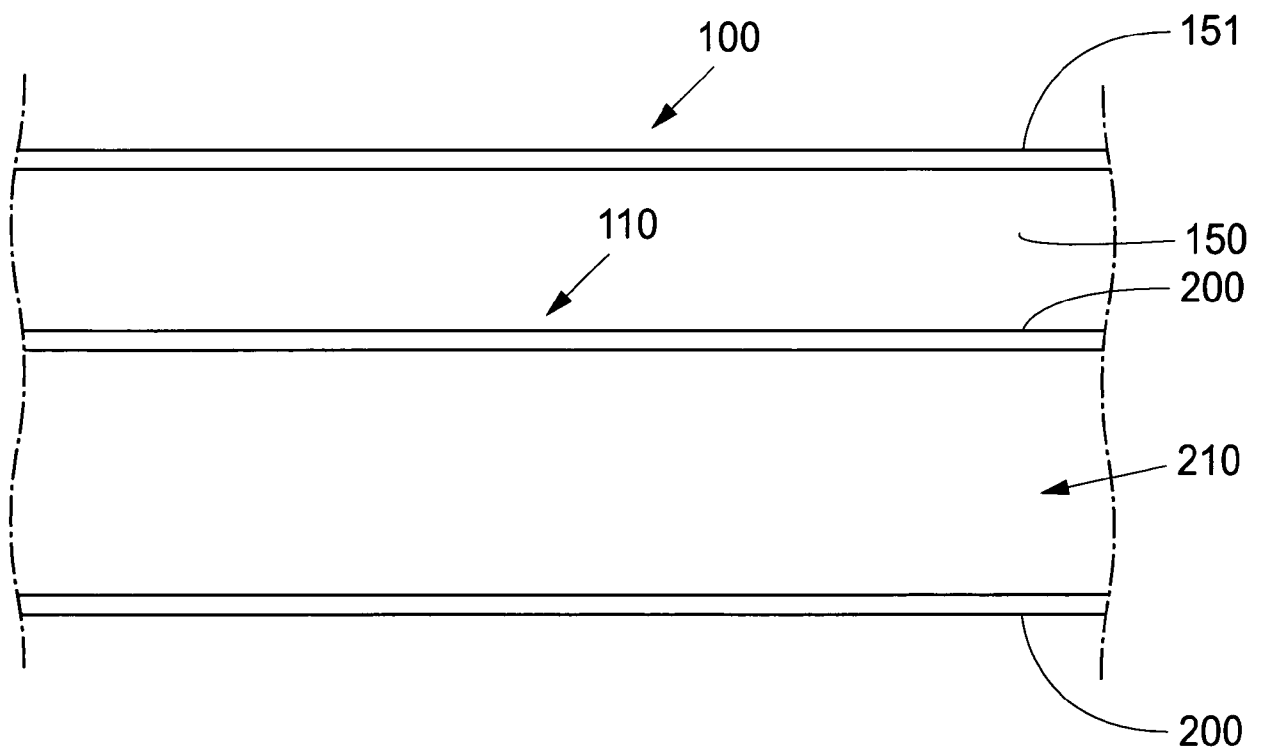


Fig. 8D

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2010/063135

A. CLASSIFICATION OF SUBJECT MATTER

INV. A61B17/00 A61F2/82 A61F2/84
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2006/034114 A2 (CORDIS DEV CORP [US]; SHERMAN DARREN R [US]; SLAZAS ROBERT R [US] CORD) 30 March 2006 (2006-03-30) paragraphs [0033], [0036], [0040], [0043], [0047], [0051], [0057]; figures 3,4,5,7,11,12	1-10,16, 19-38, 40-42
A	US 6 833 003 B2 (JONES DONALD K [US] ET AL) 21 December 2004 (2004-12-21) figures 1,2	1-3, 10-17
X	US 2009/143815 A1 (EIDENSCHINK TRACEE [US] ET AL) 4 June 2009 (2009-06-04) paragraphs [0028], [0032], [0035], [0036], [0044], [0047], [0049]; figures 2,3,5	1-16, 19-42
	----- -/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

30 September 2010

Date of mailing of the international search report

07/10/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Assion, Jean-Charles

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2010/063135

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2008/112500 A2 (NOVOSTENT CORP [US]; PARKER MARY ANN [US]; HOGENDIJK MICHAEL [US]; MAR) 18 September 2008 (2008-09-18) paragraphs [0079], [0083], [0090] - [0093]; figures 1,13,14,15	1-10,16, 19-38, 40-42
X	WO 2008/022327 A2 (TSUNAMI INNOVATIONS LLC [US]; DIECK MARTIN S [US]; MARTIN BRIAN B [US]) 21 February 2008 (2008-02-21) figures 4,19B,19C,20C,23C,37A	1-10,16, 19-38, 40-42
X	DE 10 2006 050385 A1 (PFM PRODUKTE FUER DIE MEDIZIN [DE]) 10 April 2008 (2008-04-10) paragraphs [0029], [0147], [0148]; figures 1A,30-34,552	1-10,16, 19-38, 40-42
A	EP 1 046 375 A1 (NISSHO KK [JP] NIPRO CORP [JP]) 25 October 2000 (2000-10-25) paragraphs [0018], [0019], [0020]; figures 1,3,5	1
A	WO 2005/034764 A1 (NMT MEDICAL INC [US]; DEVILLIAN CAROL A [US]) 21 April 2005 (2005-04-21) figure 5B	1
A	WO 00/18301 A1 (BIOINTERVENTIONAL CORP [US]) 6 April 2000 (2000-04-06) figure 3	1
X	WO 2008/024491 A1 (BOSTON SCIENT SCIMED INC [US]; EIDENSCHINK TRACEE E J [US]; JAGGER KAR) 28 February 2008 (2008-02-28) pages 6,7,8,14 - page 15; figures 1,3A,4	1-10,16, 19-38, 40-42
X	WO 2006/125022 A2 (BOSTON SCIENT SCIMED INC [US]; MOLAEI MASOUD [US]; HENRY WILLIAM S [US]) 23 November 2006 (2006-11-23) figures 2A,5,7A,8A	1-10,16, 19-38, 40-42
X	WO 2009/007939 A2 (ITGI MEDICAL LTD [IL]; VONDERWALDE CARLOS [CA]; BOMS ZVI [IL]; GONZALE) 15 January 2009 (2009-01-15) figures 1c,1e,5,7	1-16, 19-38, 40-42

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2010/063135

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 43-74
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by therapy
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2010/063135

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2006034114 A2	30-03-2006	CA 2580609 A1 EP 1799146 A2 JP 2008513136 T US 2008004653 A1	30-03-2006 27-06-2007 01-05-2008 03-01-2008
US 6833003 B2	21-12-2004	AT 323452 T DE 60304625 T2 EP 1374801 A1 JP 2004130075 A US 2004158307 A1 US 2004260385 A1 US 2005038496 A1	15-05-2006 16-05-2007 02-01-2004 30-04-2004 12-08-2004 23-12-2004 17-02-2005
US 2009143815 A1	04-06-2009	WO 2009070651 A1	04-06-2009
WO 2008112500 A2	18-09-2008	US 2008221665 A1	11-09-2008
WO 2008022327 A2	21-02-2008	AU 2007285800 A1 CA 2660851 A1 EP 2056747 A2 JP 2010500915 T US 2008221600 A1	21-02-2008 21-02-2008 13-05-2009 14-01-2010 11-09-2008
DE 102006050385 A1	10-04-2008	CN 101460102 A EP 2053976 A2 JP 2010505481 T KR 20090085027 A US 2008262518 A1	17-06-2009 06-05-2009 25-02-2010 06-08-2009 23-10-2008
EP 1046375 A1	25-10-2000	DE 60015841 D1 DE 60015841 T2 JP 2000300571 A US 6375671 B1	23-12-2004 20-10-2005 31-10-2000 23-04-2002
WO 2005034764 A1	21-04-2005	AT 375754 T CA 2538480 A1 DE 602004009598 T2 EP 1670360 A1 ES 2295932 T3 JP 2007504888 T	15-11-2007 21-04-2005 24-07-2008 21-06-2006 16-04-2008 08-03-2007
WO 0018301 A1	06-04-2000	EP 1115336 A1	18-07-2001
WO 2008024491 A1	28-02-2008	CA 2661159 A1 EP 2068721 A1 JP 2010501263 T	28-02-2008 17-06-2009 21-01-2010
WO 2008024491 A1		US 2008051830 A1	28-02-2008
WO 2006125022 A2	23-11-2006	US 2006259131 A1 US 2010204784 A1	16-11-2006 12-08-2010
WO 2009007939 A2	15-01-2009	EP 2170220 A2	07-04-2010