



(51) International Patent Classification:
G01L 5/22 (2006.01)

(21) International Application Number:
PCT/IL2012/000084

(22) International Filing Date:
16 February 2012 (16.02.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/444,733 19 February 2011 (19.02.2011) US

(71) Applicant (for all designated States except US): **WAT-TEAM LTD** [IL/IL]; Hamagal Street, Moshav Yodfat, M.P. Misgav, 20180 Yodfat (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DAVID, Eliyahu** [IL/IL]; Moshav Yodfat, M.P. Misgav, 20180 Yodfat (IL). **GAL-ON, Ofir** [IL/IL]; Moshav Yodfat, M.P. Misgav, 20180 Yodfat (IL).

(74) Agent: **Dr. EYAL BRESSLER LTD.**; 11 Tuval St., Lazrom House, 52522 Ramat Gan (IL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— with international search report (Art. 21(3))
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: A DEVICE, METHOD AND SYSTEM FOR ADD ON ATTACHMENT OF APPLIED FORCE STRAIN SENSOR ONTO EXERCISE EQUIPMENT

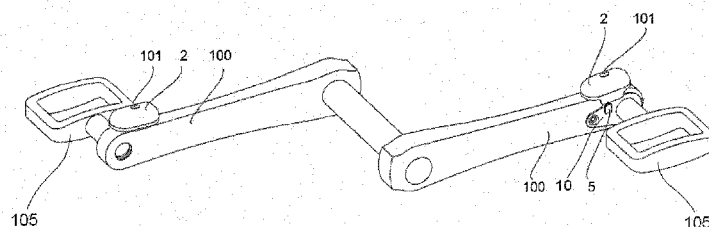


Fig. 4

(57) Abstract: The present invention is a device method and system that allow the easy add on attachment of an applied-power sensor, assuring precise measurements over time, even in vibrating environments such as exercise environments. The device possesses structural qualities such that tightening the wrapping latch around a measured object/part presses a loaded spring between the object/part and the sensor, achieving and maintaining sufficient and constant contact, thus allowing continuously precise measuring. The device also includes a transmitter to transmit the measured data to an external data processing device and may include a processor to process the data before transmitting.

A DEVICE, METHOD AND SYSTEM FOR ADD ON ATTACHMENT OF APPLIED FORCE STRAIN SENSOR ONTO EXERCISE EQUIPMENT

Abstract

The present invention is a device method and system that allow the easy add on attachment of an applied-power sensor, assuring precise measurements over time, even in vibrating environments such as exercise environments.

The device possesses structural qualities such that tightening the wrapping latch around a measured object/part presses a loaded spring between the object/part and the sensor, achieving and maintaining sufficient and constant contact, thus allowing continuously precise measuring.

The device also includes a transmitter to transmit the measured data to an external data processing device and may include a processor to process the data before transmitting.

Field of the invention

The present invention relates to the fields of athletic exercise and recreational devices and equipment, and to a device, method and system for attaching, measuring and displaying precise forces applied by the user of such devices. More specifically, the present invention allows the add-on attachment of force-measuring-sensors to moving parts in exercise apparatuses, with no recourse to the dismantling of any mechanisms or parts, in a way which maintains continuously precise measurements.

Background of the Invention

It is necessary in the field of athletic exercise to provide people (such as bicycle riders) who are interested in their level of performance, in particular their

power output, with add-on applied-force sensor device which is easy to attach and is able to produce and transmit precise measurements even in a vibrating environment. Applications include for example, measuring and displaying the driving torque applied to the crank arm in stationary or usual bicycle. To that end, the prior art, such as (U.S. Pat. No. US7,775,128B2; US7,806,006B2; US7,599,806B2; US7,257,468B1; US6,418,797B1; US5,758,735; US5,591,908; US5,257,540; US5,031,455; US 4,423,630;), teaches a method and device of applied force sensing device for use while cycling.

Although various devices are known, the known devices of the prior art fail to provide a solution for an applied-force sensing-device which can be added on to exercise apparatuses such as bicycle, without dismantling and/or replacing certain mechanisms, for example the bicycle gear system, pedals or the crank arm, or crank spider in a manner that allows precise measuring.

Exercise environments often introduce reaction forces such as vibration. In these environments, sensors must be installed and anchored to firmly grip the measured object/part, for achieving precise measurements over time. For bicycle raiders in particular, to achieve and maintain precise measuring, installation of applied-force sensing-devices often requires the dismantling of mechanisms and replacing the original parts with specialized parts. These parts are often very expensive and usually require professional person expertise to install and maintain.

An applied force measuring arrangement is already known as Strain Gage, used to measure the strain forces applied to a surface or object. For example see Transducer-Class® Strain Gages, part number: S1425 or S120P, made by Full Bridge Patterns, Vishay Micro-Measurements. Strain force measuring requires the anchoring of the sensor to the measured surface for maximizing the direct transferring of forces. Furthermore, continuous pressure is also required, to maintain constant and firm contact between the strain sensor and the measured

surface or object.

To date, there are no satisfactory add-on devices and methods for applied-force sensing-devices, which offer easy add-on installation to different types of exercise devices, do not require any action of dismantling any mechanisms and/or replacing any original parts, and maintain precise measurements in an exercising environment. Thus, there remains a need in the art for an improved add-on device and method.

In addition, there is an increasing commercial demand for personal training applications, such as smart phones application designed to work with different athletic exercise devices (for example see the Edge 800[®] and Edge 500[®], made by GARMIN; Node 1 and Node 2, made by Bontrager Node computers). There is a need to provide a system and method for easy add-on attachment of applied-force measuring device, able to continuously measure precise forces and transmit them to an external device for processing and display, using for example, wireless protocols.

Summary of the Invention

It is hence one object of the invention to disclose a device for measuring a force applied to a bicyclical pedal by a rider. The aforesaid device is attachable to a pedal crank. The device comprises (a) attaching means quickly embracing and detaching from said crank arm; (b) a spring-loaded leaf; (c) at least one strain sensor adapted to measure a strain of said spring-loaded leaf and a control unit.

Another object of the invention is to disclose said spring-loaded leaf attached along a direction of bending deformation of said crank arm.

A further object of the invention is to disclose the spring-loaded leaf attached along a direction of twisting deformation of said crank arm and pedal.

A further object of the invention is to disclose the control unit further comprising at least one component selected from the group consisting of an amplifier, an analog-to-digital converter, a microprocessor, a wireless communication interface, display means and a data transponder.

A further object of the invention is to disclose at least one component connected to said control unit which is selected from the group consisting of a sensor of crank angular displacement, a temperature sensor and a pedal cadence sensor.

A further object of the invention is to disclose the control unit preprogrammed for auto-calibration.

A further object of the invention is to disclose a method of measuring a force applied to a bicyclical pedal by a rider. The aforesaid method comprises the steps of: (a) providing a device for measuring a force applied to a bicyclical pedal by a rider; said device is attachable to a pedal crank arm; said device comprises (i) attaching means quickly embracing and detaching from said crank arm; (ii) a spring-loaded leaf; (iii) at least one strain sensor adapted to measure a strain of said spring-loaded leaf. (iv) a control unit; (b) attaching said device to said crank arm; (c) applying a turning torque to said crank arm by said rider; (d) elastically

deforming said crank arm by said turning torque; (e) measuring said deformation by means of said strain sensor.

A further object of the invention is to disclose the step of measuring said deformation comprising measuring bending deformation of said crank.

A further object of the invention is to disclose the step of measuring said deformation comprising measuring twisting deformation of said crank arm and pedal.

Brief description of the drawings

The subject matter regarded as the invention is particularly pointed out and distinctly claimed in the following portion of the description. The invention, however, both as to organization and method of operation, together with objects, features, and advantages thereof, may best be understood by reference to the following description when read with the accompanying drawings in which:

FIGS. 1a and 1b illustrate the device, installed on a bicycle crank arms;

FIG. 2 presents front, rear, top and cross-sectional views of the device installed on the inner side of a bicycle crank arm;

FIGS. 3a and 3b illustrate a perspective view of the device installable onto a bicycle crank arm;

FIG. 4 illustrates the device, installed on a bicycle crank arm attached by a pedal;

FIGS 5a and 5b present views of the device installable onto a bicycle crank attached by a pedal;

FIG. 6 is an exploded view of the device, installed on a bicycle pedal; and

FIG. 7 is a schematic diagram of the main electronic components in the device, according to some embodiments of the present invention.

Description of the invention

In the following description, specific details are set forth in order to provide a thorough understanding of the invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known methods, procedures and components have not been described in detail so as not to obscure the present invention.

The term "sensor" hereinafter refers to a pre-stressed leaf operatively connected to a strain gage. The aforesaid strain gage is configured for generation of an electric signal corresponding to a deformation of the pre-stressed leaf.

It should be emphasized that the claimed device of the present invention is designed for attaching to standard bicyclal articles and no improvement or modification of the bicyclal articles is needed.

According to some embodiments of the present invention, there is provided an applied-force sensing device, method and system for people who take interest in their performance during athletic activity, which device and/or method and/or system may be described in view of Figs. 1 – 7.

A primary function of the invention is to provide the means to improve the ease of installation of applied-force sensing-devices, while assuring continuous precise measurements over time in an exercise environment, by allowing users to tightly attach the device to a measured object in a manner which creates constant pressure, ensuring the consecutiveness of contact required for sensitive and precise measuring.

According to some embodiments of the present invention the device may be shaped as a case hosting electronic components (2) made of resilient material such as Metal or plastic shell.

According to some embodiments of the present invention, the device may include at least one applied-force sensor such as a strain-gage (5), cased in the shell (2) and provided with a spring loaded leaf (4) for measuring the force applied to an exercise object.

According to some embodiments of the present invention, a spring-loaded 'leaf' (4) is firmly connected to a measured object. Accordingly, the spring-loaded 'leaf' (4) may indicate the strain force applied to the object/part/crank arm/pedal (100), to be measured by the strain-sensor (5).

According to some embodiments of the present invention, the means (1) for attaching the device to the object/part, may allow the attachment of the device to the object/part/crank arm, by tightening the latch (1) which is wrapped around the object/part (100), using screw arrangement (6). Accordingly, tightening the wrapping latch around the object/part (100), presses the spring-loaded 'leaf' (4)

against the object/part (100), applying constant force downward, thus maintaining constant tightened contact between the sensor (5) and the measured object/part (100).

According to some embodiments of the present invention, the attachment of the device may be done on different positions on the exercise device/object, for example, on either side of the crank arm of a bicycle (see fig.1A and fig.1B). The above mentioned embodiment is configured for measuring elastic bending deformation of the crank arm.

In accordance with another embodiment of the present, the device is configured for measuring elastic twisting deformation of the crank arm and pedal as shown in FIG. 6. A twisting force is applied to a pedal 105 by a rider (not shown) and is transferred to the crank arm 100. The aforesaid force is applied along an arrow 102. The rider can press down onto the pedal 105 and pull it up when the rider's foot is fixedly attached to the pedal 105. The pedal 105 is connected to a threaded opening 115 in the crank arm 100. The spring-loaded member 10 is firmly connected to the crank arm 100 by the pedal 105. The strain gage 5 provides a change in electric impedance corresponding to deformation of the member 10. The aforesaid deformation corresponds to deformation in the crank arm 100 and the pedal 105.

According to some embodiments of the present invention, the device may include all or some of the following components (see fig.7): strain sensors (200); electronic sensor amplifier (201); pedal cadence sensor (202); temperature sensor (204); crank arm angular displacement sensor (205); A/D converter (206); a transmitting device (207); a microprocessor (208) and wireless communication means 209.

According to some embodiments of the present invention, the users may operate the system by pressing the calibration button arrangement (101) to calibrate the applied force measurement sensor before each exercise activity.

According to some embodiments of the present invention, the calibration process may be done automatically by calculation processes in the microprocessor (208), or by calculation processes in the external wireless device (203).

According to some embodiments of the present invention, the device may include a transmitting device (207) for transmitting the measured data to an external wireless device (203). Data may be transmitted using wireless protocols for example RF, Bluetooth.

In accordance with these and other objects, this invention provides a means structured to allow easy add-on attachment of the sensing device to the measured exercise object/part, to provide constant tightened contact between the sensing device and the measured object even under constant vibrations and to directly process and transmit the measured data to an external device, thus improving the integration and ease of use of exercise enhancing applications.

While certain features of the invention have been illustrated and described herein, many modifications, substitutions, changes, and equivalents will now occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

Claims:

1. A device for measuring a force applied to a bicyclical pedal by a rider; said device attachable to a standard bicyclical article; said device comprising
 - (a) attaching means adapted for quickly embracing and detaching from said crank;
 - (b) a spring-loaded leaf attached to said crank;
 - (c) at least one strain gage adapted to measure a strain of said spring-loaded leaf.
 - (d) a control unit.
2. The device according to claim 1, wherein said spring-loaded leaf is attached along a direction of bending deformation of said crank arm.
3. The device according to claim 1, wherein said spring-loaded leaf is attached along a direction of twisting deformation of said crank arm and a pedal.
4. The device according to claim 1, wherein said control unit further comprises at least one component selected from the group consisting of an amplifier, an analog-to-digital converter, a microprocessor, a wireless communication interface, display means and a data transponder.
5. The device according to claim 4, wherein at least one component connected to said control unit is selected from the group consisting of a sensor of crank angular displacement, a temperature sensor and a pedal cadence sensor.

6. The device according to claim 1, wherein said control unit is preprogrammed for auto-calibration.
7. A method of measuring a force applied to a bicyclical pedal by a rider; said method comprising the steps of:
 - (a) providing a device for measuring a force applied to a bicyclical pedal by a rider; said device attachable to a standard bicyclical article; said device comprising
 - i. attaching means adapted for quickly embracing and detaching from said crank;
 - ii. a spring-loaded leaf;
 - iii. at least one strain gage adapted to measure a strain of said spring-loaded leaf.
 - iv. a control unit;
 - (b) attaching said device to said crank;
 - (c) applying a turning torque to said crank by said rider;
 - (d) elastically deforming said crank by said turning torque;
 - (e) measuring said deformation by means of said strain sensor.
8. The method according to claim 7, wherein said step of measuring said deformation comprises measuring bending deformation of said crank arm.
9. The method according to claim 7, wherein said step of measuring said deformation comprises measuring twisting deformation of said crank arm and pedal.

10. The method according to claim 7, wherein said device is provided with control unit further comprising at least one component selected from the group consisting of an amplifier, an analog-to-digital converter, a microprocessor, a wireless communication interface, display means and a data transponder.
11. The method according to claim 10, wherein at least one component connected to said control unit is selected from the group consisting of a sensor of crank angular displacement, a temperature sensor and a pedal cadence sensor.
12. The device according to claim 7, wherein said control unit is preprogrammed for auto-calibration.

1/7

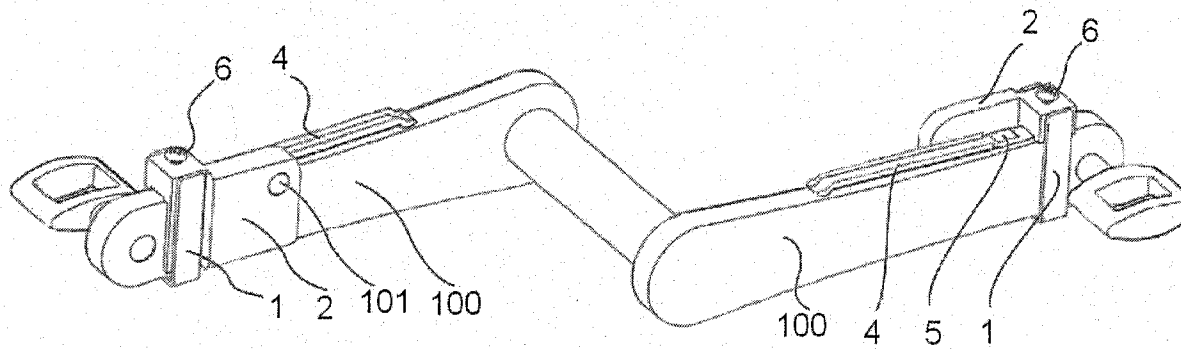


Fig. 1a

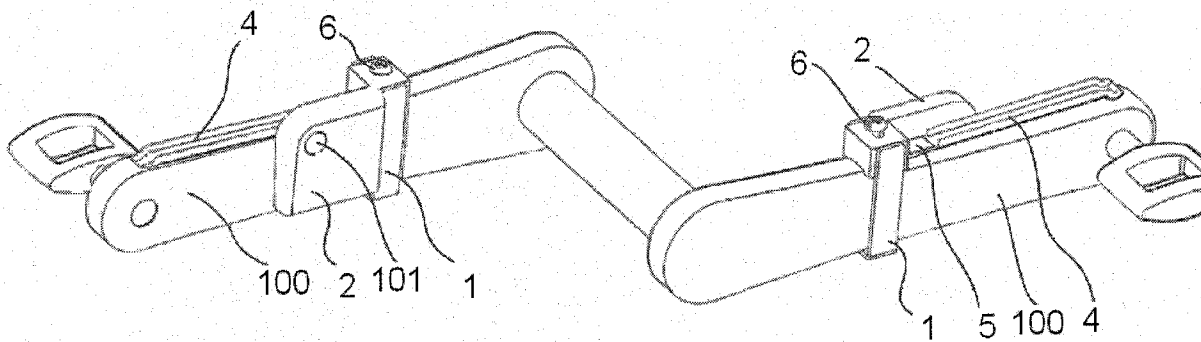


Fig. 1b

2/7

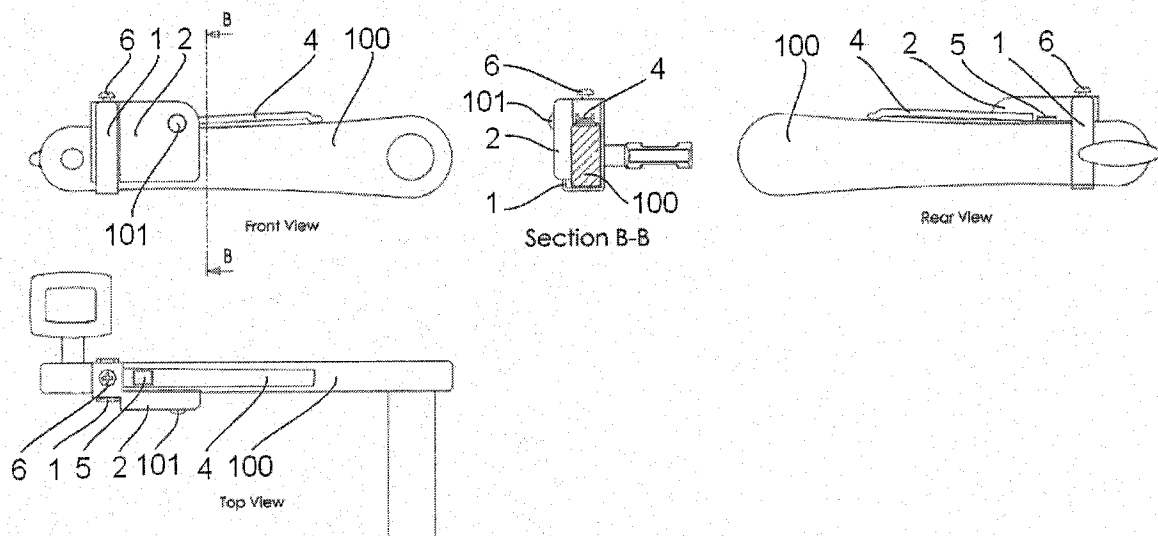


Fig. 2

3/7

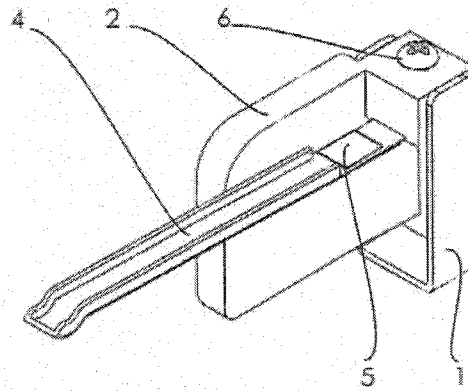


Fig. 3a

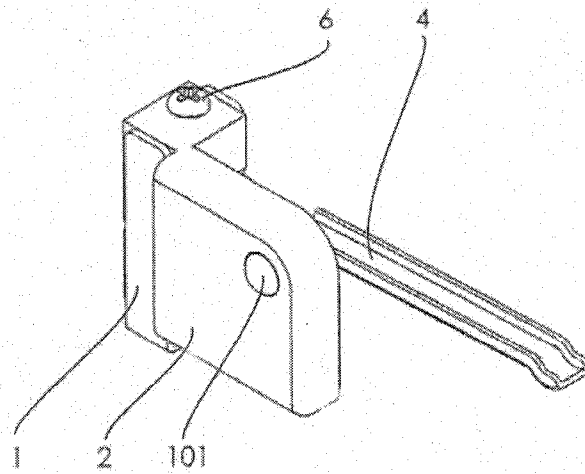


Fig. 3b

4/7

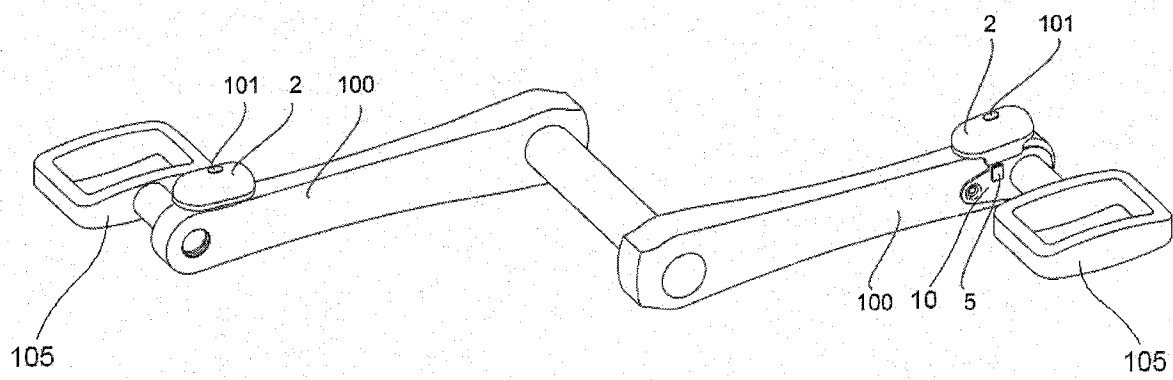


Fig. 4

5/7

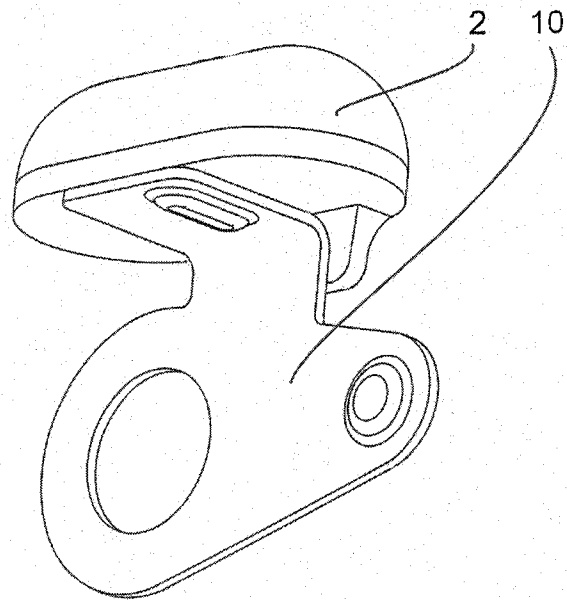


Fig. 5a

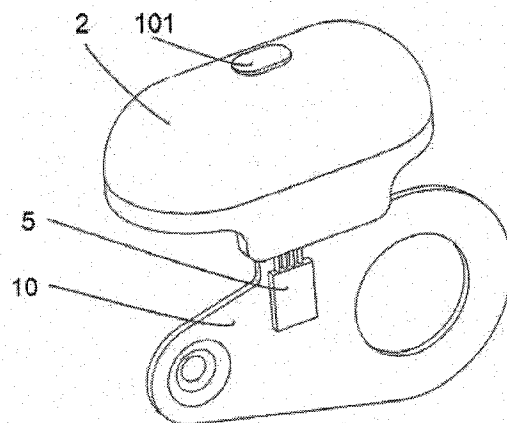


Fig. 5b

6/7

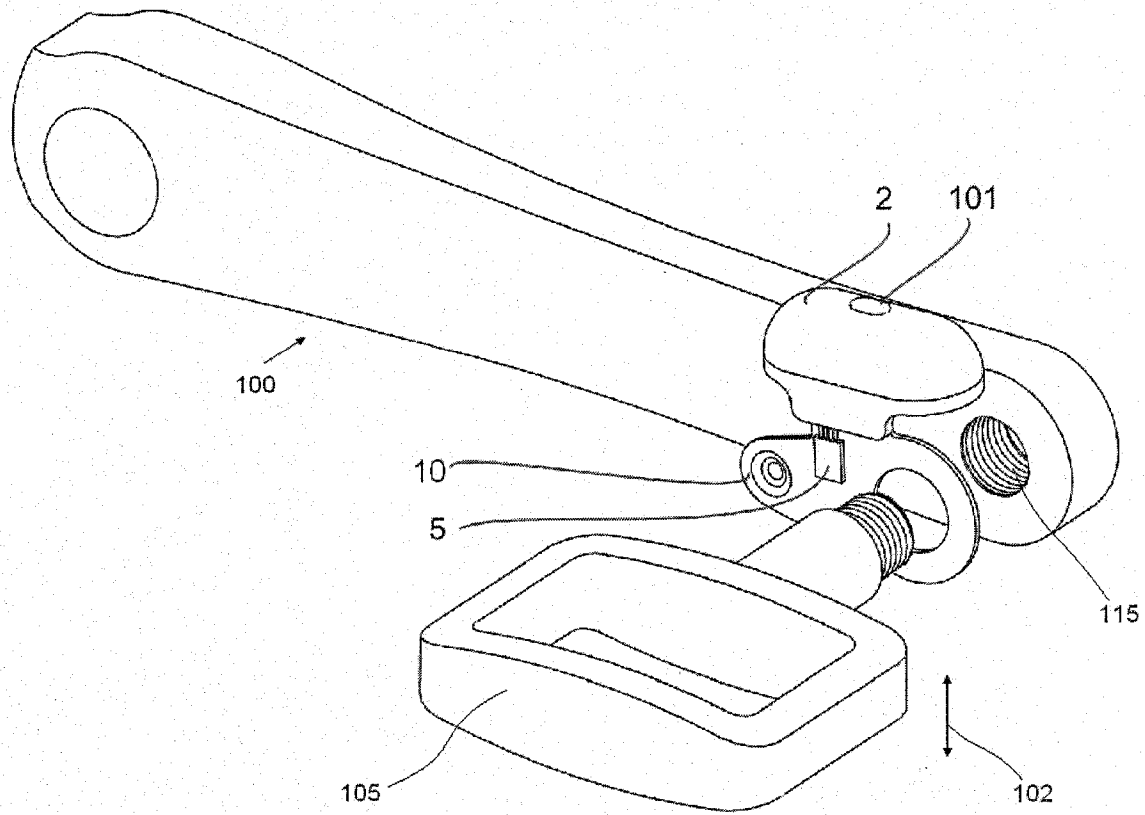


Fig. 6

7/7

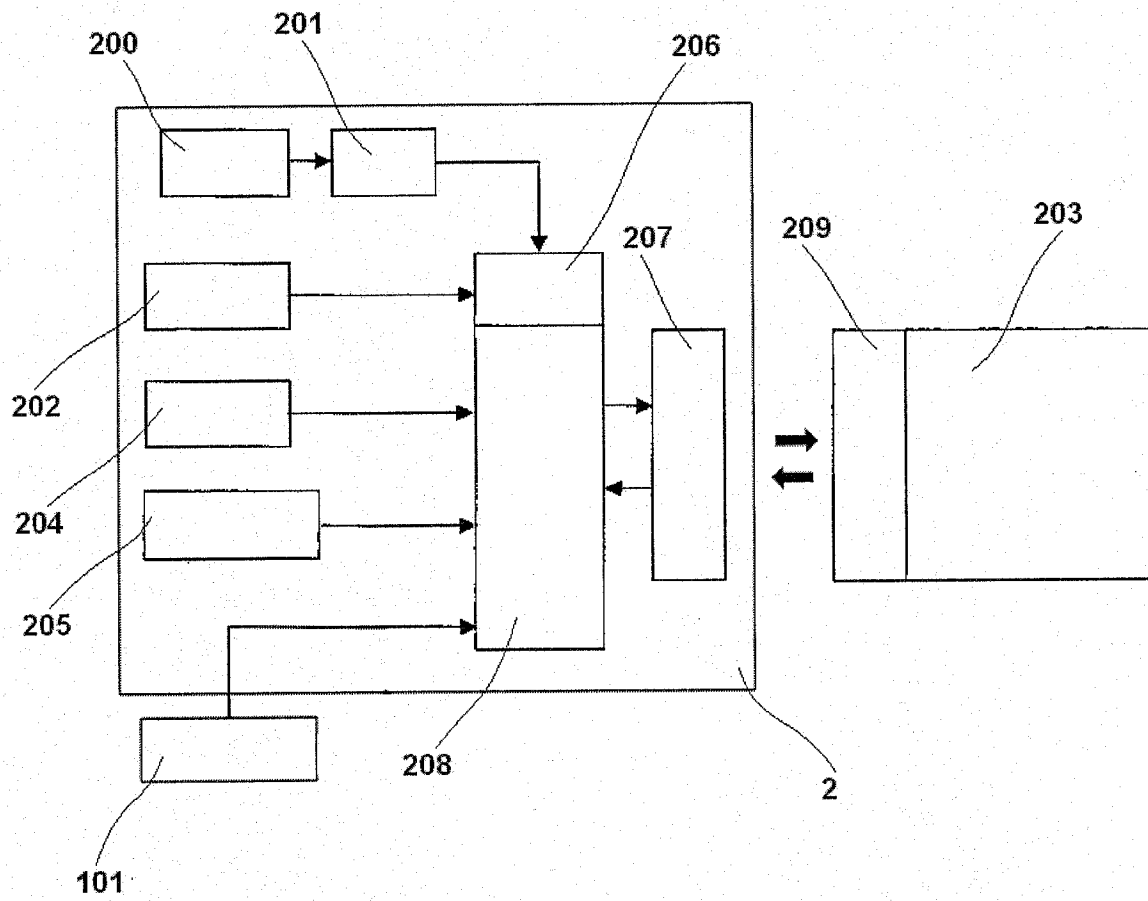


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2012/000084

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G01L 5/22 (2012.01)

USPC - 73/862.338

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - A63B 22/08, 24/00, 69/16; B62M 3/08; G01L 5/22 (2012.01)

USPC - 73/818, 862.05, 862.325, 862.331, 862.338; 702/44

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Patbase

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/20094 A1 (OBERHEIM) 14 March 2002 (14.02.2002) entire document	1-4, 6-10, 12
--		-----
Y		5, 11
Y	US 2005/0178210 A1 (LANHAM) 18 August 2005 (18.08.2005) entire document	5, 11
A	US 2010/0018307 A1 (FURUTA et al) 28 January 2010 (28.01.2010) entire document	1-12

☐ Further documents are listed in the continuation of Box C.


* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

09 July 2012

Date of mailing of the international search report

20 JUL 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300

PCT OSP: 571-272-7774