

(12) **UK Patent Application** (19) **GB** (11) **2 364 923** (13) **A**

(43) Date of A Publication **13.02.2002**

(21) Application No **0113210.9**
(22) Date of Filing **31.05.2001**
(30) Priority Data
(31) **09584920** (32) **31.05.2000** (33) **US**

(71) Applicant(s)
Callaway Golf Company
(Incorporated in USA - Delaware)
2285 Rutherford Road, Carlsbad,
California 92008-7328, United States of America

(72) Inventor(s)
Uday V Deshmukh
Kenneth S Vecchio
Joel B Erickson

(74) Agent and/or Address for Service
Graham Watt & Company
Riverhead, SEVENOAKS, Kent, TN13 2BN,
United Kingdom

(51) INT CL⁷
A63B 53/04


(52) UK CL (Edition T)
A6D DHF



(56) Documents Cited
WO 00/10653 A **JP 090262326 A**




(58) Field of Search
UK CL (Edition S) **A6D DHF**
INT CL⁷ **A63B 53/00 53/04 53/06**
Online: **EPODOC, WPI, PAJ**

(54) Abstract Title
Golf club head.

(57) A golf club head 20 comprises a body 22 with a striking plate (30, figure 2), a heel end 26, a toe end 28, and a cavity; said cavity houses a weighting member 24 which in turn comprises a multiple component material having at least a high-density component, a binding component and an anti-oxidising component. Said anti-oxidising component may be formed from chromium, nickel-chrome, stainless steel, nickel superalloy or other chromium alloys, titanium, zirconium, or aluminium. Said high-density component may be formed from tungsten, molybdenum, tantalum, platinum or rhodium. Said binding component may be formed from copper, copper alloys or tin. In a preferred embodiment the multiple component material may comprise tungsten, copper and an anti-oxidising component. Said golf club head 20 may be an iron, a driver, a fairway wood or a putter.

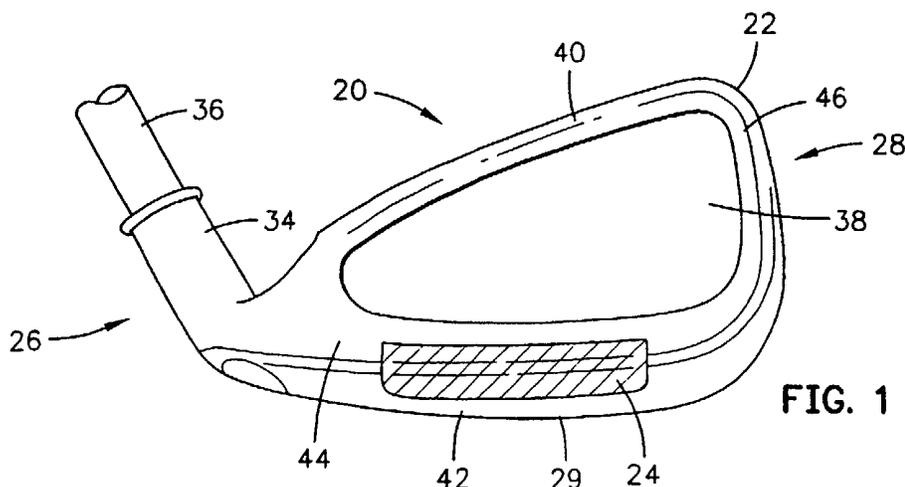

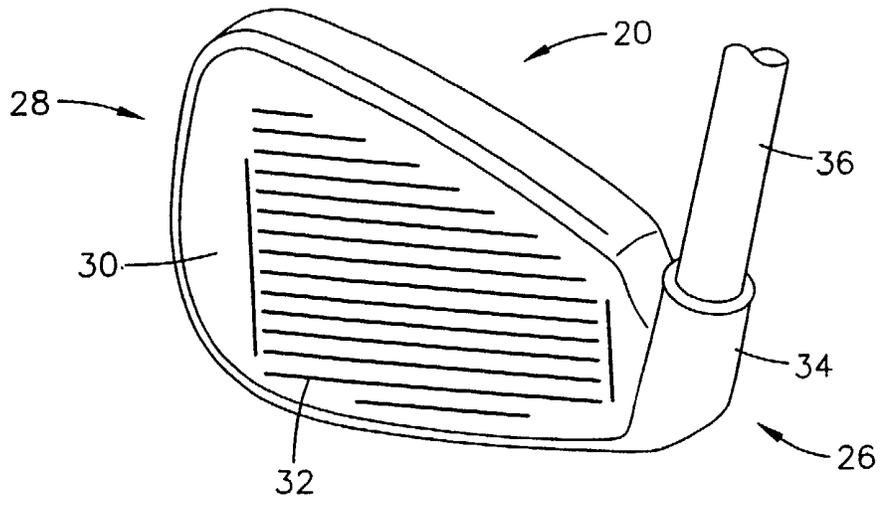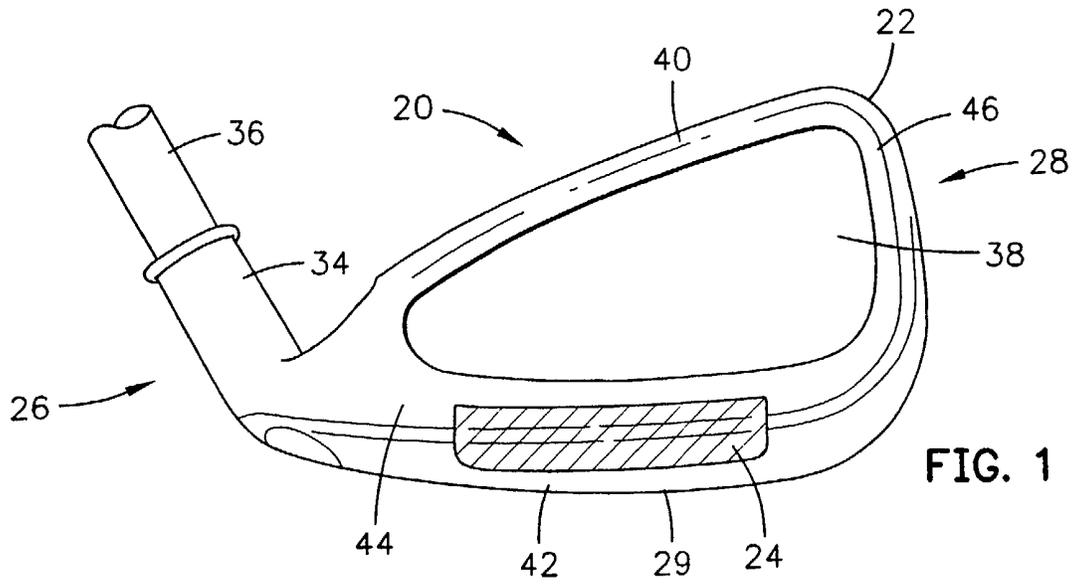

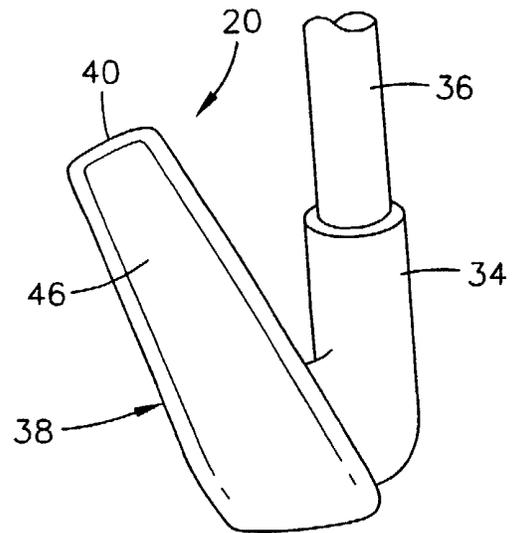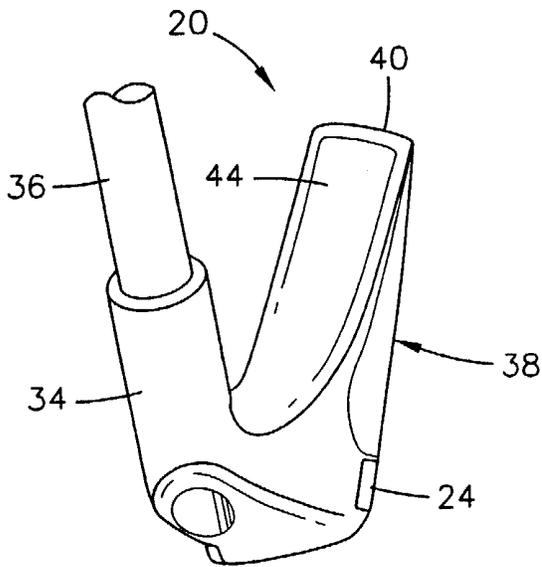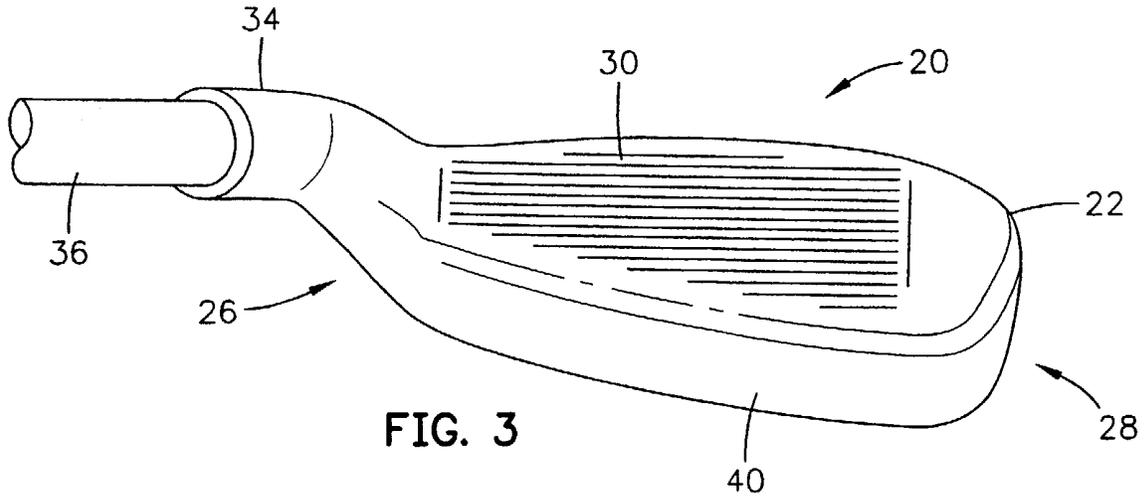

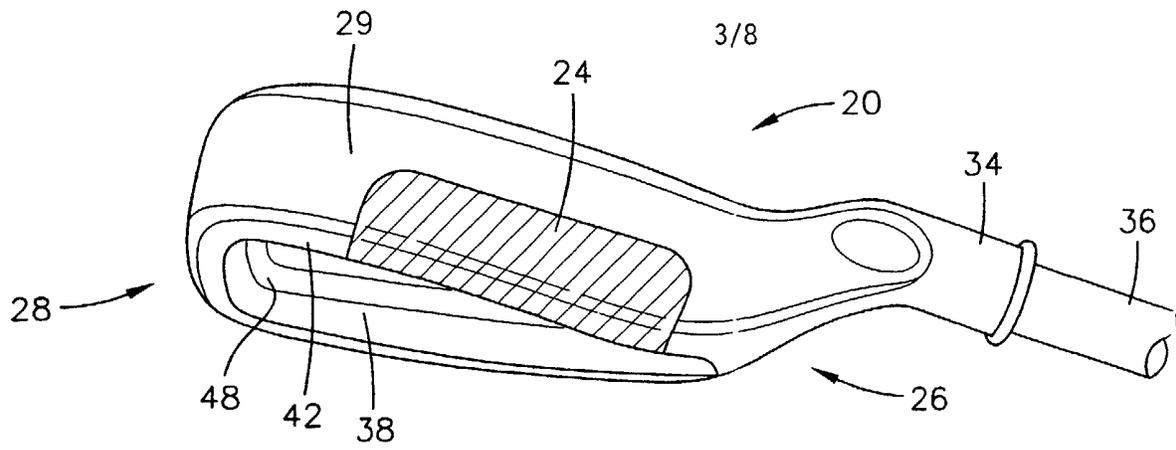


FIG. 6

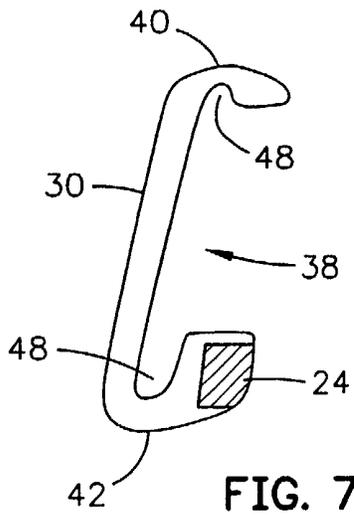


FIG. 7

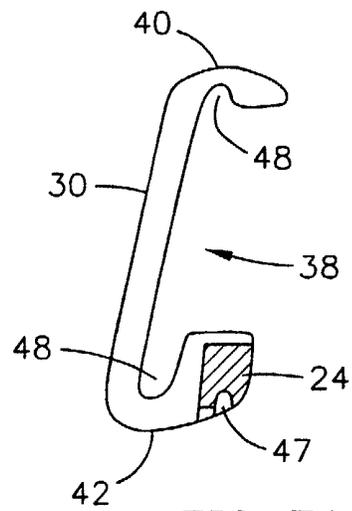


FIG. 7A

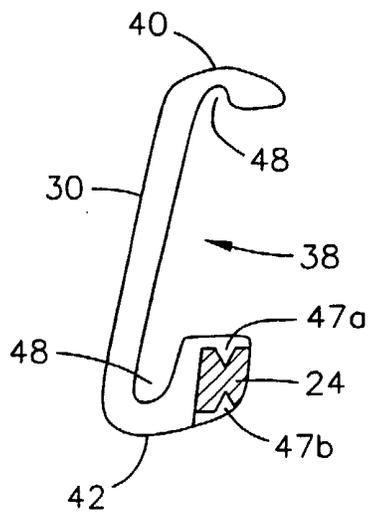
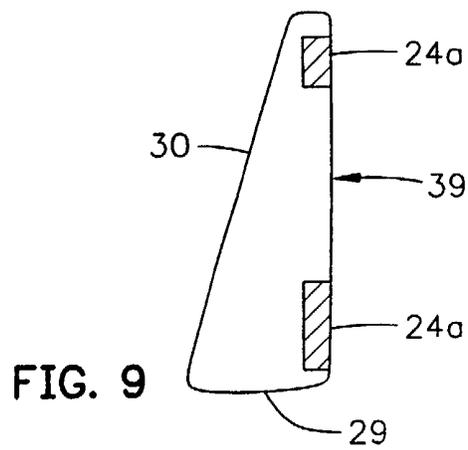
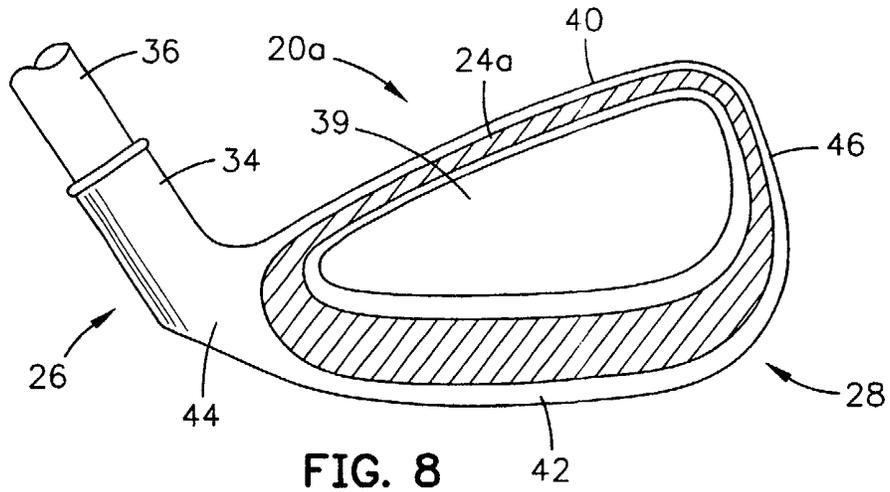


FIG. 7B



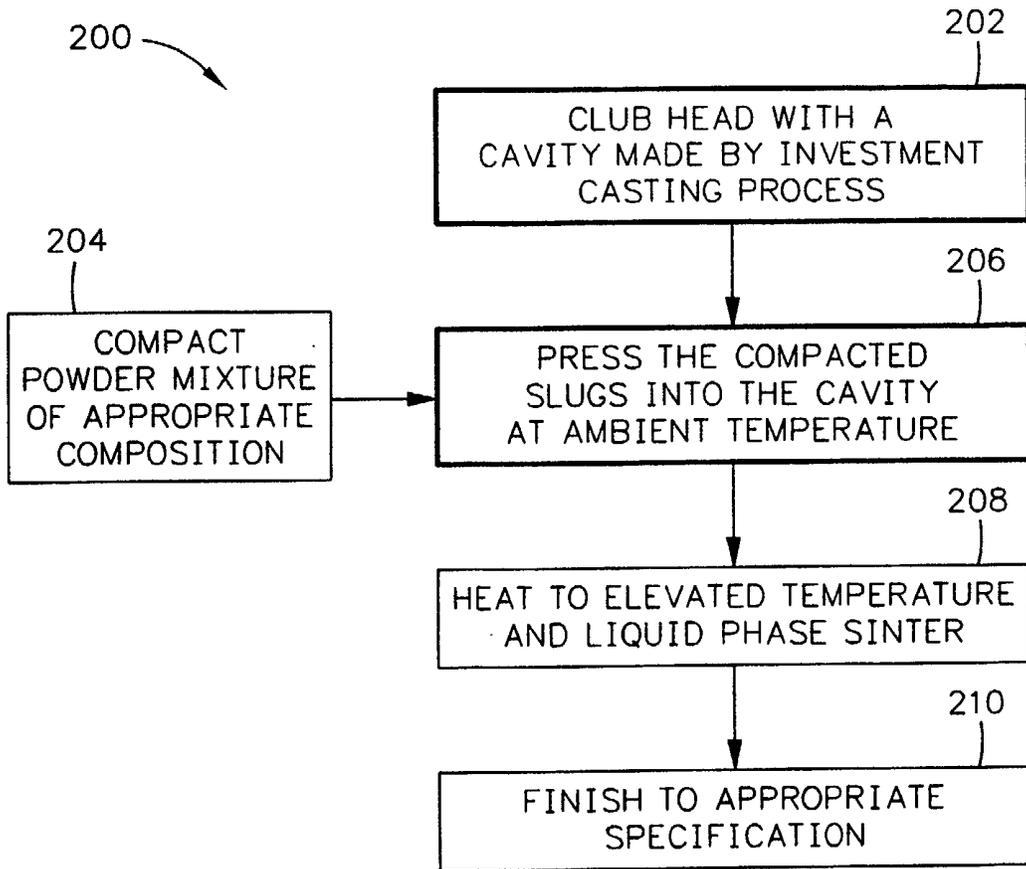


FIG. 10

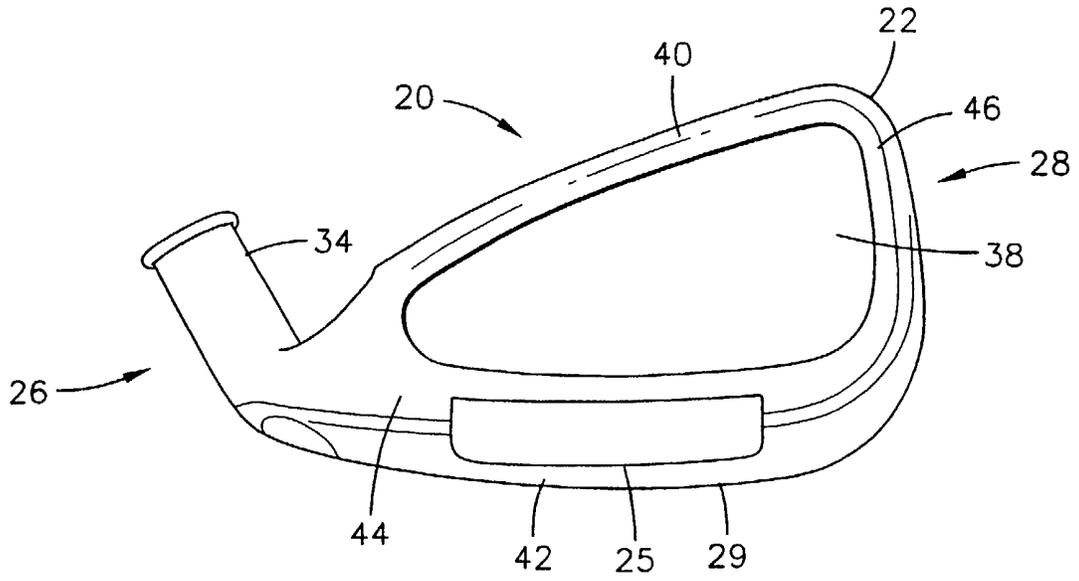


FIG. 11

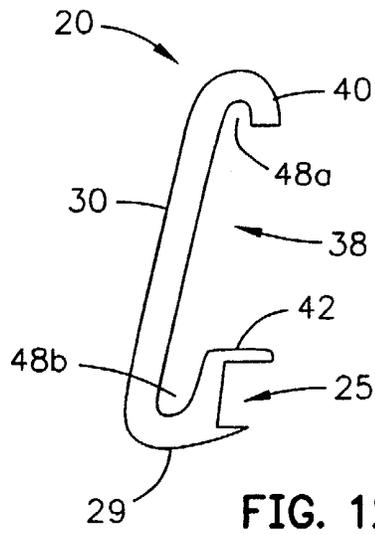


FIG. 12

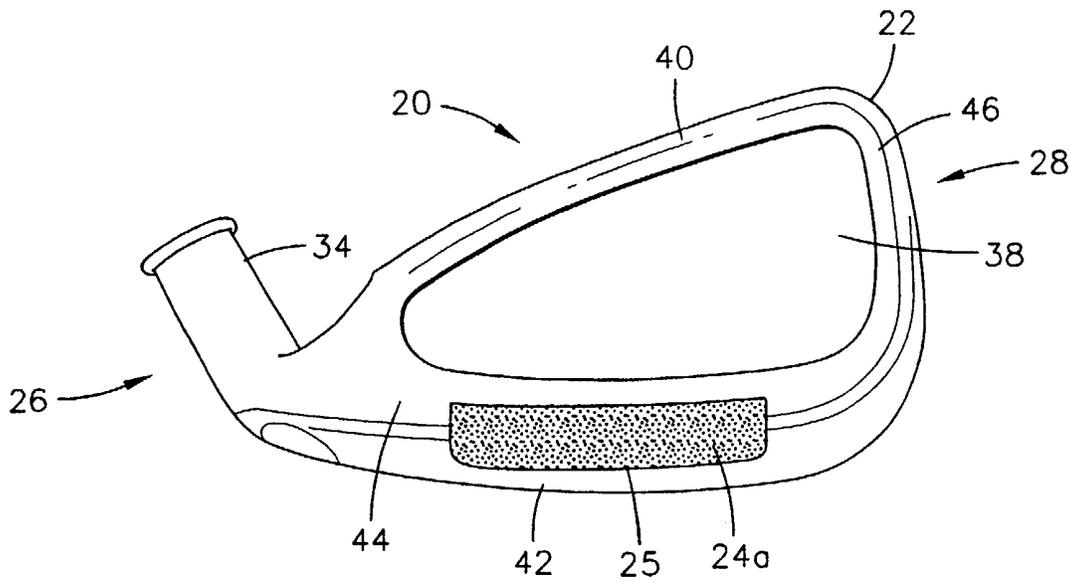


FIG. 13



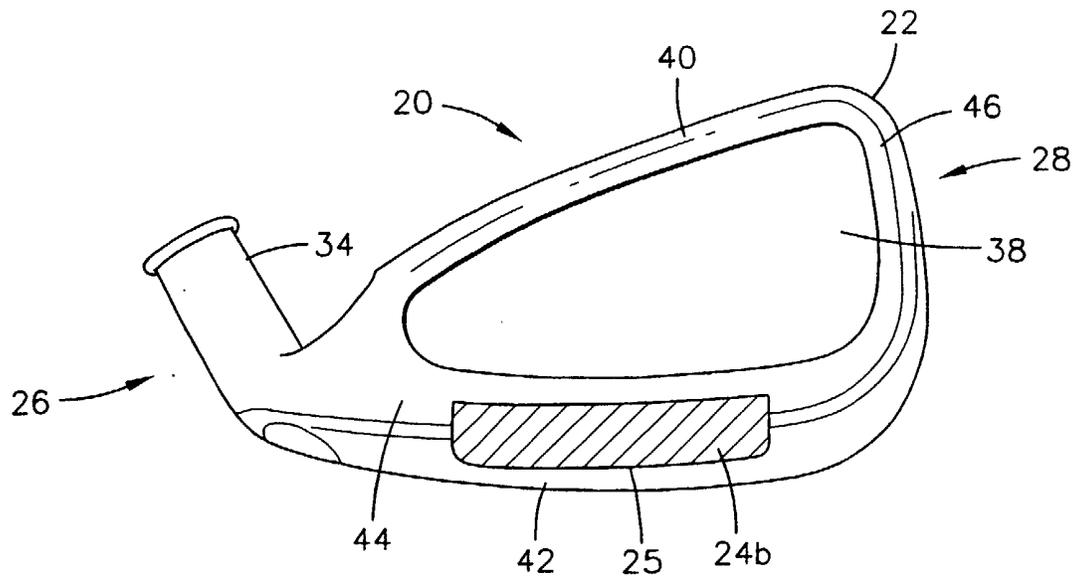


FIG. 14

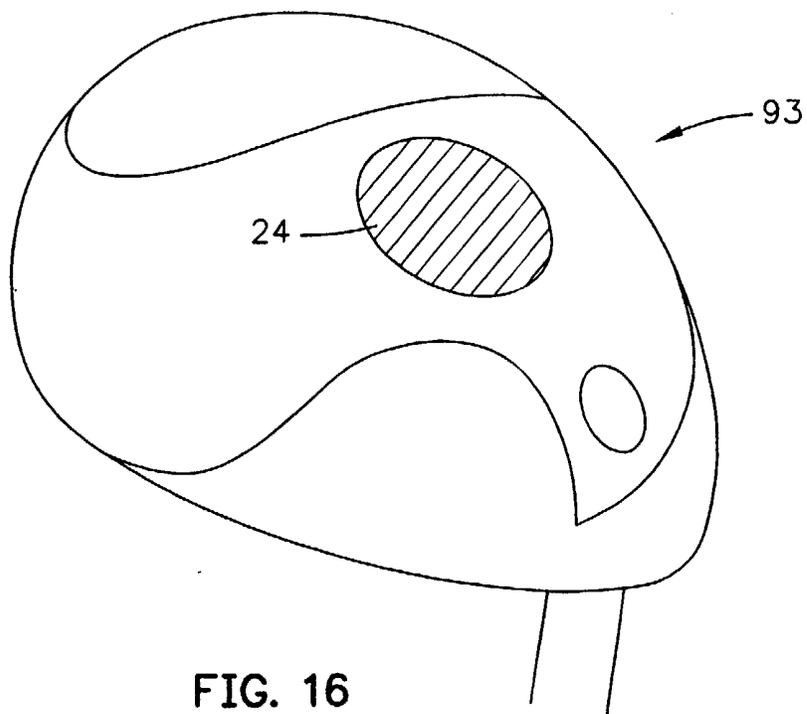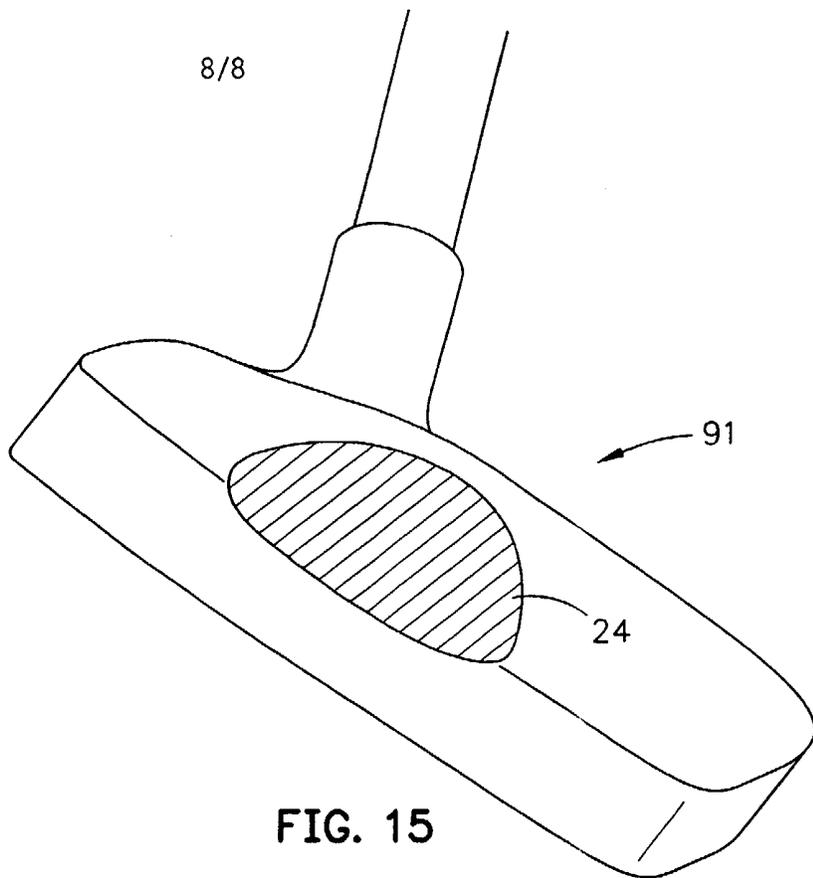

GOLF CLUB HEAD

The present invention relates to a golf club. More specifically, the present invention relates to a golf club head with a weighting member.

Golf club designs are constantly evolving with the primary purpose to improve a golfer's performance. While the improvements may address a number of areas, a designer strives to design a more forgiving golf club. Forgiveness in a golf club may be achieved by shifting the center-of-gravity of a golf club to a desirable location, and creating a larger moment of inertia.

It is difficult to increase forgiveness in a golf club head composed of a homogeneous or monolithic material, such as stainless steel, since there is a limit on the overall weight of a golf club acceptable to the typical golfer. To overcome this difficulty, designers have resorted to combining different materials (high density and low density) to achieve the desired center-of-gravity and large moment of inertia. A very high-density material provides a designer with the greatest freedom in improving the performance of a golf club head since less volume is needed to achieve the proper weighting. The most economical, commercially available material with a very high density is tungsten, which has a density of 19.3 grams per cubic centimeter.

One challenge in using heterogeneous materials is the ability to join the materials together in a golf club head. Numerous techniques have been created by the golf industry to join heterogeneous materials in a golf club head. One example is the GREAT BIG BERTHA® TUNGSTEN-TITANIUM™ irons, developed by the Callaway Golf Company of Carlsbad, California, which used a screw to attach a

tungsten block to the rear and sole of a titanium iron. Another example is the GREAT BIG BERTHA® TUNGSTEN-INJECTED™ HAWK EYE® irons, also developed by the Callaway Golf Company, which feature an internal cavity with tungsten pellets in a solder, as set forth in co-pending US Patent Application Number 09/330,292, for an Internal Cavity Tungsten Titanium Iron, filed on June 11, 1999. An example of a wood is the GREAT BIG BERTHA® HAWK EYE® drivers and fairway woods, also developed by the Callaway Golf Company, which use a tungsten screw in the sole of a titanium club head body. Other techniques use adhesives to join the materials, press fit the materials, braze the materials, or structurally hold one material piece within another material piece using undercuts or pockets.

For the most part, these techniques require a precisely machined weighting piece to fit within a precise location on a golf club head. The most economical method is to cast a golf club head body with a cavity for the weighting piece and attaching the weighting piece with a screw. However, casting tolerance are low, and require either machining of the cavity itself, or machining of the weighting piece to fit each cavity. The use of softer materials is undesirable since this creates difficulty in finishing the final product due to smearing of such soft materials during grinding of the golf club head.

Further, a co-casting process, where the weighting piece is incorporated in the mold prior to pouring the base metal, is very problematic depending on materials since the weighting piece is relatively cold when the hot liquid base metal is cast around it causing thermal shock. Also, thermal expansion mismatch of materials is a problem with co-casting of heterogeneous materials. Other problems arise during

re-shafting, where the golf club head is heated to remove the shaft. Such heating will result in low melting temperature materials (epoxies and solder) to flow, resulting in the possible movement of weighting pieces.

The present invention is as claimed in the claims.

The present invention allows for a golf club head to be easily weighted without precisely machined weighting components. The present invention is able to accomplish this by forming a weighting member composed of a multi-component material into the golf club head by applying pressure to the multi-component material while it is in a cavity of the golf club head.

The most general aspect of the present invention is a golf club head with a body and a weighting member. The body has a striking plate, a heel end, a toe end and a cavity. The weighting member is composed of a multi-component material and is disposed in the cavity of the body.

The invention may be embodied in a cavity back golf club head having a body and a weighting member as follows. The body has a striking plate, a toe end, a heel end and a main rear cavity opposite the striking plate. A top wall, a bottom wall, a heel wall and a toe wall define the main rear cavity. The bottom wall has a second cavity with a predetermined configuration. The weighting member is disposed within the second cavity and occupies the entire cavity. The weighting member is composed of a multi-component material.

Yet another aspect is a method for manufacturing a golf club head. The method includes introducing a multi-component powder/pellet mixture into a cavity on a body of a golf club head, and applying a predetermined amount of force to the

multi-component powder/pellet mixture to compact the multi-component powder/pellet mixture within the cavity and form a weighting member. The multi-component powder/pellet mixture may also be heated to a predetermined temperature for hot pressing of the multi-component powder/pellet mixture within. The predetermined temperature is above or closest to the melting temperature of one component of the multi-component powder/pellet mixture.

The multi-component powder/pellet mixture may be composed of a high-density component and a binder component. One variation of the multi-component powder/pellet mixture may be composed of tungsten and tin, or alternatively composed of tungsten and a tin bismuth material.

Having briefly described the present invention, the above and further objects, features and advantages thereof will be recognized by those skilled in the pertinent art from the following detailed description of an exemplary embodiment of the invention when taken in conjunction with the accompanying drawings in which:

FIG 1 is a rear plan view of a golf club head of the present invention.

FIG 2 is a front plan view of the golf club head of FIG 1.

FIG 3 is a top perspective view of the golf club head of FIG 1.

FIG 4 is a heel end perspective view of the golf club head of FIG 1.

FIG 5 is a toe end perspective view of the golf club head of FIG 1.

FIG 6 is a bottom perspective view of the golf club head of FIG 1.

FIG 7 is a cross-sectional view of the golf club head of FIG 1 along line 7-7.

FIG 7a and 7b are cross-sectional views of further embodiments.

FIG 8 is a rear plan view of an alternative embodiment of the golf club head of the present invention.

FIG 9 is a cross-sectional view of the golf club head of FIG 8 along line 9-9.

FIG 10 is a flow chart of the process of the present invention.

FIG 11 is a rear plan view of an unfinished golf club head of the present invention.

FIG 12 is a cross-sectional view of the unfinished golf club head of FIG 11 along line 12-12.

FIG 13 is a rear plan view of the unfinished golf club head of FIG 11 with the powder precursor material therein.

FIG 14 is a rear plan view of the unfinished golf club head of FIG 11 with the precursor material following liquid phase sintering.

FIG 15 is a view of a putter golf club head.

FIG 16 is a view of a wood golf club head.

As shown in FIGS. 1-7, a golf club head is generally designated 20. The golf club head 20 is a cavity-back iron with a body 22 and a weighting member 24. The golf club head 20 has a heel end 26, a toe end 28 and a sole 29. On the front of the body 22 is a striking plate 30 that has a plurality of scorelines 32 therein. A hosel 34 for receiving a shaft 36 is located on the heel end 26 of the golf club head 20. The rear of the golf club head 20 has a main cavity 38 that is defined by a top wall 40, a bottom wall 42, a heel wall 44 and a toe wall 46. The golf club head 20 also has an optional undercut recess 48 circumventing and openly exposed to the main cavity 38.

The weighting member 24 is composed of multiple component powder or pellet mixture that is processed via liquid phase sintering within a cavity 25 (shown in FIG. 11) of the body 22. The cavity 25 is preferably open to the sole 29 and the bottom wall 42. However those skilled in the pertinent art will recognize that the cavity 25, and hence the weighting member 24, may be disposed in numerous locations to provide a desired affect. As shown in FIG. 7, the weighting member 25 locates a large percentage of the mass of the golf club head 20 in the lower center of the golf club head 20 thereby lowering the center of gravity of the golf club head 20 to make it more forgiving for a golfer.

An alternative embodiment of the golf club head 20a of the present invention is illustrated in FIGS. 8 and 9. The golf club head 20a is a blade-style iron as compared to the

cavity-back iron of FIGS. 1-7. The golf club head 20a of FIGS. 8 and 9 does not have a cavity 38, nor does it have an undercut 48. The weighting member 24a is disposed annularly about the rear 39 of the body 22. Further, the cavity 25a containing the weighting member 24a is open only to the rear 39 and not the sole as in the previous embodiment. The annular weighting member 24a allows for the blade style golf club head 20a to have perimeter weighting similar to a cavity-back iron, and thus the forgiveness of a cavity-back iron while having the traditional appearance of a blade iron. The annular weighting member 24a will occupy a greater volume of the golf club head 20a than the weighting member 24 of FIGS. 1-7, and thus will also have a greater percentage of the mass of the golf club head 20a. The weighting member of the present invention may occupy various contoured cavities of golf club heads due to its unique manufacturing method. As shown in FIGS. 7A and 7B, the cavity 25b may have an interior projection 47, or the cavity 25c may have a plurality of interior projections 47a and 47b. The interior projections 47 create a structural means for retaining the weighting member 24 within the cavity 25b or 25c.

FIG. 10 illustrates a flow chart of the process of the present invention for producing a golf club head 20 or 20a with a weighting member 24 or 24a composed of a multiple component powder or pellet mixture. The process 200 begins with providing a golf club head 20, preferably prepared by a conventional investment casting process at block 202. However, those skilled in the pertinent art will recognize that the golf club head 20 or 20a may be prepared through other techniques well known in the golf industry, such as forging. The golf club head 20 may be composed of stainless steel, titanium, titanium alloys, zirconium, zirconium alloys, or like

materials. The golf club head 20 is cast to have a cavity 25, as shown in FIG. 11. The cavity 25 has a predetermined volume according to the amount of mass needed from the weighting member 24 for the golf club head 20. At block 204, the precursor powder materials for the multiple component powder or pellet mixture are compacted for placement into the cavity 25. The mixture may be composed of powders, pellets or a mixture thereof. The precursor powder or pellet materials are composed of a high-density component in various particle sizes (ranging from 1.0 mm to 0.01 mm) for achieving low porosity for the weighting member 24. The preferred high-density component is tungsten which has a density of 19.3 grams per cubic centimeter ("g/cm³"), however other high-density materials may be used such as molybdenum (10.2 g/cm³), tantalum (16.7 g/cm³), platinum (21.4 g/cm³), rhodium (12.4 g/cm³), and the like. Additionally, high-density ceramic powders may be utilized as the high-density component. The amount of high-density component in the mixture may range from 5 to 95 weight percent of the weighting member 24.

In addition to a high-density component such as tungsten, the multiple component powder or pellet mixture is composed of a binding component such as copper (density of 8.93 g/cm³), copper alloys, tin (density of 7.31 g/cm³), and the like. The multiple component powder or pellet mixture is also composed of an anti-oxidizing powder such as chromium (density of 7.19 g/cm³), nickel-chromium alloys (density of 8.2 g/cm³), or iron-chromium alloys (density of 7.87 g/cm³). Alternative anti-oxidizing components include aluminum, titanium, zirconium and the like. The binding component in the multiple component powder or pellet mixture may range from 4 to 49 weight percent of the weighting member 24. The anti-oxidizing component in the

alloy may range from 0.5 to 30 weight percent of the weighting member 24. The weighting member 24 is preferably 90 weight percent tungsten, 8 weight percent copper and 2 weight percent chromium. The overall density of the weighting member 24 will range from 11.0g/cm³ to 17.5 g/cm³, preferably between 12.5 g/cm³ and 15.9 g/cm³, and most preferably 15.4g/cm³.

Table one contains the various compositions and their densities.

Returning to FIG. 10, the powders are thoroughly mixed to disperse the anti-oxidizing component throughout the multiple component powder or pellet mixture to prevent oxidizing which would lead to porosity in the weighting member 24. The anti-oxidizing component gathers the oxides from the multiple component powder or pellet mixture to allow for the binding component to "wet" and fill in the cavities of the multiple component powder or pellet mixture. Also, if the surface of the weighting member 24 engaging the wall of the cavity 25 is oxidized, adherence of the weighting member 24 could be decreased resulting in failure. The multiple component powder or pellet mixture is preferably compacted into slugs for positioning and pressing within the cavity 25 at block 206, and as shown in FIG. 13. Higher densities are achieved by compacting the multiple component powder or pellet mixture prior to placement within the cavity 25. The mixture is pressed within the cavity 25 at a pressure between 10,000 pounds per square inch ("psi") to 100,000 psi, preferably 20,000 psi to 60,000 psi, and most preferably 50,000 psi.

Once the multiple component powder or pellet mixture, in compacted form or uncompact form, is placed within the cavity 25, at block 208 the unfinished golf club head 20b is placed within a furnace for liquid phase sintering of the multiple component powder or pellet

mixture under standard atmospheric conditions and in air. More precisely, the process of the present invention does not require a vacuum nor does it require an inert or reducing environment as used in the liquid phase sintering processes of the prior art. In the furnace, the multiple component powder or pellet mixture is heated for 1 to 30 minutes, preferably 2 to 10 minutes, and most preferably 5 minutes. The furnace temperature for melting at least one component of the mixture is in the range of 900 °C to 1400 °C, and is preferably at a temperature of approximately 1200 °C. The one component is preferably the binding component, and it is heated to its melting temperature to liquefy as shown in FIG. 14. However, those skilled in the art will recognize that the liquid phase sintering temperature may vary depending on the composition of the multiple component powder or pellet mixture. Preferably the binding component is copper, and the liquid phase sintering occurs at 1200 °C to allow the copper to fill in the cavities of the multiple component powder or pellet mixture to reduce porosity and thus increase the density of the weighting member 24. As the copper liquefies, the tungsten (melting temperature of 3400 °C), or other high-density component, remains in a powder form while the chromium or other anti-oxidizing component removes the oxides from the mixture to allow the copper to occupy the cavities and to reduce porosity caused by the oxides.

At block 210, the unfinished golf club head with the weighting member 24 therein is finished through milling, grinding, polishing or the like. Those skilled in the art will recognize that the density of the weighting member 24 will change depending on the particular club within a set of irons, or fairway wood or putter. The density is manipulated through modifying the amount of high density component, such as tungsten, in the mixture as shown in Table One.

Table One illustrates the compositions of the multiple component powder or pellet mixture, the processing temperatures, the theoretical or expected density, and the measured density. The processing was conducted at standard atmospheric conditions (1 atmosphere) and in air as opposed to the reducing environment of the prior art. The theoretical or expected density is the density if mixture was processed in a reducing environment under high pressure. The present invention is able to achieve between 70% to 85% of the theoretical density by using a method that does not require a reducing environment and high pressures.

Table One

	Composition	Temp.	Expected Density	Measured Density
1.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.595
2.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.595
3.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.375
4.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.815
5.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	13.002
6.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	12.386
7.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	13.123
8.	85.0 W + 7.5 Copper + 7.5 Ni-Cr	1200	17.72	14.069
9.	80.0 W + 10 Copper + 10 Ni-Cr	1200	17.19	11.935
10.	80.0 W + 7 Copper + 7 Ni-Cr + 6 Sn	1200	17.1	12.815
11.	80.0 W + 10 Bronze + 8 Ni-Cr + 2 Sn	1200	17.16	12.452
12.	85.0 W + 15 Sn	300	17.49	14.454
13.	84.0 W + 14 Sn + 2 Ni-Cr	300	17.4	14.295
14.	82.0 W + 12 Sn + 6 Ni-Cr	300	17.21	13.695
15.	80.0 W + 18 Cu + 2 Fe-Cr	1200	17.19	12.75
16.	80.0 W + 16 Cu + 4 Fe-Cr	1200	17.16	12.254
17.	80.0 W + 16 Cu + 4 Fe	1200	17.18	12.518
18.	80.0 W + 17 Cu + 3 Cr	1200	17	12.98
19.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.26	14.157
20.	60.0 W + 35 Cu + 5 Ni-Cr	1200	15.13	12.991

21.	70.0 W + 26.25 Cu + 3.75 Ni-Cr	1200	16.18	14.3
22.	80.0 W + 17.5 Cu + 2.5 Ni-Cr	1200	17.22	14.41
23.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.26	14.63
24.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.25838	14.12
25.	92.0 W + 7 Cu + 1 Ni-Cr	1200	18.4667	14.34
26.	94.0 W + 5.25 Cu + 0.75 Ni-Cr	1200	18.67503	14.53
27.	96.0 W + 3.5 Cu + 0.5 Ni-Cr	1200	18.88335	14.63
28.	90.0 W + 8.75 Cu + 1.25 Ni-Cr	1200	18.25838	14.64
29.	92.0 W + 7 Cu + 1 Ni-Cr	1200	18.4667	14.85
30.	94.0 W + 5.25 Cu + 0.75 Ni-Cr	1200	18.67503	15.04
31.	96.0 W + 3.5 Cu + 0.5 Ni-Cr	1200	18.88335	15.22

Although the present invention has been described in reference to irons, those skilled in the pertinent art will recognize that the present invention may be utilized with putter heads 91 and wood heads 93 as illustrated in FIGS. 15 and 16 respectively.

From the foregoing it is believed that those skilled in the pertinent art will recognize the meritorious advancement of this invention and will readily understand that while the present invention has been described in association with a preferred embodiment thereof, and other embodiments illustrated in the accompanying drawings, numerous changes, modifications and substitutions of equivalents may be made therein without departing from the spirit and scope of this invention which is intended to be unlimited by the foregoing except as may appear in the following appended claims. Therefore, the embodiments of the invention in which an exclusive property or privilege is claimed are defined in the following appended claims.

CLAIMS

1. A golf club head comprising:
 - a body with a striking plate, a heel end, a toe end, and a cavity; and
 - a weighting member disposed in the cavity of the body, the weighting member composed of a multiple component material having at least a high-density component, a binding component, and an anti-oxidizing component.

2. The golf club head according to claim 1 wherein the multiple component material comprises tungsten, copper and an anti-oxidizing component.

3. The golf club head according to claim 2 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.

4. The golf club head according to claim 2 wherein the anti-oxidizing component is nickel chrome.

5. The golf club head according to claim 1 wherein the golf club head is an iron.

6. The golf club head according to claim 1 wherein the golf club head is a driver, fairway

wood or a putter.

7. The golf club head according to claim 1 wherein the golf club head is a blade iron and the weighting member is an annular structure about the rear wall of the blade iron opposite a striking plate of the blade iron.
8. The golf club head according to claim 2 wherein the weight percentage of the tungsten is greater than the weight percentage of the anti-oxidizing component.
9. The golf club head according to claim 1 wherein the weight member is less than twenty percent of the volume of the golf club head and is more than twenty percent weight of the golf club head.
10. The golf club head according to claim 2 wherein the tungsten component is 5-90 weight percent of the weight member, the copper component is 5-40 weight percent of the weight member, and the anti-oxidizing component is 0.5-10 weight percent of the weight member.
11. The golf club head according to claim 1 wherein the high-density component is selected from the group consisting of tungsten, molybdenum, tantalum and platinum.

12. A golf club head comprising:

a body having a striking plate, a toe end, a heel end, a main rear cavity opposite the striking plate, the main rear cavity defined by a top wall, a bottom wall, a heel wall and a toe wall, the bottom wall having a second cavity with a predetermined configuration; and

a weighting member disposed within the second cavity and occupying the entire cavity, the weighting member comprising a multiple component material having at least a high-density component, a binding component and an anti-oxidizing component.

13. The golf club head according to claim 12 wherein the multiple component material comprises tungsten, copper and an anti-oxidizing component.

14. The golf club head according to claim 13 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.

15. The golf club head according to claim 12 wherein the main rear cavity further comprises an undercut recess into at least one region of the top wall, bottom wall, toe wall or heel wall.

16. The golf club head according to claim 13 wherein the weight percentage of the tungsten is greater than the weight percentage of the anti-oxidizing component.

17. The golf club head according to claim 12 wherein the weight member is less than twenty percent of the volume of the golf club head and is more than twenty percent weight of the golf club head.

18. The golf club head according to claim 12 wherein the body is composed of material selected from the group consisting of titanium, titanium alloy, steel, zirconium and zirconium alloy.

19. A method for manufacturing a golf club head, the method comprising:

introducing a multiple component material into a cavity on a body of a golf club head; and

heating the multiple component material to its liquid phase temperature for liquid phase sintering of at least one component of the multiple component material.

20. The method according to claim 19 further comprising compacting the multiple component material subsequent to introducing the multiple component material.

21. The method according to claim 19 wherein introducing the multiple component material

comprises pressuring a plurality of compacts of the multiple component material into the cavity.

22. The method according to claim 19 wherein heating the multiple component material is performed in an open air environment at one atmosphere of pressure.
23. The method according to claim 19 wherein heating the multiple component material is performed in an inert environment or a reducing environment.
24. The method according to claim 19 wherein the multiple component material is in a powder form prior to heating.
25. The method according to claim 19 wherein the multiple component material comprises tungsten, copper and an anti-oxidizing component.
26. The method according to claim 25 wherein the anti-oxidizing component is selected from the group consisting of chromium, nickel-chrome, stainless steel, nickel superalloy and other chromium alloys.
27. The method according to claim 19 wherein the golf club head is an iron, putter, driver or fairway wood.

28. A golf club head substantially as hereinbefore described with reference to, and/or as shown in, the accompanying drawings.

29. A method of manufacturing a golf club head substantially as hereinbefore described with reference to, and/or as shown in, the accompanying drawings.



INVESTOR IN PEOPLE

Application No: GB 0113210.9
Claims searched: 1-18

Examiner: David McWhirter
Date of search: 15 November 2001

**Patents Act 1977
Search Report under Section 17**

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.S): A6D (DHF)
Int Cl (Ed.7): A63B 53/00, 53/04, 53/06
Other: Online: EPODOC, WPI, PAJ

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
A	WO 00/10653 (ORLIMAR GOLF)	
X	JP 090262326 (MITSUBISHI & MIZUNO) 1997.10.07 (see Figure 1, and also WPI Accession No. 1997-544370/50)	1, 2, 5, 6 & 11

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.