

(51) International Patent Classification:
H02J 50/80 (2016.01)(21) International Application Number:
PCT/SG2017/050222(22) International Filing Date:
20 April 2017 (20.04.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10201603240Y 22 April 2016 (22.04.2016) SG

(71) Applicant: AGENCY FOR SCIENCE, TECHNOLOGY AND RESEARCH [SG/SG]; 1 Fusionopolis Way, #20-10 Connexis North Tower, Singapore 138632 (SG).


(72) Inventors: YAO, Lei; c/o Industry Development, Institute of Microelectronics, 2 Fusionopolis Way, #08-02, Innovis

Tower, Singapore 138634 (SG). CHEONG, Jia Hao; c/o Industry Development, Institute of Microelectronics, 2 Fusionopolis Way, #08-02, Innovis Tower, Singapore 138634 (SG). GAO, Yuan; c/o Industry Development, Institute of Microelectronics, 2 Fusionopolis Way, #08-02, Innovis Tower, Singapore 138634 (SG).

(74) Agent: SPRUSON & FERGUSON (ASIA) PTE LTD; P.O. Box 1531, Robinson Road Post Office, Singapore 903031 (SG).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,

(54) Title: SYNCHRONIZED TIME-DIVISION WIRELESS POWER TRANSFER FOR MULTIPLE VOLTAGE APPLICATIONS

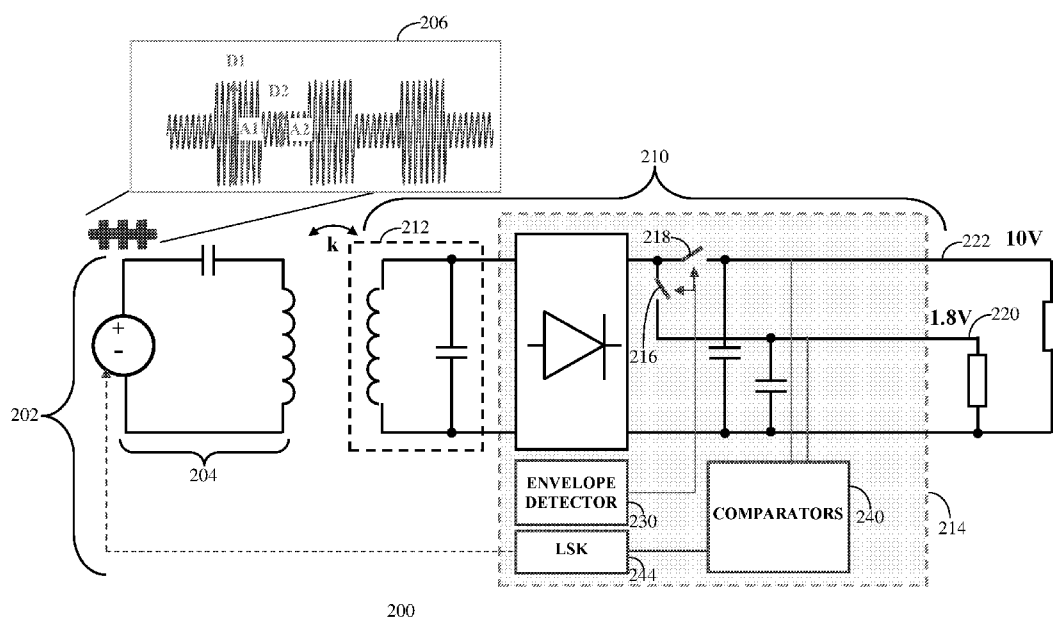**FIG. 2**

(57) **Abstract:** A wirelessly powered implantable medical device, a system for synchronized time-division wireless power transfer, and a method for closed-loop carrier waveform adaption for wireless power control are provided. The system for synchronized time-division wireless power transfer includes a wireless transmitter for generating and transmitting time-division wireless power transfer signals and a wirelessly powered device. The wirelessly powered device includes a wireless receiver for receiving the time-division wireless power transfer signals and a time division switching module. The time division switching module is coupled to the wireless receiver and generates multiple supply voltages synchronized to the time-division wireless power transfer signals for powering different circuitry of the wirelessly powered device.



SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

SYNCHRONIZED TIME-DIVISION WIRELESS POWER TRANSFER FOR MULTIPLE VOLTAGE APPLICATIONS

PRIORITY CLAIM

[0001] This application claims priority from Singapore Patent Application No. 10201603240Y filed on 22 April 2016.

TECHNICAL FIELD

[0002] The present invention generally relates to systems and methods for wireless power transfer, and more particularly relates to wireless power transfer systems and methods for implantable medical devices.

BACKGROUND OF THE DISCLOSURE

[0003] Wirelessly powered implantable medical devices are under spotlight in recent years both in academic and industry. One of the most important enabling building blocks in such implantable devices is a wireless power management block which receives power through an inductively coupled coil pair to provide power to other functional blocks of the implantable device. Normally a versatile implantable device would require multiple supply voltages for different types of functional blocks such as an analog block, a digital block and a high voltage driver block. The circuit architecture chosen to generate these multiple supply voltages and the power efficiency of this circuit is an important design specification since it greatly affects the overall performance of the implantable device including maximum implantation depth (which is related to the efficiency of the wireless power link) and device form factor (which is related to the number of external components).

[0004] Conventionally, there are three topologies to generate multiple supply voltages for wirelessly powered implantable medical device: (a) DC-DC voltage conversion architecture, (b) multiple stage rectifier architecture, and (c) segmental coil architecture. High efficiency DC-DC converters are available to build a high efficiency wireless power management blocks. However, such DC-DC converters require a number of bulky passive components such as inductors, capacitors and/or diodes which require a large form factor for implantable devices utilizing such DC-DC converters. Conventional inductive coupled wireless power transfer topologies are a multiple stage rectifier solution which uses only coupling capacitors, but such coupling capacitors still contribute to a large form factor. Additionally, the power efficiency of such topologies is lower than the DC-DC voltage conversion architecture because of the forward voltage drop on each extra rectifier stage. Conventional segmental coil architectures use a receiver coil having a segmental structure, which is problematic because such segmental coil structures and their resonant matching network are difficult to construct.

[0005] Thus, an inductive coupled wireless power transfer topology is needed which overcomes the drawbacks of prior art topologies and provides a wireless power management block for an implantable device which provides a robust power link for improved implantation depth and a minimized device form factor while still providing efficient overall performance of the implantable device. Furthermore, other desirable features and characteristics will become apparent from the subsequent detailed description and the appended claims, taken in conjunction with the accompanying drawings and this background of the disclosure.

SUMMARY

[0006] According to at least one embodiment of the present invention, a wirelessly powered implantable medical device receiving time-division wireless power transfer signals is provided. The wirelessly powered medical device includes receiver circuitry for receiving the time-division wireless power transfer signals and a time division switching module. The time division switching module is coupled to the receiver for generating multiple supply voltages in response to the time-division wireless power transfer signals.

[0007] According to another embodiment of the present invention, a system for synchronized time-division wireless power transfer is provided. The system includes a wireless transmitter for generating and transmitting time-division wireless power transfer signals and a wirelessly powered device. The wirelessly powered device includes a wireless receiver for receiving the time-division wireless power transfer signals and a time division switching module. The time division switching module is coupled to the wireless receiver and generates multiple supply voltages synchronized to the time-division wireless power transfer signals for powering different circuitry of the wirelessly powered device.

[0008] According to a further embodiment of the present invention a method for closed-loop carrier waveform adaption for wireless power control is provided. The method includes generating time-division wireless power transfer signals having a carrier waveform adapted for wireless power transfer and receiving the wireless power transfer signals and generating multiple supply voltages synchronized to the carrier waveform of the wireless power transfer signals. The method further includes generating voltage detection results in response to the multiple supply voltages and adjusting the carrier waveform of the wireless power transfer signals in response to the voltage detection results.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] The accompanying figures, where like reference numerals refer to identical or functionally similar elements throughout the separate views and which together with the detailed description below are incorporated in and form part of the specification, serve to illustrate various embodiments and to explain various principles and advantages in accordance with a present embodiment.

[0010] FIG. 1 depicts three diagrams of conventional topologies for generating multiple supply voltages in a wireless power receiver.

[0011] FIG. 2 depicts a diagram of a synchronized time-division wireless power transfer system in accordance with a present embodiment.

[0012] FIG. 3 depicts a flowchart of operation of the closed-loop power control method of the synchronized time-division wireless power transfer system of FIG. 2 in accordance with the present embodiment.

[0013] FIG. 4 depicts a diagram of a simulation setup of a synchronized time-division wireless power transfer system in accordance with the present embodiment.

[0014] And FIG. 5, comprising FIGs. 5A and 5B, depicts signaling diagrams of the closed-loop power control method produced by the simulation setup of FIG. 4 in accordance with the present embodiment.

[0015] Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been depicted to scale.

DETAILED DESCRIPTION

[0016] The following detailed description is merely exemplary in nature and is not intended to limit the invention or the application and uses of the invention.

Furthermore, there is no intention to be bound by any theory presented in the preceding background of the invention or the following detailed description. It is the intent of the present embodiment to present a synchronized time-division wireless power transfer method and device to achieve both high efficiency and small form factor with simple coil structure particularly designed for use in implantable medical devices.

[0017] Referring to FIG. 1, typical inductive coupled wireless power transfer device diagrams 100, 120, 140 depict three conventional topologies to generate multiple supply voltages for wirelessly powered implantable medical device. As shown in the diagram 100 of a conventional DC-DC voltage conversion architecture, a rectifier 102 is connected with a receiver (RX) coil 104 and converts AC power from the RX coil 104 into a single DC power supply 106. A DC-DC converter 108 is used to generate multiple power supplies 110 from the output of the rectifier 102. High efficiency DC-DC converters are available to build a high efficiency wireless power management block but such DC-DC converters require a number of bulky passive components 112 such as inductors, capacitors and/or diodes, which necessitate large form factors for implantable medical devices incorporating such DC-DC converters.

[0018] As shown in the circuit diagram 120 of a conventional multiple stage rectifier solution, a first stage rectifier 122 provides a DC voltage of V_{DD} and N stages rectifiers 124 generate DC voltages of $N \times V_{DD}$ to provide the multiple power supplies 110. While only coupling capacitors (C_1 to C_N) 126 are required for this solution, the coupling capacitors 126 also necessitate a large form factor. Additionally, the power efficiency provided by the multiple stage rectifier solution depicted in the circuit diagram 120 is lower than the power efficiency provided by the

DC-DC voltage conversion architecture depicted in the circuit diagram 100 because of the forward voltage drop on each extra rectifier stage.

[0019] A conventional segmental coil architecture is depicted in the circuit diagram 140. A RX coil 144 is designed in a segmental structure 146, which is equivalent to two separate inductive coupling coils. Each of the segmental coils is responsible for generating one of the multiple supply voltage 110. The major drawback with the conventional segmental coil architecture is the difficulty to construct the segmental coil structure 146 and its resonant matching network.

[0020] Referring to FIG. 2, a diagram 200 depicts a synchronized time-division wireless power transfer system 202 in accordance with a present embodiment. A wireless transmitter 204 generates and transmits time-division wireless power transfer signals 206. A wirelessly powered device 210 includes a wireless receiver 212 for receiving the time-division wireless power transfer signals and a time division switching module 214 for generating multiple supply voltages 216 synchronized to the time-division wireless power transfer signals 206 for powering different circuitry of the wirelessly powered device

[0021] Instead of using a single power level carrier, the time-division wireless power transfer signals 206 in accordance with the present embodiment uses a multi-level carrier signal to transmit multiple power levels modulated on the carrier of the signals 206. As depicted in the diagram 200, to obtain two supply voltages, two power transfer signals having two power levels (A1 and A2) and duty cycles (D1 and D2) are modulated onto the same carrier. Two switches 216, 218 are used in a single-inductor multiple-output (SIMO) DC-DC converter of the wirelessly powered device 210 to direct the two different power levels to generate different supply voltages 220, 222 (e.g., 1.8V and 10V) for supplying power to different circuitry of the wirelessly

powered device 210. The timing of the operation of the switches 216, 218 is synchronized to the power transfer signal modulation on the carrier by using an envelope detector 230 as a switch timing module for control of the switches 216, 218. Thus, in accordance with the present embodiment, two supply voltages can be obtained without requiring multiple passive components (e.g., DC-DC converter 108) in the wireless power receiver 214. Higher efficiency and less number of external components can advantageously be achieved as compared to conventional multiple stage rectifier structures (e.g., rectifiers 122, 124). And, as compared to conventional segmental coil solutions (e.g., segmental coil 146), the wirelessly powered device 210 has simpler coil structure.

[0022] In accordance with the present embodiment, the synchronized time-division wireless power transfer system 202 implements closed-loop power control and a comparator 240 is used to sense the voltage value of voltage outputs 220, 222 and generate voltage detection results. The voltage detection results are sent 242 back to the wireless power transmitter 204 through a backscattering (LSK) module 244 to adjust the amplitude ($A1/A2$) and duty cycle ($D1/D2$) of the two modulated power levels of the signal 206. In this manner, the synchronized time-division wireless power transfer system 202 advantageously utilizes system level regulation to keep the output voltages 220, 222 to a pre-defined value.

[0023] Referring to FIG. 3, a flowchart 300 depicts operation of the closed-loop power control method of the synchronized time-division wireless power transfer system 202 in accordance with the present embodiment. The wireless power transmitter 204 generates 302 the time-division (TD) power transfer signals 206 with a carrier waveform defined by the amplitudes ($A1/A2$) and the duty cycles ($D1/D2$). Then, the wireless power transmitter 204 transmits 304 and the wireless receiver 212

receives 306 the time-division (TD) power transfer signals 206. The wireless power receiver 214 generates 308 the multiple power supply voltages 220, 222 synchronized to the carrier waveform. The comparator 240 detects 310 the voltage value of voltage outputs 220, 222 and generates 312 voltage detection results. The voltage detection results are backscattered 313 by the backscattering (LSK) module 244 for the wireless power transmitter 204 to adapt 314 the amplitude (A1/A2) and duty cycle (D1/D2) of the modulated power levels of the signal 206 in response to the voltage detection results. Thus, in accordance with the method and system of the present embodiment, the synchronized time-division wireless power transfer system 202 advantageously utilizes system level regulation to keep the output voltages 220, 222 to a pre-defined value.

[0024] To validate the proposed system and method, a system simulation was performed using a circuit designed in a Global Foundries (GF) 0.18 μ m 24V LDMOS process and Verilog-A functional blocks. Referring to FIG. 4, a simulation setup diagram 400 uses an actual coil model 402 and a signal generator 404 generates an input carrier frequency set at 13.56 MHz. A rectifier 406 is designed as a four diode full wave rectifier using a high voltage diode in GF 0.18 μ m 24V LDMOS process. All other functional blocks are implemented using Verilog-A.

[0025] Two 20nF capacitors 408, 410 are used as the storage capacitors for 1.8V and 10V outputs 412, 414, respectively. The modulated carrier is generated by an adaptive power amplifier of which the two power levels (A1/A2/D1/D2) are controlled by a digital block 416. The digital block 416 receives a feedback signal from a demodulation block that demodulates backscattered data from the implantable side. On the implant side, an ASK demodulator and a switch timing control block of the digital block 416 are used to control switches 418, 420 to direct different power

levels to the storage capacitors 408, 410. The voltages on the storage capacitors 408, 410 are sensed by two simple comparators 422 and the voltage information is backscattered 424 to the external power control block.

[0026] In accordance with the present embodiment, the external power transmission block 416 includes an adaptive power amplifier and digital control block to tune carrier parameters A1/A2/D1/D2 to implement the adapting step 314 for the closed-loop power control method in accordance with the present embodiment, thereby enabling a power efficient, simple implant device with small form factor for inductively generating multiple supply voltages.

[0027] Referring to FIGs. 5A and 5B, signaling diagrams 500, 550 depict the simulation results. The modulated carrier signal 510 is depicted in the diagram 500 and the supply voltages 412, 414 are depicted in the diagram 550. As seen in the diagrams 500, 510, the synchronized time-division wireless power transfer and the proposed closed-loop power control method in accordance with the present embodiment tunes the modulated carrier signal 510 to successfully generate the two supply voltages (1.8V/10V) 412, 414.

[0028] Thus, it can be seen that the present embodiment provides a synchronized time-division wireless power transfer method for derivation of multiple supply voltages in the wireless receiver device. The present embodiment advantageously achieves high power efficiency without compromising the form factor and coil design simplicity and provides a wireless receiver device ideal for implantable medical applications.

[0029] While exemplary embodiments have been presented in the foregoing detailed description of the invention, it should be appreciated that a vast number of variations exist. It should further be appreciated that the exemplary embodiments are

only examples, and are not intended to limit the scope, applicability, operation, or configuration of the invention in any way. Rather, the foregoing detailed description will provide those skilled in the art with a convenient road map for implementing an exemplary embodiment of the invention, it being understood that various changes may be made in the function and arrangement of steps and method of operation described in the exemplary embodiment without departing from the scope of the invention as set forth in the appended claims.

CLAIMS

What is claimed is:

1. A wirelessly powered implantable medical device receiving time-division wireless power transfer signals, the wirelessly powered medical device comprising:

receiver circuitry for receiving the time-division wireless power transfer signals; and

a time division switching module coupled to the receiver for generating multiple supply voltages in response to the time-division wireless power transfer signals.

2. The wirelessly powered implantable medical device in accordance with Claim 1 wherein the time division switching module comprises a single-inductor multiple-output (SIMO) DC-DC converter.

3. The wirelessly powered implantable medical device in accordance with Claim 2 wherein the SIMO DC-DC converter comprises multiple switches for supplying each of the multiple supply voltages to different circuitry of the wirelessly powered implantable medical device.

4. The wirelessly powered implantable medical device in accordance with Claim 3 wherein the SIMO DC-DC converter further comprises a switch timing module coupled to the multiple switches for controlling the operation of the multiple switches in response to the time-division wireless power transfer signals to supply

each of the multiple supply voltages to the different circuitry of the wirelessly powered implantable medical device.

5. The wirelessly powered implantable medical device in accordance with Claim 4 wherein the SIMO DC-DC converter further comprises:

a voltage detector coupled to the multiple switches for detecting the multiple supply voltages and generating voltage detection results; and

a transmission device coupled to the voltage detector for transmitting the voltage detection results to a wireless transmitter transmitting the time-division wireless power transfer signals for adjusting parameters of the time-division wireless power transfer signals for synchronization with operation of the multiple switches.

6. The wirelessly powered implantable medical device in accordance with Claim 5 wherein the parameters comprise one or both of amplitude and duty cycle of the time-division wireless power transfer signals.

7. The wirelessly powered implantable medical device in accordance with Claim 5 wherein the transmission device transmits the voltage detection results to the wireless transmitter by backscattering (LSK).

8. The wirelessly powered implantable medical device in accordance with any of Claims 3 to 7 wherein each of the different circuitry of the wirelessly powered implantable medical device operates at a different one of the multiple supply voltages.

9. A system for synchronized time-division wireless power transfer comprising:
- a wireless transmitter for generating and transmitting time-division wireless power transfer signals; and
 - a wirelessly powered device comprising:
 - a wireless receiver for receiving the time-division wireless power transfer signals; and
 - a time division switching module coupled to the wireless receiver and generating multiple supply voltages synchronized to the time-division wireless power transfer signals for powering different circuitry of the wirelessly powered device.
10. The system in accordance with Claim 9 wherein the time division switching module comprises:
- multiple switches for supplying each of the multiple supply voltages to the different circuitry of the wireless receiver; and
 - a switch timing module coupled to the multiple switches for controlling the operation of the multiple switches for synchronizing the multiple supply voltages to the time-division wireless power transfer signals.
11. The system in accordance with Claim 10 wherein the time division switching module further comprises a voltage detector coupled to the multiple switches for detecting the multiple supply voltages and generating voltage detection results, the wirelessly powered device further comprising a transmission device

coupled to the voltage detector for transmitting the voltage detection results to the wireless transmitter, and

wherein the wireless transmitter comprises:

transmitter circuitry for transmitting the time-division wireless power transfer signals; and

a digital block coupled to the transmitter circuitry and adjusting parameters of the time-division wireless power transfer signals in response to the voltage detections results for synchronization of the time-division wireless power transfer signals with operation of the multiple switches.

12. The system in accordance with Claim 11 wherein the parameters comprise one or both of amplitude and duty cycle of the time-division wireless power transfer signals.

13. The system in accordance with any of Claims 9 to 12 wherein the wirelessly powered device comprises a wirelessly powered implantable medical device and wherein the different circuitry performs various operations of the wirelessly powered implantable medical device.

14. A method for closed-loop carrier waveform adaption for wireless power control, the method comprising:

generating time-division wireless power transfer signals having a carrier waveform adapted for wireless power transfer;

receiving the wireless power transfer signals and generating multiple supply voltages synchronized to the carrier waveform of the wireless power transfer signals;

generating voltage detection results in response to the multiple supply voltages; and

adjusting the carrier waveform of the wireless power transfer signals in response to the voltage detection results.

15. The method in accordance with Claim 14 wherein adjusting the carrier waveform comprises adjusting one or more parameters of the carrier waveform of the wireless power transfer signals in response to the voltage detection results, the parameters comprising at least an amplitude of the carrier waveform and a duty cycle of the carrier waveform.

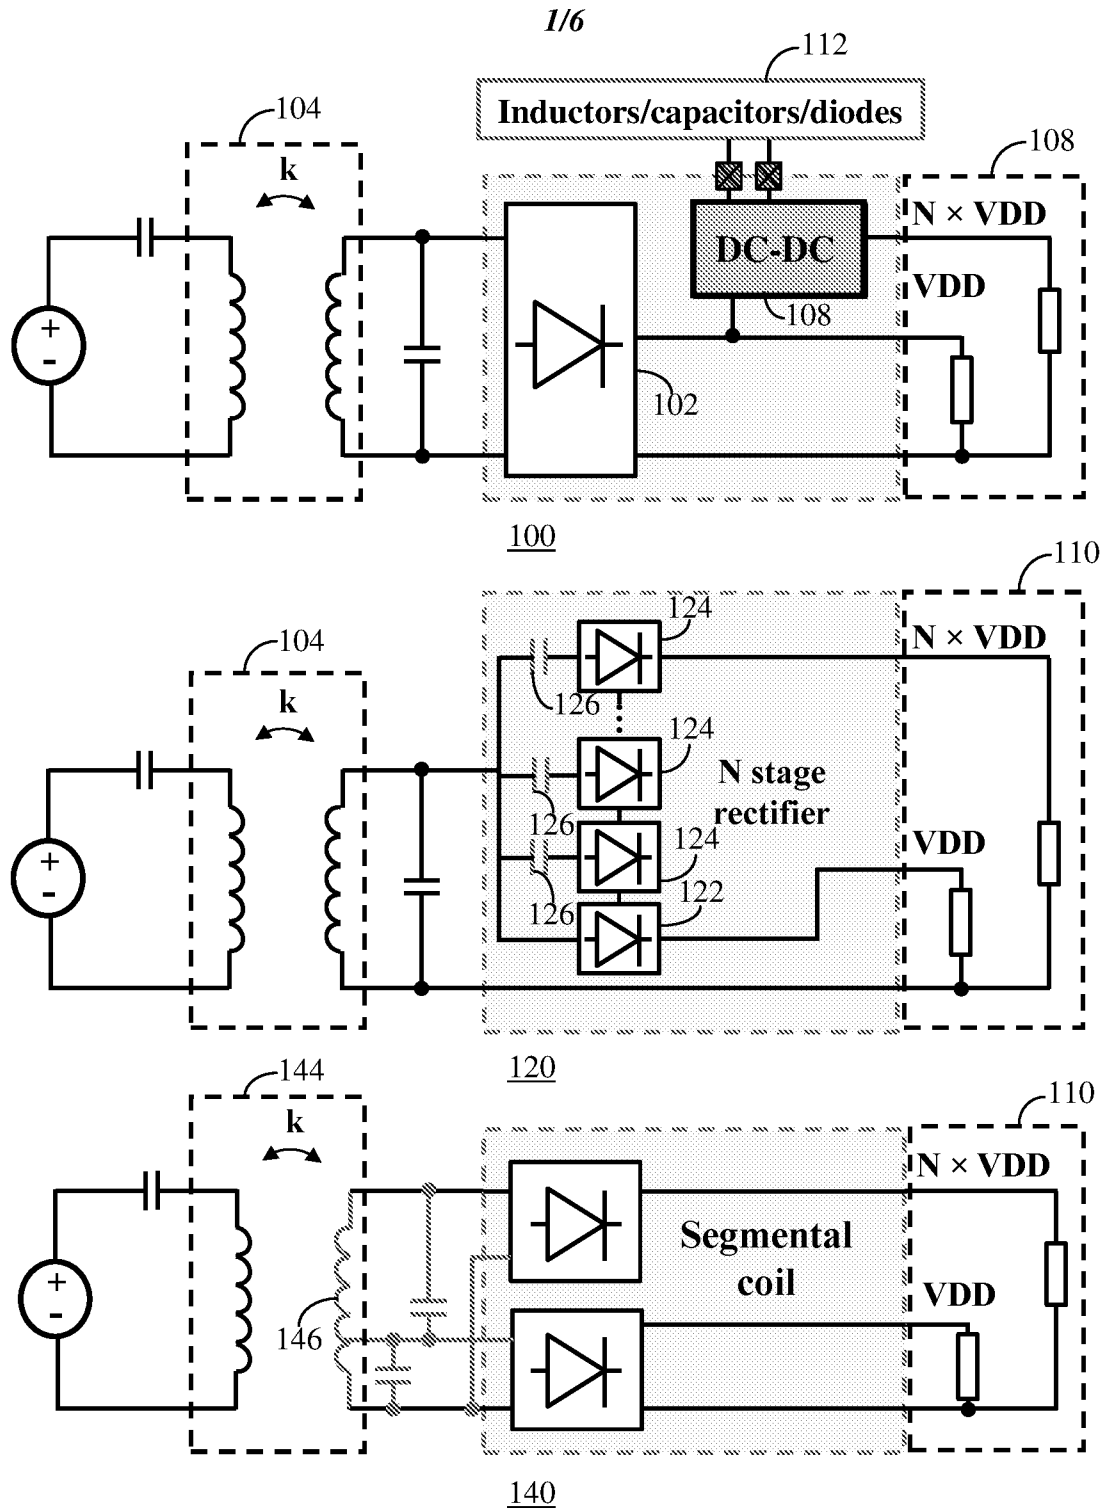


FIG. 1
PRIOR ART

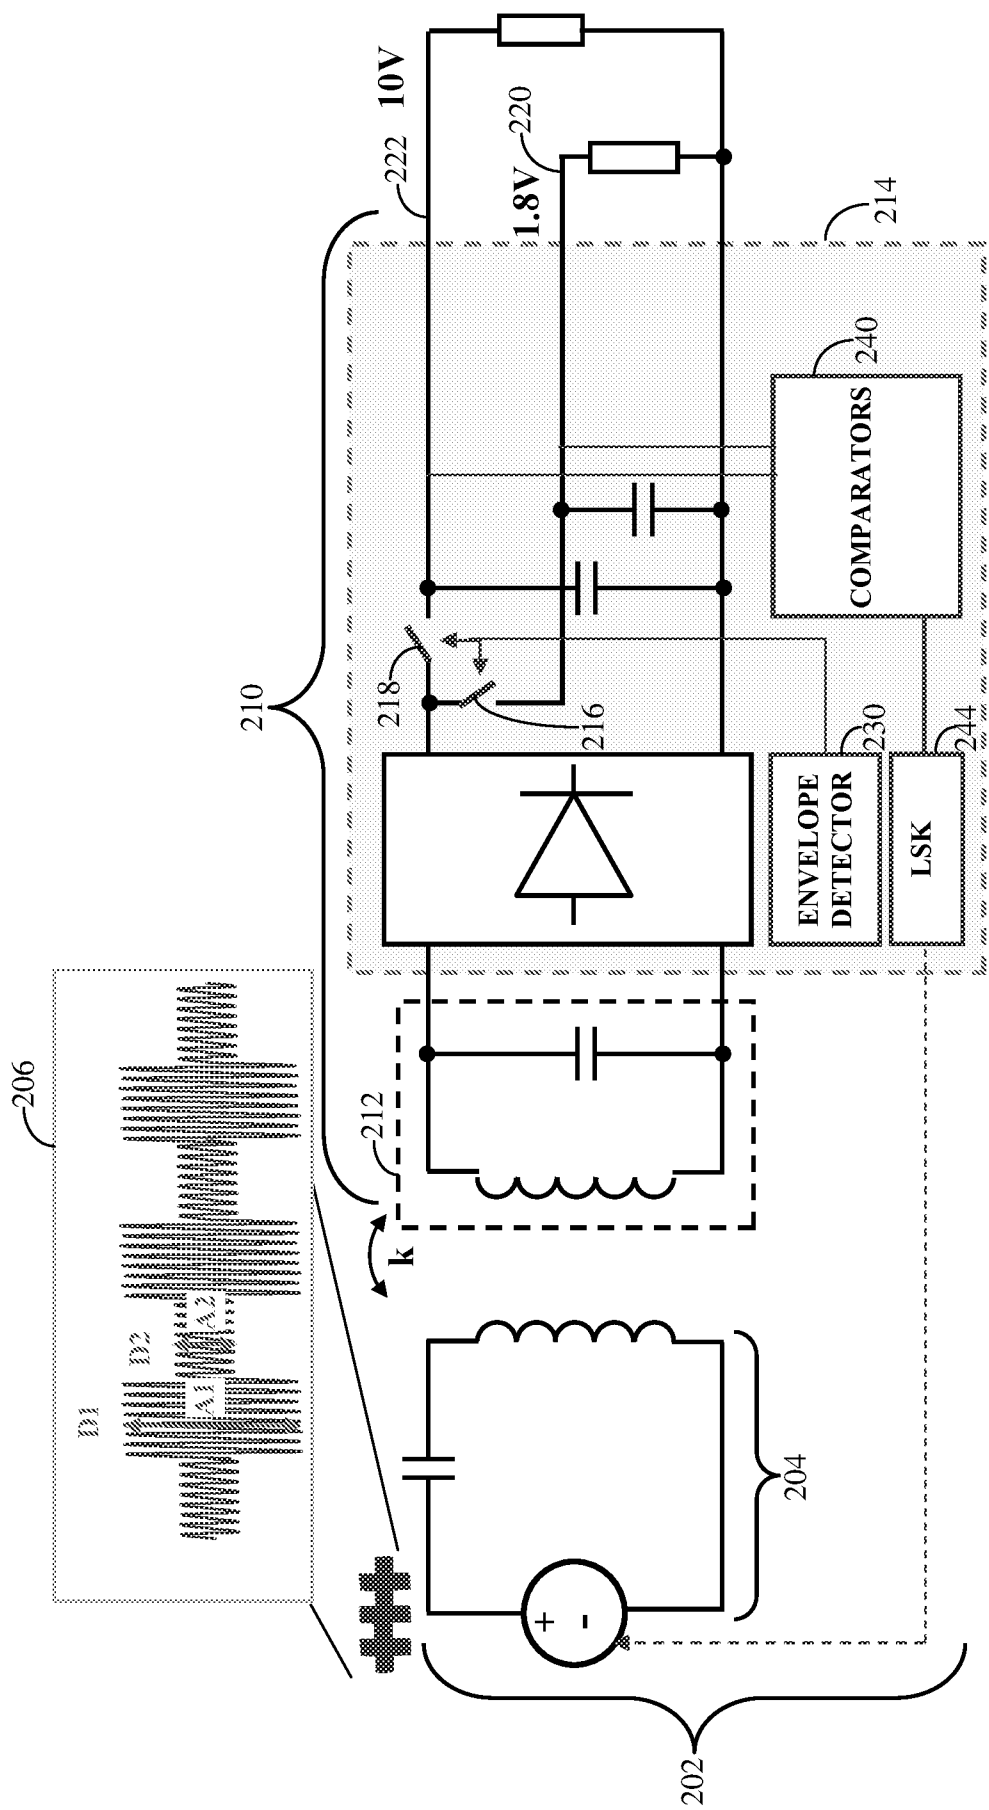
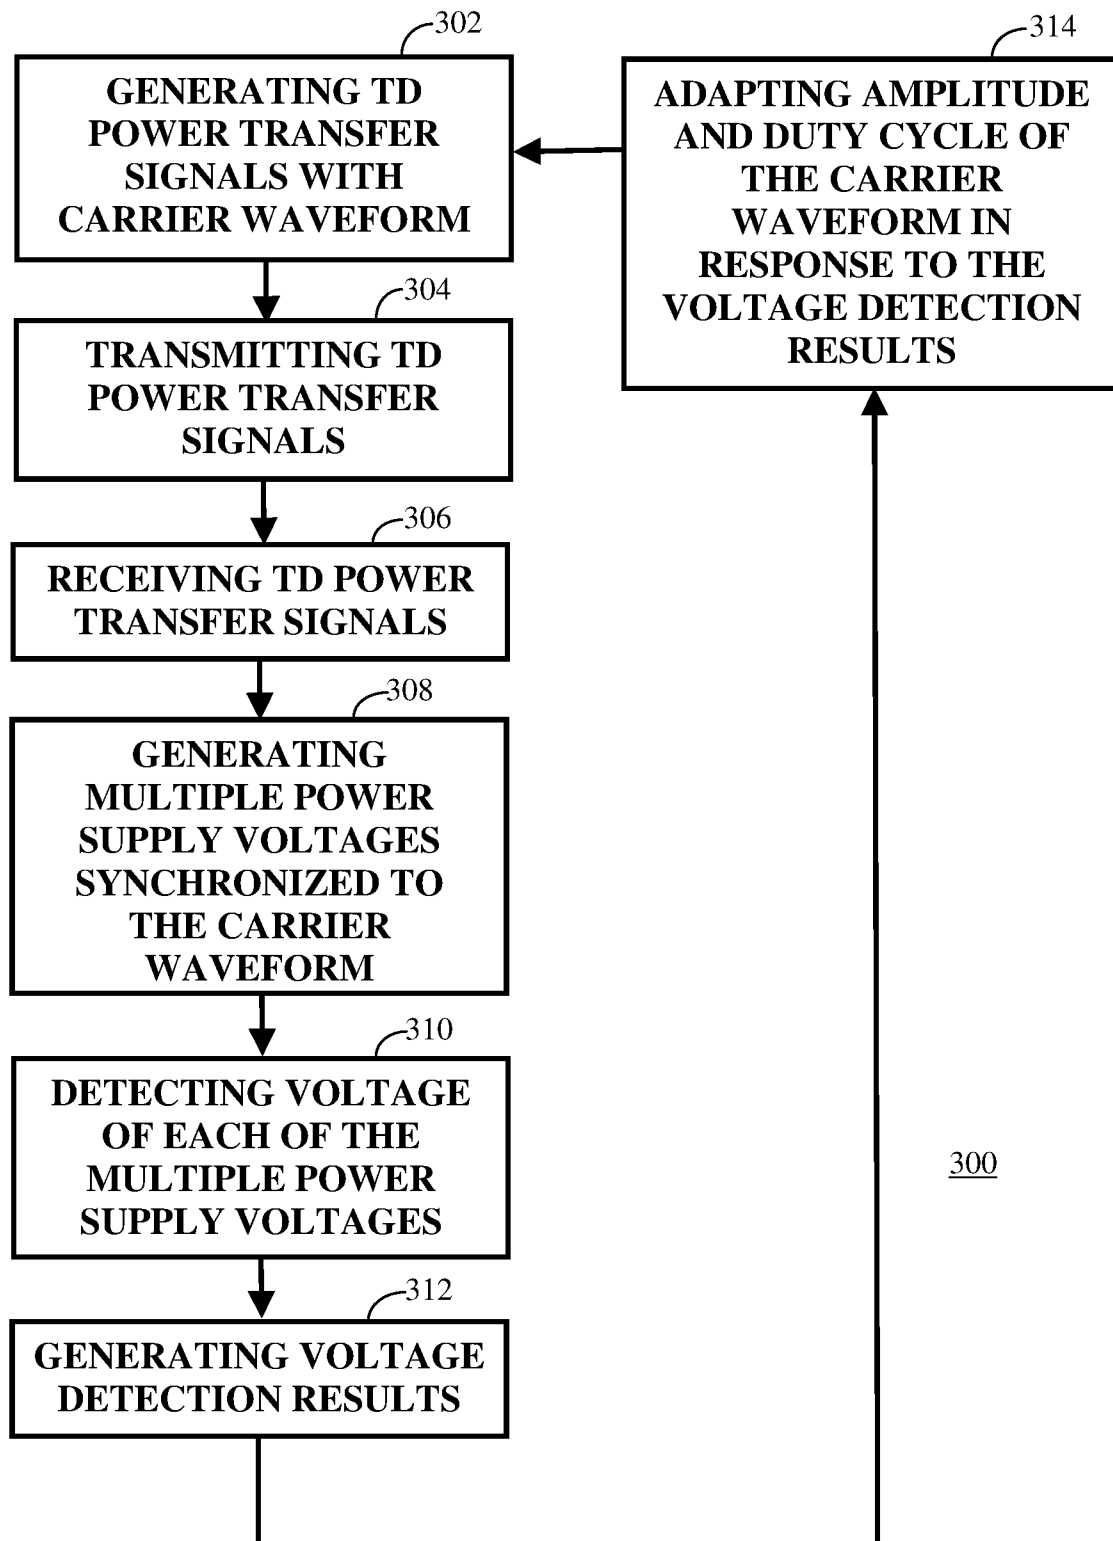


FIG. 2

3/6

**FIG. 3**

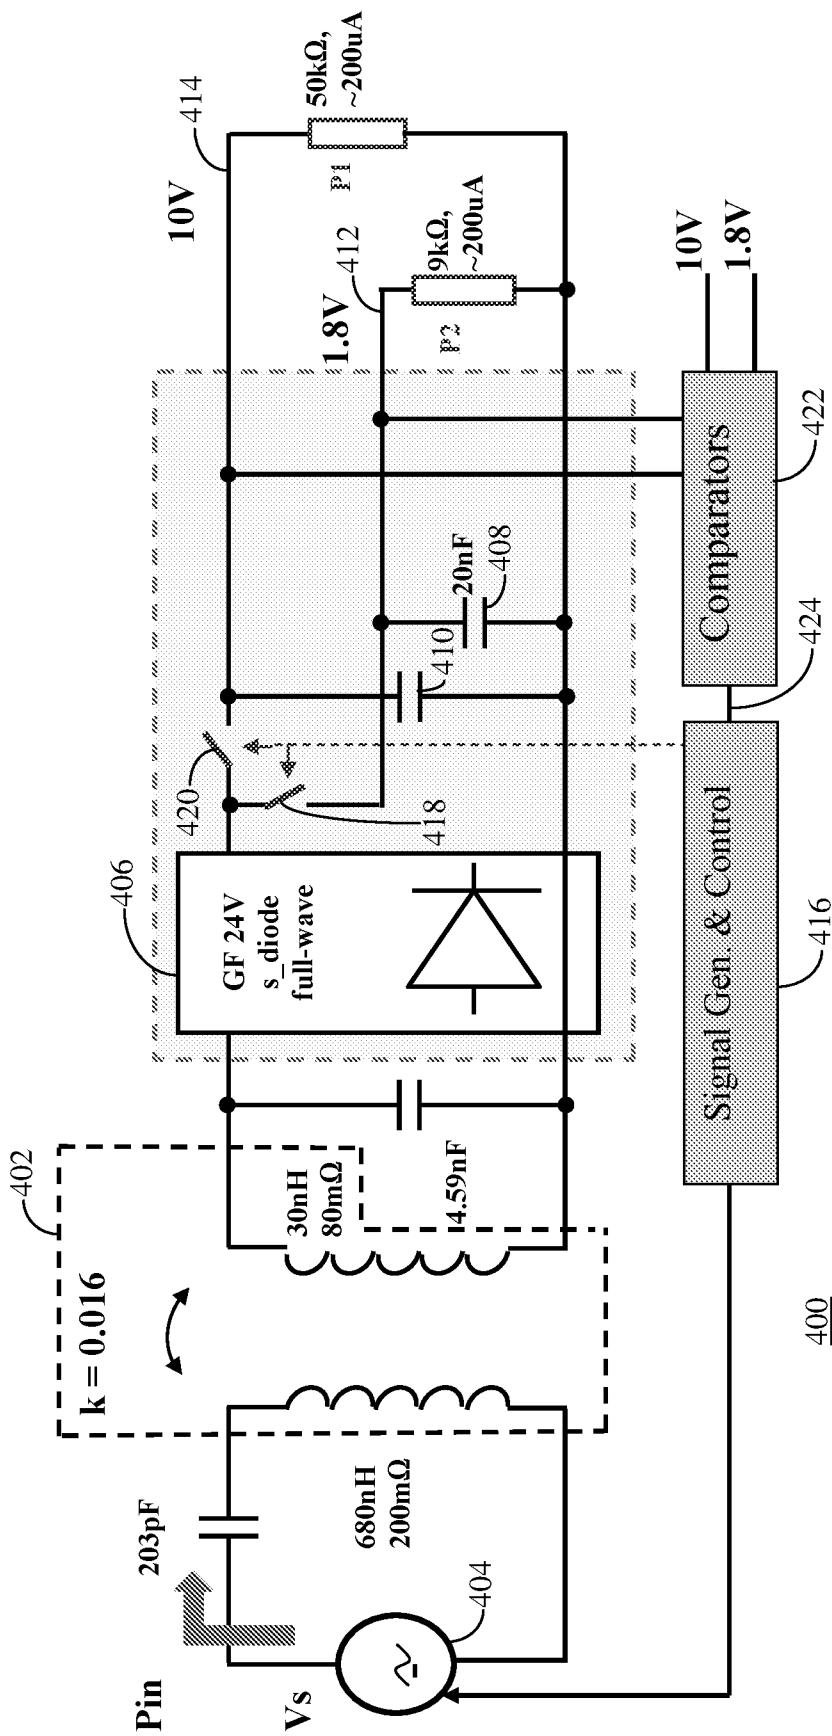


FIG. 4


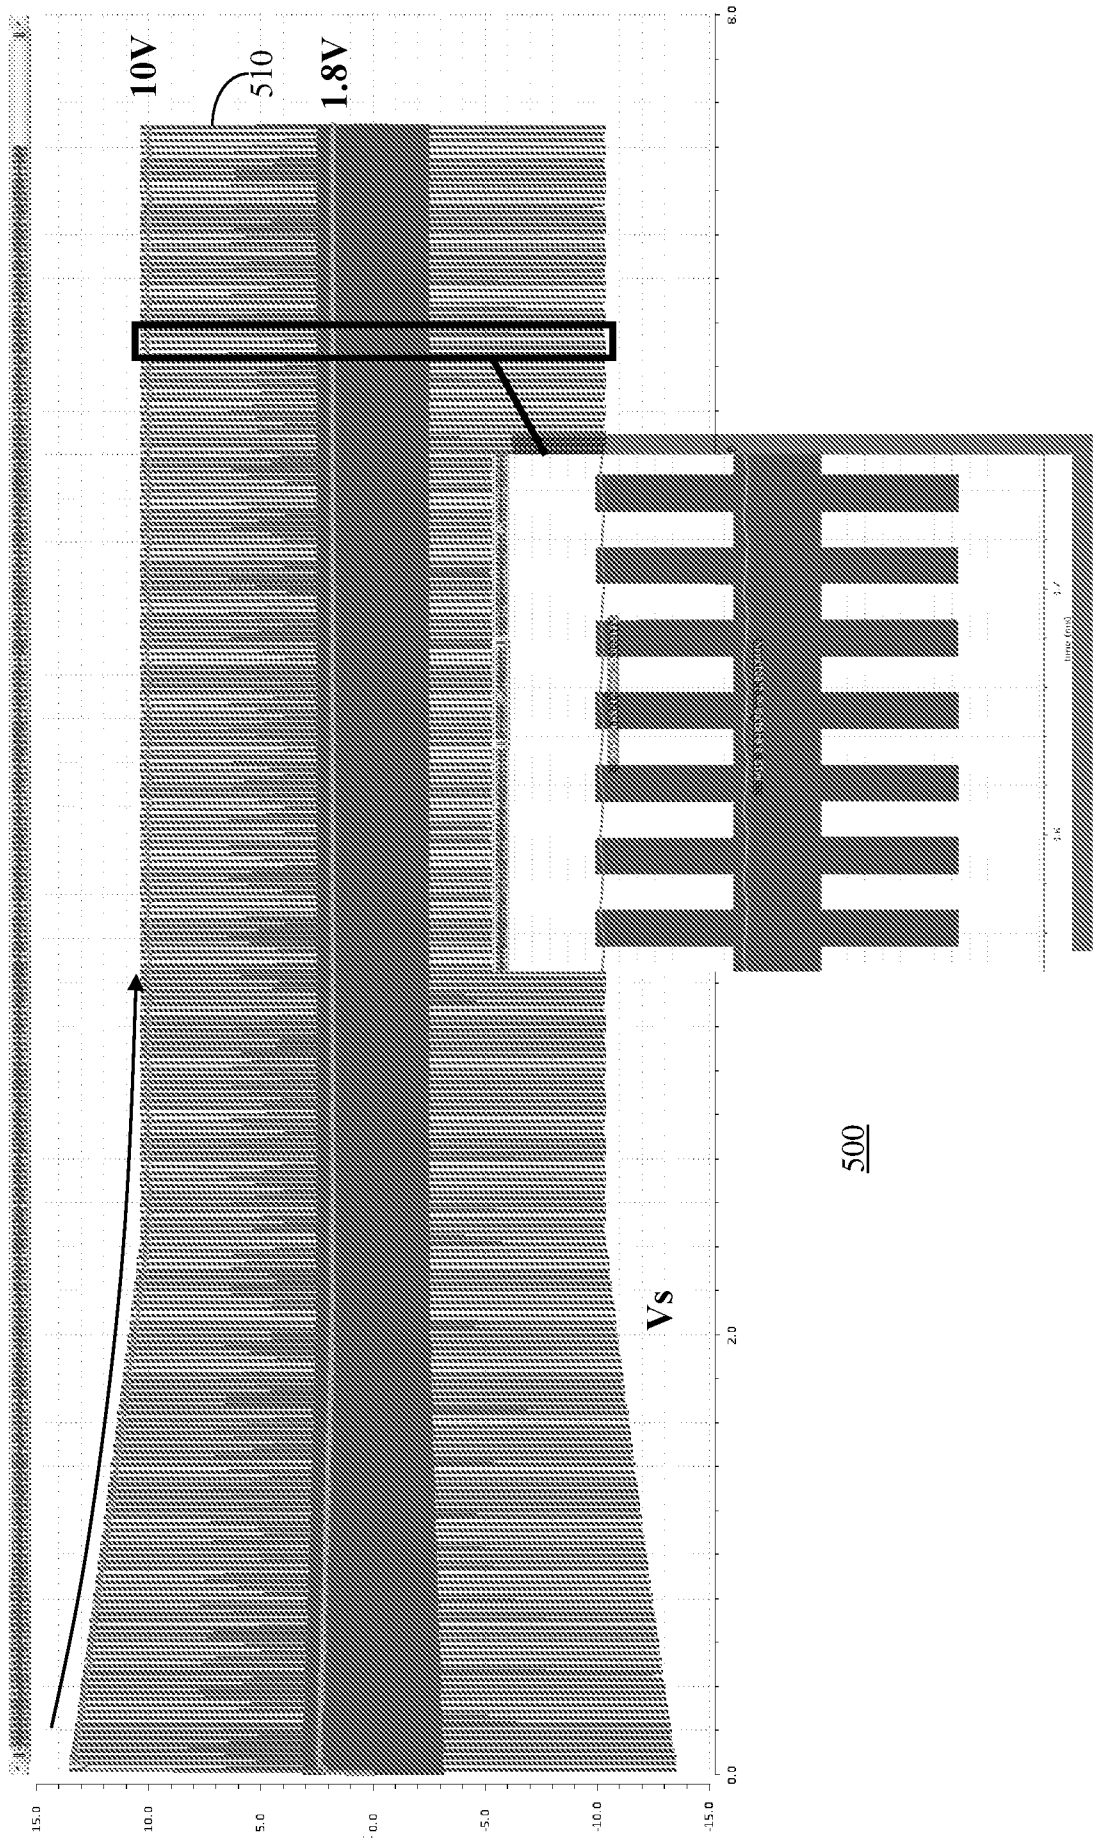


FIG. 5A

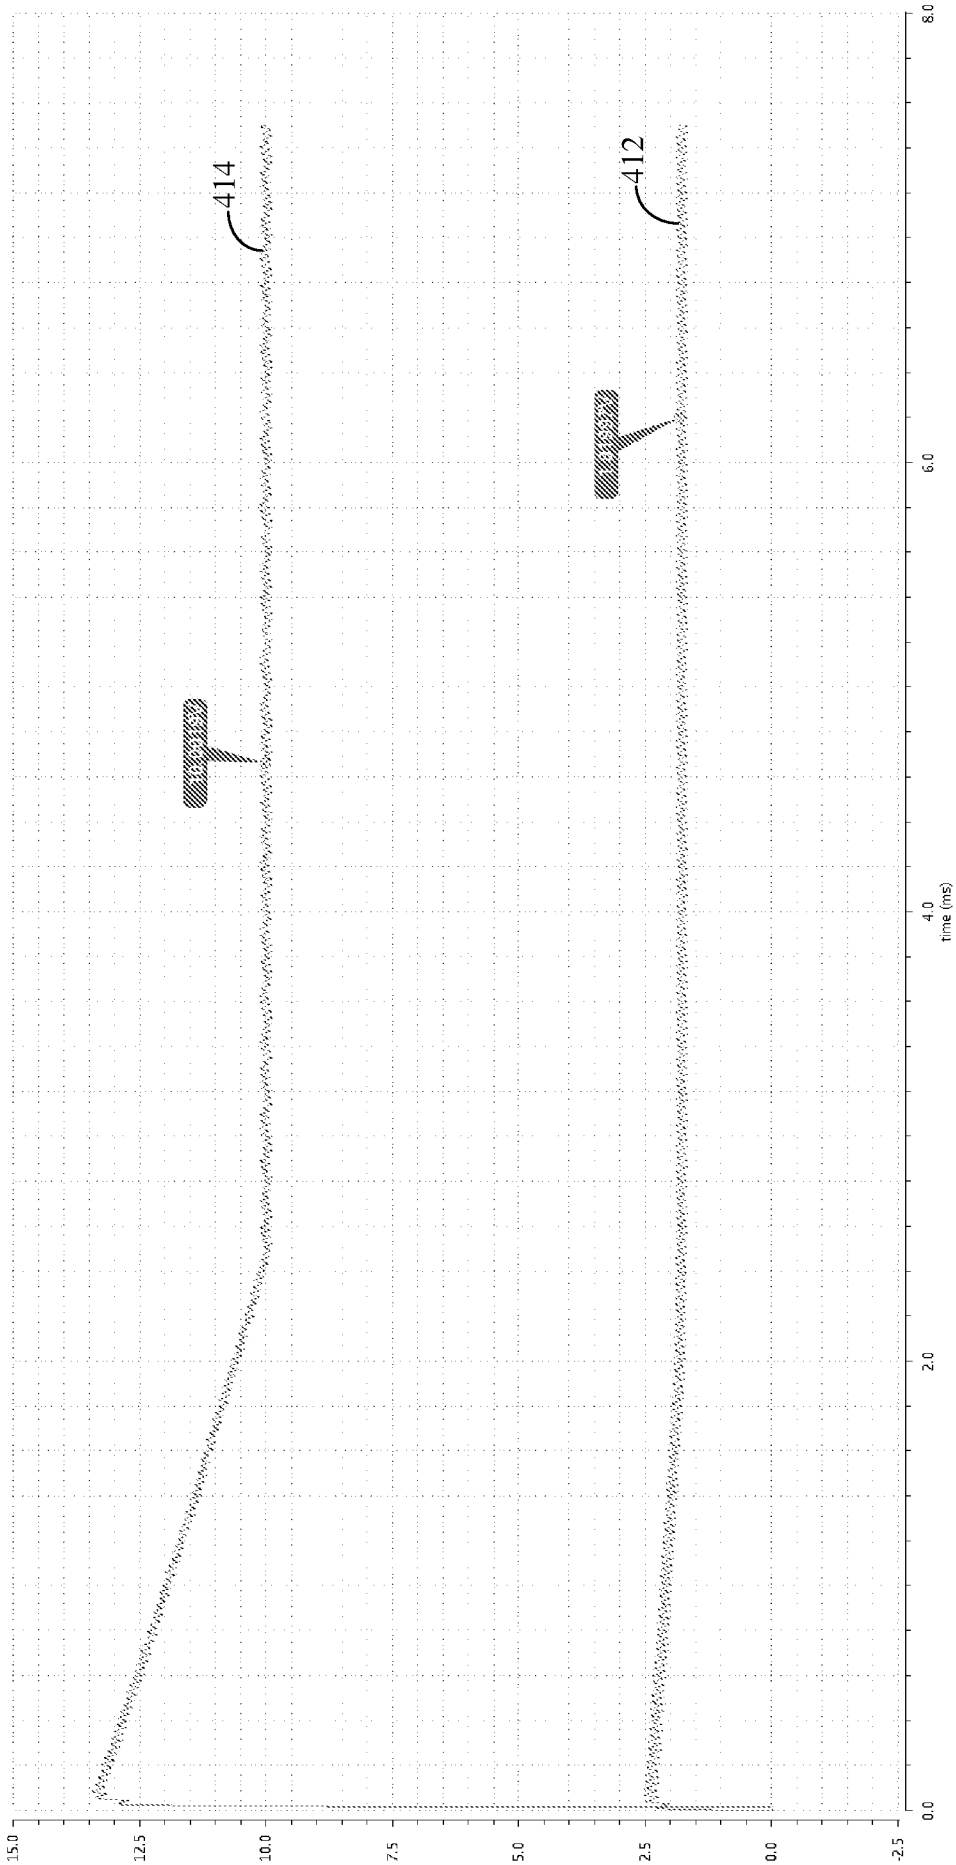

550

FIG. 5B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SG2017/050222

A. CLASSIFICATION OF SUBJECT MATTER

H02J 50/80 (2016.01)

According to International Patent Classification (IPC)

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H02J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Fampat/Scopus: wireless, contactless, power transfer, charge, time-division, time-varying, switch, voltage, current, 时分, 无线充电, 变压, 变流 and other related terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2015/177905 A1 (FUJITSU LIMITED) 26 November 2015 & US 2017/0063166 A1 Figure 8B; Paragraph [0101] of the patent family member	1-15
A	WO 2015/080539 A1 (LG ELECTRONICS INC.) 4 June 2015 Whole document	
A	JP 2014-79091 A (CANON) 1 May 2014 Whole document of the machine translation	
A	US 2012/0202435 A1 (KIM N. Y. ET AL.) 9 August 2012 Whole document	

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

*Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

05/07/2017

(day/month/year)

Date of mailing of the international search report

14/07/2017

(day/month/year)

Name and mailing address of the ISA/SG

Intellectual Property Office of Singapore
51 Bras Basah Road
#01-01 Manulife Centre
Singapore 189554

Email: pct@ipos.gov.sg

Authorized officer

Hu Yongxu (Dr)

IPOS Customer Service Tel. No.: (+65) 6339 8616

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/SG2017/050222

Note: This Annex lists known patent family members relating to the patent documents cited in this International Search Report. This Authority is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015/177905 A1	26/11/2015	CN 106464022 A	22/02/2017
		EP 3151375 A1	05/04/2017
		JPWO 2015177905 A1	20/04/2017
		KR 20160145150 A	19/12/2016
		US 2017/0063166 A1	02/03/2017
WO 2015/080539 A1	04/07/2015	CN 105765827 A	13/07/2016
		EP 3075060 A1	05/10/2016
		EP 3075060 A4	28/06/2017
		JP 2016536959 A	24/11/2016
		KR 20150063933 A	10/06/2015
		US 2016233728 A1	11/08/2016
JP 2014-079091 A	01/05/2014	JP 6053442 B2	27/12/2016
US 2012/0202435 A1	09/08/2012	US 9160421 B2	13/10/2015
		CN 103477536 A	25/12/2013
		CN 103477536 B	25/11/2015
		EP 2673866 A2	18/12/2013
		EP 2673866 A4	25/05/2016
		JP 2014505460 A	27/02/2014
		KR 20120090220 A	17/08/2012
		WO 2012108663 A2	16/08/2012
		WO 2012108663 A3	13/12/2012