(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
10 December 2015 (10.12.2015)

WIPO | PCT

(10) International Publication Number
WO 2015/187133 A1

(51) International Patent Classification:
G06T 1/00 (2006.01) *G06F 17/00* (2006.01)

(21) International Application Number:
PCT/US2014/040721

(22) International Filing Date:
3 June 2014 (03.06.2014)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant: **LANDMARK GRAPHICS CORPORATION** [US/US]; 2107 City West Blvd., Bldg. 2, Houston, TX 77042 (US).

(72) Inventor: **BIVINS, Gerrick, O'ron**; 5546 Cedar Elm Lane, Fulshear, TX 77441 (US).

(74) Agent: **JENSEN, William, P.**; Crain, Caton & James, 1401 Mckinney Street, Suite 1700, Houston, TX 77010 (US).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(54) Title: INTEGRATING EXTERNAL ALGORITHMS INTO A FLEXIBLE FRAMEWORK FOR IMAGING VISUALIZATION DATA

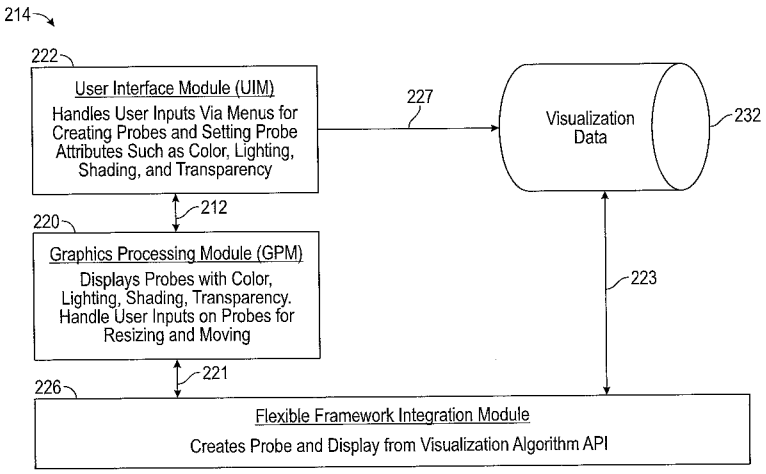


FIG. 2B

(57) Abstract: Systems and methods for integrating external algorithms into a flexible framework for imaging visualization data without altering the external algorithms to fit the flexible framework are presented. In one embodiment, a method represents a flexible framework that may be used for scientific visualization as a means of providing insight into visualization data by displaying the data in various graphical illustrations.

WO 2015/187133 A1

INTEGRATING EXTERNAL ALGORITHMS INTO A FLEXIBLE FRAMEWORK FOR IMAGING VISUALIZATION DATA

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application and U.S. Patent No. 8,736,600, which is incorporated by reference, are commonly assigned to Landmark Graphics Corporation.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH

[0002] Not applicable.

FIELD OF THE DISCLOSURE

[0003] The present disclosure generally relates to systems and methods for integrating external algorithms into a flexible framework for imaging visualization data. More particularly, the present disclosure relates to integrating external algorithms into a flexible framework for imaging visualization data without altering the external algorithm to fit the flexible framework.

BACKGROUND

[0004] Typical commercialized petroleum reservoir visualization software helps petroleum and reservoir engineers and geoscientists see the results from static or dynamic simulations and visually compare iterative "what if" scenarios. Many reservoir models are often described as a disconnected curvilinear grid volume, also called a "3D grid," where each grid cell has clearly defined hexahedronal geometry. The software shows different views of the reservoir with particular attributes (e.g. gas saturation) of the reservoir. The edges, top, and bottom of the reservoir can be seen by rotating the view. Visualization software typically allows the representation of any simulation attribute, instant switching between attributes, and the ability to set data thresholds with unique displays of cells that are restricted to specified data

ranges. A visualization model may include a single layer, or multi-layer views wherein cells are stripped away to reveal the inside of the model. They can also be constructed to show a full display of corner points and local refinement for grid volumes.

[0005] A 3D reservoir model may be presented as hexahedral grid cells, which can be topologically structured or unstructured and geometrically regular or irregular. Curvilinear grid volumes, which are topologically structured and geometrically irregular, are more typical in reservoirs and are therefore, of particular interest. A 3D grid may be defined as: cell = f (I, J, K) = (v1, v2 ... v8, a1, a2... an); where v1, v2... and v8 are eight vertices for the cell and a1, a2... and an are attributes. 3D grids are I layers thick, J cells wide, K cells deep, which contain cells with coordinates (I, J, K) referred to as grid coordinates. Grid Coordinates (I, J, K) are typically used in an index domain, while Cartesian (world) coordinates (x, y, z) are typically used in a sampling domain.

[0006] Research for unstructured volume visualization includes the widely used Projected Tetrahedral technique. Many other extended and enhanced algorithms have also been published. Another algorithm used for visualizing geoscience data is incremental slicing, which was first introduced by Yagel, et al. in *Hardware Assisted Volume Rendering of Unstructured Grids by Incremental Slicing*, IEEE Visualization, 1996, pp. 55-62. The basic idea behind this algorithm is to slice the whole grid volume along the viewing direction and render the slices from back to front. For surface volume rendering, the well known Marching Cubes algorithm can be used for rendering both regular and irregular grid cells. The challenge of scientific visualization, however, lies in determining which algorithm best fits a particular domain and task. In this respect, selecting a visualization software solution is largely dependent on the

particular data domain because most visualization software solutions do not provide a flexible framework for using a preferred, external, visualization algorithm as-is or will require a substantial revision of the algorithm to fit the visualization software framework.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The present disclosure is described below with references to the accompanying drawings in which like elements are referenced with like reference numerals, and in which:

[0008] **FIG. 1** is a block diagram illustrating one embodiment of a computer system for implementing the present disclosure.

[0009] **FIG. 2A** is a block diagram illustrating one embodiment of a software program for implementing the present disclosure.

[0010] **FIG. 2B** is a block diagram illustrating an architecture for the software program in **FIG. 2A**.

[0011] **FIGS. 3A-3D** are flow diagrams illustrating one embodiment of a method for implementing the present disclosure.

[0012] **FIG. 4** is an exemplary graphical user interface illustrating the installation of an external visualization algorithm according to step **306** in **FIG. 3A**.

[0013] **FIG. 5** is a display of a visualization algorithm probe illustrating an exemplary visualization algorithm display created according step **374** in **FIG. 3D.**

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] The present disclosure overcomes one or more deficiencies in the prior art by providing systems and methods for integrating external algorithms into a flexible framework for imaging visualization data without altering the external algorithm to fit the flexible framework.

[0015] In one embodiment, the present disclosure includes a method for integrating external algorithms into a flexible framework for imaging visualization data, which comprises: i) selecting a valid visualization algorithm API; ii) selecting a visualization algorithm for the valid visualization algorithm API; iii) executing the visualization algorithm using visualization data and a computer processor; iv) translating results for the executed visualization algorithm to geometry primitives; v) applying interpolated attributes of the visualization data to the geometry primitives; vi) applying surface normal vectors to the interpolated attributes applied to the geometry primitives; vii) adding the surface normal vectors applied to the interpolated attributes to a visualization algorithm display; and viii) creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the visualization algorithm display.

[0016] In another embodiment, the present disclosure includes a non-transitory program carrier device tangibly carrying computer executable instructions for integrating external algorithms into a flexible framework for imaging visualization data, the instructions being executable to implement: i) selecting a valid visualization algorithm API; ii) selecting a visualization algorithm for the valid visualization algorithm API; iii) executing the visualization algorithm using visualization data; iv) translating results for the executed visualization algorithm to geometry primitives; v) applying interpolated attributes of the visualization data to the geometry primitives; vi) applying surface normal vectors to the interpolated attributes applied to the geometry primitives; vii) adding the surface normal vectors applied to the interpolated attributes to a visualization algorithm display; and viii) creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the

visualization algorithm display.

[0017] In yet another embodiment, the present disclosure includes a non-transitory program carrier device tangibly carrying computer executable instructions for integrating external algorithms into a flexible framework for imaging visualization data, the instructions being executable to implement: i) selecting a valid visualization algorithm API; ii) selecting a visualization algorithm for the valid visualization algorithm API; iii) executing the visualization algorithm using visualization data; iv) translating results for the executed visualization algorithm to geometry primitives; v) applying interpolated attributes of the visualization data to the geometry primitives; vi) applying surface normal vectors to the interpolated attributes applied to the geometry primitives; vii) adding the surface normal vectors applied to the interpolated attributes to a visualization algorithm display; viii) creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the visualization algorithm display; ix) converting the visualization data to an acceptable format using an input data factory from the valid visualization algorithm API; x) creating the visualization algorithm probe using the converted visualization data; and xi) creating the visualization algorithm display for the visualization algorithm probe.

[0018] The subject matter of the present disclosure is described with specificity, however, the description itself is not intended to limit the scope of the disclosure. The subject matter thus, might also be embodied in other ways, to include different steps or combinations of steps similar to the ones described herein, in conjunction with other present or future technologies. Moreover, although the term "step" may be used herein to describe different elements of methods employed, the term should not be interpreted as implying any particular

order among or between various steps herein disclosed unless otherwise expressly limited by the description to a particular order. While the present disclosure may be applied in the oil and gas industry, it is not limited thereto and may also be applied in other industries, such as medical imaging, to achieve similar results.

System Description

[0019] The present disclosure may be implemented through a computer-executable program of instructions, such as program modules, generally referred to as software applications or application programs executed by a computer. The software may include, for example, routines, programs, objects, components and data structures that perform particular tasks or implement particular abstract data types. The software forms an interface to allow a computer to react according to a source of input. DecisionSpace®, which is a commercial software application marketed by Landmark Graphics Corporation, may be used as an interface application to implement the present disclosure. The software may also cooperate with other code segments to initiate a variety of tasks in response to data received in conjunction with the source of the received data. The software may be stored and/or carried on any variety of memory such as CD-ROM, magnetic disk, bubble memory and semiconductor memory (e.g. various types of RAM or ROM). Furthermore, the software and its results may be transmitted over a variety of carrier media such as optical fiber, metallic wire and/or through any of a variety of networks, such as the Internet.

[0020] Moreover, those skilled in the art will appreciate that the disclosure may be practiced with a variety of computer-system configurations, including hand-held devices, multiprocessor systems, microprocessor-based or programmable-consumer electronics,

minicomputers, mainframe computers, and the like. Any number of computer-systems and computer networks are acceptable for use with the present disclosure. The disclosure may be practiced in distributed-computing environments where tasks are performed by remote-processing devices that are linked through a communications network. In a distributed-computing environment, program modules may be located in both local and remote computer-storage media including memory storage devices. The present disclosure may therefore, be implemented in connection with various hardware, software or a combination thereof, in a computer system or other processing system.

[0021] Referring now to **FIG. 1**, a block diagram illustrates one embodiment of a system for implementing the present disclosure on a computer. The system includes a computing unit, sometimes referred to as a computing system, which contains memory, application programs, a client interface, a video interface, and a processing unit. The computing unit is only one example of a suitable computing environment and is not intended to suggest any limitation as to the scope of use or functionality of the disclosure.

[0022] The memory primarily stores the application programs, which may also be described as program modules containing computer-executable instructions, executed by the computing unit for implementing the present disclosure described herein and illustrated in **FIGS. 1-5**. The memory therefore, includes a flexible framework integration module, which enables the steps described in reference to **FIGS. 3A-D,** except steps **302, 304, 308, 312-319, 334, 340** and **374.** The flexible framework integration module may integrate functionality from the remaining application programs illustrated in **FIG. 1**. In particular, DecisionSpace® may be used as an interface application to perform the remaining steps in **FIGS. 3A-3D.** Although

DecisionSpace® may be used as interface application, other interface applications may be used, instead, or the flexible framework integration module may be used as a stand-alone application.

[0023] Although the computing unit is shown as having a generalized memory, the computing unit typically includes a variety of computer readable media. By way of example, and not limitation, computer readable media may comprise computer storage media and communication media. The computing system memory may include computer storage media in the form of volatile and/or nonvolatile memory such as a read only memory (ROM) and random access memory (RAM). A basic input/output system (BIOS), containing the basic routines that help to transfer information between elements within the computing unit, such as during start-up, is typically stored in ROM. The RAM typically contains data and/or program modules that are immediately accessible to, and/or presently being operated on, the processing unit. By way of example, and not limitation, the computing unit includes an operating system, application programs, other program modules, and program data.

[0024] The components shown in the memory may also be included in other removable/nonremovable, volatile/nonvolatile computer storage media or they may be implemented in the computing unit through an application program interface ("API") or cloud computing, which may reside on a separate computing unit connected through a computer system or network. For example only, a hard disk drive may read from or write to nonremovable, nonvolatile magnetic media, a magnetic disk drive may read from or write to a removable, nonvolatile magnetic disk, and an optical disk drive may read from or write to a removable, nonvolatile optical disk such as a CD ROM or other optical media. Other removable/nonremovable, volatile/nonvolatile computer storage media that can be used in the

exemplary operating environment may include, but are not limited to, magnetic tape cassettes, flash memory cards, digital versatile disks, digital video tape, solid state RAM, solid state ROM, and the like. The drives and their associated computer storage media discussed above provide storage of computer readable instructions, data structures, program modules and other data for the computing unit.

[0025] A client may enter commands and information into the computing unit through the client interface, which may be input devices such as a keyboard and pointing device, commonly referred to as a mouse, trackball or touch pad. Input devices may include a microphone, joystick, satellite dish, scanner, or the like. These and other input devices are often connected to the processing unit through the client interface that is coupled to a system bus, but may be connected by other interface and bus structures, such as a parallel port or a universal serial bus (USB).

[0026] A monitor or other type of display device may be connected to the system bus via an interface, such as a video interface. A graphical user interface ("GUI") may also be used with the video interface to receive instructions from the client interface and transmit instructions to the processing unit. In addition to the monitor, computers may also include other peripheral output devices such as speakers and printer, which may be connected through an output peripheral interface.

[0027] Although many other internal components of the computing unit are not shown, those of ordinary skill in the art will appreciate that such components and their interconnection are well known.

[0028] Referring now to **FIG. 2A**, a block diagram of a program for implementing the

present disclosure on software is illustrated. The present disclosure may be implemented using hardware, software or a combination thereof, and may be implemented in a computer system or other processing system. One embodiment of a software or program structure **200** for implementing the present disclosure is shown in **FIG. 2A**. At the base of program structure **200** is an operating system **202**. Suitable operating systems **202** include, for example, the UNIX® operating system, or Windows NT® from Microsoft Corporation, or other operating systems as would be apparent to one of skill in the relevant art.

[0029] Windowing software **204** overlays operating system **202**. Windowing software **204** is used to provide various menus and windows to facilitate interaction with the user, and to obtain user input and instructions. Windowing software **204** can include, for example, Microsoft Windows™, X Window System™ (registered trademark of Massachusetts Institute of Technology), and MOTIF™ (registered trademark of Open Software Foundation Inc.). As would be readily apparent to one of skill in the relevant art, other menu and windowing software could also be used.

[0030] A 3D graphics library **206** overlays Windowing software **204**. The 3D graphics library **206** is an API for 3D computer graphics. The functions performed by 3D graphics library **206** include, for example, geometric and raster primitives, RGBA or color index mode, display list or immediate mode, viewing and modeling transformations, lighting and shading, hidden surface removal, alpha blending (translucency), anti-aliasing, texture mapping, atmospheric effects (fog, smoke, haze), feedback and selection, stencil planes, and accumulation buffer.

[0031] A particularly preferred 3D graphics library **206** is OpenGL®. The OpenGL® API is a well known multi-platform industry standard that is hardware, window, and operating system

independent. OpenGL® is designed to be callable from C, C++, FORTRAN, Ada and Java™ programming languages. OpenGL® performs each of the functions listed above for 3D graphics library **206**. Some commands in OpenGL® specify geometric objects to be drawn, and others control how the objects are handled. All elements of the OpenGL® state, even the contents of the texture memory and the frame buffer, can be obtained by a client application using OpenGL®. OpenGL® and the client application may operate on the same or different machines because OpenGL® is network transparent. OpenGL® is described in more detail in the OpenGL® Programming Guide (ISBN: 0-201-63274-8) and the OpenGL® Reference Manual (ISBN: 0-201-63276-4), the entirety of both of which are incorporated herein by reference.

[0032] 3D graphics utilities **208** overlay the 3D graphics library **206**. The 3D graphics utilities **208** is an API for creating real-time, multi-processed 3D visual simulation graphics applications. The 3D graphics utilities **208** provide functions that bundle together graphics library state control functions such as lighting, materials, texture, and transparency. These functions track state and the creation of display lists that can be rendered later. A particularly preferred set of 3D graphics utilities is offered in Picasso.

[0033] A flexible framework integration program **210** overlays 3D graphics utilities **208** and the 3D graphics library **206**. The flexible framework integration program **210** interacts with, and uses the functions carried out by, each of the 3D graphics utilities **208**, the 3D graphics library **206**, the windowing software **204**, and the operating system **202** in a manner known to one of skill in the relevant art.

[0034] The flexible framework integration program **210** of the present disclosure is preferably written in an object oriented programming language to allow the creation and use of

objects and object functionality. A particularly preferred object oriented programming language is Java™. In carrying out the present disclosure, the flexible framework integration program **210** creates one or more probe objects. As noted above, the probe objects created and used by the flexible framework integration program **210** are also referred to herein as grid probes or probes. Flexible framework integration program **210** manipulates the probe objects so that they have the following attributes.

[0035] A probe corresponds to a sub-set of the original data. Particularly, a probe defines a sub-set that is less than the complete data set of cells for a grid volume. A probe could be configured to be equal to or coextensive with the complete data set of cells for a grid volume.

[0036] Referring now to **FIG. 2B**, a block diagram of an architecture **214** for the program **200** in **FIG. 2A** is illustrated.

[0037] The 3D graphics utilities **208** include a User Interface Module (UIM) **222** and a Graphics Processing Module (GPM) **220**. The flexible framework integration program **210** includes a Flexible Framework Integration Module **226**. UIM **222** and GPM **220** communicate via a bi-directional pathway **212**. UIM **222** interacts with Visualization Data **232** through pathway **227**.

[0038] Grid data from Visualization Data **232** is transferred to GPM **220** through Flexible Framework Integration Module **226** via bi-directional pathways **221**, **223**. Visualization Data **232** stores the grid data in a manner well known to one of skill in the relevant art, which may include grid data representing multiple different volumes.

[0039] UIM **222** handles the user interface to receive commands, instructions, and input data from the user. UIM **222** interfaces with the user through a variety of menus through which

the user can select various options and settings, either through keyboard selection or through one or more user-manipulated input devices, such as a mouse or a 3D pointing device. UIM **222** receives user input as the user manipulates the input device to move, size, shape, etc. a grid probe.

[0040] UIM **222** inputs the identification of one or more grid volumes from Visualization Data **232** to use for imaging and analysis. When a plurality of grid volumes are used, the data value for each of the plurality of grid volumes represents a different physical parameter or attribute for the same geographic space. By way of example, a plurality of grid volumes could include a geology volume, a temperature volume, and a water-saturation volume.

[0041] UIM **222** inputs information to create one or more probes. Such information may include, for example, probe type, size, shape, and location. Such information may also include, for example, the type of display and imaging attributes such as color, lighting, shading, and transparency (or opacity). By adjusting opacity as a function of data value, certain portions of the grid volume are more transparent, thereby allowing a viewer to see through surfaces. As would be readily apparent to one skilled in the art, data values with greater opacity (less transparency) will mask the imaging or display of data values with lower opacity (more transparency). Conversely, data values will less opacity and greater transparency will permit the imaging or display of data values with greater opacity and lower transparency.

[0042] UIM **222** receives input from the user for sizing and shaping the probes. As described in more detail below, in a preferred embodiment of the present disclosure, the shape and/or size of a probe may be changed by clicking onto manipulators or the probe display and making changes in the dimensions of the probe in one or more directions. A manipulator refers

to a designated graphical representation on a surface of the probe, which may be used to move, reshape or re-size the probe. Manipulators may also be used to identify boundaries or extents for creating certain types of probes. A manipulator is preferably displayed in a color that is different from the colors being used to display the features or physical parameters of the grid data. UIM **222** receives input from the user to move the position or location of a probe within the grid volume. In a preferred embodiment, a user manipulates a mouse to click onto a manipulator or the probe display and move or re-size the probe.

[0043] UIM **222** also receives input from the user regarding the content of the displayed image. For example, the user can preferably select the content of the displayed image. The content of the displayed image could include only the probe, *i.e.,* its intersection with the grid volume. Additionally, the probe could be displayed either with or without a bounding box that defines the outer geometry of the probe.

[0044] To carry out the foregoing functions, UIM **222** communicates via bi-directional pathway **212** with GPM **220** that carries out the display and imaging.

[0045] GPM **220** processes data for imaging probes with the color, lighting, shading, transparency, and other attributes selected by the user. To do so, GPM **220** uses the functions available through 3D graphics library **206** and 3D graphics utilities **208** described above. The user can select (through UIM **222**) to display only the one or more probes that have been created. Alternatively, the user can select to display one or more probes, as well as the grid volume outside of the probes, i.e. cells within the grid volume that do not intersect any of the probes that are being displayed. Probes that are being displayed may be referred to herein as active probes.

[0046] GPM **220** processes the re-shaping and move requests that are received by UIM

222 from the user. GPM **220** draws the re-shaped probe in accordance with the user-selected attributes (color, lighting, shading, transparency, etc.). As the user inputs a change in shape for a probe, the image with selected attributes is re-drawn sufficiently fast to be perceived in real-time by the user. Similarly, GPM **220** draws the probe in the new position or location in accordance with the user-selected attributes (color, lighting, shading, transparency, etc.). As the user moves the probe through the grid volume, the image of the probe with selected attributes is re-drawn sufficiently fast to be perceived in real-time by the user.

[0047] To carry out the foregoing functions, GPM **220** communicates via bi-directional pathway **212** with UIM **222** so that the information requested by the user is imaged or displayed with the selected attributes. GPM **220** obtains the needed data from Visualization Data **232** by sending a data request through the Flexible Framework Integration Module **226** via bi-directional pathways **221**, **223**.

[0048] The Flexible Framework Integration Module **226** selects a bounding box based on input received from UIM **222** through GPM **220**. The Flexible Framework Integration Module **226** then sends a request to Visualization Data **232** via bi-directional pathway **223** for visualization data that corresponds to the selected bounding box extents. The Flexible Framework Integration Module **226** receives visualization data corresponding to the bounding box extents from Visualization Data **232** via bi-directional pathway **223**. The Flexible Framework Integration Module **226** then creates (builds) the selected probe and display using the visualization data and transmits the selected probe and display to GPM **220** for rendering an image of the selected visualization algorithm API.

[0049] The primary function of the visualization algorithm API is therefore, to extract

the appropriate grid data within the bounding box extents at the request of Flexible Framework Integration Module **226**. The visualization algorithm API in the Flexible Framework Integration Module **226** receives requests for visualization data from Flexible Framework Integration Module **226**. The visualization algorithm API extracts the required sub-grid within the probe bounding box extents of the visualization data. The Flexible Framework Integration Module 226 then renders the output for display.

Method Description

[0050] Referring now to **FIGS. 3A-3D**, the flow diagrams illustrate one embodiment of a method **300** for implementing the present disclosure. The method **300** represents a flexible framework that may be used for scientific visualization as a means of providing insight into visualization data by displaying the data in various graphical illustrations. The goal of a flexible framework like the method **300** is to expose relationships and features of the data that are not easily discoverable from simply looking at the data in its raw form.

[0051] In step **302**, each predetermined internal visualization algorithm API is initialized using techniques well known in the art. The visualization algorithm API is the API that the method **300** delegates to for algorithm specific data processing. The API can be broken down into four parts:

A. Algorithm Specification

B. Algorithm Graphics Factory

C. Algorithm View Type

D. Algorithm Manipulator Factory (Optional)

The following describes how each part is used by the method **300** in a deployed application, to allow each visualization algorithm API to be integrated.

A – The algorithm specification is called by the method **300** to validate algorithms for selected input and to create the display of the visualization algorithm. One aspect of the algorithm specification defines data conversions into and out of the visualization algorithm. It also defines the operations to perform on the data to calculate the visualization. The algorithm specification includes three separate, but related, functions,

which are described in further detail below:

I. Input Translation Specification – defines if and how the method **300** can convert visualization data into a format that is suitable for the algorithm execution specification to accept;

II. Output Translation Specification – defines how the method **300** can convert the output of the algorithm execution specification into a format that is suitable for displaying graphically; and

III. Algorithm Execution Specification – defines the specific visualization algorithm that the method **300** can call to create the input translation specification and the output translation specification.

A I – Input Translation Specification

a. Input Data Factory – converts the visualization data into a suitable format for the specific visualization algorithm, typically following the adapter pattern in object oriented programming; and

b. Input Domain Data Validator – validates if the input data factory can convert the visualization into a suitable format for the specific visualization algorithm, which is how filters for the type of visualization data that can be accepted are defined.

A II -- Output Translation Specification

a. Input/Output Geometry Mapper – creates a mapping of the output of the specific visualization algorithm back to the original location in the visualization data. The mapping can be used, for instance, to look up an attribute value in

original visualization data to apply to the output of the specific visualization algorithm at the corresponding location;

b. Output Geometry Translator – converts the output of the specific visualization algorithm to a graphical format (referred to as output geometry) that the graphics factory can render and display;

c. Output Geometry Normal Translator (Optional) – calculates normal vectors at each vertex of the output geometry. This is optional because there are existing algorithms for calculating the normal vectors of polygons, which the method **300** can use as a default. However, if for any reason, the default functionality is not preferred, this option may be utilized; and

d. Output Geometry Attribute Translator (Optional) – interpolates attributes from the visualization data to the output geometry. This is optional because the attributes can be interpolated using the mapping defined by the input/output geometry mapper. However, if for any reason, the default functionality is not preferred, this option may be utilized.

A III -- Algorithm Execution Specification

a. Visualization Algorithm – the implementation of a specific visualization algorithm. Using the result of calling the input data factory and any parameters defined by the algorithm parameters, as input, this computes the output as implemented by the method **300**; and

b. Algorithm Parameters (Optional) – parameters specific to the implementation of a specific visualization algorithm. Some specific visualization algorithms may

require extra parameters as input to the execution. For example, the X Cartesian coordinate location of an "x slice plane" visualization algorithm may be required for the algorithm to execute properly. This allows the requirement of such parameters to be defined and the method **300** will supply them to the visualization algorithms for execution.

B – The algorithm graphics factory is called by the method **300** to create the required components to integrate the output of the visualization algorithm into the underlying graphical display system. After creation of the required components, any changes to the output of the execution of the visualization algorithm may trigger the display to be updated.

C – The algorithm view type simply defines the graphical displays that a visualization algorithm can be viewed in.

D – The algorithm manipulator factory allows the user of the method **300** to define a graphical widget that can be used to send parameters to the algorithm for execution. If defined, the method **300** will create the graphical representation of the widget and add it to the display. Typically the manipulator is tied to 1 or more of the parameters specified in algorithm execution specification but that is not required. The method **300** will pass any parameters defined by the manipulator to the visualization algorithm and it is up to the visualization algorithm implementation whether or not to use the parameters.

[0052] In step **304**, the method **300** determines whether to add an external visualization algorithm API based on each predetermined internal visualization algorithm API from step **302**, available external visualization algorithm API's and instructions from the client interface and/or

the video interface described further in reference to **FIG. 1**. If the method **300** determines not to add an external visualization algorithm API, then the method **300** proceeds to step **308**. If the method **300** determines to add an external visualization algorithm API, then the method **300** proceeds to step **306**.

[0053] In step **306**, one or more external visualization algorithm API's are installed using techniques well known in the art and the client interface and/or the video interface described further in reference to **FIG. 1**. Each visualization algorithm API is the API that the method **300** delegates to for algorithm specific data processing. The API can be broken down into the same four parts described in step **302**, however, may be customized and/or supplied from a source external to the method **300**. In **FIG. 4**, an exemplary graphical user interface illustrates the installation of an external visualization algorithm called GridProbe.

[0054] In step **308**, visualization data is input using the client interface and/or the video interface described further in reference to **FIG. 1**. Visualization data may include any data that may be graphically represented in a way to gain insight into the data and possibly gain a better understanding of the data. Such data therefore, may include output from an oil/gas reservoir simulation on a grid or output from an MRI in the medical field.

[0055] In step **310**, each valid predetermined internal visualization algorithm API from step **302** and each valid external visualization algorithm API from step **306** is identified based on the visualization data input in step **308** and the API algorithm view type from step **302** and/or step **306**. The input domain data validator and the API algorithm view type from step **302** and/or step **306** are used to identify which predetermined internal visualization algorithm API's from step **302** and which external visualization algorithm API's from step **306** are valid to the extent it

can accept the visualization data from step **308** as input for the respective API algorithm view type.

[0056] In step **312**, the method **300** determines if there are any predetermined internal visualization algorithm API's or any external visualization algorithm API's identified in step **310**. If there are no predetermined internal visualization algorithm API's and no external visualization algorithm API's identified in step **310**, then the method returns to step **304**. If there is at least one predetermined internal visualization algorithm API or at least one external visualization algorithm API, then the method proceeds to step **314**.

[0057] In step **314**, a predetermined internal visualization algorithm API or an external visualization algorithm API identified in step **310** is selected using the client interface and/or the video interface described further in reference to **FIG. 1**.

[0058] In step **316**, the method **300** determines whether to create a new visualization based on any current visualizations, or lack thereof, and instructions from the client interface and/or the video interface described further in reference to **FIG. 1**. If the method **300** determines to create a new visualization, then the method **300** proceeds to step **320**. If the method **300** determines not to create a new visualization, then the method **300** proceeds to step **318**.

[0059] In step **318**, the method **300** determines whether to update a current visualization based on one or more current visualizations and instructions from the client interface and/or the video interface described further in reference to **FIG. 1**. If the method **300** determines to update a current visualization, then the method **300** proceeds to step **332**. If the method **300** determines not to update a current visualization, then the method **300** proceeds to step **319**.

[0060] In step **319**, the method **300** determines if there are any predetermined internal

visualization algorithm API's or external visualization algorithm API's identified in step **310** that have not been selected in step **314**. If there is another predetermined internal visualization algorithm API or another external visualization algorithm API identified in step **310** that has not been selected in step **314**, then the method **300** returns to step **314**. Otherwise, the method **300** ends.

[0061] In step **320**, the visualization data from step **308** is converted into an acceptable format to use as input for the visualization algorithm from the visualization algorithm API selected in step **314** using the input data factory from the visualization algorithm API selected in step **314**.

[0062] In step **322**, the method **300** determines if the visualization algorithm API selected in step **314** has an algorithm manipulator factory. If the visualization algorithm API selected in step **314** does not have an algorithm manipulator factory, then the method **300** proceeds to step **326**. If the visualization algorithm API selected in step **314** does have an algorithm manipulator factory, then the method **300** proceeds to step **324**.

[0063] In step **324**, a manipulator is created in the form of a graphical widget using the algorithm manipulator factory from the visualization algorithm API selected in step **314**. The manipulator may be used to convert changes in the graphical widget properties or state into input parameters for the visualization algorithm from the visualization algorithm API selected in step **314**.

[0064] In step **326**, a visualization algorithm probe is created using the visualization data from step **320** and techniques well known in the art.

[0065] In step **328**, a visualization algorithm display is created for the visualization

algorithm probe created in step **326** using techniques well known in the art.

[0066] In step **332**, the method **300** determines if the visualization algorithm API selected in step **314** has a preexisting manipulator or a manipulator created in step **324**. If the visualization algorithm API selected in step **314** has no manipulator, then the method **300** proceeds to step **336**. If the visualization algorithm API selected in step **314** has a manipulator, then the method **300** proceeds to step **334**.

[0067] In step **334**, the parameters of the preexisting manipulator or the manipulator created in step **324** are selected using the client interface and/or the video interface described further in reference to **FIG. 1**.

[0068] In step **336**, the visualization algorithm for the visualization algorithm API selected in step **314** is selected.

[0069] In step **338**, the method **300** determines if the visualization algorithm API selected in step **314** has specific algorithm parameters. If the visualization algorithm API selected in step **314** has no specific algorithm parameters, then the method **300** proceeds to step **342**. If the visualization algorithm API selected in step **314** has specific algorithm parameters, then the method **300** proceeds to step **340**.

[0070] In step **340**, the values of the specific algorithm parameters for the visualization algorithm API selected in step **314** are selected using the client interface and/or the video interface described further in reference to **FIG. 1**.

[0071] In step **342**, the visualization algorithm selected in step **336** is executed using, as input, the visualization data from step **308** or step **320** and, optionally, any of the manipulator parameters selected in step **334** and any of the values of the specific algorithm parameters

selected in step **340**.

[0072] In step **344**, the method **300** determines if the current visualization algorithm display or the visualization algorithm display created in step **328** needs to be updated based on whether there are results for step **342**. If there are no results for step **342**, then the visualization algorithm display created in step **328** does not need to be updated and the method **300** returns to step **314**. If there are results for step **342**, then the visualization algorithm display created in step **328** needs to be updated and the method **300** proceeds to step **346**.

[0073] In step **346**, the current visualization algorithm display or the visualization algorithm display created in step **328** is cleared.

[0074] In step **350**, the results from step **342** are translated to geometry primitives representing a graphical format using the output geometry translator for the visualization algorithm API selected in step **314**.

[0075] In step **352**, the geometry primitives representing a graphical format from step **350** are mapped to the original coordinates of the visualization data from step **308** using the input/output geometry mapper for visualization algorithm API selected in step **314**.

[0076] In step **354**, the method **300** determines if the visualization algorithm API selected in step **314** has an output geometry attribute translator. If the visualization algorithm API selected in step **314** has an output geometry attribute translator, then the method **300** proceeds to step **358**. If the visualization algorithm API selected in step **314** has no output geometry attribute translator, then the method **300** proceeds to step **356**.

[0077] In step **356**, attributes of the visualization data from step **308** are interpolated to the geometry primitives representing a graphical format from step **350** using the mapped

geometry primitives from step **352** and techniques well known in the art.

[0078] In step **358**, attributes of the visualization data from step **308** are interpolated to the geometry primitives representing a graphical format from step **350** using the output geometry attribute translator of the visualization algorithm API selected in step **314**.

[0079] In step **360**, the interpolated attributes from step **356** or step **358** are applied to the geometry primitives representing a graphical format from step **350** using techniques well known in the art.

[0080] In step **362**, the method **300** determines if the visualization algorithm API selected in step **314** has an output geometry normal translator. If the visualization algorithm API selected in step **314** has an output geometry normal translator, then the method **300** proceeds to step **368**. If the visualization algorithm API selected in step **314** has no output geometry normal translator, then the method **300** proceeds to step **364**.

[0081] In step **364**, surface normal vectors at the vertices of the geometry primitives representing a graphical format from step **350** are calculated using any well-known default output geometry normal algorithm.

[0082] In step **368**, surface normal vectors at the vertices of the geometry primitives representing a graphical format from step **350** are calculated using the output geometry normal translator of the visualization algorithm API selected in step **314**.

[0083] In step **370**, the surface normal vectors from step **364** or step **368** are applied to the interpolated attributes applied to the geometry primitives representing a graphical format in step **360** using techniques well known in the art.

[0084] In step **372**, the surface normal vectors applied to the interpolated attributes in

step **370** are added to the current visualization algorithm display or the visualization algorithm display created in step **328** using techniques well known in the art.

[0085] In step **374**, a new visualization algorithm display is created for the current visualization algorithm probe or the visualization algorithm probe created in step **326** using the results of step **372** and techniques well known in the art. In **FIG. 5**, a display of a visualization algorithm probe illustrates an exemplary visualization algorithm display created according to step **374**. The method **300** returns to step **314**.

[0086] While the present disclosure has been described in connection with presently preferred embodiments, it will be understood by those skilled in the art that it is not intended to limit the disclosure to those embodiments. It is therefore, contemplated that various alternative embodiments and modifications may be made to the disclosed embodiments without departing from the spirit and scope of the disclosure defined by the appended claims and equivalents thereof.

CLAIMS

1. A method for integrating external algorithms into a flexible framework for imaging visualization data, which comprises:

selecting a valid visualization algorithm API;

selecting a visualization algorithm for the valid visualization algorithm API;

executing the visualization algorithm using visualization data and a computer processor;

translating results for the executed visualization algorithm to geometry primitives;

applying interpolated attributes of the visualization data to the geometry primitives;

applying surface normal vectors to the interpolated attributes applied to the geometry primitives;

adding the surface normal vectors applied to the interpolated attributes to a visualization algorithm display; and

creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the visualization algorithm display.

2. The method of claim 1, wherein the valid visualization algorithm API is one of a predetermined internal visualization algorithm API and an external visualization algorithm API.

3. The method of claim 1, further comprising:

converting the visualization data to an acceptable format using an input data factory from the valid visualization algorithm API;

creating a manipulator in the form of a graphical widget using an algorithm

manipulator factory from the valid visualization algorithm API;

creating the visualization algorithm probe using the converted visualization data; and

creating the visualization algorithm display for the visualization algorithm probe.

4. The method of claim 3, wherein the visualization algorithm is executed using the converted visualization data, parameters selected for the manipulator and values selected for specific algorithm parameters for the valid visualization algorithm API.

5. The method of claim 1, further comprising mapping the geometry primitives to original coordinates for the visualization data using an input/output geometry mapper for the valid visualization algorithm API.

6. The method of claim 5, wherein the interpolated attributes are interpolated to the geometry primitives using one of the mapped geometry primitives and an output geometry attribute translator for the valid visualization algorithm API.

7. The method of claim 1, wherein the surface normal vectors are calculated at vertices of the geometry primitives using an output geometry normal translator for the valid visualization algorithm API.

8. A non-transitory program carrier device tangibly carrying computer executable instructions for integrating external algorithms into a flexible framework for imaging visualization data, the instructions being executable to implement:

selecting a valid visualization algorithm API;

selecting a visualization algorithm for the valid visualization algorithm API;

executing the visualization algorithm using visualization data;

translating results for the executed visualization algorithm to geometry primitives;

applying interpolated attributes of the visualization data to the geometry primitives;

applying surface normal vectors to the interpolated attributes applied to the geometry primitives;

adding the surface normal vectors applied to the interpolated attributes to a visualization algorithm display; and

creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the visualization algorithm display.

9. The program carrier device of claim 8, wherein the valid visualization algorithm API is one of a predetermined internal visualization algorithm API and an external visualization algorithm API.

10. The program carrier device of claim 8, further comprising:

converting the visualization data to an acceptable format using an input data factory from the valid visualization algorithm API;

creating a manipulator in the form of a graphical widget using an algorithm manipulator factory from the valid visualization algorithm API;

creating the visualization algorithm probe using the converted visualization data; and

creating the visualization algorithm display for the visualization algorithm probe.

11. The program carrier device of claim 10, wherein the visualization algorithm is executed using the converted visualization data, parameters selected for the manipulator and

values selected for specific algorithm parameters for the valid visualization algorithm API.

12. The program carrier device of claim 8, further comprising mapping the geometry primitives to original coordinates for the visualization data using an input/output geometry mapper for the valid visualization algorithm API.

13. The program carrier device of claim 12, wherein the interpolated attributes are interpolated to the geometry primitives using one of the mapped geometry primitives and an output geometry attribute translator for the valid visualization algorithm API.

14. The program carrier device of claim 8, wherein the surface normal vectors are calculated at vertices of the geometry primitives using an output geometry normal translator for the valid visualization algorithm API.

15. A non-transitory program carrier device tangibly carrying computer executable instructions for integrating external algorithms into a flexible framework for imaging visualization data, the instructions being executable to implement:

selecting a valid visualization algorithm API;

selecting a visualization algorithm for the valid visualization algorithm API;

executing the visualization algorithm using visualization data;

translating results for the executed visualization algorithm to geometry primitives;

applying interpolated attributes of the visualization data to the geometry primitives;

applying surface normal vectors to the interpolated attributes applied to the geometry primitives;

adding the surface normal vectors applied to the interpolated attributes to a

visualization algorithm display;

creating a new visualization algorithm display for a visualization algorithm probe using the surface normal vectors added to the visualization algorithm display;

converting the visualization data to an acceptable format using an input data factory from the valid visualization algorithm API;

creating the visualization algorithm probe using the converted visualization data; and

creating the visualization algorithm display for the visualization algorithm probe.

16. The program carrier device of claim 15, wherein the valid visualization algorithm API is one of a predetermined internal visualization algorithm API and an external visualization algorithm API.

17. The program carrier device of claim 15, wherein the visualization algorithm is executed using the converted visualization data and values selected for specific algorithm parameters for the valid visualization algorithm API.

18. The program carrier device of claim 15, further comprising mapping the geometry primitives to original coordinates for the visualization data using an input/output geometry mapper for the valid visualization algorithm API.

19. The program carrier device of claim 18, wherein the interpolated attributes are interpolated to the geometry primitives using one of the mapped geometry primitives and an output geometry attribute translator for the valid visualization algorithm API.

20. The program carrier device of claim 15, wherein the surface normal vectors are calculated at vertices of the geometry primitives using an output geometry normal translator for

the valid visualization algorithm API.

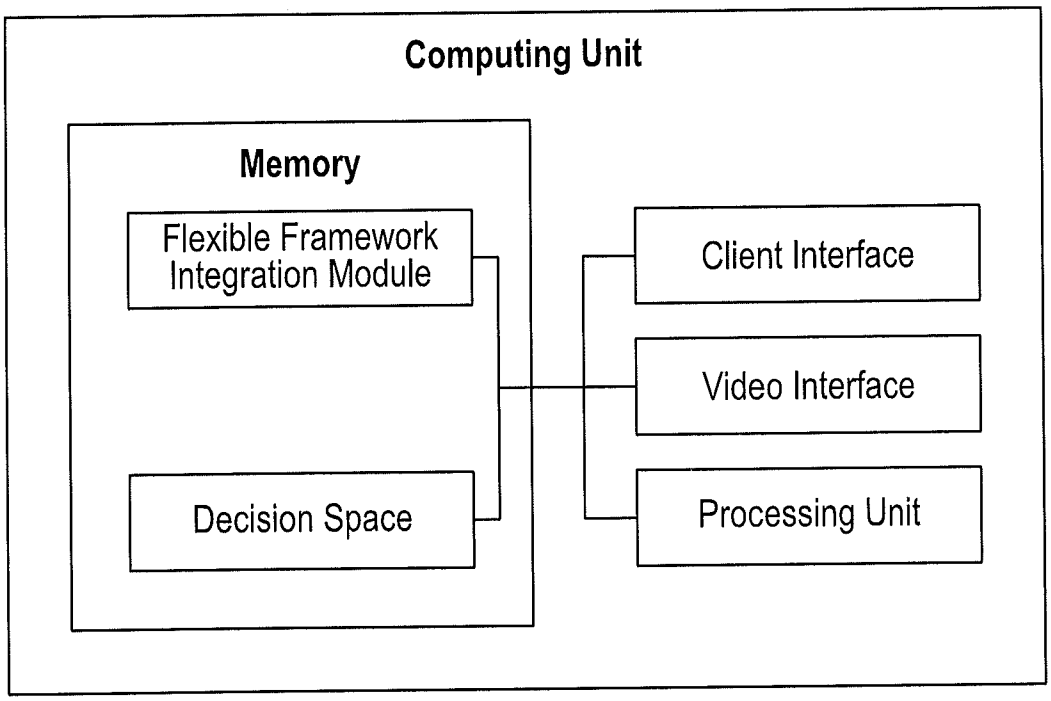

Computing Unit
Memory
Flexible Framework Integration Module
Decision Space
Client Interface
Video Interface
Processing Unit

FIG. 1

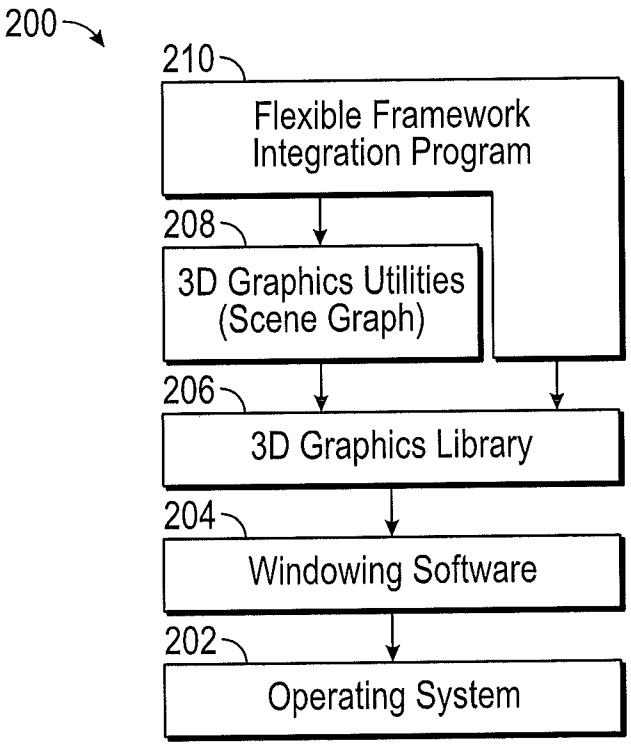

200
210
Flexible Framework Integration Program
208
3D Graphics Utilities (Scene Graph)
206
3D Graphics Library
204
Windowing Software
202
Operating System

FIG. 2A

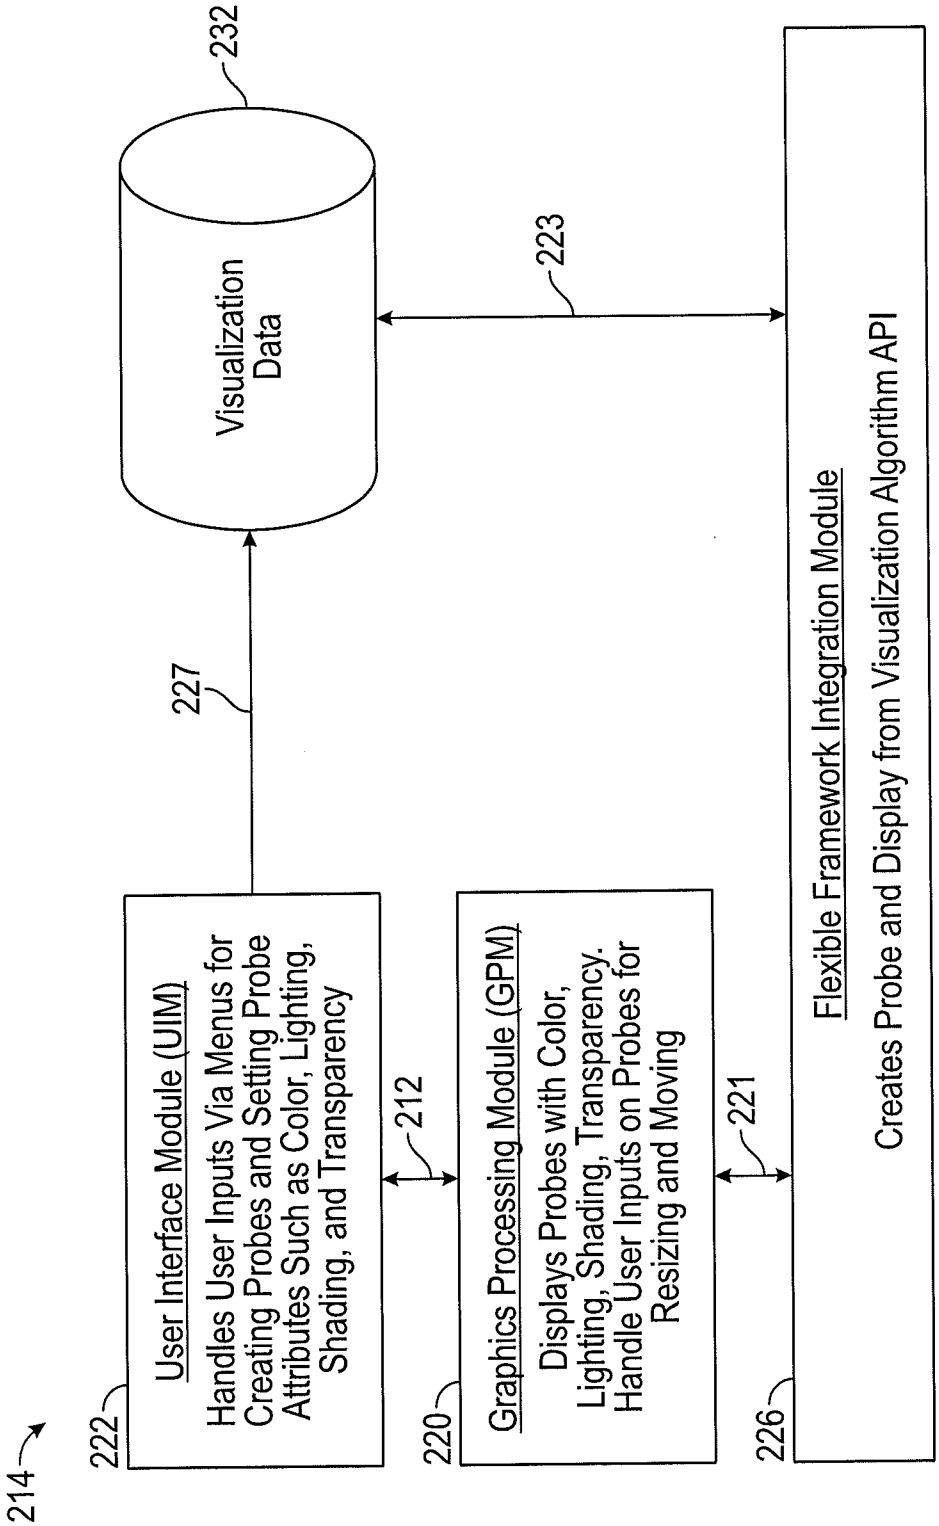

214
222
User Interface Module (UIM)
Handles User Inputs Via Menus for Creating Probes and Setting Probe Attributes Such as Color, Lighting, Shading, and Transparency
227
232
Visualization Data
223
212
220
Graphics Processing Module (GPM)
Displays Probes with Color, Lighting, Shading, Transparency. Handle User Inputs on Probes for Resizing and Moving
221
226
Flexible Framework Integration Module
Creates Probe and Display from Visualization Algorithm API

FIG. 2B

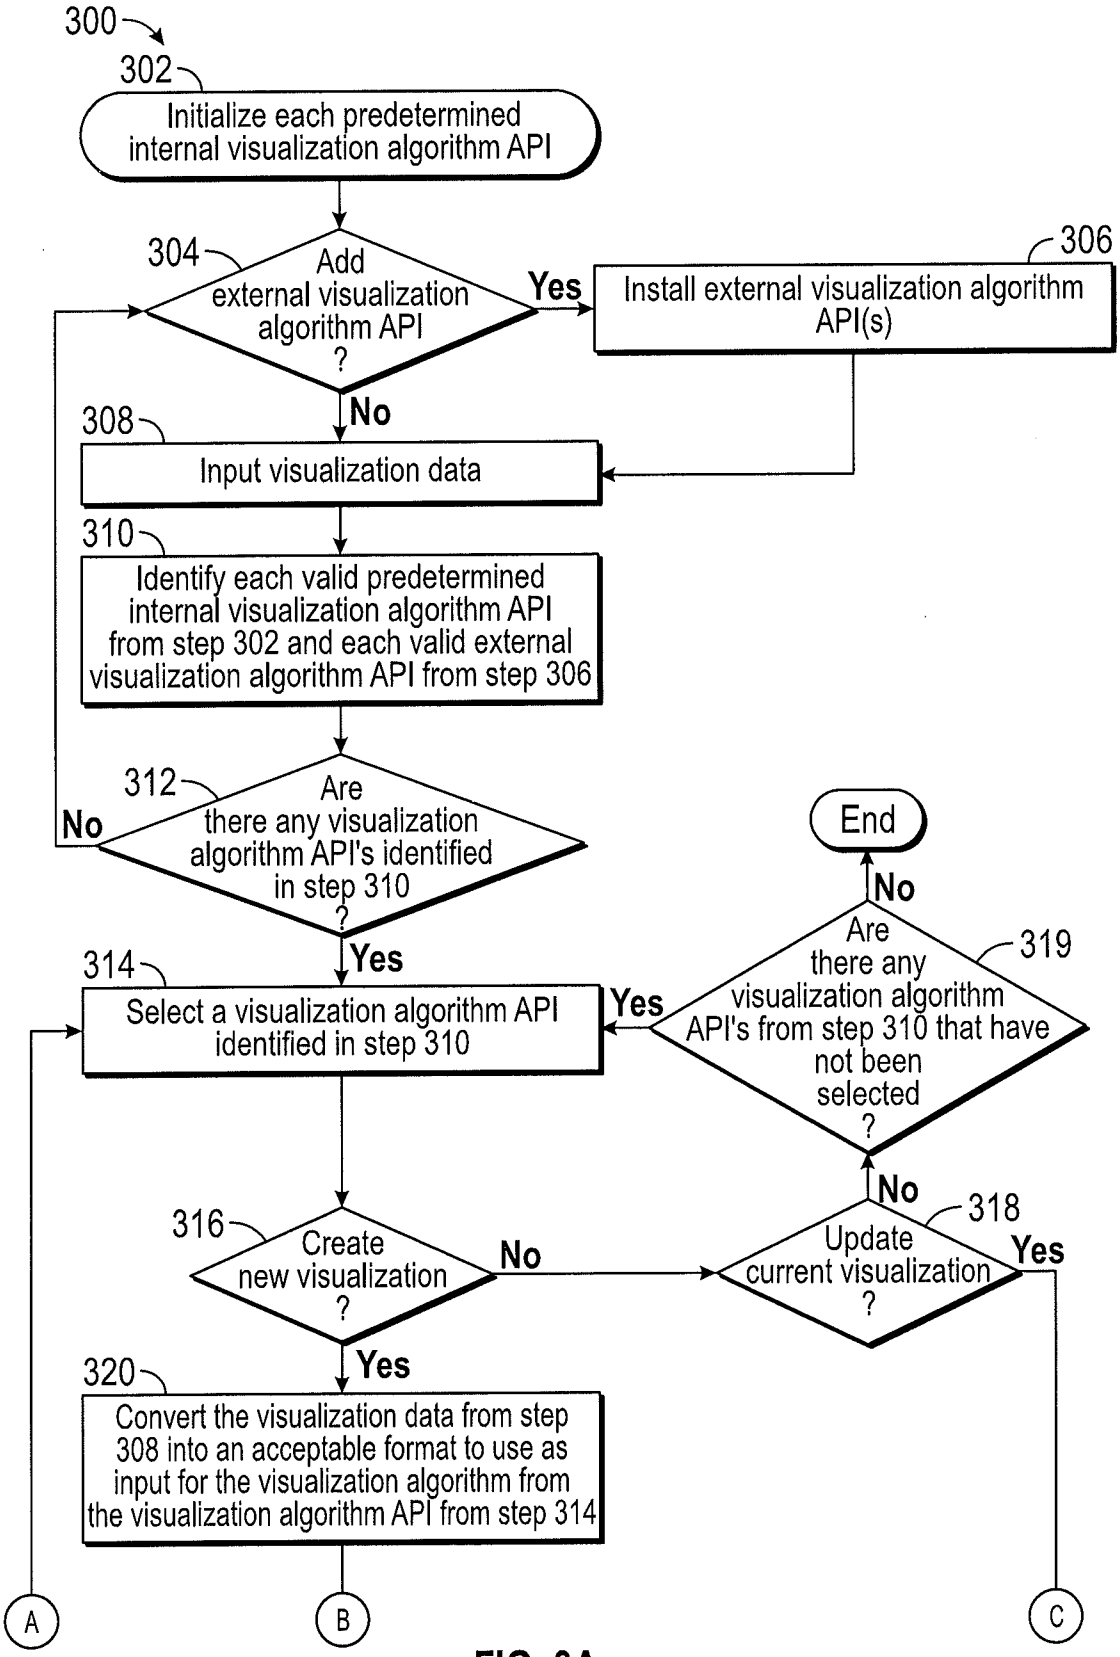

300
302
Initialize each predetermined internal visualization algorithm API
304
Add external visualization algorithm API ?
Yes
306
Install external visualization algorithm API(s)
No
308
Input visualization data
310
Identify each valid predetermined internal visualization algorithm API from step 302 and each valid external visualization algorithm API from step 306
312
Are there any visualization algorithm API's identified in step 310 ?
No
Yes
End
No
319
Are there any visualization algorithm API's from step 310 that have not been selected ?
314
Select a visualization algorithm API identified in step 310
Yes
No
318
Update current visualization ?
Yes
316
Create new visualization ?
No
Yes
320
Convert the visualization data from step 308 into an acceptable format to use as input for the visualization algorithm from the visualization algorithm API from step 314
A
B
C

FIG. 3A

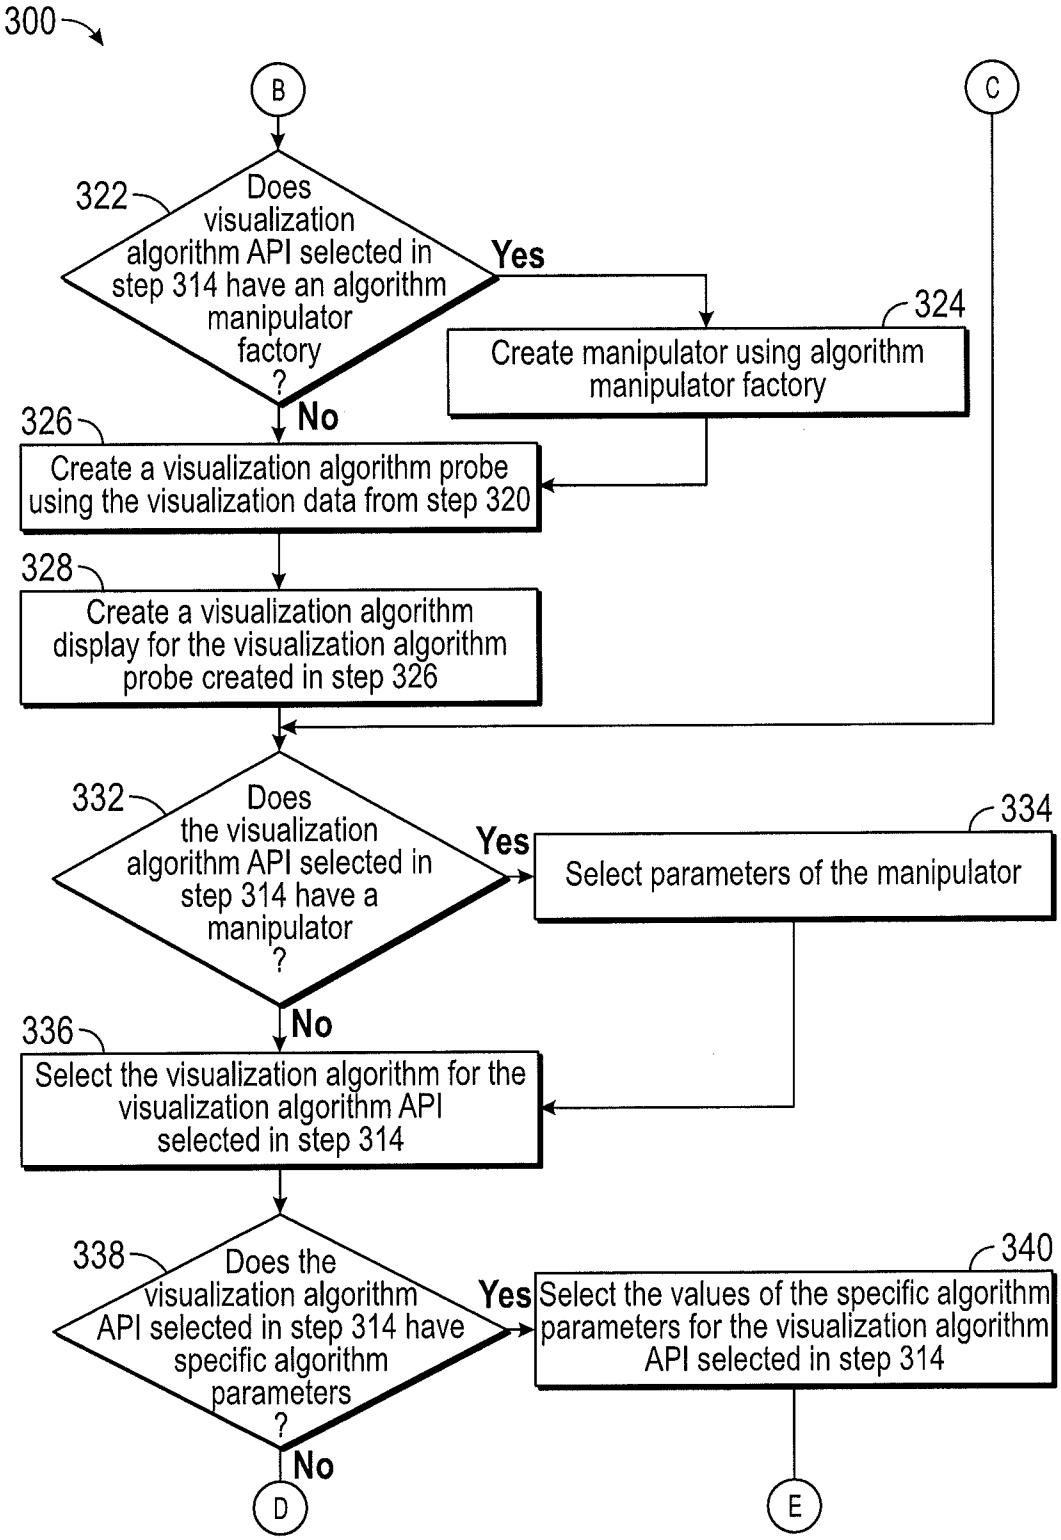

300
B
C
322
Does visualization algorithm API selected in step 314 have an algorithm manipulator factory ?
Yes
No
324
Create manipulator using algorithm manipulator factory
326
Create a visualization algorithm probe using the visualization data from step 320
328
Create a visualization algorithm display for the visualization algorithm probe created in step 326
332
Does the visualization algorithm API selected in step 314 have a manipulator ?
Yes
No
334
Select parameters of the manipulator
336
Select the visualization algorithm for the visualization algorithm API selected in step 314
338
Does the visualization algorithm API selected in step 314 have specific algorithm parameters ?
Yes
No
340
Select the values of the specific algorithm parameters for the visualization algorithm API selected in step 314
D
E

FIG. 3B

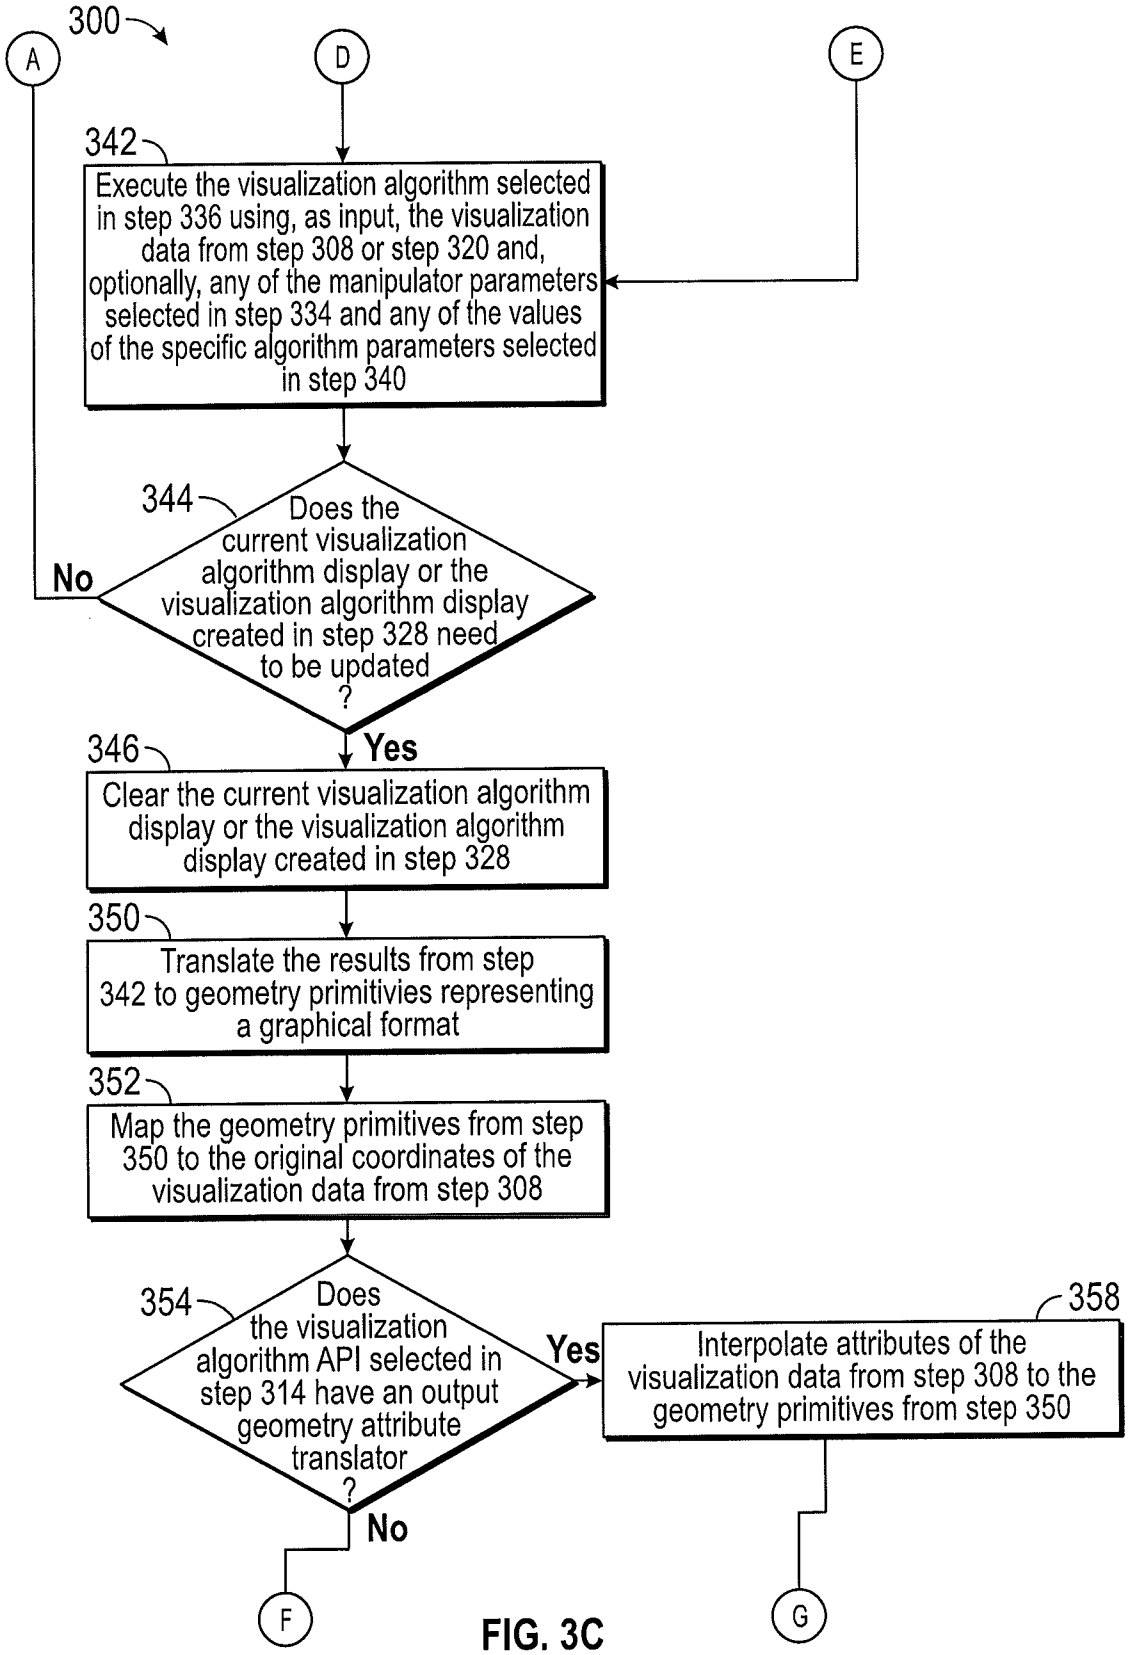

300
A
D
E
342
Execute the visualization algorithm selected in step 336 using, as input, the visualization data from step 308 or step 320 and, optionally, any of the manipulator parameters selected in step 334 and any of the values of the specific algorithm parameters selected in step 340
344
Does the current visualization algorithm display or the visualization algorithm display created in step 328 need to be updated ?
No
Yes
346
Clear the current visualization algorithm display or the visualization algorithm display created in step 328
350
Translate the results from step 342 to geometry primitivies representing a graphical format
352
Map the geometry primitives from step 350 to the original coordinates of the visualization data from step 308
354
Does the visualization algorithm API selected in step 314 have an output geometry attribute translator ?
Yes
No
358
Interpolate attributes of the visualization data from step 308 to the geometry primitives from step 350
F
G

FIG. 3C

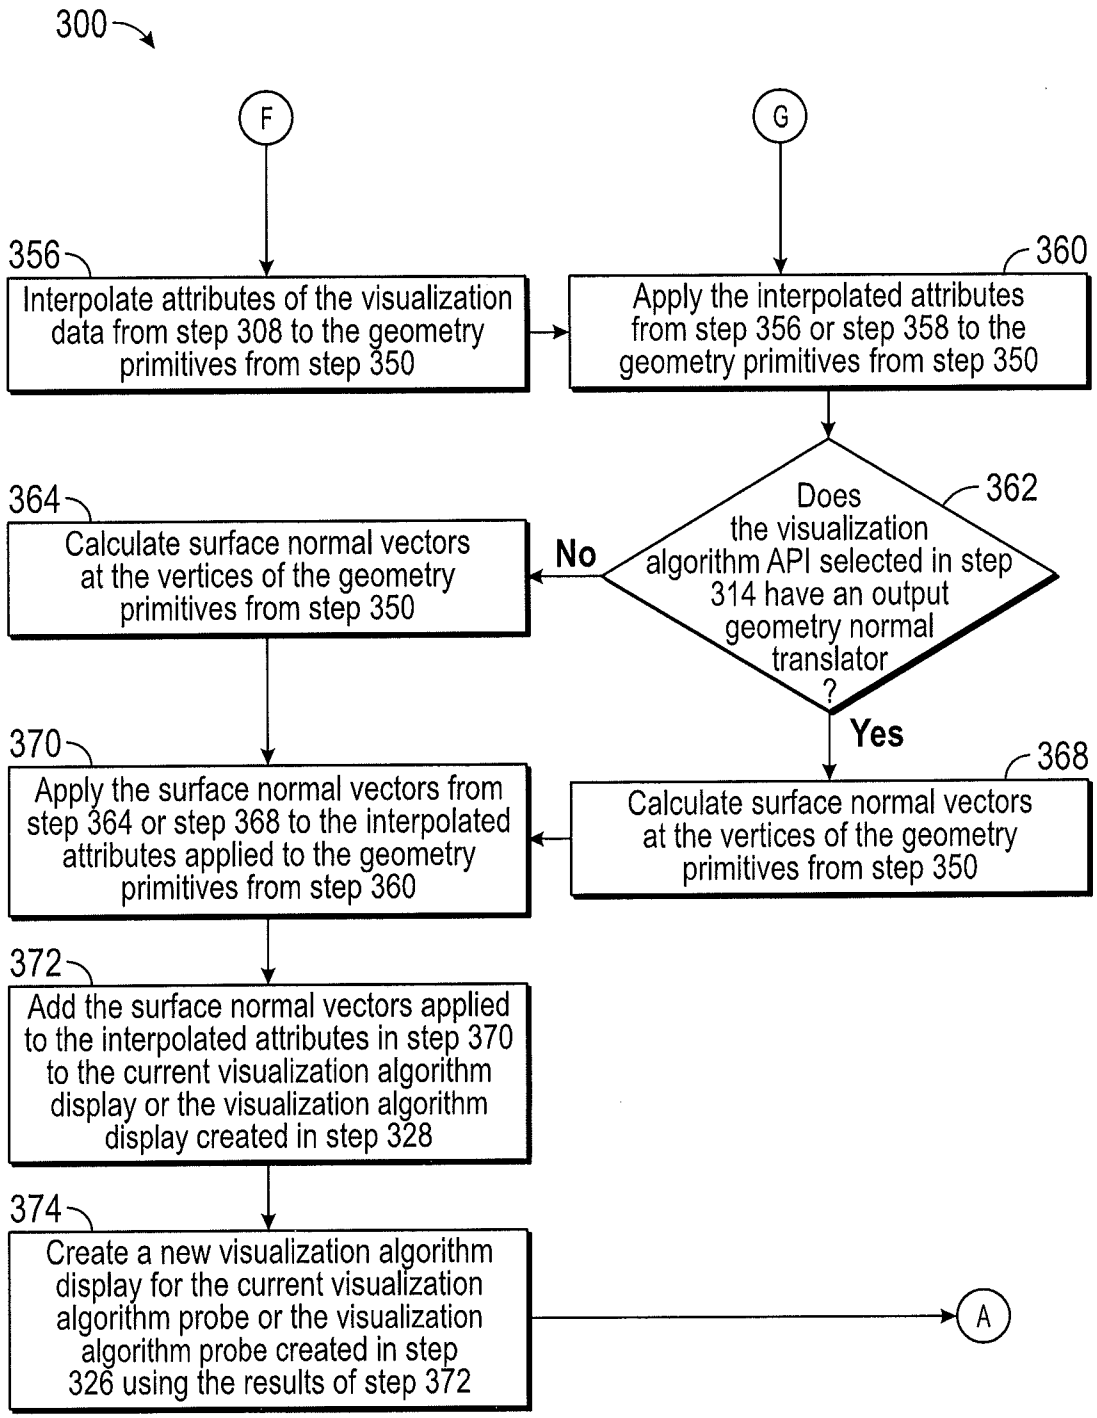

300
F
G
356
Interpolate attributes of the visualization data from step 308 to the geometry primitives from step 350
360
Apply the interpolated attributes from step 356 or step 358 to the geometry primitives from step 350
362
Does the visualization algorithm API selected in step 314 have an output geometry normal translator ?
No
Yes
364
Calculate surface normal vectors at the vertices of the geometry primitives from step 350
368
Calculate surface normal vectors at the vertices of the geometry primitives from step 350
370
Apply the surface normal vectors from step 364 or step 368 to the interpolated attributes applied to the geometry primitives from step 360
372
Add the surface normal vectors applied to the interpolated attributes in step 370 to the current visualization algorithm display or the visualization algorithm display created in step 328
374
Create a new visualization algorithm display for the current visualization algorithm probe or the visualization algorithm probe created in step 326 using the results of step 372
A

FIG. 3D

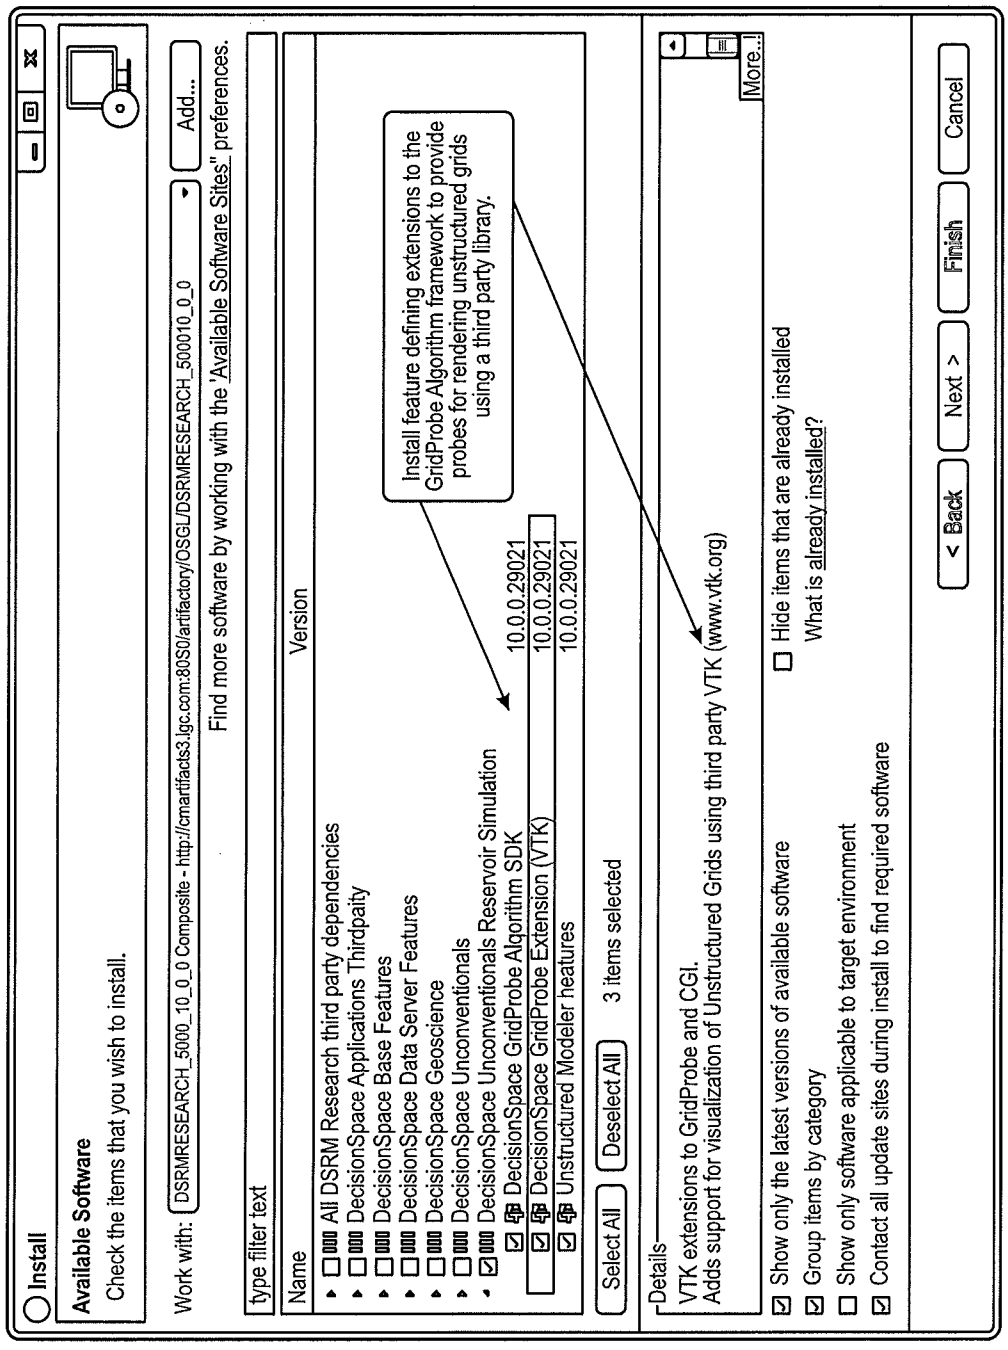

Install
Available Software
Check the items that you wish to install.
Work with: DSRMRESEARCH_5000_10_0_0 Composite - http://cmartifacts3.lgc.com:8080/artifactory/OSGI/DSRMRESEARCH_500010_0_0
Add...
Find more software by working with the 'Available Software Sites" preferences.
type filter text
Name
Version
All DSRM Research third party dependencies
DecisionSpace Applications Thirdpaity
DecisionSpace Base Features
DecisionSpace Data Server Features
DecisionSpace Geoscience
DecisionSpace Unconventionals
DecisionSpace Unconventionals Reservoir Simulation
DecisionSpace GridProbe Algorithm SDK 10.0.0.29021
DecisionSpace GridProbe Extension (VTK) 10.0.0.29021
Unstructured Modeler heatures 10.0.0.29021
Install feature defining extensions to the GridProbe Algorithm framework to provide probes for rendering unstructured grids using a third party library.
Select All
Deselect All
3 items selected
Details
VTK extensions to GridProbe and CGI.
Adds support for visualization of Unstructured Grids using third party VTK (www.vtk.org)
More...
Show only the latest versions of available software
Group items by category
Show only software applicable to target environment
Contact all update sites during install to find required software
Hide items that are already installed
What is already installed?
< Back
Next >
Finish
Cancel

FIG. 4

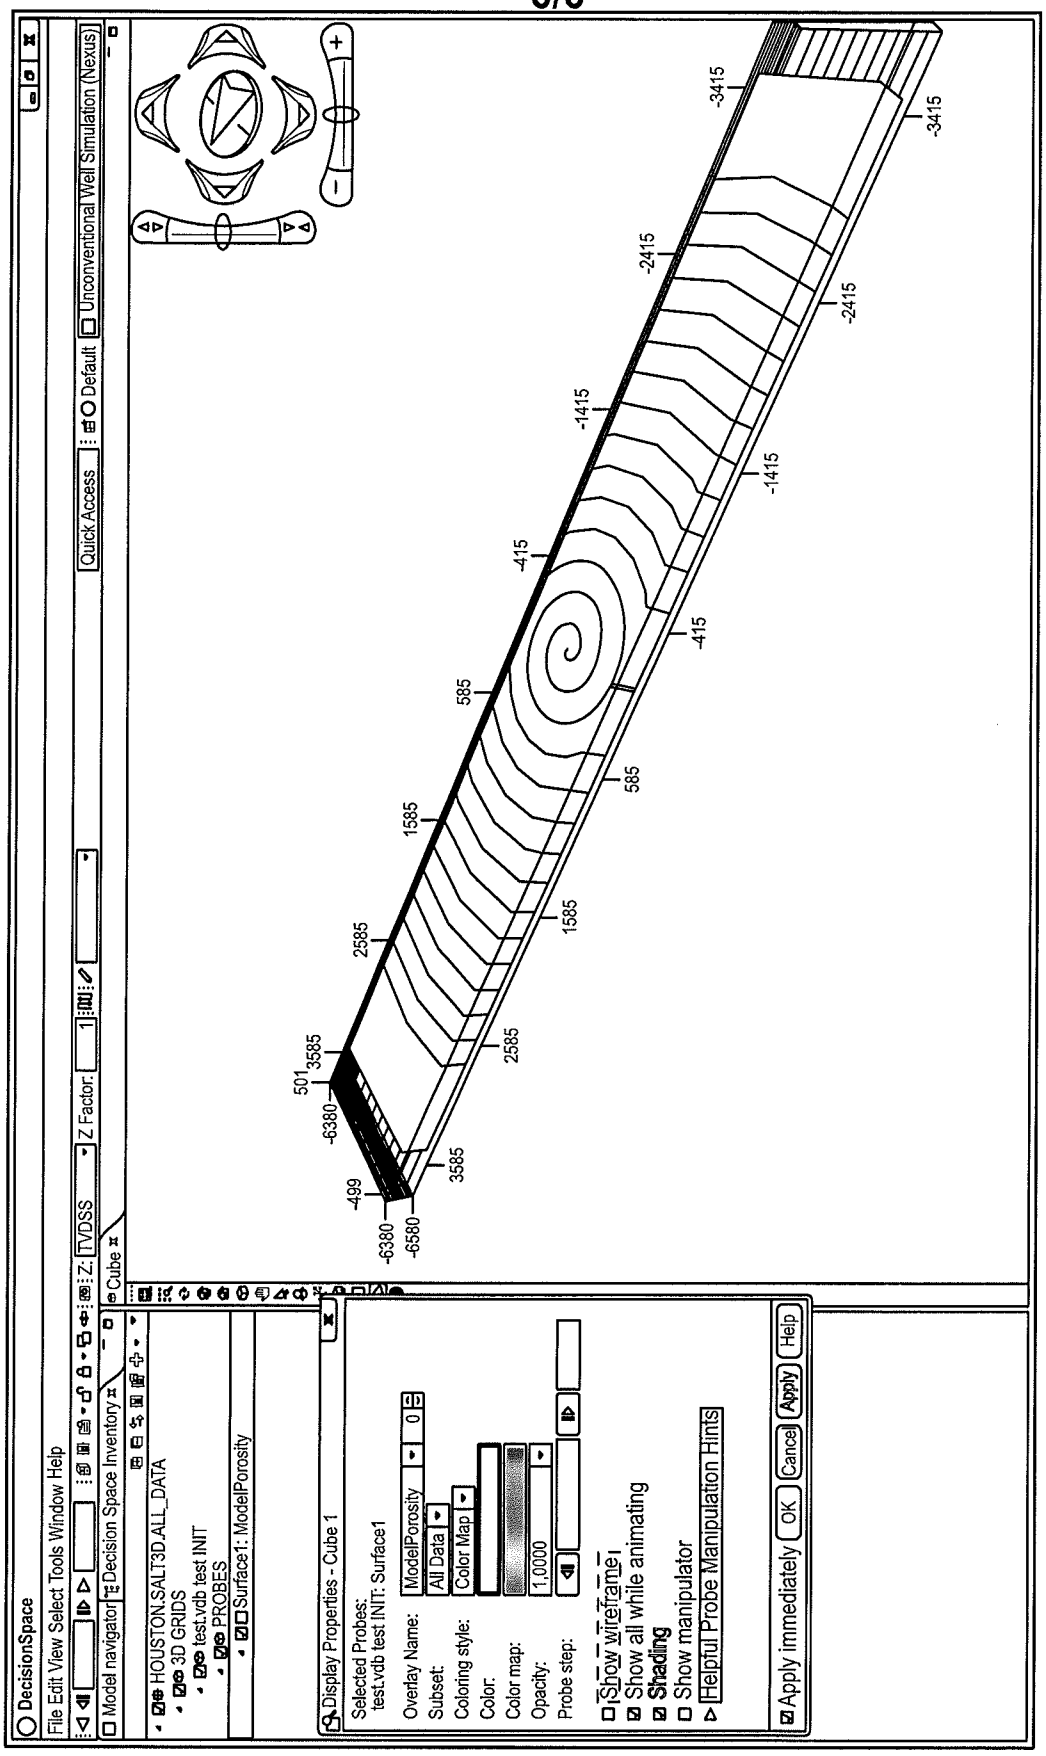

DecisionSpace
File Edit View Select Tools Window Help
Model navigator
Decision Space Inventory
HOUSTON.SALT3D.ALL_DATA
3D GRIDS
test.vdb test INIT
PROBES
Surface1: ModelPorosity
Cube
Quick Access
Default
Unconventional Well Simulation (Nexus)
Z: TVDSS
Z Factor: 1
Display Properties - Cube 1
Selected Probes:
test.vdb test INIT: Surface1
Overlay Name: ModelPorosity
Subset: All Data
Coloring style: Color Map
Color:
Color map:
Opacity: 1.0000
Probe step:
Show wireframe
Show all while animating
Shading
Show manipulator
Helpful Probe Manipulation Hints
Apply immediately
OK
Cancel
Apply
Help
501
3585
-6380
-499
-6380
-6580
2585
1585
585
-415
-1415
-2415
-3415

FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/040721

A. CLASSIFICATION OF SUBJECT MATTER

G06T 1/00(2006.01)i, G06F 17/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06T 1/00; G06F 7/00; G06T 15/00; G06F 17/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & keywords: flexible framework, visualization algorithm, API, surface normal vector, convert

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	C. PRADAL et al., `PlantGL: A Python-based geometric library for 3D plant modelling at different scales`, In: Graphical Models, Vol. 71, Issue 1, January 2009, pp. 1-21 ("http://www.sciencedirect.com/science/article/pii/S1524070308000143") See page 10.	1-20
A	ANUPAM AGRAWAL et al., `Real-time Photorealistic Visualisation of Large-scale Multiresolution Terrain Models`, Defence Science Journal, Vol. 57, No. 1, January 2007, pp. 149-162 ("http://publications.drdo.gov.in/ojs/index.php/dsj/article/view/1742") See page 155.	1-20
A	US 2007-0094299 A1 (FRANCOIS LE MASNE DE CHERMONT) 26 April 2007 See paragraphs [0077]-[0162] and figures 3-5.	1-20
A	ASHOK CHANDRASEKHAR et al., `Interfacing Geometric Design Models to Analyzable Product Models with Multifidelity and Mismatched Analysis Geometry`, December 1999 ("http://eislab.gatech.edu/pubs/theses/99chandrasekhar/1999-chandrasekhar.pdf") See pages 55-60.	1-20

☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
05 February 2015 (05.02.2015)	**06 February 2015 (06.02.2015)**

Name and mailing address of the ISA/KR
International Application Division
Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City, 302-701, Republic of Korea
Facsimile No. ++82 42 472 3473

Authorized officer
AHN, Jeong Hwan
Telephone No. +82-42-481-8440

Form PCT/ISA/210 (second sheet) (January 2015)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2014/040721

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2007-0257924 A1 (CHRISTOPHE QUARRE et al.) 08 November 2007 See paragraphs [0053]-[0076] and figures 3-11B.	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2014/040721

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2007-0094299 A1	26/04/2007	CA 2450941 A1	16/01/2003
		CN 1526098 A	01/09/2004
		EP 1402371 A1	31/03/2004
		EP 1402371 B1	06/10/2004
		JP 04125673 B2	30/07/2008
		JP 2004-534320 A	11/11/2004
		KR 10-0876025 B1	26/12/2008
		KR 10-2004-0018425 A	03/03/2004
		US 2004-0189671 A1	30/09/2004
		US 7150026 B2	12/12/2006
		US 7747570 B2	29/06/2010
US 2007-0257924 A1	08/11/2007	CN 101059760 A	24/10/2007
		CN 101059760 B	07/05/2014
		EP 1847966 A2	24/10/2007
		EP 1847966 A3	10/10/2012
		EP 1847966 B1	28/08/2013
		US 8347275 B2	01/01/2013