



(22) Date de dépôt/Filing Date: 1996/09/03

(41) Mise à la disp. pub./Open to Public Insp.: 1998/03/04

(45) Date de délivrance/Issue Date: 2007/05/22

(51) Cl.Int./Int.Cl. *B60K 6/04* (2006.01),
B60L 11/12 (2006.01)


(72) Inventeur/Inventor:
YANG, TAI-HER, TW

(73) Propriétaire/Owner:
YANG, TAI-HER, TW

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : GROUPE DE PRODUCTION D'ENERGIE A MACHINE ELECTRIQUE ENTRAINEE PAR UN MOTEUR

(54) Title: DRIVING ELECTRICAL MACHINE SPEED CONTROLLED POWER COMBINED SYSTEM AND DEVICE

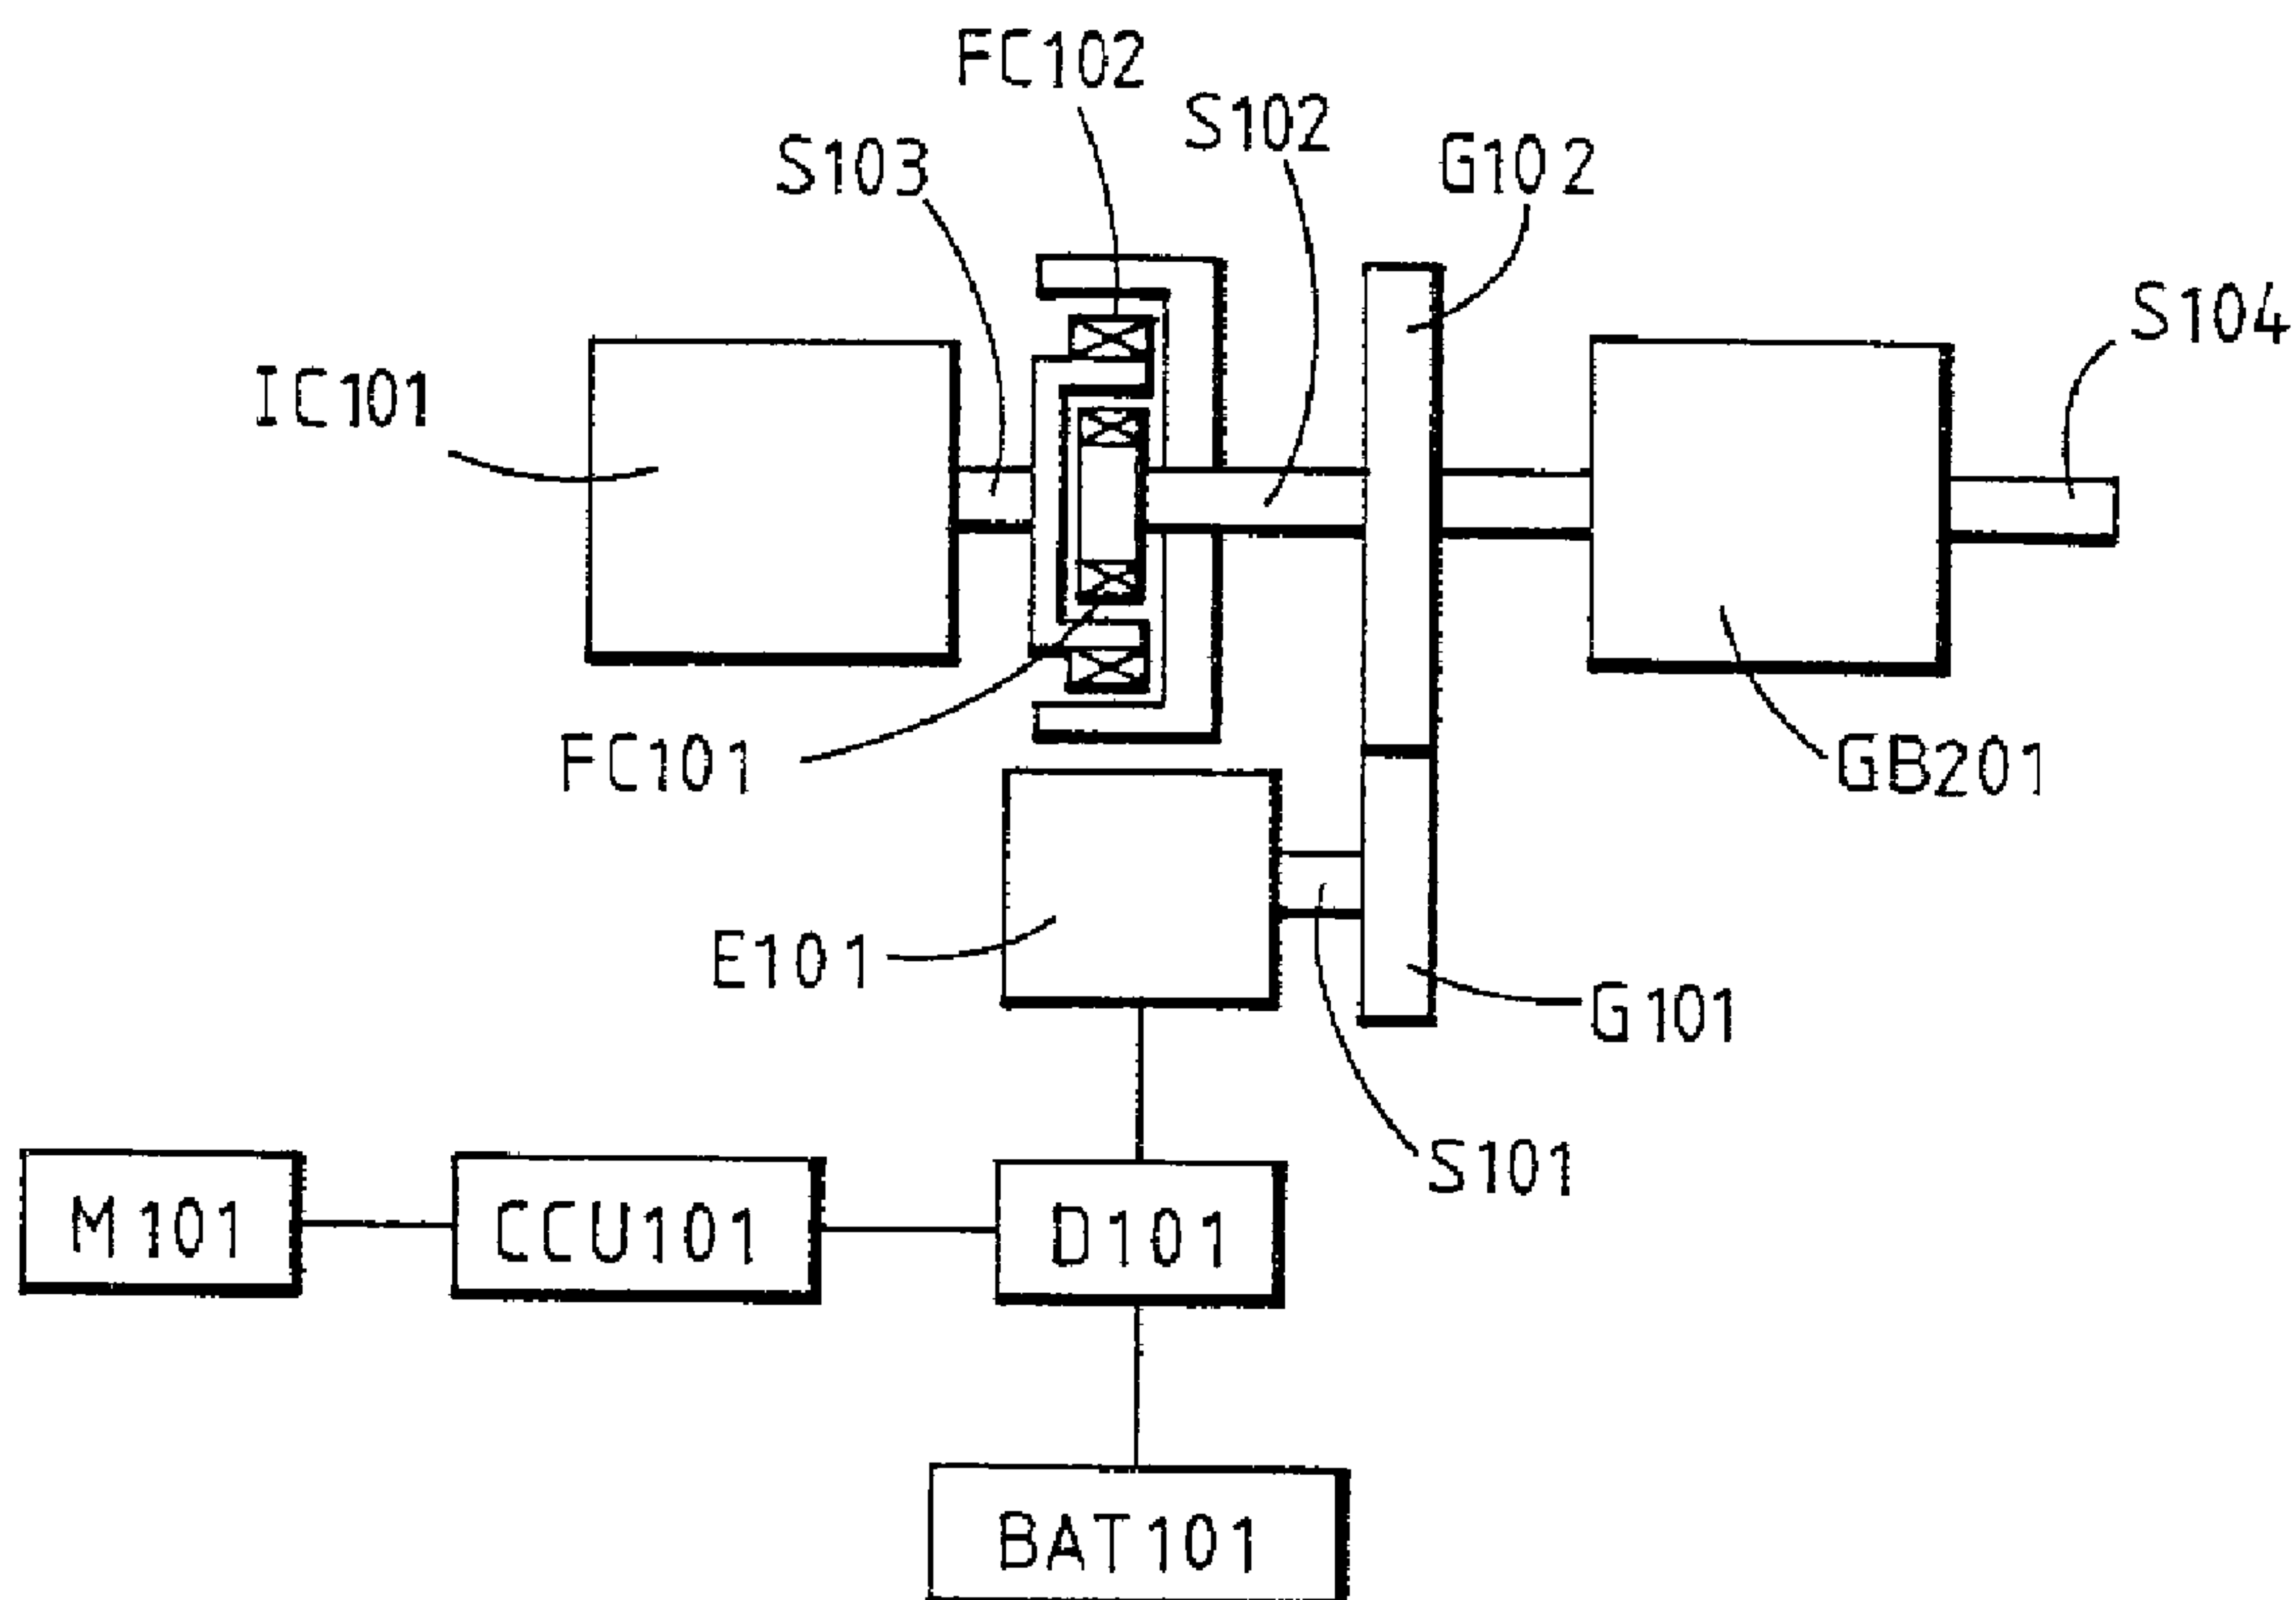

(57) **Abrégé/Abstract:**

A combined driving structure is made up of an engine and an electrical machine. The engine is connected to the electrical machine through a clutch which allows the electrical machine to be used as a starting motor for the battery, and when the engine is started, allows the engine to drive a load and also drive the electrical machine to operate as a generator. In addition, the electrical machine can be operated as a motor at low speeds to drive the load by electrical power when the engine is stopped, and as a generator to provide regenerative braking for charging the battery, either with or without friction damping of the engine by the clutch.



2184673

ABSTRACT OF THE DISCLOSURE

A combined driving structure is made up of an engine and an electrical machine. The engine is connected to the electrical machine through a clutch which allows the electrical machine to be used as a starting motor for the battery, and when the engine is started, allows the engine to drive a load and also drive the electrical machine to operate as a generator. In addition, the electrical machine can be operated as a motor at low speeds to drive the load by electrical power when the engine is stopped, and as a generator to provide regenerative braking for charging the battery, either with or without friction damping of the engine by the clutch.

5 THE DRIVING ELECTRICAL MACHINE SPEED CONTROLLED POWER
COMBINED SYSTEM AND DEVICE

BACKGROUND OF THE INVENTION

1. Field of the Invention

10 The present invention relates to a engine and electrical machine coupled
through a clutch and control component.

2. Description of Related Art

15 In recent years, energy and noise pollution have become more and more
serious problems, with electrical power driven carriers being considered as a
potential solution. However, research and development of electrical power driven
carriers has up to now been limited by the problem that increasing the capacity of
the batteries to achieve a larger moving range increases the battery volume or
number of batteries and consequently the weight of the carrier, resulting in greater
electrical energy consumption and a failure to meet economic requirements. As
20 a result, in the absence of a big breakthrough in solving battery technical problems,
the more practical driving method is to use a combined driving structure.

SUMMARY OF THE INVENTION

25 The present invention is accordingly a unique combined driving structure made
up of an electrical machine and an engine (or other rotational power devices)
coupled through an eccentric clutch and an electrical machine control component
to achieve the following working conditions in response to operation of a manual
operating interface, a central controller and a drive control device:

- A. The electrical machine is used as a starting motor, by operating the
electrical machine at high speed to pull the drive side of the eccentric clutch
to close and drive the engine, and when the engine is started, the engine

not only drives the load, but also drives the electrical machine to operate as a generator.

- 5 B. The electrical machine is operated at low speed to drive the load by electrical power while the engine is stopped, the drive mode selections being determined by the electrical machine operating speed: if the electrical power drive is operated at low speed, the electrical machine is used to provide a generator brake; and if the electrical power drive is operated too fast, then the eccentric clutch is closed to drag the engine and function as a friction damping brake.

10

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic drawing of a first preferred embodiment.

Figure 2 is a schematic drawing of a second preferred embodiment.

Figure 3 is a schematic drawing of a third preferred embodiment.

Figure 4 is a schematic drawing of a fourth preferred embodiment.

15

Figure 5 is a schematic drawing of a fifth preferred embodiment.

DETAILED DESCRIPTION OF THE INVENTION

The key components of the combined driving structure of the invention are as follows:

- 20 • An eccentric clutch set FC101, FC102: in the form of a double acting eccentric clutch constituted by two clutches embodied either in a multiple sleeve structure or in a common structure and incorporated into a three layers structure: including an inner layer, a middle layer and an external layer, wherein the inner layer is provided with a drive friction disk to act outwardly when the eccentric force reaches a preset value so as to couple with an output shaft for mutual
- 25 driving, the middle layer is combined with the engine and is provided with an inner ring friction coupling surface while its outside is provided with a drive friction disk to act outwardly when the eccentric force reaches a preset value so as to be friction coupled with the inner ring of the external layer to constitute an output clutch function, and the external layer structure is further combined with the

engine for temporally releasing the linkage between the engine and the load when the engine is operated at a low speed.

5 • An electrical machine E101: which is a series or auxiliary compound excited electrical machine having the electrical characteristics which cause the rotational speed to increase with a corresponding decreasing load, or an AC or DC brush or brushless machine able to perform current control (including constant current control), to provide added torque functions following the load control.

10 • A drive controller D101 controlled by a manual operating interface M101 and a central controller CCU101 to operate the electrical machine as a motor to provide operations such as start, stop, speed change, or positive/reverse rotation; or to operate the electrical machine as a generator with controlled generation capacity.

These key components are combined in various preferred embodiments of the invention as follows:

15 Figure 1 illustrates the first preferred embodiment of a speed controlled combined system and device in which the eccentric clutch FC101 and a second gear G102 are installed on a rotating shaft S102 between the drive shaft S103 of an engine IC101 and a load driving output shaft S104, wherein the output shaft S104 can be provided either to drive the load directly or to drive the load through
20 an output clutch CL101 or a speed change mechanism GB101. In the illustrated example, the second gear G102 is engaged with a first gear G101, although the illustrated gear train can be placed by a multiple staged speed reducer or other transmission components such as chain wheels.

25 An electrical machine E101 is combined with the first gear G101 and is controlled by a manual operating interface M101, central controller CCU101, and drive control device D101 to cause the electrical machine E101 to be powered by a battery BAT101 in order to provide a motor output for driving the gear G101 as follows: The gear G101 is rotated at high speed to drive the eccentric clutch FC101 to close and start the engine IC101, whereupon the engine IC101 either
30 drives the load directly or through the speed reducing device GB101, while electrical machine E101 is either powered to drive the load with the engine IC101 together or the power to the electrical machine can be cut off to cause the

electrical machine to be in a waiting state, or the electrical machine can be driven by the engine IC101 to be operated as a generator to charge the battery BAT101 or supply power to other loads.

For the purpose of AC power generation, the electrical machine E101 may
 5 be either a permanent magnet or a winding excited, variable frequency driven field type electrical device, or a brushed alternator type electrical device, with its armature winding being commonly connected via conducting rings for AC output and commutators for DC input/output, and whereby the AC output can be a variable frequency output or a constant frequency output through the engine
 10 constant speed control. In the case of high sliding speed, the load feedback may be used to drive the engine IC101 to provide a friction damping brake and the electrical machine E101 used for regeneration feedback braking functions, while in the case of low speed drive, below the rotation speed of eccentric clutch coupled with engine, the electrical machine may be operated as a motor to drive
 15 the load, and in the case of a low sliding speed, the electrical machine may be operated as a generator to provide braking function by recovering the kinetic energy to the battery, or to supply power to the other loads to provide the braking function. A summary of the operating states of the various components for each of the above-described function are shown in Table 1. Specifically, table 1 shows
 20 the operating states of engine IC101 and gear direction (clockwise (CW) or counterclockwise (CCW)), engine speed (Stop, 0 ~ Max (running speed), and Max → 0 (deceleration)), battery status (charge/discharge), electric machine operation (motor/generator), and clutch status (open/close) during the various functions selectable by manual control M101 and controller CCU101 as described
 25 above.

Figure 2 illustrates the second preferred embodiment of the invention in which the eccentric clutch set FC101, FC102 and the second gear G102 are installed between the drive shaft S103 of the engine IC101 and the load driving output shaft S104, wherein the output shaft S104 can be provided either to drive
 30 the load directly or to drive the load through the reducing gear train GB201. The second gear G102 is engaged with the first gear G101, or the illustrated gear train can be replaced by a multiple staged speed reducer or other transmission

components such as chain wheels, and the electrical machine E101 is combined with the first gear G101 and is controlled by the manual operating interface M101, central controller CCU101 and the drive control device D101 to be powered by the battery BAT101 to drive the gear G101. Electric machine E101 is again equipped with AC power generating functions and includes a permanent magnet, winding excited, variable frequency driven field type electrical device, or a brushed alternator type electrical device, with its armature winding commonly connected to conducting rings for AC output and to commutators for DC input/output, so that the AC output can be a variable frequency output or a constant frequency output through the engine constant speed control.

The double acting eccentric clutch set of this embodiment is constituted by the two eccentric clutches FC101 and FC102 embodied either in a sleeve joint structure or in a common structure, and is incorporated in a three layer structure including an inner layer, a middle layer and an external layer. The inner layer is provided with a drive friction disk to act outwardly when the eccentric force reaches a preset value and is combined with the output shaft for mutual driving. The middle layer is combined with the engine and is provided with an inner ring friction coupling surface while its outside is provided with a drive friction disk to act outwardly when the eccentric force reaches a preset value thereby to be friction coupled with the inner ring of the external layer to constitute an output clutch function, and the external layer structure is further combined with the engine for temporally releasing the linkage between the engine and the load when the engine is operated at a low speed.

This embodiment is controlled by the central controller CCU101, manual operating interface M101, electrical machine drive device D101, and the battery BAT101 to provide the following functions:

- start engine: The electrical machine E101 is rotated at high speed to drive the double acting clutch FC101, FC102, so that the inner layer drive friction disk is coupled with middle layer inner ring to start the engine:
- Operation by engine: After the engine IC101 is started to drive the double acting clutch FC101, FC102, and when the speed of the middle

- ring structure is increased to a preset rotation speed, the outside drive friction disk of the middle layer is coupled with the external layer by the eccentric force to further drive the output shaft S104, thereby to drive the load directly or through the speed change mechanism and to drive the electrical machine E101 to be operated as a generator to charge the battery or to be waiting in a no-load operation at the OFF state, and when the engine speed is slowed down, the drive friction disk of the middle layer structure of the double acting eccentric clutch is withdrawn to cut off the connection with the output shaft and the engine is no-load operated.
- Combined power drive: While the engine IC101 is operated to drive the load, the electrical machine E101 supplies power to also help drive the load to constitute a combined power drive.
 - Electric power drive: The electrical machine is powered by the battery BAT101 to operate at a low speed which is below the rotation speed of the inner layer drive friction disk of the double acting clutch FC101 and FC102 and the electrical machine E101 drives the load directly by electric power.
 - Kinetic energy recovery at low sliding speed: When the load is sliding and the rotation speed of the driven output shaft S104 is below the rotation speed of the inner layer drive friction disk of the double acting eccentric clutch FC101 and FC102, then the electrical machine E101 is operated as a generator to provide regenerative braking for charging the battery.
 - The kinetic energy recovery at high sliding speed: When the load is sliding at high speed and the rotation speed of the driven output shaft S104 is higher than the rotation speed of the inner layer drive friction disk of the double acting eccentric clutch FC101 and FC102, the inner layer and the middle layer are thereby coupled, and the engine IC101 is dragged to provide friction damping. The electrical machine E101 is also driven to operate as a generator to provide regenerative braking for charging the battery BAT101.

These functions are summarized in Table 2, which gives the specific operating states for the functions described above. Table 2 is identical to Figure 1, except that the status of both clutches FC101 and FC102 is given in this table.

Figure 3 shows the third preferred embodiment of the invention, in which
 5 an output clutch CL301 is further installed between the second gear G102 and the output shaft S102 driven by the inner and external rings of the double acting eccentric clutch FC101, FC102, identical to that of the embodiment illustrated in Figure 2, and the output shaft S105 for driving the load or the speed reducing mechanism, to thereby link or separate the two output shafts. The clutch CL301
 10 is driven manually or by electromagnetic or fluid power, and when it is closed, this embodiment has the same functions as are described above in connection with the second preferred embodiment. When the clutch CL301 is released, however, this embodiment has the following additional function of generation at stand-still, in which the engine IC101 drives the middle layer and the external layer of the double
 15 acting clutch FC101, FC102 to be coupled, thereby to driving the electrical machine E101 to be operated as a generator to charge the battery or supply power to other loads, in which case the power generation can be further controlled by timing or capacity.

Electric machine E101 is again comprised of a permanent magnet or a
 20 winding excited, variable frequency driven field type electrical device, or a brushed alternator type electrical device, in which its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output, and whereby the AC output can be a variable frequency output or a constant frequency output through the engine constant speed control.

25 These functions are summarized in Table 3, which gives the specific operating states of the various system components for each of the functions described above in connection with the third preferred embodiment of the invention. This table differs from Table 2 in its inclusion of operating states for clutch CL301.

Figure 4 illustrates the fourth preferred embodiment of the invention, in which the output shafts of the electrical machine E101 and the engine IC101 are embodied in a common shaft structure, while the double acting clutch FC101, FC102 is installed between the electrical machine E101 and the engine IC101 and has its inner layer and external layer coupled with the common shaft S101 of the electrical machine E101 and the output shaft S104, while its middle layer is coupled with the engine rotating shaft S103, and the operation types include the following:

- 10 • The electrical machine E101 is operated at high speed to start the engine through the control of the manual operating interface M101, central controller CCU101, drive control device D101; and after the engine is started, driving of the electrical machine E101 is continued to help drive the load with the engine together, or the electrical machine is operated as a generator to charge the battery or supply power to the other loads.

15 As in the previous embodiment, the electrical machine E101 is selected to be comprised of a permanent magnet or winding excited, variable frequency driven field type electrical device, or a brushed alternator type electrical device, having an armature winding commonly connected to the conducting rings for AC output and to commutators for DC input/output, whereby the AC output can be a variable frequency output or a constant frequency output through the engine constant speed control; or can be operated as a motor and controlled as to rotation directions and rotational speeds, or can be cut off by a transmission to remain in a waiting state;

20 • The electrical machine E101 is controlled to be operated a low speed, below the required rotation speed for the inner layer drive friction disk to couple with the middle layer inner ring of the double acting clutch, and the electrical machine drives the load by the electric power.

25 • The kinetic energy recovery at low sliding speed: When the load is sliding and the rotation speed of the driven output shaft S104 is below the rotation speed of the inner layer drive friction disk of the double acting eccentric clutch FC101 and FC102, then the electrical machine E101 is operated as a generator to provide regenerative braking by charging the battery.

30

- Engine friction damping and kinetic energy recovery at high sliding speed:
When the load is sliding at high speed and the rotation speed of the driven output shaft S104 is higher than the rotation speed of the inner layer drive friction disk of the double acting eccentric clutch FC101 and FC102, the inner layer and the middle layer are thereby coupled, and the engine IC101 is dragged to provide friction damping. The electrical machine E101 is also driven to operate as a generator to provide regenerative braking by charging the battery BAT101.

The above said functions are summarized in Table 4, which gives the specific operating status of the various system components for each of the functions described above in connection with the fourth preferred embodiment of the invention. Figure 5 shows the fifth preferred embodiment of the invention, in which a clutch CL101 is further installed between the output shaft S104 and the loading shaft S105 described in connection with the embodiment of Figure 4, and the clutch is driven manually or by electromagnetic or fluid power, such that when it is closed, the combined system has the same functions as the fourth embodiments, and when the clutch CL101 is released, the combined system has the additional function of generation at stand-still, in which the engine IC101 drives the middle layer and the external layer of the double acting clutch FC101, FC102 to be coupled, to thereby further drive the electrical machine E101 to be operated as a generator to charge the battery BAT101 or supply power to other loads, with the electrical machine E101 being selected to be comprised of a permanent magnet or a winding excited, variable frequency driven field type electrical device, or a brushed alternator type electrical device, with its armature winding commonly connected to a conducting rings for AC output and to commutators for DC input/output, whereby the AC output can be a varied frequency output or a constant frequency output through the engine constant speed control and its generation function can be further controlled by timing or capacity.

These functions are summarized in Table 5 which gives the specific generating states of the various system components for each of the functions described above in connection with the fifth preferred embodiments of the

invention. The above embodiments have in common that the electrical machine and the engine constitute a combined power, multiple functioned driving system through a particular transmission structure which employs the relationship between the electrical machine rotation speed and the eccentric clutch changeover point

5 to cause the electric motor and/or the engine to drive the load. For city driving conditions of frequent waiting in crowded traffic, this design provides a high efficiency, low pollution electric vehicle.

M101/CCU101	IC101	E101	D101	BAT101	G101	G102	FC101	CL101	S101	S102	S103	S104	S105
STOP	STOP	STOP	OFF	Ready	Stop	STOP	OPEN	OPEN	STOP	STOP	STOP	STOP	STOP
START	CCW Start	Motor CW Operation	ON	Discharge	CW	CCW	CLOSE	OPEN	CW	CCW	CCW	STOP	STOP
IC101 in operation and charging	0~Max CCW operation	CW Generation	ON	Charge	CW	CCW	CLOSE	CLOSE	CW	CCW	CCW	CCW	CCW
IC101 in operation	0~Max CCW operation	No load operation	OFF	Ready	CW	CCW	CLOSE	CLOSE	CW	CCW	CCW	CCW	CCW
Combined Power Driving	0~Max CCW operation	Motor CW operation	ON	Discharge	CW	CCW	CLOSE	CLOSE	CW	CCW	CCW	CCW	CCW
Sliding Brake	Max→0	CW generation	ON	Charge	CW	CCW	CLOSE	CLOSE	CW	CCW OR STOP	CCW	CCW	CCW
Electric powered CW	STOP	Motor low speed CW operation	ON	Discharge	CW	CCW	OPEN	CLOSE	CW	CCW	STOP	CCW	CCW
Electric powered CCW	STOP	Motor low speed CCW operation	ON	Discharge	CCW	CW	OPEN	CLOSE	CCW	CW	STOP	CW	CW
Charge in Stand-Still (Controllable Charge rate or timing stop) or generate varied frequency or constant frequency AC output	0~Max CCW operation	CW generation	On	Charge	CW	CCW	CLOSE	OPEN	CW	CCW	CCW	STOP	STOP
Remark	for the case of AC power generation output functions, E101 is selected to be an electrical machine with AC power generating functions comprised of a permanent magnet or winding excited, varied frequency driven field type electrical device, or a brushed alternator type electrical device, wherein its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output												

TABLE 1

M101/CCU101	IC101	E101	DI01	BAT101	G101	G102	FC101		FC102		S101		S102		S103		S104	
							STOP	CCW	OPEN	CLOSE	STOP	CW	STOP	CCW	STOP	CCW	STOP	CCW
IC101 in operation and charging	STOP	Motor CW Operation	ON	Charge	CW	CCW			CLOSE		CW		CCW					
	START	Generation	ON	Discharge	CW	CCW			CLOSE		CW		CCW					
IC101 in operation	0~Max CCW operation	No load operation	OFF	Ready	CW	CCW			CLOSE		CW		CCW					
	0~Max CCW operation	Motor CW operation	ON	Discharge	CW	CCW			CLOSE		CW		CCW					
Combined Power Driving	0~Max CCW operation	Max→0	ON	Charge	CW	CCW			CLOSE		CW		CCW					
Sliding Brake	STOP	Motor low speed CW operation	ON	Discharge	CW	CCW			CLOSE		CW		CCW					
Electric powered CW	STOP	Motor low speed CCW operation	ON	Discharge	CCW	CW			OPEN		CCW		CW					
Electric powered CCW	STOP	CW generation	On	Charge	CW	CCW			CLOSE		CW		CCW					
Charge in Stand-Still (Controllable Charge rate or timing stop) or generate varied frequency or constant frequency AC output	0~Max CCW operation		On	Charge	CW	CCW			OPEN		CCW		CW					
Remark	for the case of AC power generation output functions, E101 is selected to be an electrical machine with AC power generating functions comprised of a permanent magnet or winding excited, varied frequency driven field type electrical device, or a brushed alternator type electrical device, wherein its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output																	

TABLE 2

M101/CCU101	IC101	E101	D101	BAT101	G101	G102	FC101	FC102	CI301	S101	S102	S103	S105
STOP	STOP	STOP	OFF	Ready	Stop	STOP	OPEN	OPEN	STOP	STOP	STOP	STOP	STOP
START	CCW Start	Motor CW Operation	ON	Discharge	CW	CCW	CLOSE	CLOSE	OPEN	CW	CCW	CCW	CCW
IC101 in operation and charging	0-Max CCW operation	CW Generation	ON	Charge	CW	CCW	CLOSE	CLOSE	CLOSE	CW	CCW	CCW	CCW
IC101 in operation	0-Max CCW operation	No load operation	OFF	Ready	CW	CCW	CLOSE	CLOSE	CLOSE	CW	CCW	CCW	CCW
Combined Power Driving	0-Max CCW operation	Motor CW operation	ON	Discharge	CW	CCW	CLOSE	CLOSE	CLOSE	CW	CCW	CCW	CCW
Sliding Brake	Max → 0	CW generation	ON	Charge	CW	CCW	CLOSE	CLOSE	CLOSE	CW	CCW	CCW OR STOP	CCW
Electric powered CW	STOP	Motor low speed CW operation	ON	Discharge	CW	CCW	OPEN	CLOSE	CLOSE	CW	CCW	STOP	CCW
Electric powered CCW	STOP	Motor low speed CCW operation	ON	Discharge	CCW	CW	OPEN	OPEN	CLOSE	CCW	CW	STOP	CW
Charge in Stand-Still (Controllable Charge rate or timing stop) or generate varied frequency or constant frequency AC output	0-Max CCW operation	CW generation	On	Charge	CW	CCW	CLOSE	OPEN	OPEN	CW	CCW	CCW	STOP
Remark	for the case of AC power generation output functions, E101 is selected to be an electrical machine with AC power generating functions comprised of a permanent magnet or winding excited, varied frequency driven field type electrical device, or a brushed alternator type electrical device, wherein its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output												

TABLE 3

M101/CCW101	IC101	E101	D101	BAT101	FC101	FC102	S101	S103	S104
STOP	STOP	STOP	OFF	Ready	OPEN	OPEN	STOP	STOP	STOP
START	CCW Start	Motor CW Operation	ON	Discharge	CLOSE	CLOSE	CW	CW	CW
IC101 in operation and charging	0~Max CCW operation	CW Generation	ON	Charge	CLOSE	CLOSE	CW	CW	CW
IC101 in operation	0~Max CCW operation	No load operation	OFF	Ready	CLOSE	CLOSE	CW	CW	CW
Combined Power Driving	0~Max CCW operation	Motor CW operation	ON	Discharge	CLOSE	CLOSE	CW	CW	CW
Sliding Brake	Max→0	CW generation	ON	Charge	CLOSE	CLOSE	CW	CW OR STOP	CW
Electric powered CW	STOP	Motor low speed CW operation	ON	Discharge	OPEN	CLOSE	CW	STOP	CW
Electric powered CCW	STOP	Motor low speed CCW operation	ON	Discharge	OPEN	OPEN	CCW	STOP	CCW
Charge in Stand-Still (Controllable Charge rate or timing stop) or generate varied frequency or constant frequency AC output	0~Max CCW operation	CW generation	On	Charge	CLOSE	OPEN	CW	CW	CW
Remark	for the case of AC power generation output functions, E101 is selected to be an electrical machine with AC power generating functions comprised of a permanent magnet or winding excited, varied frequency driven field type electrical device, or a brushed alternator type electrical device, wherein its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output								

TABLE 4

M101/CCU101	IC101		E101	D101		BAT101		FC101		FC102		CL101		S101		S103		S104		S105	
	STOP	CCW Start	STOP Motor CW Operation	OFF	ON	Ready	Discharge	OPEN	CLOSE	OPEN	CLOSE	STOP	OPEN	STOP	CW	STOP	CW	STOP	CW	STOP	CW
IC101 in operation and charging		0~Max CCW operation	CW Generation	ON		Charge		CLOSE		CLOSE		CLOSE		CW		CW		CW		CW	
IC101 in operation		0~Max CCW operation	No load operation	OFF		Ready		CLOSE		CLOSE		CLOSE		CW		CW		CW		CW	
Combined Power Driving		0~Max CCW operation	Motor CW operation	ON		Discharge		CLOSE		CLOSE		CLOSE		CW		CW		CW		CW	
Sliding Brake		Max→0	CW generation	ON		Charge		CLOSE		CLOSE		CLOSE		CW		CW OR STOP		CW		CW	
Electric powered CW		STOP	Motor low speed CW operation	ON		Discharge		OPEN		CLOSE		CLOSE		CW		STOP		CW		CW	
Electric powered CCW		STOP	Motor low speed CCW operation	ON		Discharge		OPEN		OPEN		CLOSE		CCW		STOP		CCW		CCW	
Charge in Stand-Still (Controllable Charge rate or timing stop) or generate varied frequency or constant frequency AC output		0~Max CCW operation	CW generation	On		Charge		CLOSE		OPEN		OPEN		CW		CW		CW		STOP	
Remark	for the case of AC power generation output functions, E101 is selected to be an electrical machine with AC power generating functions comprised of a permanent magnet or winding excited, varied frequency driven field type electrical device, or a brushed alternator type electrical device, wherein its armature winding is commonly connected to conducting rings for AC output and to commutators for DC input/output																				

TABLE 5

CLAIMS

1. A combined engine and electrical device, comprising:
 - an engine;
 - an electrical machine;
 - means including a clutch for connecting the engine and electrical machine;
 - means including an output shaft for connecting the engine and electrical machine to a load;
 - a battery connected to the electrical machine; and
 - the following means for controlling said electrical machine and engine:
 - a) means for operating the electrical machine as a motor powered by electricity from said battery, at a speed sufficient to cause said clutch to close, thereby connecting the electrical machine to the engine and causing said electrical machine to function as a starter for said engine;
 - b) means for, when the engine is running, operating the electrical machine to drive the load together with the engine; and
 - c) means for operating the electrical machine as a motor powered by electricity from said battery, at a speed insufficient to cause said clutch to close in order to drive said load while the engine is stopped.
2. A device as claimed in claim 1, wherein said clutch is a two-way clutch arranged to close and connect said electrical machine to said engine upon rotation at a sufficient speed of either said electrical machine or said engine, and wherein said means for controlling said electrical machine and engine further carries out the function of causing said engine to drive said electrical machine to operate as a generator to charge said battery.
3. A device as claimed in claim 1, wherein said clutch is a two-way clutch arranged to close and connect said electrical machine to said engine upon rotation at a sufficient speed of either said electrical machine or said engine, and wherein said means for controlling said electrical machine and engine further carries out the function of operating said electrical machine as a motor while the engine is running, at a speed sufficient to cause said clutch to close and function as a friction brake for said motor.
4. A device as claimed in claim 1, wherein said clutch is a two-way clutch arranged to close and connect said electrical machine to said engine upon rotation at a sufficient speed of either said electrical machine or said engine, and wherein said means for controlling said electrical machine and

engine further carries out the function of operating said electrical machine as a regenerative brake for charging said battery.

5. A device as claimed in claim 1 , wherein said electrical machine is connected to said clutch by means of a gear train, and further comprising a second clutch positioned between said gear train and said output shaft.

6. A device as claimed in claim 1 , further comprising a speed change mechanism connected between said clutch and said output shaft.

7. A combined engine and electrical device, comprising:

an engine;

an electrical machine;

means including a clutch for connecting the engine and electrical machine;

means including an output shaft for connecting the engine and electrical machine to a load;

a battery connected to the electrical machine; and

the following means for controlling said electrical machine and engine:



a) means for operating the electrical machine as a motor powered by electricity from said battery, at a speed sufficient to cause said clutch to close, thereby connecting the electrical machine to the engine and causing said electrical machine to function as a starter for said engine;

b) means for, when the engine is running, operating the electrical machine to drive the load together with the engine;

c) means for operating the electrical machine as a motor powered by electricity from said battery, at a speed insufficient to cause said clutch to close in order to drive said load while the engine is stopped;

d) means for, when the load is slipping at a low rate, causing the engine to drive the load and recover excess kinetic energy by driving said electrical machine as a generator to charge said battery and provide regenerative braking without any friction braking by the clutch; and

e) means for, when the load is slipping at a high rate, causing the engine to drive the load and recover excess kinetic energy by driving said electrical machine as a generator to charge said battery and provide regenerative braking as said clutch closes to provide frictional damping.

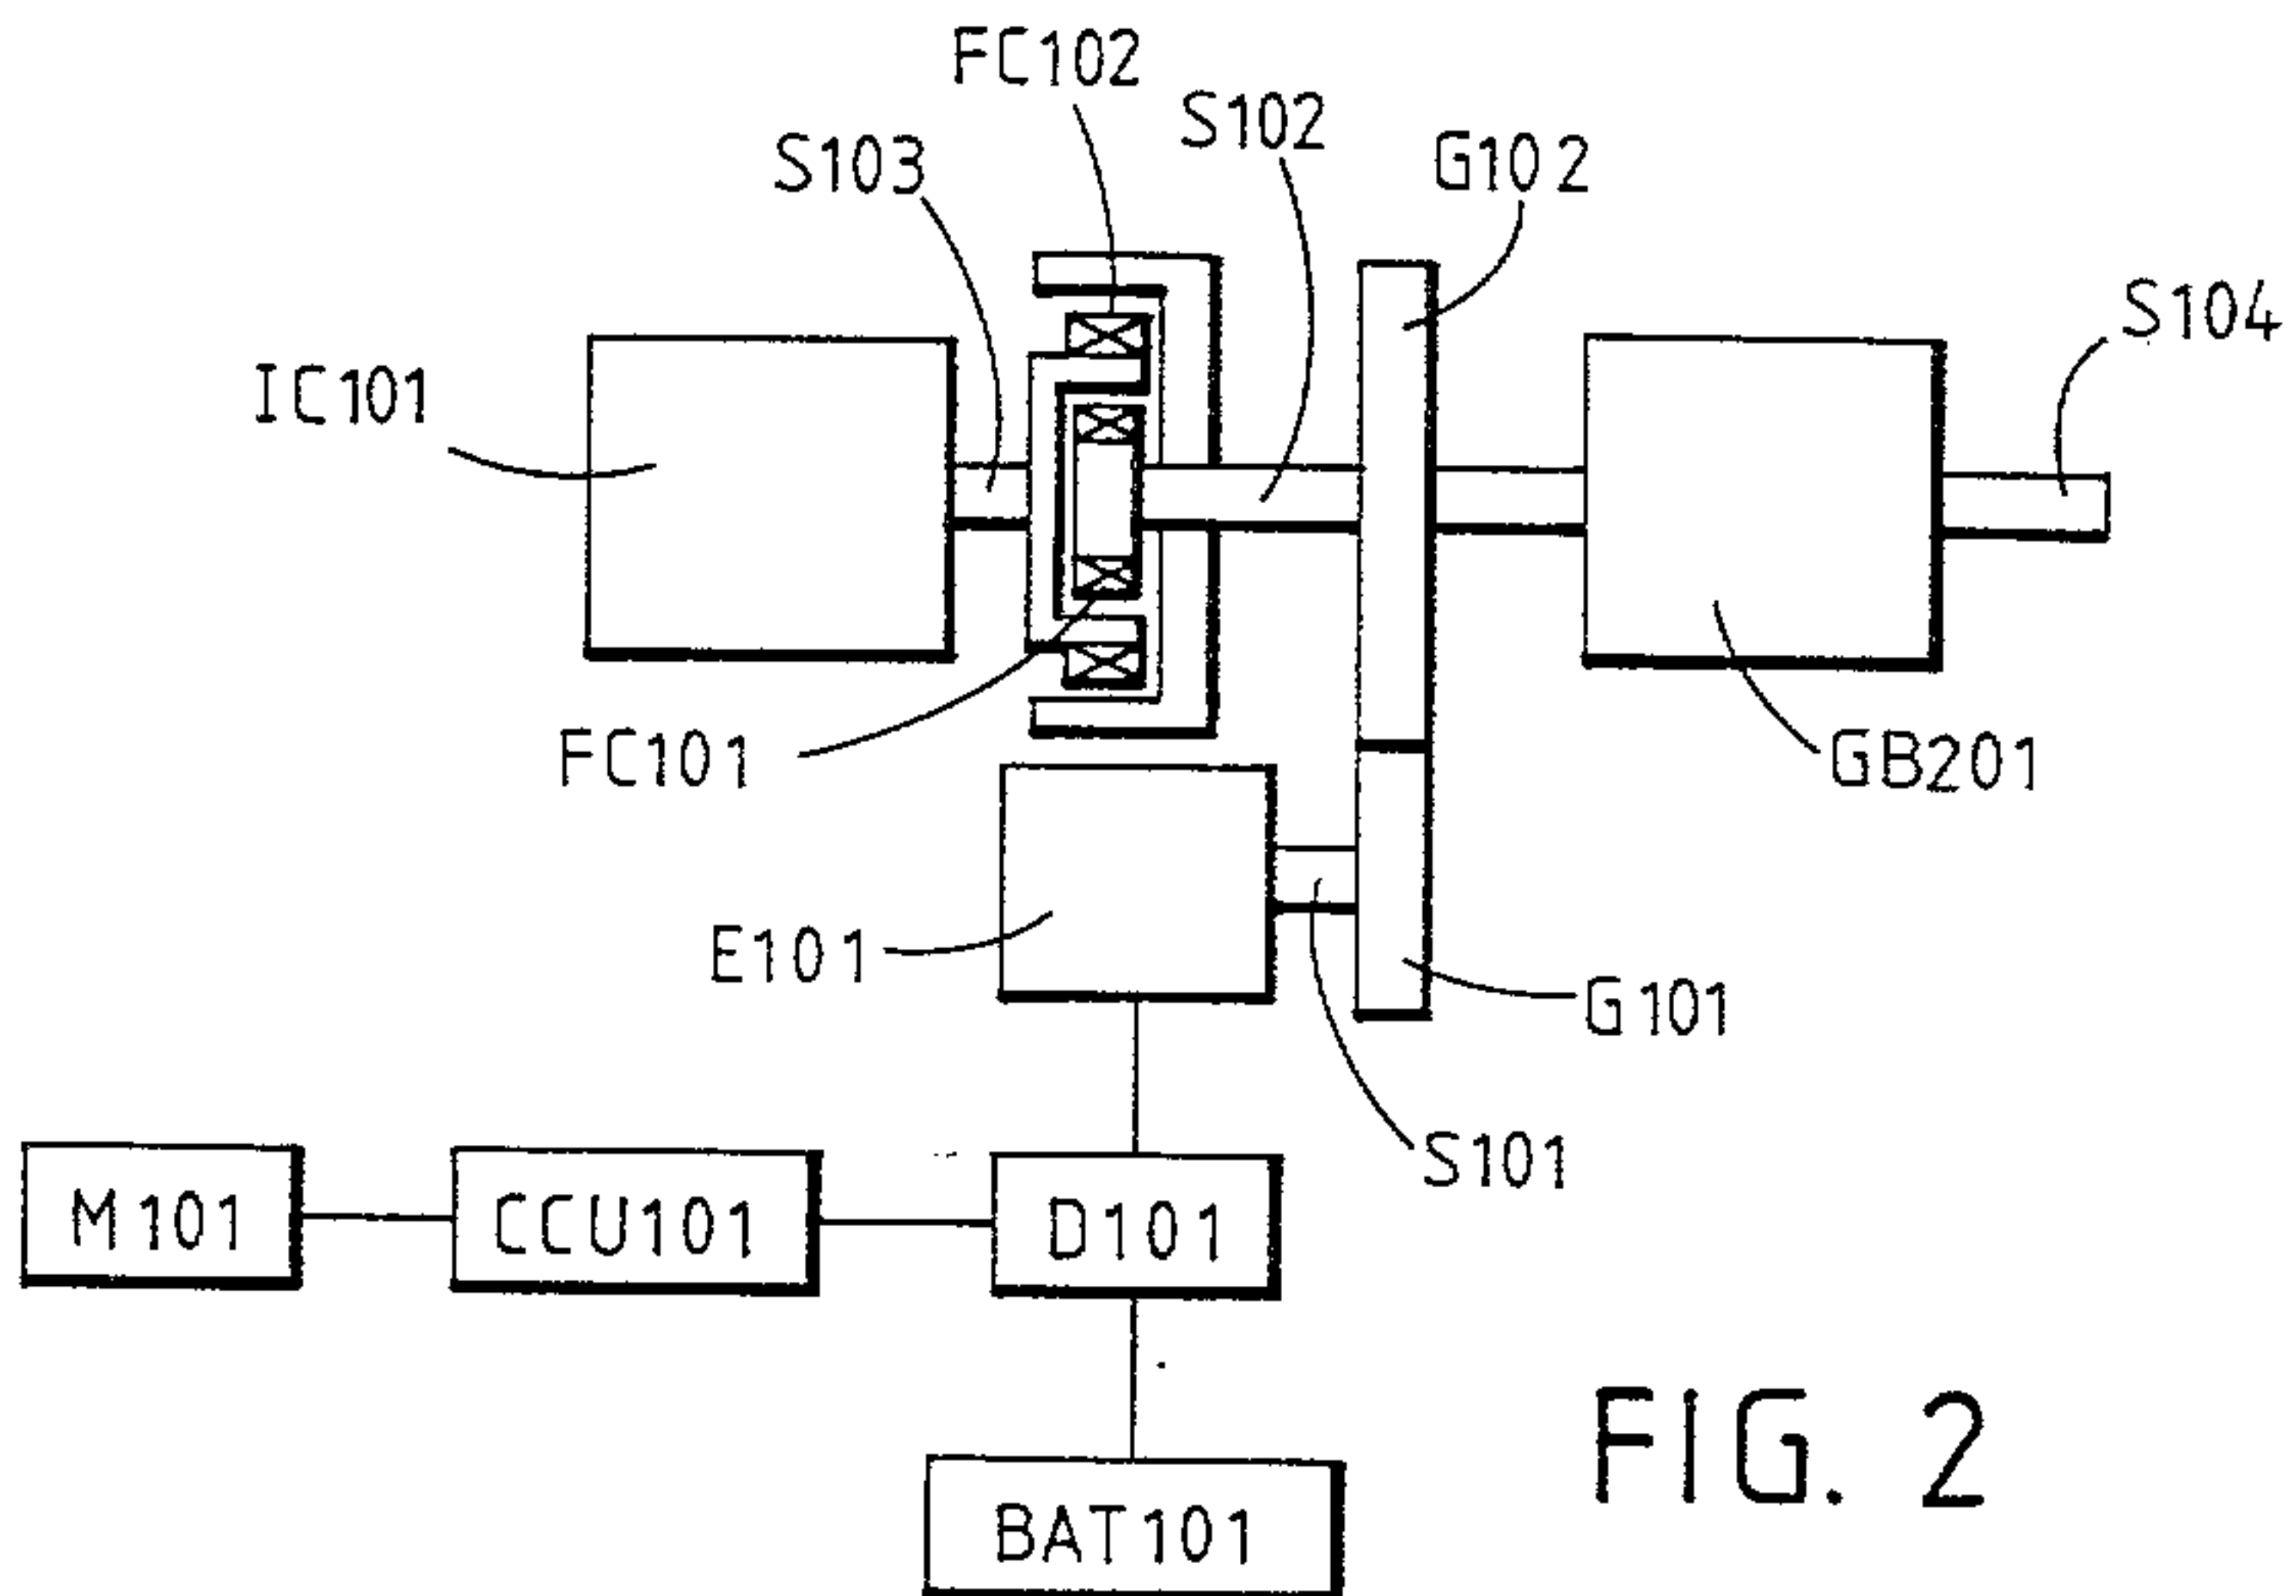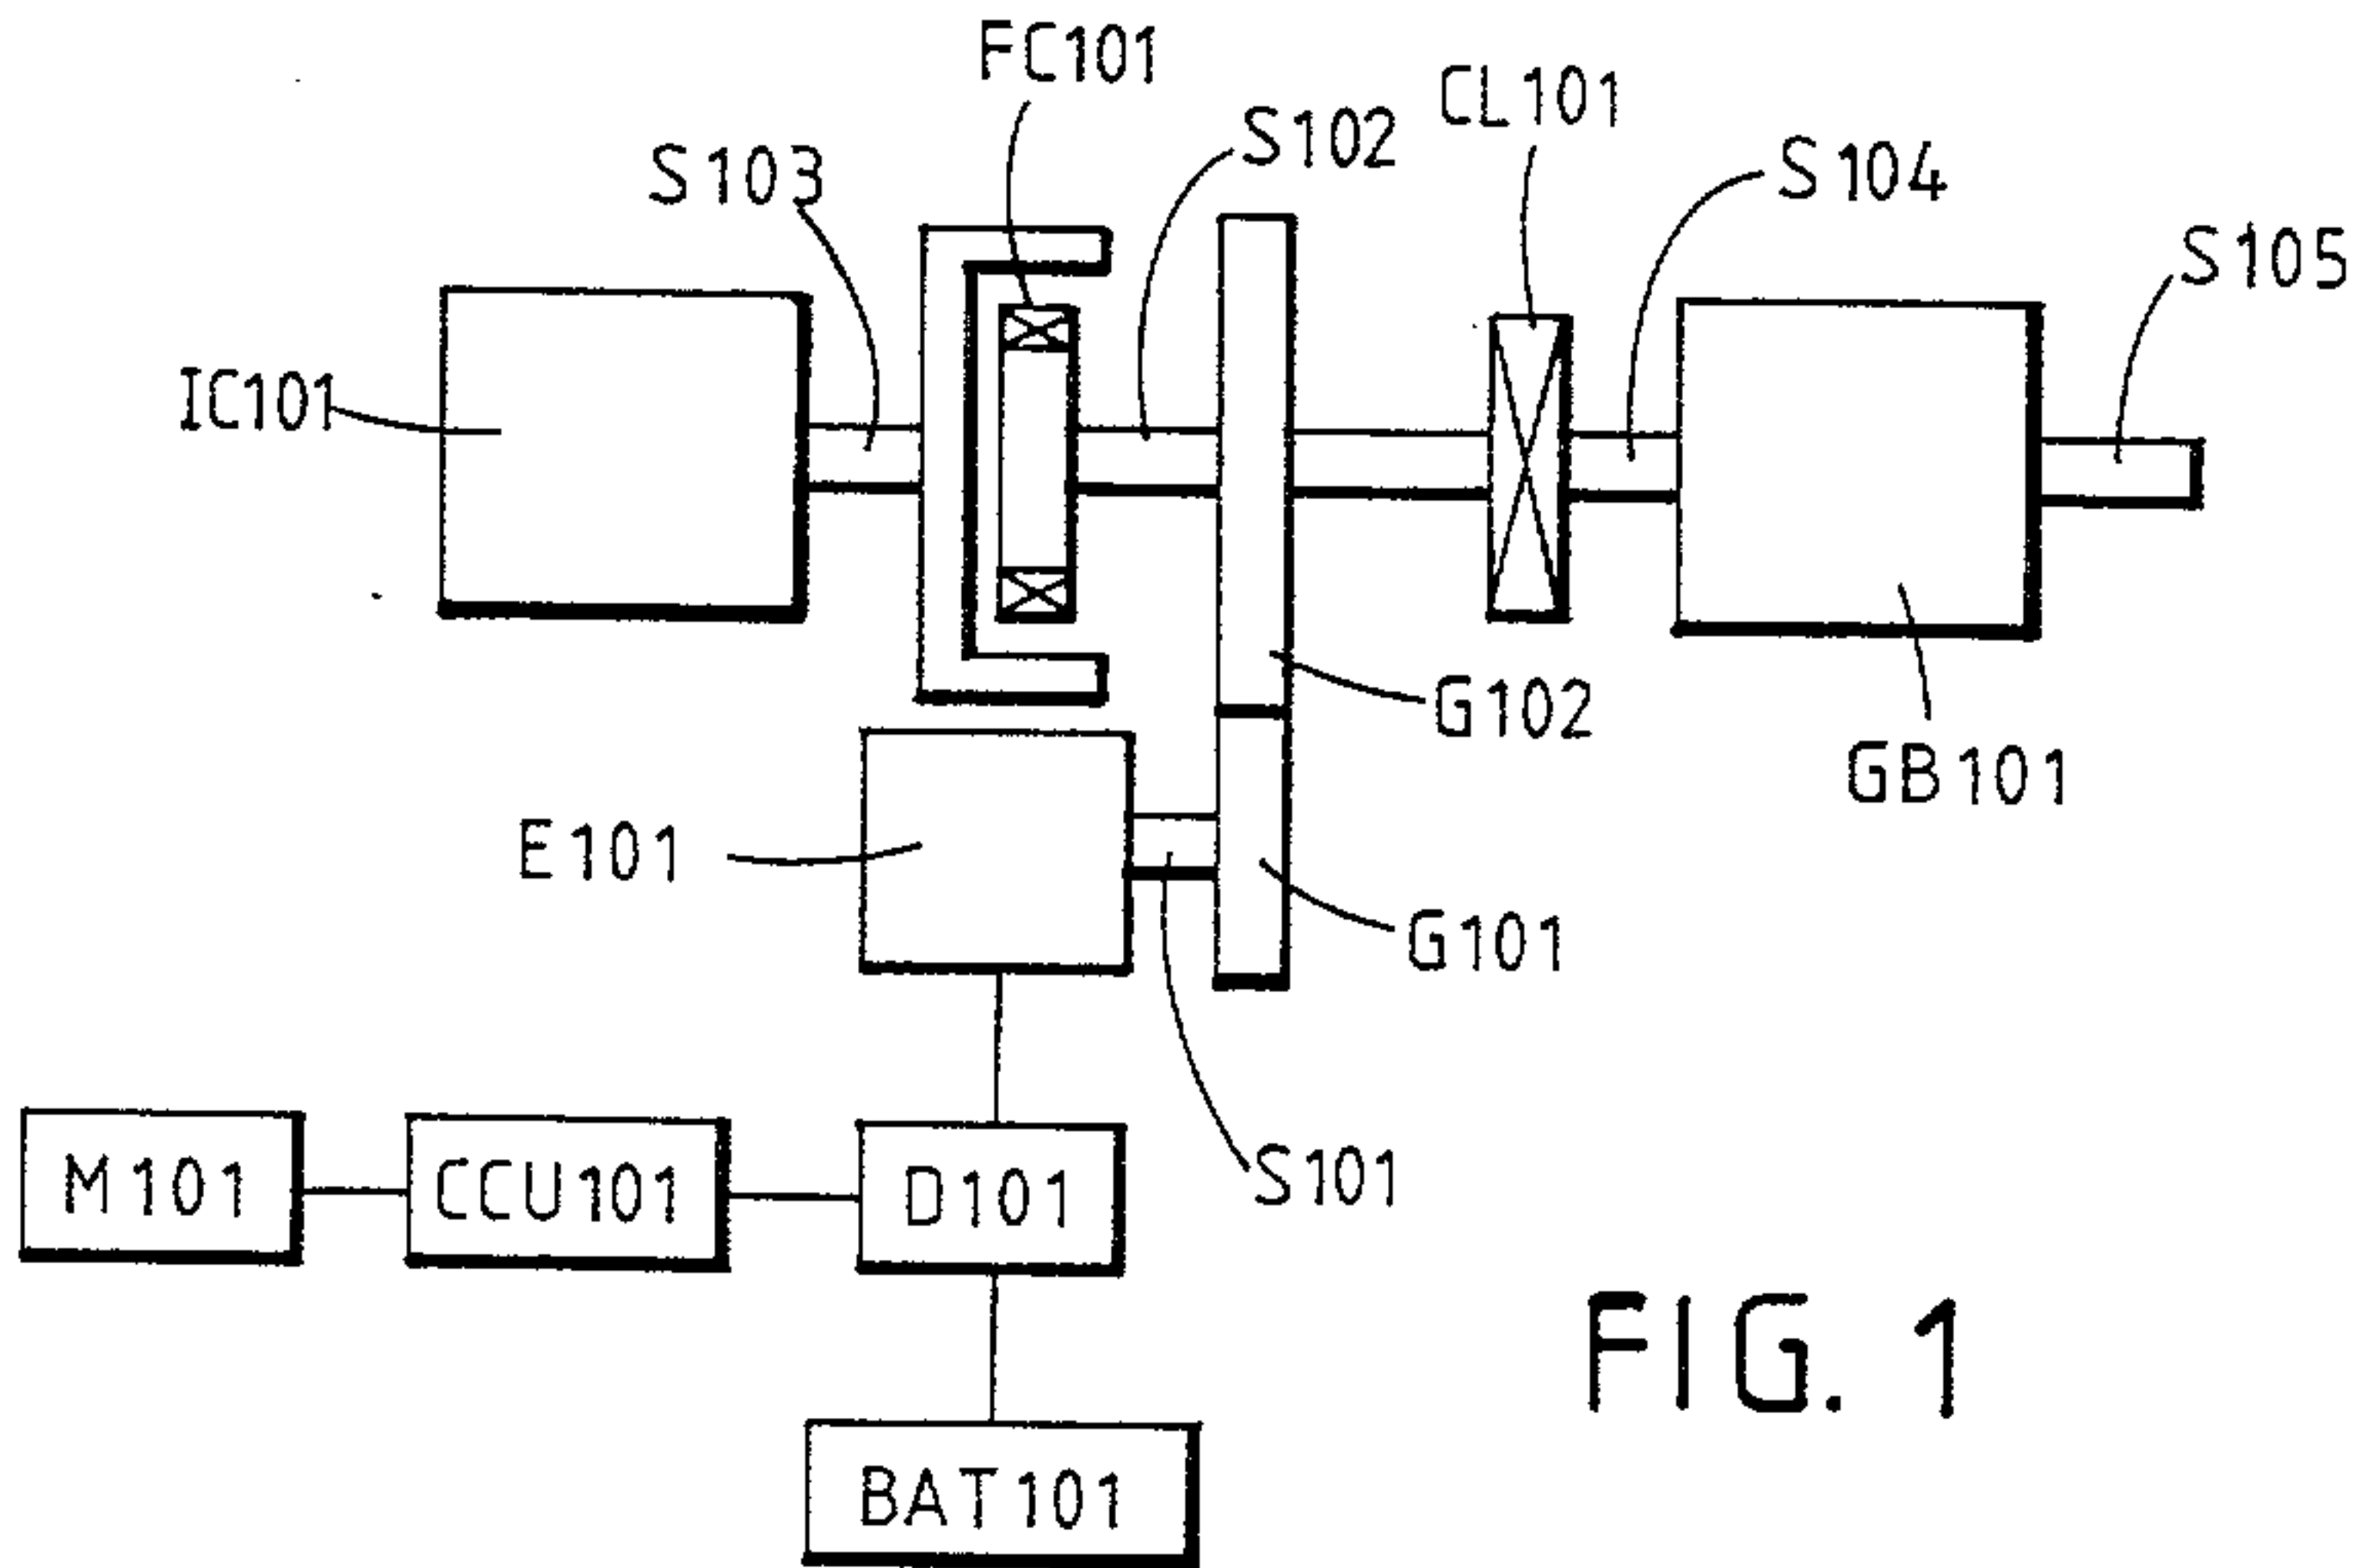

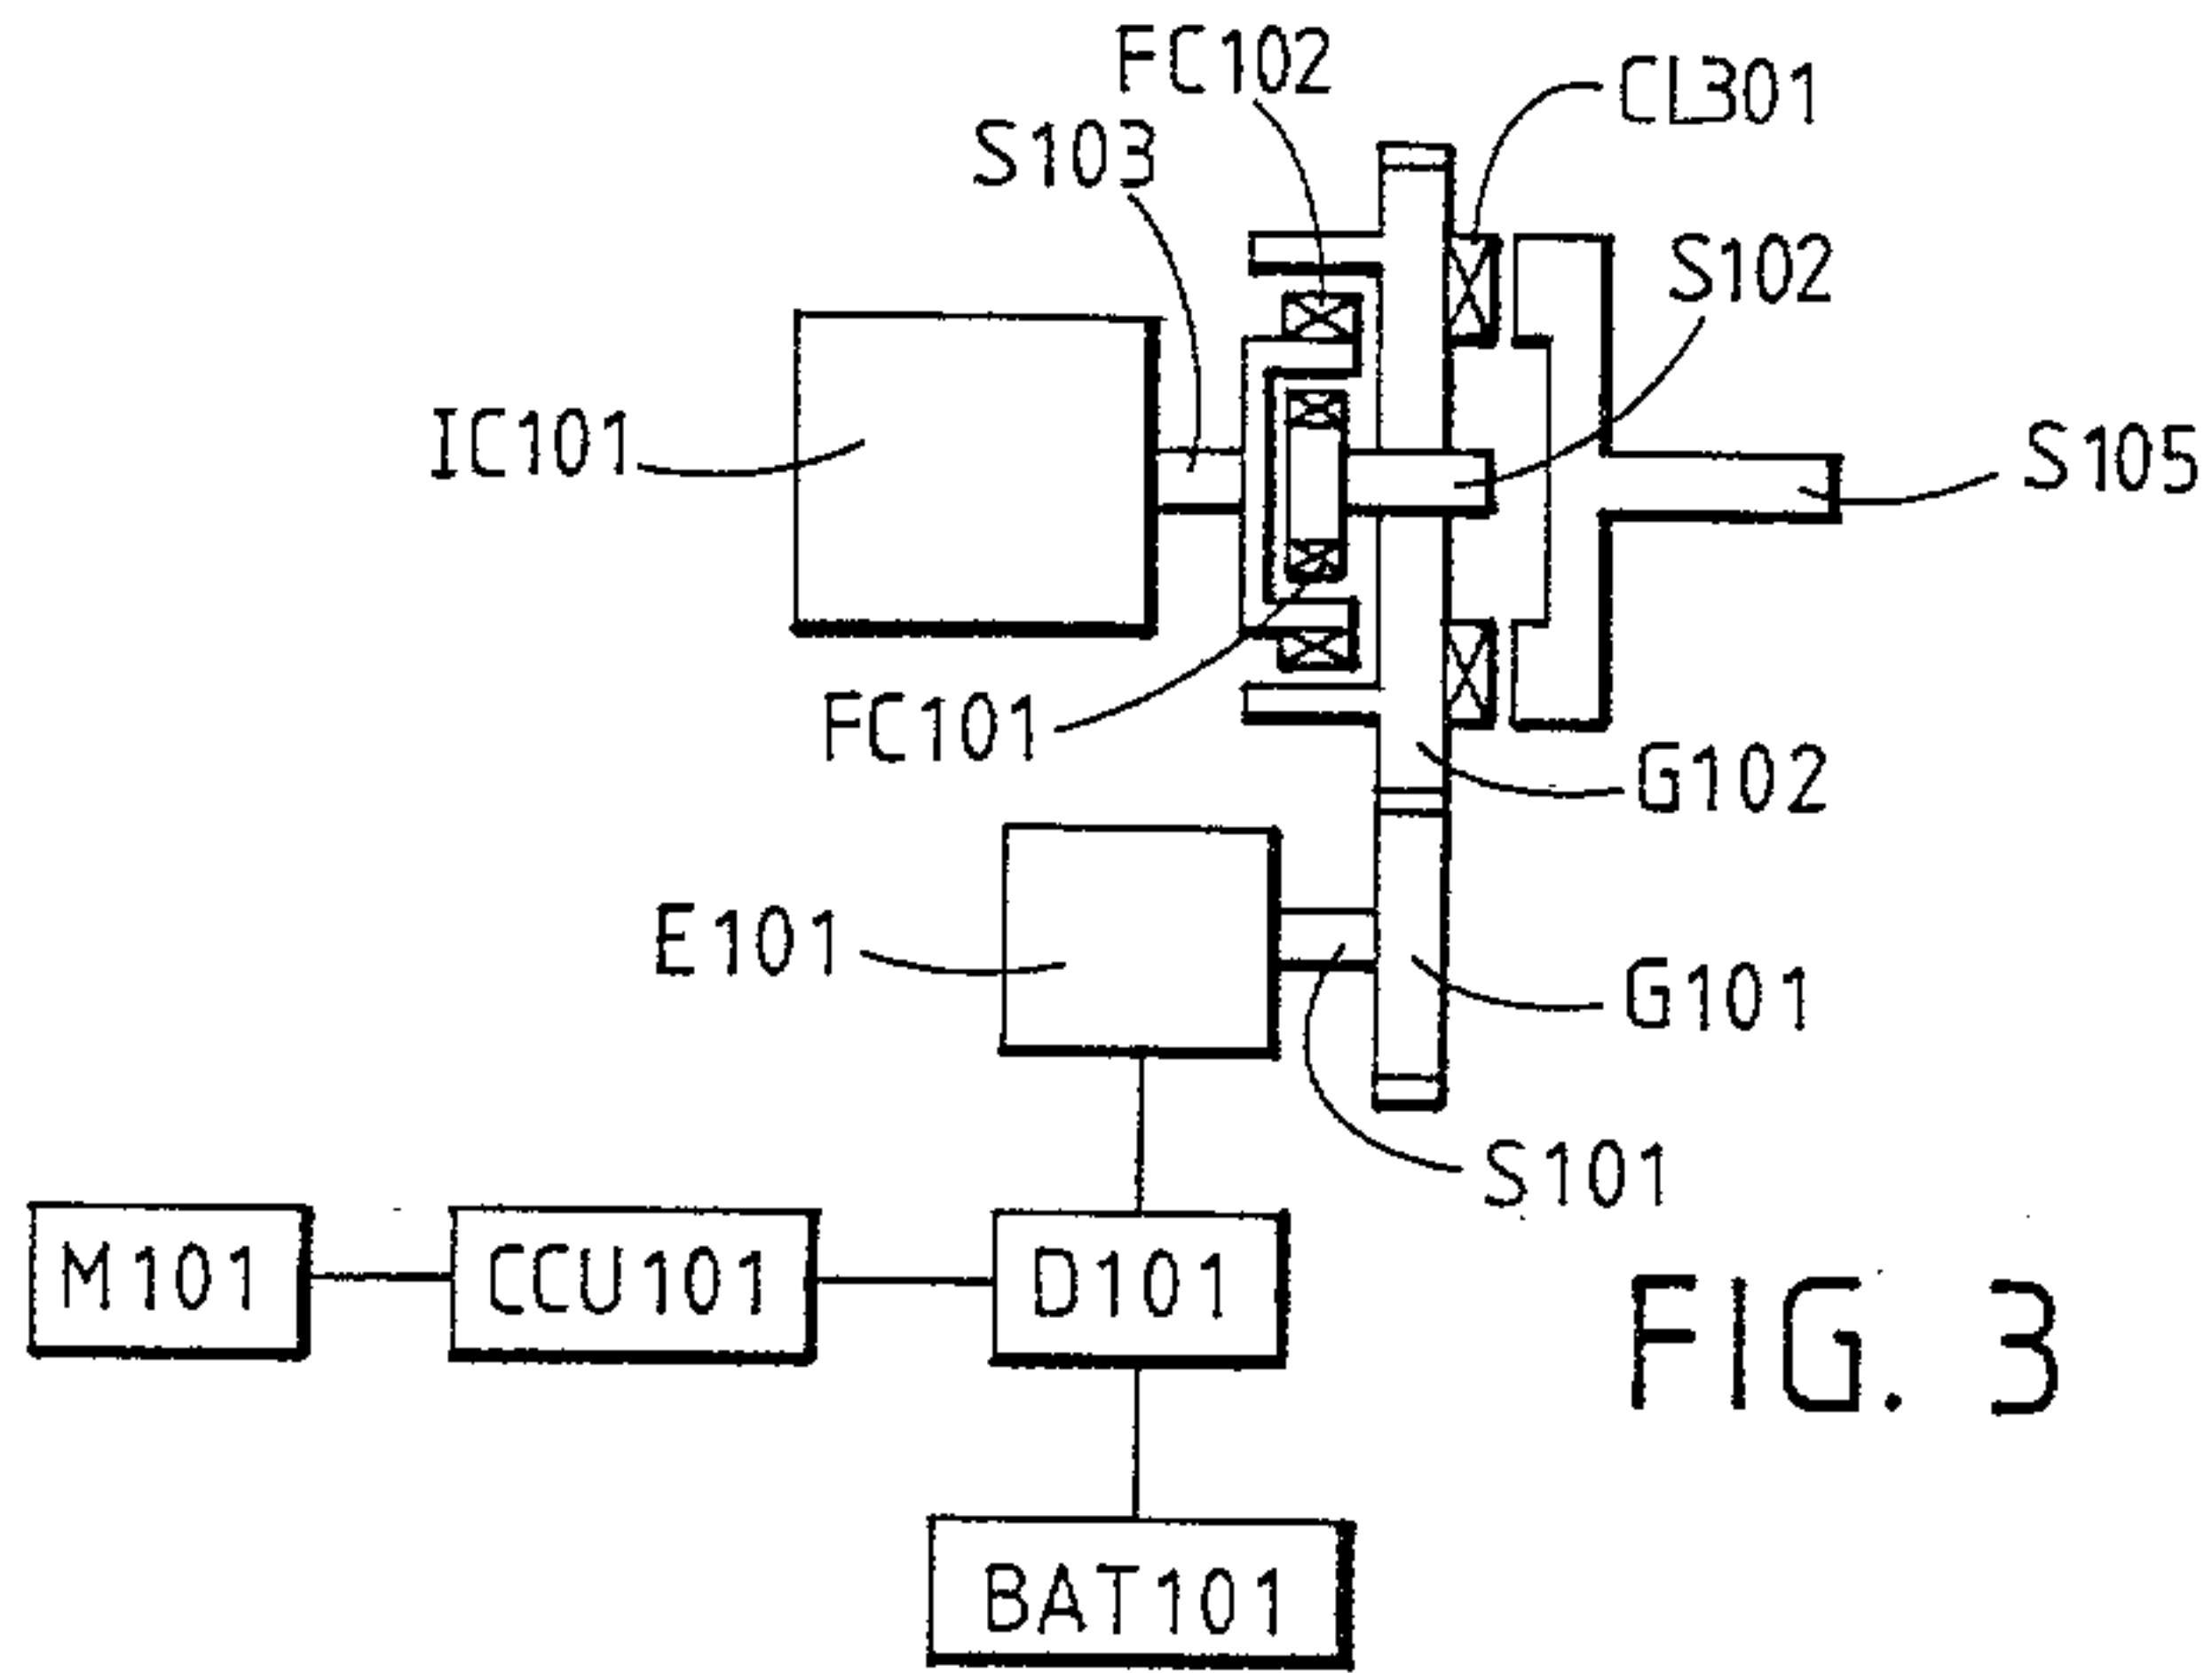


FIG. 3

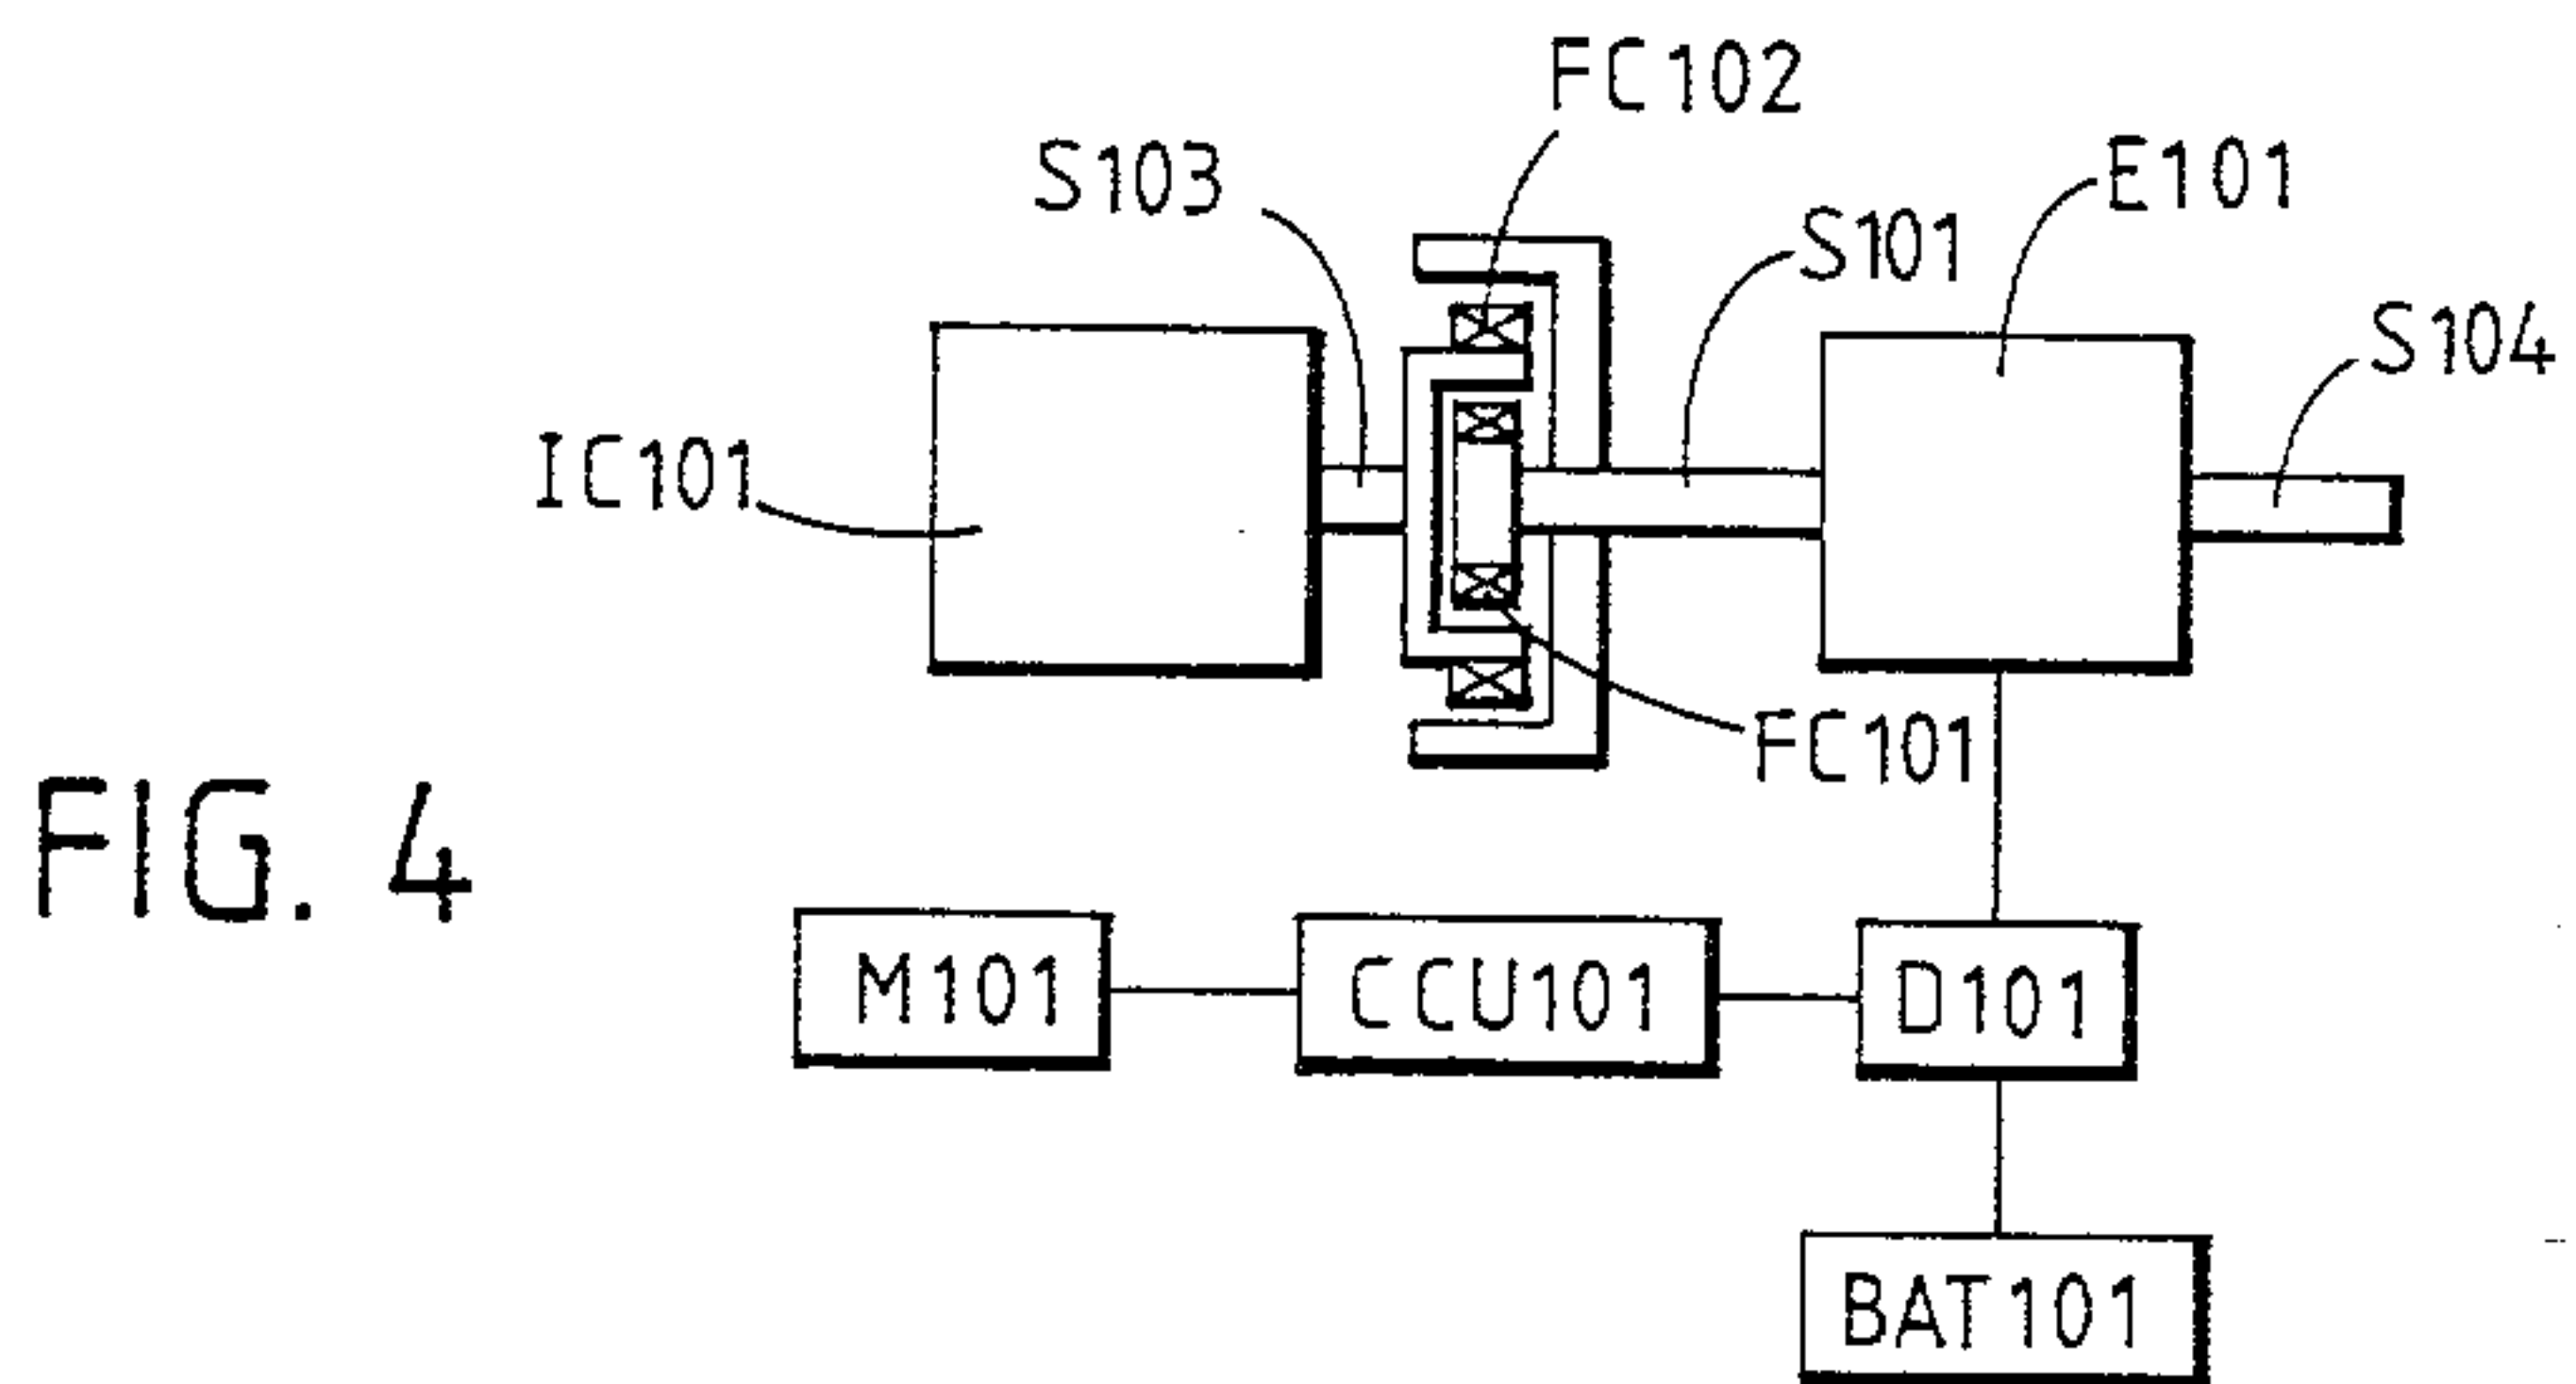


FIG. 4

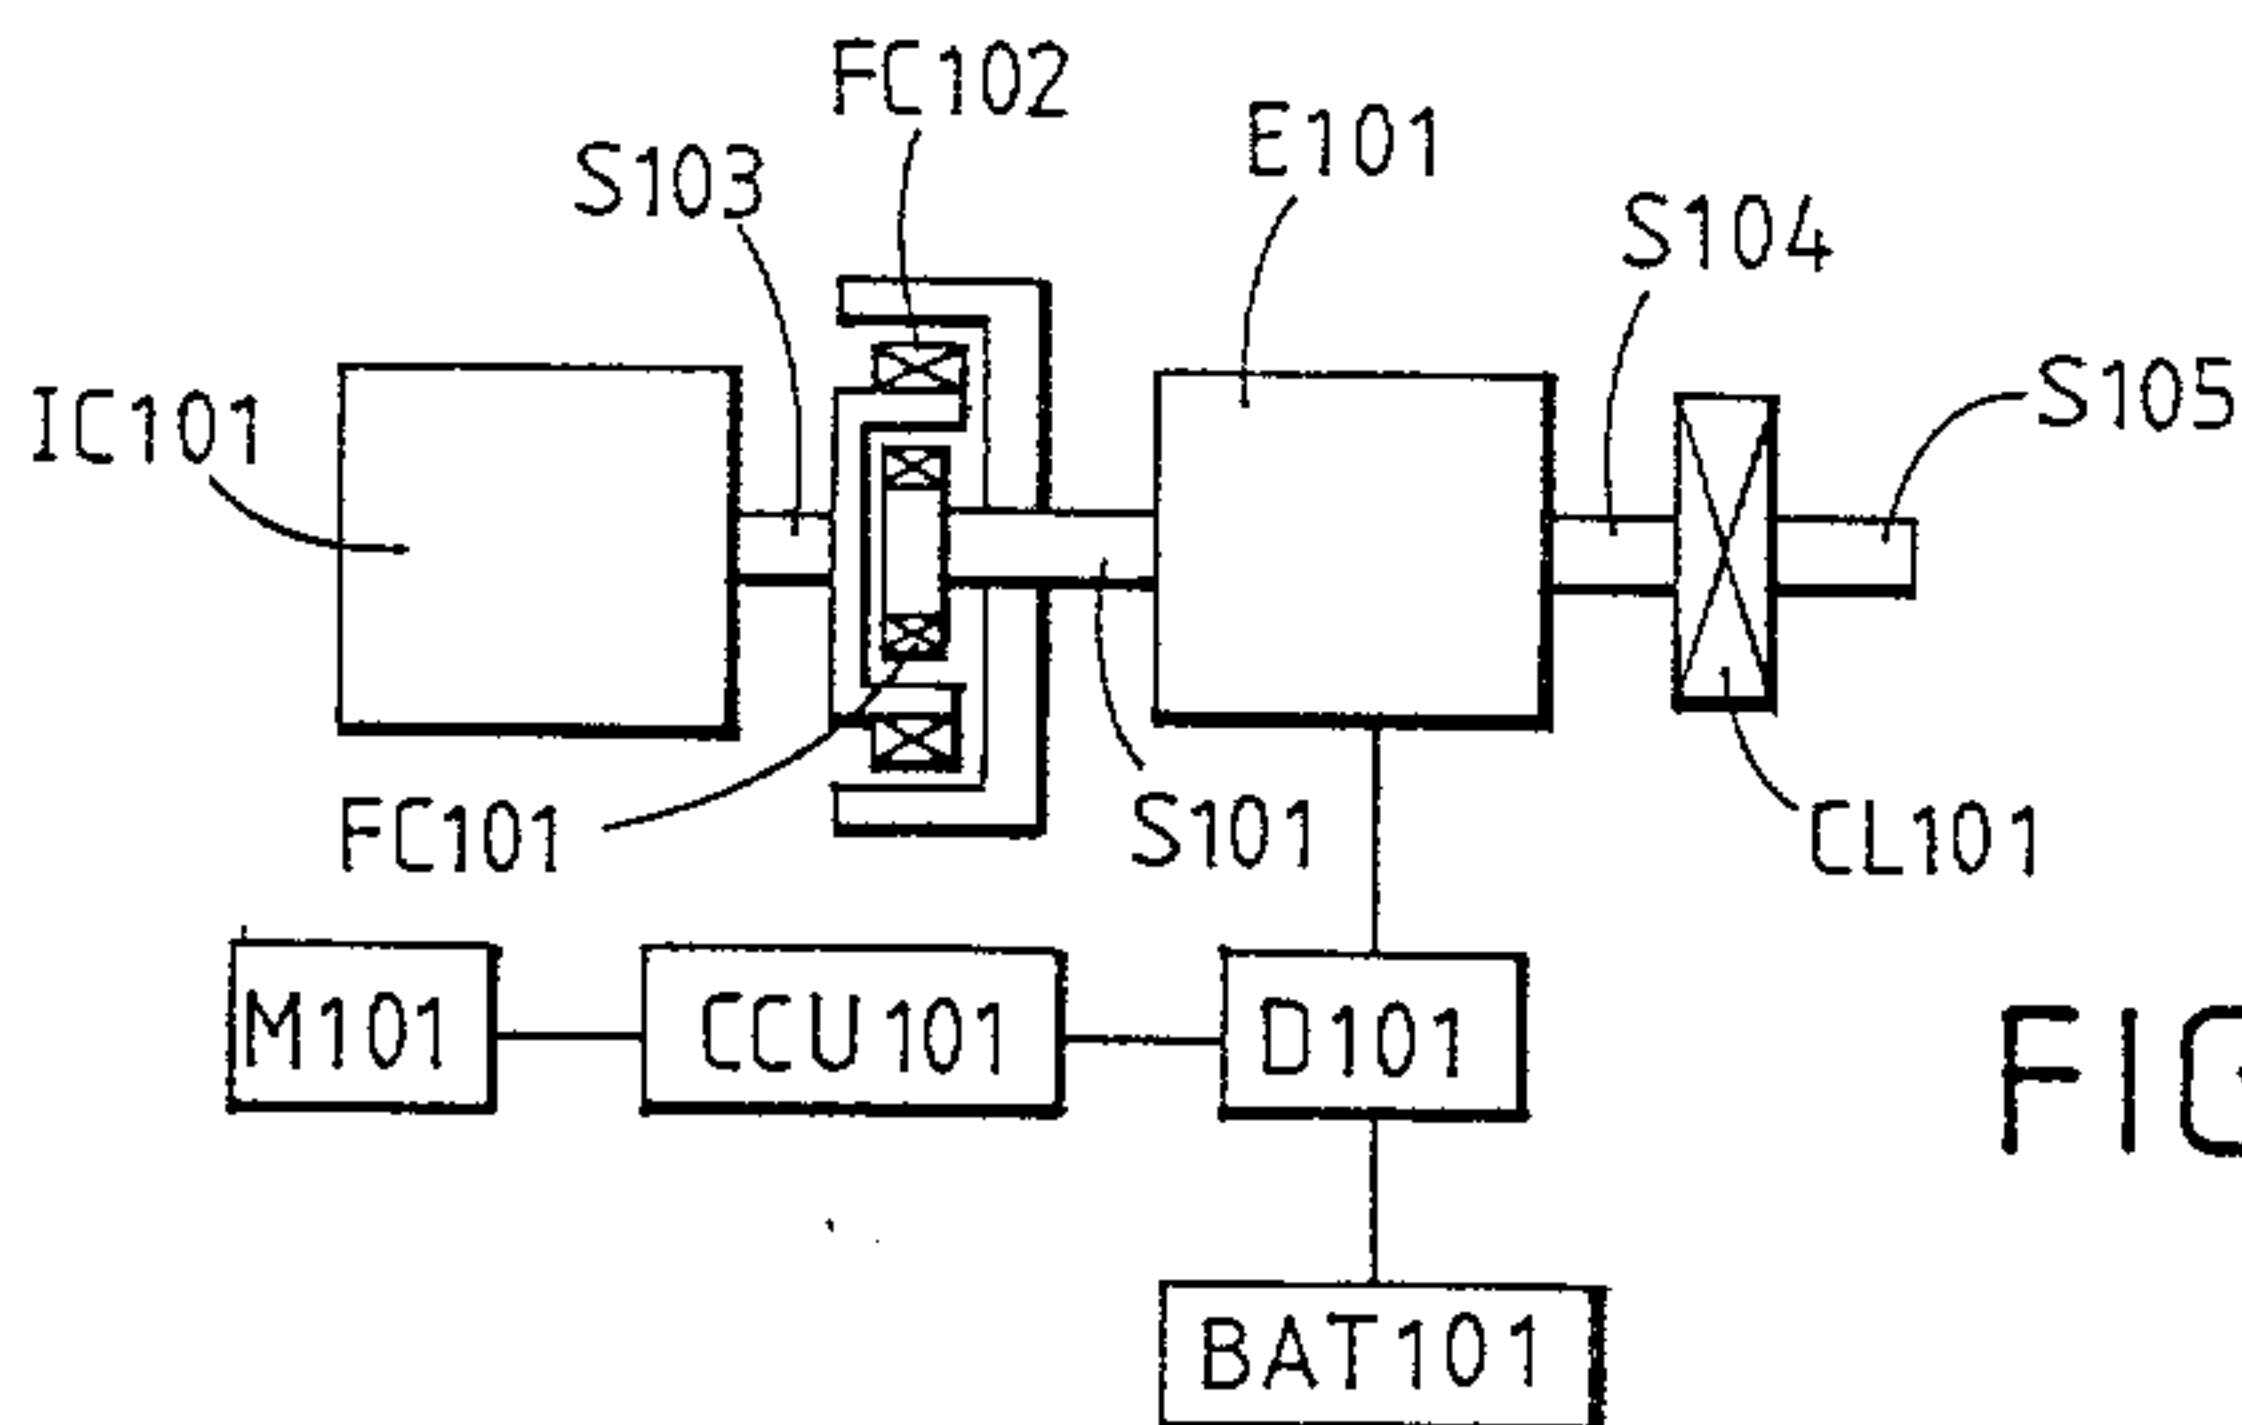


FIG. 5

