




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : H04B 17/02, 17/00, 1/40, H04L 27/00	A1	(11) International Publication Number: WO 94/19882 (43) International Publication Date: 1 September 1994 (01.09.94)
(21) International Application Number: PCT/US94/01048 (22) International Filing Date: 27 January 1994 (27.01.94) (30) Priority Data: 08/022,229 25 February 1993 (25.02.93) US (71) Applicant: MOTOROLA INC. [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US). (72) Inventors: DERANGO, Mario, F.; 957 Manchester Road, Lake Zurich, IL 60047 (US). BENNETT, Richard, L.; 416 Cutters Mill Lane, Schaumburg, IL 60194 (US). (74) Agents: PARMELEE, Steven, G. et al.; Motorola Inc., Intellectual Property Dept./TWM, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).	(81) Designated States: AU, BR, CA, CN, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>	

(54) Title: A METHOD FOR REPEATERS TO ADAPTIVELY DIGITALLY CODE RECEIVED ANALOG INFORMATION

(57) Abstract

Adaptive digital coding of received analog information based on signal strength can be accomplished in the following manner. Once a repeater receives analog information from a communication unit (200), the signal quality of the received analog information is determined (201, 203). Next, the signal quality of the received analog information is compared with a first signal quality value (204). If the signal quality of the received analog information is above the first signal quality value, the received analog information is digitally coded based on a first digital coding format (208). If the signal quality of the received analog information is below the first signal quality value, the received analog information is digitally coded based on a second digital coding means (206).

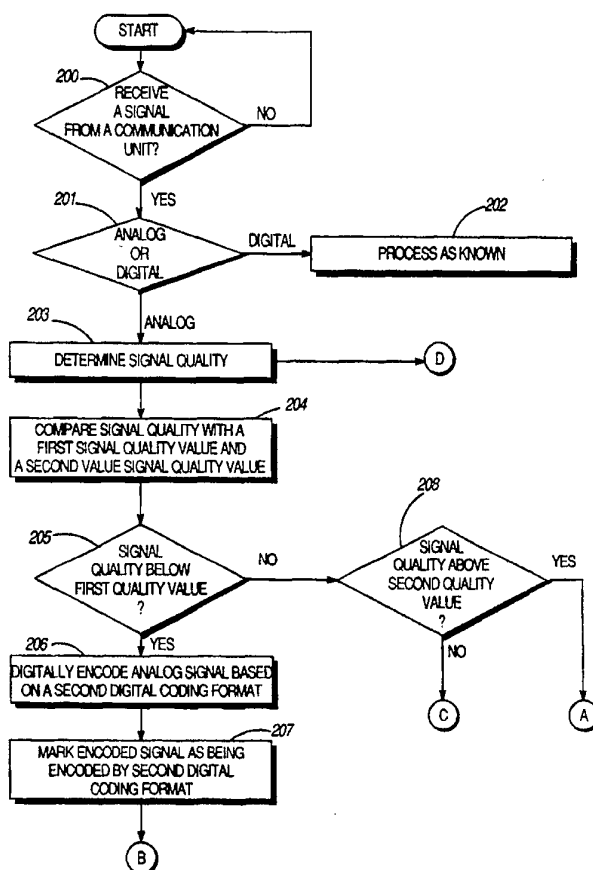

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

5

A Method for Repeaters to Adaptively Digitally Code
Received Analog Information

10

Field of the Invention

This invention relates generally to digital coding of analog information and, in particular, to adaptive digital coding of analog information.

15

Background of the Invention

Communication systems are known to comprise a plurality of communication units, repeaters, and
20 dispatcher stations. The repeaters and dispatcher stations are physically connected together via a data link, such as a local area network (LAN). The communication units may either be digital communication units (transceive digital information) or analog
25 communication units (transceive analog information). The digital communication units, because they transmit digital information, are able to communicate on a digital infrastructure directly, while analog communication units, because they transmit analog
30 information, are incompatible with a digital infrastructure. For this reason, an analog communication unit cannot function in a digital infrastructure unless the received analog information is digitized before placement on the LAN and then decoded

back to an analog signal before transmission to a receiving analog communication unit.

One implementation, which permits analog communication units to operate on a digital infrastructure, converts analog signals into a selected digital coding format. The selected digital coding format is typically based on the bandwidth of the digital infrastructure. For example, the selected digital coding format may be 4.8 kbps vector sum excitation linear predictive (VSELP), a Motorola acronym, or 64 kbps pulse coded modulation, (PCM). In general, the more bits used in the digital coding process, the more accurately the analog information can be recaptured. Conversely, the less bits used to digitally code the analog information, the less accurately the analog information can be recaptured. Thus, the 4.8 kbps VSELP digital coding may be fine for strong analog signals (high signal strength or low signal to noise), but may produce distorted representations of weak analog signals (low signal strength or high signal to noise). Consequently, the quality of the digitally coded analog signal may be unacceptable. In contrast, the 64 kbps PCM digital coding provides acceptable digital coding of weak analog signals and strong analog signals but requires substantial infrastructure bandwidth.

While the above works well when the signal quality remains relatively constant, in practice the signal quality tends to vary.

Therefore a need exists for a method of handling analog communication units within a digital infrastructure that adaptively digitally codes received

analog signals based on signal strength and minimizing infrastructure bandwidth requirements.

Brief Description of the Drawings

5

FIG. 1 illustrates a digital communication system in accordance with the present invention.

FIG.s 2A and 2B illustrates a logic diagram that
10 may be used to implement the present invention.

FIG. 3 illustrates a logic diagram that a repeater and a dispatcher station may use to implement the present invention.

15

Description of a Preferred Embodiment

Generally, the present invention provides a method and apparatus that allows repeaters in a digital
20 communication system to efficiently support analog communication units. This is achieved by taking a received analog signal and digitally coding it to produce a digital signal. The digital coding may be pulse coded modulation (PCM), adaptive differential
25 pulse coded modulation (ADPCM), or vector sum excitation linear predictive (VSELP), a Motorola acronym, which is selected based on the quality of the received analog signal.

30 The present invention can be more fully described with reference to FIG.s 1-3. FIG. 1 illustrates a digital communication system that includes repeaters 101-105, a digital bus 106, a dispatcher station 107, and mobile communication units 115-116. Each repeater
35 101-105 includes an antenna 108, a receiver 109, an

ABACUS, a Motorola acronym, 110, a digital signal processor (DSP) 111, a receive signal strength indication (RSSI) 112, a microprocessor 113, and memory 114. As is known, the digital bus 106 is used to send
5 and receive digital information between repeaters and the dispatcher station in a communication system and may extend over a large geographical area. The ABACUS circuit 110 provides the initial high bit rate analog to digital conversion of the intermediate frequency (IF)
10 signal of the receiver, the DSP is used to demodulate the received signal and further digitally encode/decode the demodulated analog signals. The RSSI function indicates received signal quality of the received analog signal.

15

FIG.s 2A and 2B illustrates a logic diagram that a repeater may incorporate to implement the present invention. The process begins when a signal is received from a communication unit 200. A determination is made
20 as to whether the received signal is analog or digital 201. The received signal is digital information, if it is a digitally readable signal. Otherwise it is an analog signal. If the received signal is digital the signal is transmitted onto the digital network in a
25 known manner. The received digital signal may or may not be compressed for purposes of reducing bandwidth before being transmitted onto the digital network 202. In either case, the process is known, thus no further discussion will be presented except to facilitate the
30 understanding of the present invention.

If the received signal is analog, the quality of the received analog information is determined 203. The quality is determined by the RSSI which measures the
35 absolute signal strength of the radio frequency (RF)

signal and/or signal to noise power ratio of the same. Next the quality of received analog information is compared with two signal quality threshold values 204. For purposes of this discussion, the two signal quality thresholds will be RF signal to noise ratios of 6dB and 12dB plus or minus some hysteresis. If the quality of the received analog information is above the first signal quality value, or 6dB, 205, and below the second signal quality value, or 12dB, 208 the received analog information is digitally coded based on a first digital coding format 211, such as 32 kbps ADPCM, and then marked as being digitally coded by the first digital coding format (32 kbps ADPCM) 212. If the quality of the received analog information is below the first signal quality value, or 6dB, 205 the received analog information is digitally coded based on a second digital coding format 206, such as 64 kbps PCM which requires more bandwidth than 32kbps ADPCM, and then marked as being digitally coded by the second digital coding format (64 kbps PCM) 207. If the quality of the received analog information is above the first signal quality value, or 6dB, 205 and above the second signal quality value, or 12dB, 208 the received analog information is digitally coded based on a third digital coding format 209, such as 4.8 kbps VSELP which requires less bandwidth than 64kbps PCM and 32kbps ADPCM, and then marked as being coded by the third digital coding format (4.8 kbps VSELP) 210. After the received analog information has been digitally coded and marked as being digitally coded by a particular digital coding format, the digitally coded signal is transmitted onto the digital bus 213.

Next, a check is done to determine whether a predetermined amount of time has expired since the

analog signal has been received 214. The predetermined amount of time, or time interval, is based on the mobility of the communication units. For example, if the communication units have high mobility, the time interval may be one second. On the other hand, if the communication units have low mobility, the time interval may be one minute. Basically, the predetermined time interval may be any time value that is appropriate for the communication system. If the predetermined amount of time has expired, the signal quality of the received analog information is determined again 203. If the predetermined period of time has not expired, the repeater determines whether the analog information is still being received 215. If the analog information is no longer being received, the process ends. If the analog information is still being received, the repeater determines whether the predetermined period of time has expired since receiving the analog information 214 and continues as mentioned above until the analog information is no longer being received. As long as the analog information is being received, the quality of the information will be checked at a predetermined time interval. This is done to allow a different digital coding method to be chosen to digitally code the received analog information if the quality of the information changes during the duration of its transmission.

FIG. 3 illustrates a logic diagram that a repeater and/or a dispatcher station may use to implement the present invention. The process begins when a digital packet is received from the digital bus 300. Once the digital packet is received, it is checked for marking 301. The marking indicates whether the digital packet was received analog information that has been digitally

coded. The marking also indicates the type of digital coding format used to digitally code the analog information. If the received digital packet is not marked, it is transmitted to the communication unit or
5 to the dispatcher station as digital information 302. If the received digital packet is marked, the digital coding format is identified based on the marking 303. Next the received digital packet is decoded based on the digital coding format indicated by the marking to
10 reproduce the analog information 304. Finally, the reproduced analog information is transmitted to other analog communication units 305 to end the process.

The above discussion described two threshold
15 levels, however, to one skilled in the art, it is easily recognizable that multiple threshold levels could be used. For example, a different threshold value could be used to indicate when to digitally code the received analog information using 64 kbps PCM, 32 kbps ADPCM, 16
20 kbps ADPCM, 8kbps VSELP, 4.8kbps VSELP, etc.

By allowing analog information to be digitized and adaptively compressed, the audio quality of the received analog information is maintained throughout a
25 transmission in which the RF signal quality varies. Since most signals are received with an average RF signal quality that permits a high degree of voice coding compression, the present invention minimizes the average bandwidth requirements on the digital bus, while
30 still preserving the audio quality. In this manner, the digital link can accommodate more calls, in general, than when using only one digital coding format such as 64kbps PCM for all received analog information.

Claims

1. In a communication system that includes a limited number of repeaters and a plurality of communication units, wherein the limited number of repeaters are operably coupled together via a digital bus, wherein at least a first set of the plurality of communication units transceives analog information with the limited number of repeaters, a method for each of the limited number of repeaters to adaptively digitally code the analog information, the method comprises the steps of:
- a) receiving, by a first repeater of the limited number of repeaters, analog information from a communication unit of the first set to produce received analog information;
 - b) determining, by the first repeater, signal quality of the received analog information;
 - c) comparing, by the first repeater, the signal quality of the received analog information with a first signal quality value;
 - d) when the signal quality of the received analog information is above the first signal quality value, digitally coding the received analog information based on a first digital coding format to produce a first digital coded information; and
 - e) when the signal quality of the received analog information is below the first signal quality value, digitally coding the received analog information based on a second digital coding format to produce second digital coded information, wherein the first digital

coding format requires less bandwidth than the second digital coding format.

2. In the method of claim 1, use the established digital coding format until a predetermined period of time expires, when the predetermined period of time expires, re-determining a digital coding format to use
5 based on the signal quality of a subsequently received analog information.

3. The method of claim 1 further comprises the steps of:
10

f) marking, by the first repeater, the first digital coded information as first marked information to indicate that the received analog information was digitally coded by the first digital coding format; and
15

g) marking, by the first repeater, the second digital coded information as second marked information to indicate that the received analog information was digitally coded by the second digital coding format.
20

4. The method of claim 3 further comprises the steps of:

h) receiving, by a second repeater of the limited
25 number of repeaters, either the first marked information or the second marked information via the digital bus to produce received marked information; and

i) decoding, by the second repeater, the received
30 marked information utilizing the first digital coding format when the received marked information is first marked information and utilizing the second digital coding format when the received marked information is second marked information.

35

5. The method of claim 3 further comprises the steps of:

- h) receiving, by a dispatcher station, either the
5 first marked information or the second marked
information via the digital bus to produce received
marked information, wherein the dispatcher station is
operably coupled to the digital bus; and
- 10 i) decoding, by the dispatcher station, the received
marked information utilizing the first digital coding
format when the received marked information is first
marked information and utilizing the second digital
15 coding format when the received marked information is
second marked information.

6. The method of claim 1 further comprises the steps of:

- 20 f) comparing the signal quality of the received analog
information with a second signal quality value, wherein
the second signal quality value is greater than the
first signal quality value; and
- 25 g) when the signal quality of the received analog
information is above the second signal quality level,
digitally coding the received analog information based
on a third digital coding format.

30 7. The method of claim 1 further comprises:

- f) receiving, by the first repeater, digital
information transmitted by a communication unit of a
second set of the plurality of communication units to
35 produce received digital information; and

g) determining, by the first repeater, whether incoming information is the received digital information or the received analog information.

8. In a communication system that includes a limited number of repeaters and a plurality of communication units, wherein the limited number of repeaters are operably coupled together via a digital bus, wherein at least a first set of the plurality of communication units transceives analog information with the limited number of repeaters, a method for a repeater to adaptively digitally code the analog information, the method comprises the steps of:
- 10 a) receiving, by the repeater, analog information from a communication unit of the first set to produce received analog information;
 - 15 b) determining, by the repeater, signal quality of the received analog information;
 - 20 c) comparing, by the repeater, the signal quality of the received analog information with a first signal quality value;
 - 25 d) when the signal quality of the received analog information is above the first signal quality value, digitally coding the received analog information based on a first digital coding format to produce a first digital coded information; and
 - 30 e) when the signal quality of the received analog information is below the first signal quality value, digitally coding the received analog information based on a second digital coding format to produce a second digital coded information, wherein the first digital coding format requires less bandwidth than the second digital coding format.

9. An improved repeater that is used in a communication system, wherein the communication system includes a limited number of improved repeaters and a plurality of communication units, wherein the limited number of improved repeaters are operably coupled together via a digital bus, wherein at least a first set of the plurality of communication units transceives analog information with the limited number of improved repeaters, wherein the improvement comprises:
- 10 first receiving means for receiving analog information from a communication unit of the first set;
- 15 first determining means, operably coupled to the first receiving means, for determining signal quality of the analog information;
- 20 first comparing means, operably coupled to the first determining means, for comparing the signal quality of the analog information with a first signal quality value;
- 25 first digital coding means, operably coupled to the first receiving means and the first comparing means, for digitally coding the analog information based on a first digital coding format to produce a first digital coded information when the signal quality of the received analog information is above the first signal quality value; and
- 30 second digital coding means, operably coupled to the first receiving means and the first comparing means, for digitally coding the analog information based on a second digital coding format to produce a second digital coded information when the signal quality of the
- 35

received analog information is below the first signal quality value wherein the first digital coding format requires less bandwidth than the second digital coding format.

10. The improved repeater of claim 14 further comprises:

- 5 second receiving means, operably coupled to the digital bus, for receiving marked information from another repeater in the communication system via the digital bus to produce received marked information; and
- 10 decoding means, operably coupled to the second receiving means, for decoding the received marked information utilizing the first digital coding format when the received marked information is first marked information and utilizing the second digital coding
- 15 format when the received marked information is second marked information.

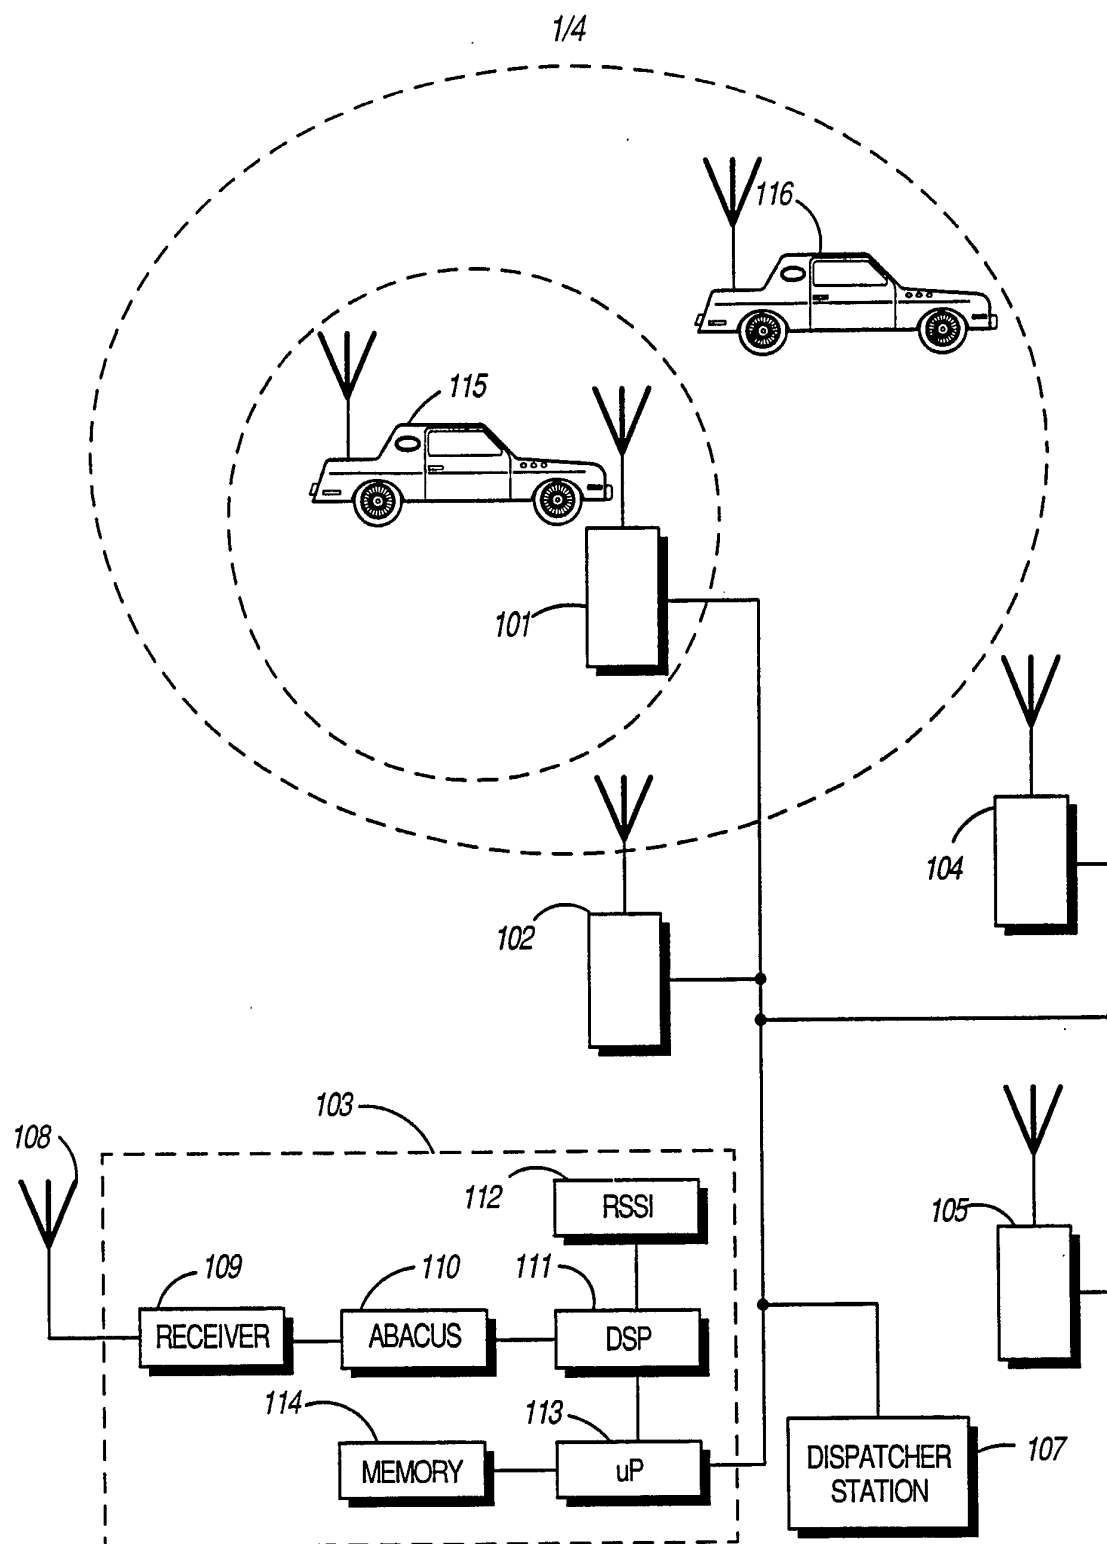


FIG. 1

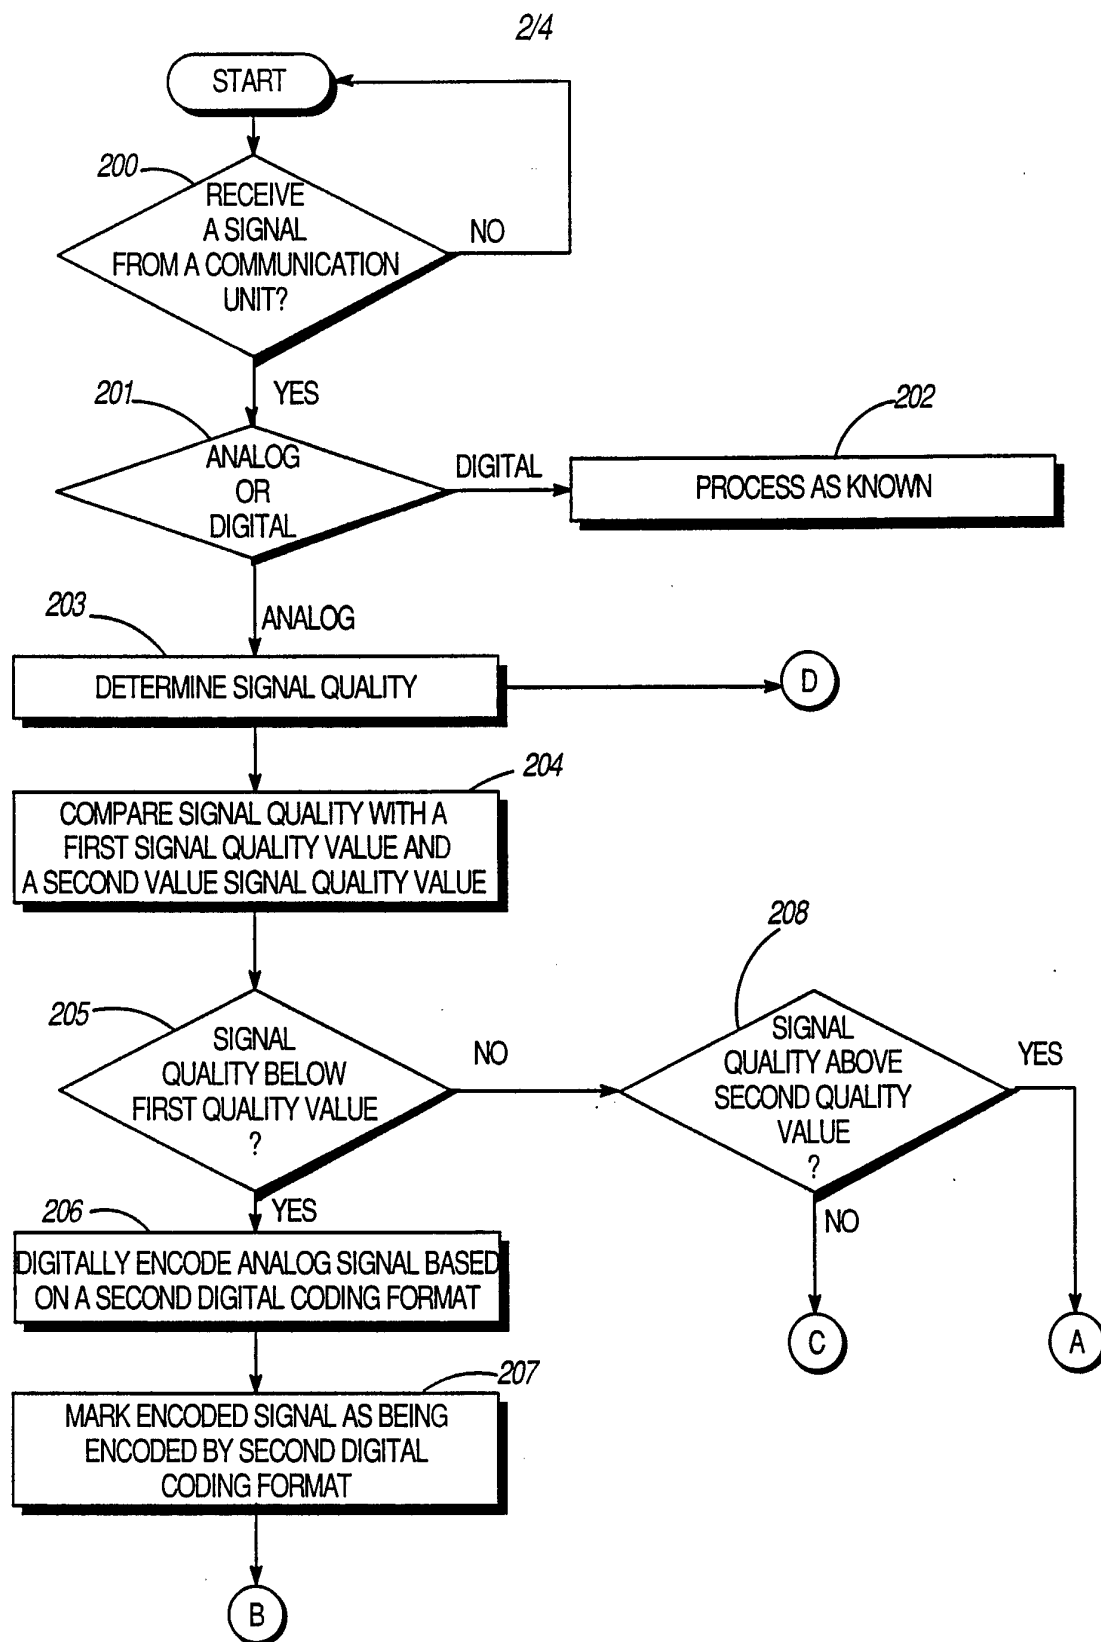


FIG.2A

3/4

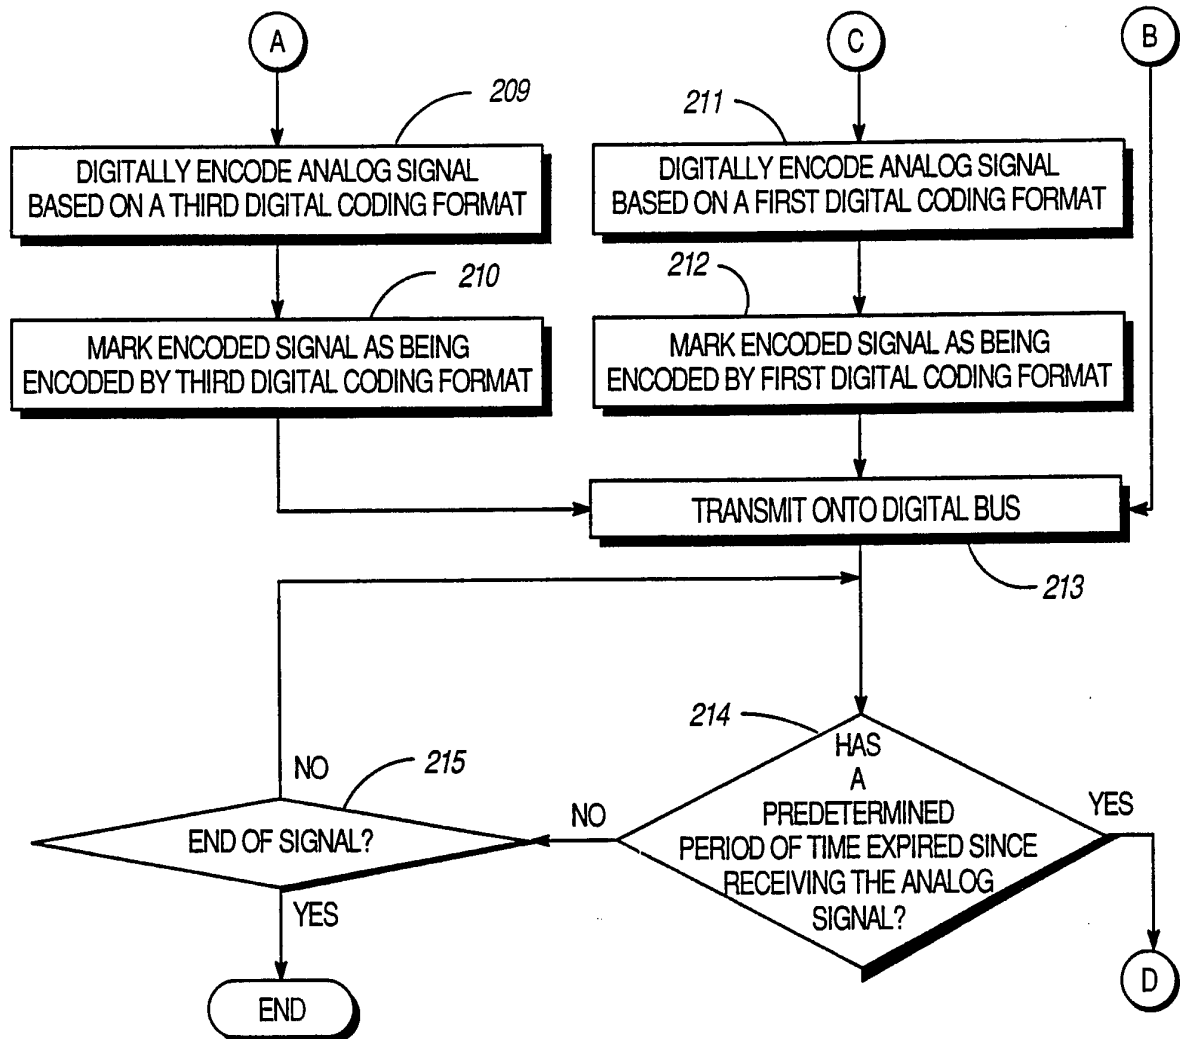


FIG.2B

4/4

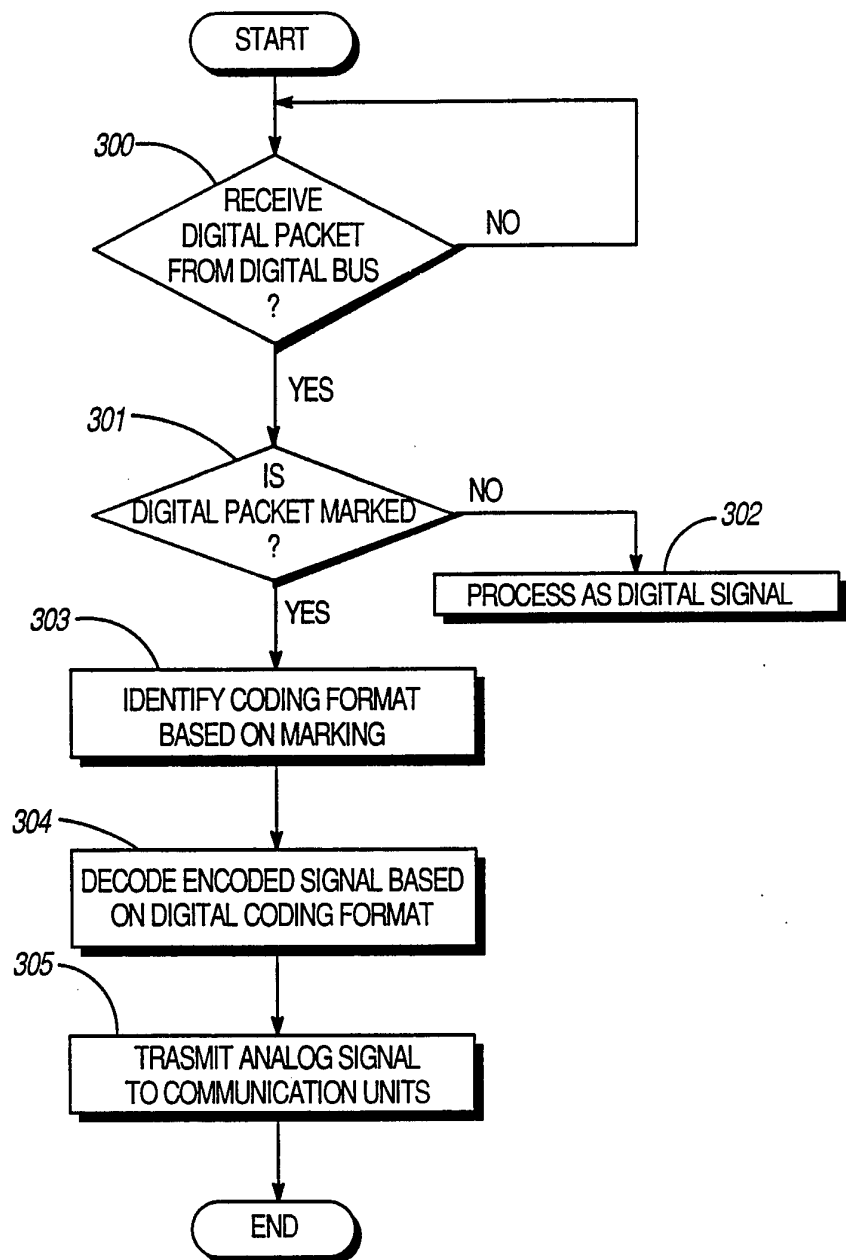


FIG.3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US94/01048

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :H04B 17/02, 17/00, 1/40; H04L 27/00;

US CL :375/3.1, 3, 5; 455/74

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 375/3.1, 3, 5, 7, 10, 122; 455/74, 93, 102, 110;

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 4,377,860 (GODBOLE) 22 March 1983, column 1, line 45 to column 2, line 6.	8, 9
A	US, A, 4,682,123 (LOPER ET. AL.) 21 July 1987, entire document.	1-10
A	US, A, 5,109,525 (NICHOLS) 28 April 1992, entire document.	1-10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A document defining the general state of the art which is not considered to be part of particular relevance	*X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E earlier document published on or after the international filing date	*Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G document member of the same patent family
*O document referring to an oral disclosure, use, exhibition or other means	
*P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

21 MARCH 1994

Date of mailing of the international search report

21 APR 1994

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. N/A

Authorized officer

AMANDA LE

Telephone No. (703) 305-4769