



- (51) International Patent Classification:
H04W 72/12 (2009.01)
- (21) International Application Number:
PCT/EP2018/069709
- (22) International Filing Date:
20 July 2018 (20.07.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
17182498.0 21 July 2017 (21.07.2017) EP
- (71) Applicants: **KONINKLIJKE KPN N.V.** [NL/NL];
Wilhelminakade 123, 3072 AP Rotterdam
(NL). **NEDERLANDSE ORGANISATIE VOOR
TOEGEPAST-NATUURWETENSCHAPPELIJK ON-**
- DERZOEK TNO** [NL/NL]; Anna van Buerenplein 1, 2595
DA 's-Gravenhage (NL).
- (72) Inventors: **JORGUESKI, Ljupco**; Jozef Israellaan 234,
2282 TR Rijswijk (NL). **ZHANG, Haibin**; Laan van Nieuw
Oostende 29, 2274 EA Voorburg (NL). **TRICHIAS,
Konstantinos**; Pindou 111, Mochato 18345 Athens (GR).
LITJENS, Remco; Van Kempenstraat 22, 2352 VH
Voorschoten (NL).
- (74) Agent: **WUYTS, Koenraad**; Koninklijke KPN N.V., Intel-
lectual Group, P.O. Box 25110, 3001 HC Rotterdam (NL).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,

(54) Title: SELECTING A SUBSET OF FREQUENCY RESOURCES BASED ON MEASUREMENTS OF CANDIDATE FREQUENCY RESOURCES

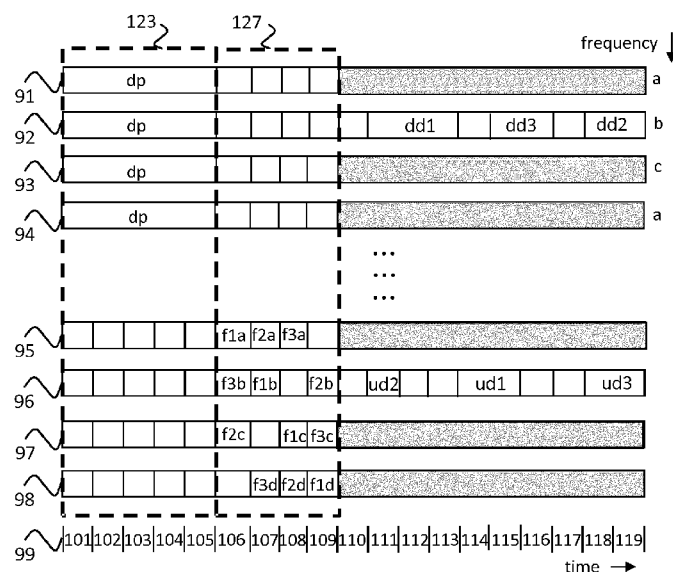


Fig. 9

(57) Abstract: A method of scheduling transmissions to client devices comprises receiving feedback (f1a-f3d) about a plurality of candidate downlink frequency resources (91-94) from a plurality of client devices and/or measuring channel qualities of a plurality of candidate uplink frequency resources (95-98) from receptions of transmissions, e.g. of the feedback, by the plurality of client devices. The method further comprises selecting a subset (92) of the plurality of candidate downlink frequency resources and/or a subset (96) of the plurality of the candidate uplink frequency resources based on the received feedback and/or the measured channel qualities. The method further comprises scheduling transmissions (dd1-3) to the client devices on the selected subset of candidate downlink frequency resources and/or transmissions (ud1-3) from the client devices on the selected subset of uplink frequency resources.



KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

Selecting a subset of frequency resources based on measurements of candidate frequency resources

5 Field of the invention

[0001] The invention relates to a system for scheduling transmissions to client devices and a client device for transmitting feedback to said system.

10 **[0002]** The invention further relates to a method of scheduling transmissions to client devices and a method of transmitting feedback.

[0003] The invention also relates to a computer program product enabling a computer system to perform such methods.

Background of the invention

15

[0004] Narrowband Internet of Things (NB-IoT) has been specified in 3GPP Release 13 with the aim to efficiently support IoT applications in LTE-based mobile networks with the requirements of deep indoor coverage, low complexity, low cost devices and long device battery life, amongst others.

20 **[0005]** There are two types of NB-IoT carriers specified in 3GPP Release 13, each occupying a bandwidth of 180 kHz, the same as one LTE Physical Resource Block (i.e. 12 OFDM sub-carriers each with 15 kHz width): anchor carriers and non-anchor carriers. An anchor carrier carries all the common control channels for NB-IoT (for the delivery of system information, synchronization, etc.). There could be one or more anchor carriers dedicated to
25 NB-IoT applications. A non-anchor carrier does not carry the common control channels of NB-IoT. In case the in-band operation mode of NB-IoT is used, the LTE Physical Resource Block (PRB) of the non-anchor carrier is not dedicated to NB-IoT, i.e. it can be shared by NB-IoT client devices (a client device is referred to as "User Equipment" or "UE" in LTE) and regular (not NB-IoT capable) LTE client devices via PRB resource allocation done by e.g. a
30 joint scheduler.

[0006] An idle NB-IoT client device camps on an anchor NB-IoT carrier and uses it for setting up the connection (i.e. paging and RACH procedure). During the connection set-up process (i.e. when transiting from RRC_Idle to RRC_Connected mode), the NB-IoT client device might be allocated an anchor or non-anchor NB-IoT carrier for its transmission/reception of
35 data.

[0007] Typically, an LTE carrier is wideband and the radio propagation condition is frequency-selective. At the exact locations of static client devices, the receive wideband signal may experience a “dip” at some Physical Resource Blocks (assuming the in-band mode operation mode of NB-IoT is used), while it might experience much better radio condition at some other PRBs. Typically, each static client device experiences the frequency-selective channel differently: when for one static client device the PRB is in a “dip”, the same PRB might have relatively very strong radio channel response for another static client device. For mobile devices, the radio channel quality of particular PRB is varying over time due to its mobility and if a PRB may experience a “dip” this is temporary and changes as the devices move around in the coverage area of the NB-IoT system.

[0008] In LTE, a scheduler assigns frequency and time resources as PRBs to a client device as soon as there is data to transmit by or to the client device. The smallest scheduling time interval is the transmission time interval (TTI). The most advanced resource assignment available in LTE is the so-called ‘channel aware’ time-frequency scheduling. For the downlink, the scheduler learns the time-frequency fading per client device via channel quality information (CQI) feedback from the client device. Ideally, this feedback is per PRB. For the uplink, the scheduler residing at the base station learns the time-frequency fading per client device via so-called sounding reference signal (SRS) transmission per client device. The SRS is a pilot signal transmitted over the whole frequency band of the LTE carrier (e.g. a 10 MHz band) so the scheduler can measure the channel for that client device in each PRB. Based on the time-frequency fading information determined for a client device, the scheduler assigns the PRBs that are ‘best’ for this client device to this client device.

[0009] Although ‘channel aware’ time-frequency scheduling takes the time-frequency fading per client device into account, which frequency resources are used for anchor and non-anchor NB-IoT carriers is configured by operators manually. As a result, the frequency-selective radio channels are not taken into account sufficiently. This is especially a problem for static client devices experiencing poor radio conditions (e.g. client devices installed at fixed locations deep in a building), as these client devices may experience unchanged radio conditions during the whole data transmission.

30

Summary of the invention

[0010] It is a first object of the invention to provide a system for scheduling transmissions to client devices, which already takes into account frequency-selective radio channels before scheduling takes place.

35

[0011] It is a second object of the invention to provide a client device for transmitting feedback to a system, which allows said system to already take into account frequency-selective radio channels before scheduling takes place.

5 **[0012]** It is a third object of the invention to provide a method of scheduling transmissions to client devices, which already takes into account frequency-selective radio channels before scheduling takes place.

[0013] It is a fourth object of the invention to provide a method of transmitting feedback to a system, which allows said system to already take into account frequency-selective radio channels before scheduling takes place.

10 **[0014]** According to the invention, the first object is realized in that the system comprises at least one receiver and at least one processor configured to use said at least one receiver to receive feedback about a plurality of candidate downlink frequency resources from a plurality of client devices and/or measure channel qualities of a plurality of candidate uplink frequency resources from receptions of transmissions by said plurality of client devices, select a subset
15 of said plurality of candidate downlink frequency resources and/or a subset of said plurality of candidate uplink frequency resources based on said received feedback and/or said measured channel qualities, and schedule transmissions to said plurality of client devices on said selected subset of candidate downlink frequency resources and/or transmissions from said plurality of client devices on said selected subset of uplink frequency resources.

20 **[0015]** By selecting a subset of frequency resources from candidate frequency resources based on measurements by a plurality of client devices and/or by measuring transmissions of a plurality of client devices, frequency resources may be automatically instead of manually selected while taking into account frequency-selective radio channels in this selection step, so before scheduling takes place. Thus, the real deployment environment of client devices is
25 taken into account and better overall performance is achieved. Moreover, an optimized frequency resource selection may lead to increased spectral efficiency and reduced power consumption by the client devices.

[0016] A frequency resource may be a frequency band, for example. The candidate downlink frequency resources may comprise contiguous and/or non-contiguous frequency bands. The
30 candidate uplink frequency resources may comprise contiguous and/or non-contiguous frequency bands. Said system may further comprise at least one transmitter and said at least one processor may be configured to use said at least one transmitter to transmit wireless signals on said plurality of candidate downlink frequency resources.

[0017] Said plurality of client devices may comprise one or more idle client devices. By not
35 only selecting a subset of frequency resources from candidate frequency resources based on measurements by active client devices and/or by measuring transmissions of active client devices, but also based on measurements by idle client devices and/or by measuring transmissions of idle client devices (e.g. when triggered to report on signal quality of

candidate frequency resources), the selection may take into account more client devices. This is especially beneficial when the idle client devices are static and are thus going to be in the same location when they are active as when they are idle.

5 **[0018]** Said at least one processor may be configured to use said at least one receiver to receive said feedback about said plurality of candidate downlink frequency resources on said plurality of candidate uplink frequency resources and measure said channel quality of said plurality of candidate uplink frequency resources from receptions of said feedback on said plurality of candidate uplink frequency resources. This makes it unnecessary for the client devices to transmit pilot signals like the sounding reference signals transmitted when using
10 'channel aware' time-frequency scheduling in uplink, and thereby reduces overhead.

[0019] At least one of said plurality of candidate downlink frequency resources may be paired with at least one of said plurality of candidate uplink frequency resources and said at least one processor may be configured to use said at least one receiver to receive said feedback about said at least one candidate downlink frequency resource on the at least one
15 candidate uplink frequency resource paired with said at least one candidate downlink frequency resource. Thus, in case a pair of uplink and downlink frequency resources, i.e. an uplink frequency resource with a pre-defined relative frequency offset compared to a downlink frequency resource, is used and the system receives feedback on the uplink frequency resource, the system knows that the feedback relates to the paired downlink
20 frequency resource.

[0020] Said feedback may comprise an identification of one or more candidate downlink frequency resources to which said feedback relates. In case an uplink frequency resource has not been paired with a downlink frequency resource, this identification allows the system to identify to which downlink frequency resource feedback from a client device on this uplink
25 frequency resource relates. Thus, the assigned downlink and uplink frequency resources do not necessarily need to be paired.

[0021] At least one of said plurality of candidate downlink frequency resources may be paired with at least one of said plurality of candidate uplink frequency resources and said at least one processor may be configured to determine at least one combined quality for at
30 least one pair of candidate downlink and uplink frequency resources and select a subset of said plurality of candidate downlink frequency resources and a subset of said plurality of candidate uplink frequency resources based on said at least one combined quality. If the assigned downlink and uplink frequency resources need to be paired, then the selection should preferably consider the uplink and downlink jointly, i.e. determine and use a
35 combined/joint quality measure for a paired downlink frequency resource and uplink frequency resource.

[0022] Said at least one processor may be further configured to schedule transmissions to a mobile client device on said selected subset of candidate downlink frequency resources

and/or transmissions from said mobile client device on said selected subset of uplink frequency resources, said selected subset of candidate downlink frequency resources not being based on feedback received from said mobile client device and/or said selected subset of candidate uplink frequency resources not being based on a channel quality measured from a reception of a transmission by said mobile device. As mobile client devices normally experience changing radio conditions during the whole data transmission, statically configured/selected frequency resources are less of a problem for mobile client devices. This is because a 'dip' in the quality of the radio conditions for a particular frequency resource is of temporary nature due to the device mobility. It is therefore not necessary to select a subset of downlink frequency resources based on feedback received from a mobile client device and/or select a subset of uplink frequency resources based on a channel quality measured based on a reception of a transmission by a mobile device.

[0023] Said wireless signals transmitted by said at least one processor using said at least one transmitter on said plurality of candidate downlink frequency resources may be pilot signals. Said pilot signals may be narrowband reference signals or cell specific reference signals, for example. Measurements on pilot signals are well known and therefore easy to implement.

[0024] Said at least one processor may be configured to use said at least one transmitter to inform said plurality of client devices of at least one time at which it will start transmitting said wireless signals on said plurality of candidate downlink frequency resources. Since transmitting the wireless signals on many candidate downlink frequency resources would use a significant amount of resources, it would not be efficient to transmit the wireless signals continuously. Instead, the wireless signals may be transmitted at certain times. These times, e.g. the first minute of every hour or every second hour, may be communicated to the client devices or, alternatively, configured in advance.

[0025] According to the invention, the second object is realized in that the client device comprises at least one receiver, at least one transmitter, and at least one processor configured to use said at least one receiver to measure at least one channel quality of at least one candidate downlink frequency resource from at least one reception of at least one transmission by a transmitting system on said at least one candidate downlink frequency resource, and use said at least one transmitter to transmit feedback based on one or more of said at least one measured channel quality to said transmitting system on a plurality of candidate uplink frequency resources. As this allows the system to measure the channel qualities of the candidate uplink frequency resources based on receptions of the feedback, it is unnecessary for the client device to transmit pilot signals like the sounding reference signals transmitted when using 'channel aware' time-frequency scheduling in uplink, and thereby reduces overhead.

[0026] According to the invention, the third object is realized in that the method of assigning frequency resources to a plurality of client devices comprises receiving feedback about a plurality of candidate downlink frequency resources from a plurality of client devices and/or measuring channel qualities of a plurality of candidate uplink frequency resources from
5 receptions of transmissions by said plurality of client devices, selecting a subset of said plurality of candidate downlink frequency resources and/or a subset of said plurality of said candidate uplink frequency resources based on said received feedback and/or said measured channel qualities, and scheduling transmissions to said plurality of client devices on said selected subset of candidate downlink frequency resources and/or transmissions
10 from said plurality of client devices on said selected subset of uplink frequency resources. Said method may be performed by software running on a programmable device. This software may be provided as a computer program product.

[0027] According to the invention, the fourth object is realized in that the method of transmitting feedback comprises measuring at least one channel quality of at least one
15 candidate downlink frequency resource from at least one reception of at least one transmission by a transmitting system on said at least one candidate downlink frequency resource and transmitting feedback based on one or more of said at least one measured channel quality to said transmitting system on a plurality of candidate uplink frequency resources. Said method may be performed by software running on a programmable device.
20 This software may be provided as a computer program product.

[0028] Said method may be performed by software running on a programmable device. This software may be provided as a computer program product.

[0029] Moreover, a computer program for carrying out the methods described herein, as well as a non-transitory computer readable storage-medium storing the computer program are
25 provided. A computer program may, for example, be downloaded by or uploaded to an existing device or be stored upon manufacturing of these systems.

[0030] A non-transitory computer-readable storage medium stores at least a first software code portion, the first software code portion, when executed or processed by a computer, being configured to perform executable operations comprising: receiving feedback about a
30 plurality of candidate downlink frequency resources from a plurality of client devices and/or measuring channel qualities of a plurality of candidate uplink frequency resources from receptions of transmissions by said plurality of client devices selecting a subset of said plurality of candidate downlink frequency resources and/or a subset of said plurality of said candidate uplink frequency resources based on said received feedback and/or said
35 measured channel qualities, and scheduling transmissions to said plurality of client devices on said selected subset of candidate downlink frequency resources and/or transmissions from said plurality of client devices on said selected subset of uplink frequency resources.

[0031] A non-transitory computer-readable storage medium stores at least a second software code portion, the second software code portion, when executed or processed by a computer, being configured to perform executable operations comprising: measuring at least one channel quality of at least one candidate downlink frequency resource from at least one reception of at least one transmission by a transmitting system on said at least one candidate downlink frequency resource and transmitting feedback based on one or more of said at least one measured channel quality to said transmitting system on a plurality of candidate uplink frequency resources.

[0032] As will be appreciated by one skilled in the art, aspects of the present invention may be embodied as a device, a method or a computer program product. Accordingly, aspects of the present invention may take the form of an entirely hardware embodiment, an entirely software embodiment (including firmware, resident software, micro-code, etc.) or an embodiment combining software and hardware aspects that may all generally be referred to herein as a "circuit", "module" or "system." Functions described in this disclosure may be implemented as an algorithm executed by a processor/microprocessor of a computer. Furthermore, aspects of the present invention may take the form of a computer program product embodied in one or more computer readable medium(s) having computer readable program code embodied, e.g., stored, thereon.

[0033] Any combination of one or more computer readable medium(s) may be utilized. The computer readable medium may be a computer readable signal medium or a computer readable storage medium. A computer readable storage medium may be, for example, but not limited to, an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system, apparatus, or device, or any suitable combination of the foregoing. More specific examples of a computer readable storage medium may include, but are not limited to, the following: an electrical connection having one or more wires, a portable computer diskette, a hard disk, a random access memory (RAM), a read-only memory (ROM), an erasable programmable read-only memory (EPROM or Flash memory), an optical fiber, a portable compact disc read-only memory (CD-ROM), an optical storage device, a magnetic storage device, or any suitable combination of the foregoing. In the context of the present invention, a computer readable storage medium may be any tangible medium that can contain, or store, a program for use by or in connection with an instruction execution system, apparatus, or device.

[0034] A computer readable signal medium may include a propagated data signal with computer readable program code embodied therein, for example, in baseband or as part of a carrier wave. Such a propagated signal may take any of a variety of forms, including, but not limited to, electro-magnetic, optical, or any suitable combination thereof. A computer readable signal medium may be any computer readable medium that is not a computer readable storage medium and that can communicate, propagate, or transport a program for use by or in connection with an instruction execution system, apparatus, or device.

[0035] Program code embodied on a computer readable medium may be transmitted using any appropriate medium, including but not limited to wireless, wireline, optical fiber, cable, RF, etc., or any suitable combination of the foregoing. Computer program code for carrying out operations for aspects of the present invention may be written in any combination of one or more programming languages, including an object oriented programming language such as Java(TM), Smalltalk, C++ or the like and conventional procedural programming languages, such as the "C" programming language or similar programming languages. The program code may execute entirely on the user's computer, partly on the user's computer, as a stand-alone software package, partly on the user's computer and partly on a remote computer, or entirely on the remote computer or server. In the latter scenario, the remote computer may be connected to the user's computer through any type of network, including a local area network (LAN) or a wide area network (WAN), or the connection may be made to an external computer (for example, through the Internet using an Internet Service Provider).

[0036] Aspects of the present invention are described below with reference to flowchart illustrations and/or block diagrams of methods, apparatus (systems), and computer program products according to embodiments of the present invention. It will be understood that each block of the flowchart illustrations and/or block diagrams, and combinations of blocks in the flowchart illustrations and/or block diagrams, can be implemented by computer program instructions. These computer program instructions may be provided to a processor, in particular a microprocessor or a central processing unit (CPU), of a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions, which execute via the processor of the computer, other programmable data processing apparatus, or other devices create means for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0037] These computer program instructions may also be stored in a computer readable medium that can direct a computer, other programmable data processing apparatus, or other devices to function in a particular manner, such that the instructions stored in the computer readable medium produce an article of manufacture including instructions which implement the function/act specified in the flowchart and/or block diagram block or blocks.

[0038] The computer program instructions may also be loaded onto a computer, other programmable data processing apparatus, or other devices to cause a series of operational steps to be performed on the computer, other programmable apparatus or other devices to produce a computer implemented process such that the instructions which execute on the computer or other programmable apparatus provide processes for implementing the functions/acts specified in the flowchart and/or block diagram block or blocks.

[0039] The flowchart and block diagrams in the figures illustrate the architecture, functionality, and operation of possible implementations of devices, methods and computer

program products according to various embodiments of the present invention. In this regard, each block in the flowchart or block diagrams may represent a module, segment, or portion of code, which comprises one or more executable instructions for implementing the specified logical function(s). It should also be noted that, in some alternative implementations, the functions noted in the blocks may occur out of the order noted in the figures. For example, two blocks shown in succession may, in fact, be executed substantially concurrently, or the blocks may sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustrations, and combinations of blocks in the block diagrams and/or flowchart illustrations, can be implemented by special purpose hardware-based systems that perform the specified functions or acts, or combinations of special purpose hardware and computer instructions.

Brief description of the Drawings

[0040] These and other aspects of the invention are apparent from and will be further elucidated, by way of example, with reference to the drawings, in which:

- Fig. 1 depicts an environment comprising embodiments of a system and client devices of the invention;
- Fig. 2 is a block diagram of the system and one of the client devices of Fig.1;
- Fig. 3 is a flow diagram of a first embodiment of the methods of the invention;
- Fig. 4 is a flow diagram of a second embodiment of the methods of the invention;
- Fig. 5 shows a first example of a resource allocation in relation to Fig.3;
- Fig. 6 shows a second example of a resource allocation in relation to Fig.4;
- Fig. 7 is a flow diagram of a third embodiment of the methods of the invention;
- Fig. 8 is a flow diagram of a fourth embodiment of the methods of the invention;
- Fig. 9 shows a third example of a resource allocation in relation to Fig.7;
- Fig. 10 shows a fourth example of a resource allocation in relation to Fig.8;
- Fig. 11 shows a fifth example of a resource allocation in relation to Fig.8;
- Fig. 12 shows a sixth example of a resource allocation in relation to Fig.8;
- Fig. 13 is a block diagram of an exemplary cellular telecommunication system used in an embodiment of the device and the system of the invention; and
- Fig. 14 is a block diagram of an exemplary data processing system for performing the methods of the invention.

[0041] Corresponding elements in the drawings are denoted by the same reference numeral.

Detailed description of the Drawings

5 **[0042]** Fig. 1 depicts an environment comprising an embodiment of the system for scheduling transmissions to client devices, base station 1 (e.g. an LTE eNodeB), and embodiments of the client devices for transmitting feedback, static client devices 11-15. In Fig.1, the static client devices 11-15 are located in a building 21 and mobile client devices 16-19 are vehicles driving on a road.

10 **[0043]** The base station 1 comprises a transceiver 3 and a processor 5, see Fig.2. The processor 5 is configured to use the transceiver 3 to receive feedback about a plurality of candidate downlink frequency resources from the plurality of static client devices 11-15 and/or measure channel qualities of a plurality of candidate uplink frequency resources from
15 receptions of transmissions by the plurality of static client devices 11-15. The plurality of static client devices 11-15 comprises one or more active client devices and one or more idle client devices. The processor 5 is further configured to select a subset of the plurality of candidate downlink frequency resources and/or a subset of the plurality of candidate uplink
20 frequency resources based on the received feedback and/or the measured channel qualities. The processor 5 is further configured to schedule transmissions to the plurality of client devices on the selected subset of candidate downlink frequency resources and/or
transmissions from the plurality of static client devices 11-15 on the selected subset of uplink frequency resources. In the embodiment of Fig.2, the base station 1 further comprises storage means 7, e.g. for storing the selection/configuration and/or the schedule.

[0044] The selected uplink frequency resource(s) and the selected downlink frequency
25 resource(s) may be used as NB-IoT anchor carriers, for example. The selected uplink frequency resource(s) and the selected downlink frequency resource(s) may optionally be used as NB-IoT non-anchor carriers. Alternatively, the above-mentioned measurements and/or feedback may be re-used or measurements may be performed and feedback may be transmitted in the same manner to determine on which non-anchor carrier(s) to schedule
30 transmissions.

[0045] The static client device 11 comprises a transceiver 33 and a processor 35, see Fig.2. The processor 35 is configured to use the transceiver 33 to measure at least one channel quality of at least one candidate downlink frequency resource from at least one reception of
35 at least one transmission by the base station 1 on the at least one candidate downlink frequency resource. The processor 35 is further configured to use the transceiver 33 to transmit feedback based on one or more of the at least one measured channel quality to the base station 1 on a plurality of candidate uplink frequency resources. The static client devices 12-15 comprise a transceiver and a processor configured as described above. In the

embodiment of **Fig.2**, the static client device **11** further comprises a sensor **39**. The static client devices **12-15** comprise a similar sensor. These sensors may be smart electricity sensors, for example.

5 **[0046]** In the embodiment of **Fig.2**, the processor **5** is configured to use the transceiver **3** to receive the feedback about the plurality of candidate downlink frequency resources on the plurality of candidate uplink frequency resources and measure the channel quality of the plurality of candidate uplink frequency resources from receptions of the feedback on the plurality of candidate uplink frequency resources.

10 **[0047]** In the embodiment of **Fig.2**, the processor **5** is configured to use the receiver **3** to receive the feedback about at least one candidate downlink frequency resource on the at least one candidate uplink frequency resource paired with the at least one candidate downlink frequency resource, if such a pairing has been specified. The feedback comprises an identification of one or more candidate downlink frequency resources to which the feedback relates when the feedback is transmitted on an unpaired candidate uplink
15 frequency resource.

[0048] The processor **5** is further configured to determine at least one combined quality for at least one pair of candidate downlink and uplink frequency resources and select a subset of the plurality of candidate downlink frequency resources and a subset of the plurality of candidate uplink frequency resources based on the at least one combined quality if such a
20 pairing has been specified. Separate (e.g. channel) qualities may be used for non-paired candidate downlink and uplink frequency resources. In practice, most likely either all candidate downlink and uplink frequency resources are paired or none of them is paired.

[0049] The processor **5** is further configured to schedule transmissions to mobile client devices **16-19** on the selected subset of candidate downlink frequency resources and
25 transmissions from the mobile client devices **16-19** on the selected subset of uplink frequency resources. The selected subset of candidate downlink frequency resources is not based on feedback received from the mobile client devices **16-19**. The selected subset of candidate uplink frequency resources is not based on a channel quality measured from a reception of a transmission by the mobile client devices **16-19**.

30 **[0050]** The processor **5** is configured to use the transceiver **3** to transmit wireless signals, specifically pilot signals, on the plurality of candidate downlink frequency resources. The processor **5** is configured to use the transceiver **3** to inform the plurality of static client devices **11-15** of at least one time at which it will start transmitting the wireless signals on the plurality of candidate downlink frequency resources.

35 **[0051]** In the embodiment shown in **Fig.2**, the base station **1** comprises one processor **5**. In an alternative embodiment, the base station **1** comprises multiple processors. The processor **5** of the base station **1** may be a general-purpose processor, e.g. an Intel or an AMD processor, or an application-specific processor, for example. The processor **5** may comprise

multiple cores, for example. The processor **5** may run a Unix-based or Windows operating system, for example. The transceiver **3** of the base station **1** may use one or more cellular communication technologies such as GPRS, CDMA, UMTS, NB-IoT and/or LTE to communicate with the client devices **11-19**, for example. In the embodiment shown in **Fig.2**,
5 a receiver and a transmitter are combined in the transceiver **3** of the base station **1**. In an alternative embodiment, the base station **1** comprises a receiver and a transmitter that are separate. The storage means **7** may comprise solid state memory, e.g. one or more Solid State Disks (SSDs) made out of Flash memory, or one or more hard disks, for example. The base station **1** may comprise other components typical for a component in a mobile
10 communication network, e.g. a power supply, or typical for a base station, e.g. an array of antennas. In the embodiment shown in **Fig.2**, the base station **1** comprises one device. In an alternative embodiment, the base station **1** comprise multiple devices.

[0052] In the embodiment shown in **Fig.2**, the static client device **11** comprises one processor **35**. In an alternative embodiment, the static client device **11** comprises multiple
15 processors. The processor **35** may be a general-purpose processor, e.g. an ARM processor, or an application-specific processor. The processor **35** may run a Unix-based operating system, for example. The transceiver **33** of the static client device **11** may use one or more cellular communication technologies such as e.g. GPRS, CDMA, UMTS, NB-IoT (Narrow Band - Internet of Things) and/or LTE to communicate with the base station **1**, for example.
20 In the embodiment shown in **Fig.2**, a receiver and a transmitter are combined in the transceiver **33** of the static client device **11**. In an alternative embodiment, the static client device **11** comprises a receiver and a transmitter that are separate. The sensor **39** may comprise one or more cameras and/or one or more microphones, for example. The static client device **11** may comprise other components typical for a client device, e.g. a battery.

[0053] In the embodiment shown in **Fig.2**, the system for scheduling transmissions to client devices is a base station. In an alternative embodiment, the system may comprise a base station plus one or more other components/functions of a mobile communication network, e.g. plus a physical or virtual node which schedules transmissions to client devices. The system may comprise multiple base stations distributed over multiple sites or one base
30 station working with multiple distributed antennas at different locations (Remote Radio Head (RRH) concept), for example.

[0054] First embodiments of the method of scheduling transmissions to client devices and the method of transmitting feedback are shown in **Fig.3**. A step **51** comprises a client device transmitting pilot signals (e.g. LTE Sounding Reference Signals or pilot signals similar to LTE
35 Sounding Reference Signals) to a base station on a plurality of candidate uplink frequency resources. In the embodiments of **Figs.3** to **12**, the uplink frequency resources are frequency bands allocated as LTE Physical Resource Blocks (PRBs). LTE uses Orthogonal Frequency-Division Multiplexing (OFDM) in which a large number of closely spaced orthogonal sub-carrier signals are used to carry data in parallel. In an alternative embodiment, resources

may be allocated to users in a different way. In the embodiments of **Figs.3 to 12**, the selected uplink frequency resources are used as NB-IoT carriers.

[0055] Step **51** is carried out in stage **121** shown in **Fig.5**. Stage **121** corresponds to time slots **101-105** in **Fig.5**. Time slots **101-119** are indicated on timeslot bar **99**. In time slot **101**, static client device UE1 transmits a pilot signal (up1) to the base station on candidate uplink NB-IoT carrier **95**, static client device UE3 transmits a pilot signal (up3) to the base station on candidate uplink NB-IoT carrier **96**, and static client device UE2 transmits a pilot signal (up2) to the base station on candidate uplink NB-IoT carrier **97**. In time slot **102**, UE2 transmits a pilot signal (up2) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits a pilot signal (up1) to the base station on candidate uplink carrier **96**, and UE3 transmits a pilot signal (up3) to the base station on candidate uplink NB-IoT carrier **98**.

[0056] In time slot **103**, UE3 transmits a pilot signal (up3) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits a pilot signal (up1) to the base station on candidate uplink NB-IoT carrier **97**, and UE2 transmits a pilot signal (up2) to the base station on candidate uplink NB-IoT carrier **98**. In time slot **104**, UE2 transmits a pilot signal (up2) to the base station on candidate uplink NB-IoT carrier **96**, UE3 transmits a pilot signal (up3) to the base station on candidate uplink NB-IoT carrier **97**, and UE1 transmits a pilot signal (up1) to the base station on candidate uplink NB-IoT carrier **98**. In the embodiment of **Fig.5** (and also in the embodiments of **Fig.6** and **9-12**), UE1 to UE3 do not transmit simultaneously on a single candidate uplink NB-IoT carrier. In an alternative embodiment, multiple of the UEs transmit on a single candidate uplink NB-IoT carrier simultaneously in at least one time slot. This may be used to reduce the length of stage **121** of **Fig.5** (and stage **125** of **Fig.6** and stage **127** of **Figs. 9-12**).

[0057] A step **52** comprises the base station receiving the pilot signals from the client device and from further ones of the plurality of client devices. A step **53** comprises the base station measuring channel qualities (e.g. pilot signal level) on the plurality of candidate uplink NB-IoT carriers from receptions of transmissions of the pilot signals. The plurality of client devices comprises one or more active client devices and/or one or more idle client devices. By analyzing the channel qualities, the base station can estimate if and where the 'fade dip' in the uplink is. This 'fade dip' may be on different frequency position between downlink and uplink for the frequency division duplexing (FDD) communication. While for the Time division duplexing (TDD) communication, there is symmetry between downlink and uplink.

[0058] A step **54** comprises selecting a subset of the plurality of the candidate uplink NB-IoT carriers based on the measured channel qualities. Which carriers have been selected may be communicated via a selected/configured downlink carrier. A step **55** comprises scheduling transmissions to the plurality of client devices on the manually configured downlink NB-IoT carrier(s) and transmissions from the plurality of client devices on the selected subset of uplink NB-IoT carriers. Step **55** is performed repeatedly for a certain period, e.g. hours, days,

weeks, or months, after which steps **51** to **54** are repeated. Steps **51** to **54** may be performed at the initial deployment of NB-IoT, and optionally repeated afterwards e.g. periodically in order to account for the changes at NB-IoT client devices (e.g. deployment of new NB-IoT client devices and/or movements of existing NB-IoT client devices). Optionally, the periodicity of this scheme may be adapted while the scheme is being performed, e.g. based on an expectation of how quickly there might be (significant) changes at NB-IoT client devices.

[0059] The scheduled transmissions take place in time slots **106-119** shown in **Fig.5**. In time slots **107-109**, the base station transmits data (dd1) to UE1 on manually configured downlink NB-IoT carrier **91**. In time slots **111-112**, the base station transmits data (dd3) to UE3 on downlink carrier **91**. In time slots **116-117**, the base station transmits data (dd2) to UE2 on downlink NB-IoT carrier **91**. In time slot **109**, UE2 transmits data (ud2) to the base station on selected uplink NB-IoT carrier **96**. In time slots **114-115**, UE1 transmits data (ud1) to the base station on selected uplink NB-IoT carrier **96**. In time slots **117-118**, UE3 transmits data (ud3) to the base station on selected uplink NB-IoT carrier **96**.

[0060] In the embodiment of **Fig.5** (and also in the embodiments of **Fig.6** and **9-12**), transmissions to/from UEs are multiplexed in the time domain. In an alternative embodiment, the transmissions to/from UEs are multiplexed in the frequency domain (different subcarriers are used by different UEs), or in both time and frequency domains. In the embodiment of **Fig.5** (and also in the embodiments of **Fig.6** and **9-12**), only a single downlink NB-IoT carrier and a single uplink NB-IoT carrier are used for transmissions to/from UEs. In an alternative embodiment, multiple downlink NB-IoT carriers and/or multiple uplink NB-IoT carriers are used for transmissions to/from UEs.

[0061] Second embodiments of the method of scheduling transmissions to client devices and the method of transmitting feedback are shown in **Fig.4**. A step **61** comprises a base station transmitting pilot signals to a plurality of client devices on a plurality of candidate downlink NB-IoT carriers. The plurality of client devices comprises one or more active client devices and/or one or more idle client devices. The pilot signals could be LTE Cell Specific Reference Signals or Narrowband Reference Signals (NRS) as specified for NB-IoT, for example.

[0062] NB-IoT client devices are currently only able to measure one single downlink PRB (i.e. not multiple PRBs at the same time) due to the reception/transmission bandwidth limit of the receiver, e.g. the receiver is simple, because the client device needs to be low cost. The client devices therefore listen on each of the candidate downlink NB-IoT carriers in sequence. This procedure introduces some overhead in using radio resource and the time spent, as well as overhead for a client device in measuring and reporting. On the other hand, this procedure typically only happens once per e.g. hour, day, week, or a month, so the

overhead is manageable. Furthermore, this procedure could be scheduled at a time when there is little traffic in the network (e.g. at night), in order to mitigate the impact.

[0063] Step **61** is carried out in stage **123** shown in **Fig.6**. Stage **123** corresponds to time slots **101-105** in **Fig.6**. In time slots **101-105**, the base station transmits a pilot signal (dp) on candidate downlink NB-IoT carrier **91**, on candidate downlink NB-IoT carrier **92**, on candidate downlink NB-IoT carrier **93** and on candidate downlink NB-IoT carrier **94**. In the embodiment of **Fig.6** (and also in the embodiments of **Figs. 9-12**), the pilot signal (dp) is transmitted on all of the candidate downlink NB-IoT carriers simultaneously. In an alternative embodiment, the pilot signal (dp) is transmitted on the candidate downlink NB-IoT carriers in sequence or according to another schedule. This may result in a more efficient use of resources. The schedule for transmitting the pilot signal (dp) may be standardized or communicated by the base station to the UEs, for example.

[0064] A step **62** comprises a client device receiving these pilot signals. A step **63** comprises the client device measuring at least one channel quality of at least one of the plurality of candidate downlink NB-IoT carriers from at least one reception of at least one transmission by the base station on the plurality of candidate downlink NB-IoT carriers. A step **64** comprises transmitting feedback based on one or more of the at least one measured channel quality to the base station on a single, manually configured uplink NB-IoT carrier.

[0065] Step **64** is carried out in stage **125** shown in **Fig.6**. Stage **125** corresponds to time slots **106-108** in **Fig.6**. In time slot **106**, UE1 transmits its feedback (f1) to the base station on manually configured uplink NB-IoT carrier **95**. In time slot **107**, UE2 transmits its feedback (f2) to the base station on uplink NB-IoT carrier **95**. In time slot **108**, UE3 transmits its feedback (f3) to the base station on uplink NB-IoT carrier **95**. In the embodiment of **Fig.4**, illustrated in **Fig.6**, the feedback identifies which one or more of candidate downlink NB-IoT carriers **91-94** is or are preferred by the client device. The period in which stages **123** and **125** take place may be pre-configured in the base station and in the client devices or communicated by the base station to the client devices, for example. In the embodiment of **Fig.6**, the feedback transmitted by the UEs is multiplexed in the time domain. In an alternative embodiment, the feedback transmitted by the UEs is multiplexed in the frequency domain (different subcarriers are used by different UEs), or in both time and frequency domains.

[0066] A step **65** comprises the base station receiving this feedback from the client device and receiving further feedback from the further ones of the plurality of client devices. A step **66** comprises selecting a subset of the plurality of candidate downlink NB-IoT carriers based on the received feedback. Step **55** comprises scheduling transmissions to the plurality of client devices on the selected subset of candidate downlink NB-IoT carriers and transmissions from the plurality of client devices on the manually configured uplink NB-IoT carrier(s).

[0067] The scheduled transmissions take place in time slots **109-119** shown in **Fig.6**. In time slots **110-112**, the base station transmits data (dd1) to UE1 on selected downlink NB-IoT carrier **92**. In time slots **114-115**, the base station transmits data (dd3) to UE3 on selected downlink NB-IoT carrier **92**. In time slots **118-119**, the base station transmits data (dd2) to
 5 UE2 on selected downlink NB-IoT carrier **92**. In time slot **111**, UE2 transmits data (ud2) to the base station on manually configured uplink NB-IoT carrier **95**. In time slots **114-115**, UE1 transmits data (ud1) to the base station on manually configured uplink NB-IoT carrier **95**. In time slots **118-119**, UE3 transmits data (ud3) to the base station on manually configured uplink NB-IoT carrier **95**.

10 **[0068]** Third embodiments of the method of scheduling transmissions to client devices and the method of transmitting feedback are shown in **Fig.7**. Steps **61**, **62** and **63** are the same as in **Fig.4**. However, step **64** of **Fig.4** has been replaced with a step **71** in **Fig.7**. Step **71** comprises transmitting feedback based on one or more of the at least one measured channel quality of at least one of the plurality of candidate downlink NB-IoT carriers to the base
 15 station on a plurality of candidate uplink NB-IoT carriers.

[0069] Step **71** is carried out in stage **127** shown in **Fig.9**. Stage **127** corresponds to time slots **106-109** in **Fig.9**. In time slot **106**, UE1 transmits its feedback relating to candidate downlink carrier **91** (f1a) to the base station on candidate uplink NB-IoT carrier **95**, UE3 transmits its feedback relating to candidate downlink carrier **92** (f3b) to the base station on
 20 candidate uplink NB-IoT carrier **96** and UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f2c) to the base station on candidate uplink NB-IoT carrier **97**. In time slot **107**, UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **91** (f2a) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **92** (f1b) to the base station on candidate uplink
 25 NB-IoT carrier **96** and UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f3d) to the base station on candidate uplink NB-IoT carrier **98**.

[0070] In time slot **108**, UE3 transmits its feedback relating to candidate downlink carrier **91** (f3a) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f1c) to the base station on candidate uplink
 30 NB-IoT carrier **97** and UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f2d) to the base station on candidate uplink NB-IoT carrier **98**. In time slot **109**, UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **92** (f2b) to the base station on candidate uplink NB-IoT carrier **96**, UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f3c) to the base station on candidate uplink NB-IoT
 35 carrier **97** and UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f1d) to the base station on candidate uplink NB-IoT carrier **98**. In the embodiment of **Fig.7**, illustrated in **Fig.9**, the feedback comprises the Received Signal Received Power (RSRP) of a single downlink carrier. In an alternative embodiment, the feedback additionally or alternatively comprises other performance metrics like RSRQ, CQI, SNR, SINR.

[0071] A step **72** comprises the base station receiving the feedback from the client devices on the plurality of candidate uplink NB-IoT carriers. A step **73** comprises the base station measuring channel qualities on the plurality of candidate uplink NB-IoT carriers from receptions of the feedback from the plurality of client devices. A step **74** comprises selecting
 5 a subset of the plurality of candidate downlink NB-IoT carriers and a subset of the plurality of candidate uplink NB-IoT carriers based on the received feedback and the measured channel qualities.

[0072] Step **55** comprises scheduling transmissions to the plurality of client devices on the selected subset of candidate downlink NB-IoT carriers and transmissions from the plurality of
 10 client devices on the selected subset of candidate uplink NB-IoT carriers. In the embodiment of **Fig.7**, the uplink NB-IoT carriers and the downlink NB-IoT carriers are paired, i.e. an uplink NB-IoT carrier has a pre-defined relative frequency position to the downlink NB-IoT carrier (where the base station has transmitted the pilot signal). In this case, the base station implicitly knows for which downlink carrier the feedback received in step **72** is.

[0073] The scheduled transmissions take place in time slots **110-119** shown in **Fig.9**. In time slots **111-113**, the base station transmits data (dd1) to UE1 on selected downlink NB-IoT carrier **92**. In time slots **115-116**, the base station transmits data (dd3) to UE3 on selected downlink NB-IoT carrier **92**. In time slots **118-119**, the base station transmits data (dd2) to UE2 on selected downlink NB-IoT carrier **92**. In time slot **111**, UE2 transmits data (ud2) to
 20 the base station on selected uplink NB-IoT carrier **96**. In time slots **114-115**, UE1 transmits data (ud1) to the base station on selected uplink NB-IoT carrier **96**. In time slots **118-119**, UE3 transmits data (ud3) to the base station on selected uplink NB-IoT carrier **96**.

[0074] Fourth embodiments of the method of scheduling transmissions to client devices and the method of transmitting feedback are shown in **Fig.8**. In these fourth embodiments, the
 25 uplink NB-IoT carriers and the downlink NB-IoT carriers are not paired, i.e. there is no uplink NB-IoT carrier that has a one-to-one relation with the downlink carrier where the base station has transmitted the pilot signal. Steps **61** to **63**, steps **71** to **73** and step **55** are the same as in **Fig.7**. Step **74** of **Fig.7** has been replaced with step **54** of **Fig.3** and step **66** of **Fig.4**. Since the uplink NB-IoT carriers and the downlink NB-IoT carriers are not paired, they are
 30 selected separately, which may result in better performance. This is illustrated in **Fig.10**.

[0075] The difference between **Figs.9** and **10** is that in **Fig.10**, candidate uplink NB-IoT carrier **95** has been selected instead of candidate uplink NB-IoT carrier **96**. In **Fig.9**, downlink NB-IoT carrier **91** is paired with uplink NB-IoT carrier **95**, downlink carrier **92** is paired with uplink NB-IoT carrier **96**, downlink NB-IoT carrier **93** is paired with uplink NB-IoT carrier **97**,
 35 and downlink NB-IoT carrier **94** is paired with uplink NB-IoT carrier **98**. Thus, the selected downlink NB-IoT carrier **92** and the selected uplink NB-IoT carrier **96** of **Fig.9** are paired and the selected downlink NB-IoT carrier **92** and the selected uplink NB-IoT carrier **95** of **Figs.10-12** are not paired.

[0076] In time slot **111** of **Fig.10**, UE2 transmits data (ud2) to the base station on selected uplink NB-IoT carrier **95**. In time slots **114-115** of **Fig.10**, UE1 transmits data (ud1) to the base station on selected uplink NB-IoT carrier **95**. In time slots **118-119** of **Fig.10**, UE3 transmits data (ud3) to the base station on selected uplink NB-IoT carrier **95**. In **Fig.10**, the feedback transmitted by the client devices in stage **127** is the same as in **Fig.9**. Although the selected downlink NB-IoT carrier **92** and the selected uplink NB-IoT carrier **95** are not paired, the pairing between downlink NB-IoT carriers and uplink NB-IoT carriers is used in stage **127** in **Fig.10**.

[0077] In **Figs.11-12**, the pairing between downlink NB-IoT carriers and uplink NB-IoT carriers is not used in stage **127**. In **Fig.11**, the feedback transmitted on an uplink NB-IoT carrier does not relate to a paired downlink NB-IoT carrier, but identifies to which downlink NB-IoT carrier it does relate. Like in **Figs.9** and **10**, the feedback comprises the Received Signal Received Power (RSRP) of a single downlink NB-IoT carrier. In an alternative embodiment, the feedback additionally or alternatively comprises other performance metrics like RSRQ, CQI, SNR, SINR.

[0078] In time slot **106** of **Fig.11**, UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **91** (f1a) to the base station on candidate uplink NB-IoT carrier **95**, UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f3c) to the base station on candidate uplink NB-IoT carrier **96** and UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f2d) to the base station on candidate uplink NB-IoT carrier **97**. In time slot **107** of **Fig.11**, UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **92** (f2b) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **92** (f1b) to the base station on candidate uplink NB-IoT carrier **96** and UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **91** (f3a) to the base station on candidate uplink NB-IoT carrier **98**.

[0079] In time slot **108** of **Fig.11**, UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f3d) to the base station on candidate uplink NB-IoT carrier **95**, UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f1c) to the base station on candidate uplink NB-IoT carrier **97** and UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **91** (f2a) to the base station on candidate uplink NB-IoT carrier **98**. In time slot **109** of **Fig.11**, UE2 transmits its feedback relating to candidate downlink NB-IoT carrier **93** (f2c) to the base station on candidate uplink NB-IoT carrier **96**, UE3 transmits its feedback relating to candidate downlink NB-IoT carrier **92** (f3b) to the base station on candidate uplink NB-IoT carrier **97** and UE1 transmits its feedback relating to candidate downlink NB-IoT carrier **94** (f1d) to the base station on candidate uplink NB-IoT carrier **98**.

[0080] In **Fig.12**, the feedback transmitted on a candidate uplink NB-IoT carrier identifies which one or more of candidate downlink NB-IoT carriers **91-94** is or are preferred by the client device, like in **Fig.6**. However, since feedback should be transmitted on multiple candidate uplink NB-IoT carriers, a client device transmits the same feedback on all the candidate uplink NB-IoT carriers **95-98**. UE1 transmits its feedback on candidate uplink NB-IoT carrier **95** in time slot **106**, on candidate uplink NB-IoT carrier **96** in time slot **107**, on candidate uplink NB-IoT carrier **97** in time slot **108** and on candidate uplink NB-IoT carrier **98** in time slot **109**.

[0081] UE2 transmits its feedback on candidate uplink NB-IoT carrier **95** in time slot **107**, on candidate uplink NB-IoT carrier **96** in time slot **109**, on candidate uplink NB-IoT carrier **97** in time slot **106** and on candidate uplink NB-IoT carrier **98** in time slot **108**. UE3 transmits its feedback on candidate uplink NB-IoT carrier **95** in time slot **108**, on candidate uplink NB-IoT carrier **96** in time slot **106**, on candidate uplink NB-IoT carrier **97** in time slot **109** and on candidate uplink NB-IoT carrier **98** in time slot **107**.

[0082] **Figs.5-6** and **9-12** show the use of Frequency Division Multiplexing (FDD). In an alternative embodiment, Time Division Multiplexing (TDD) is used. In this alternative embodiment, the same frequency resources are used for both uplink and downlink and downlink and uplink frequency resources thus do not need to be paired.

[0083] Step **54** of **Figs.3** and **8**, step **66** of **Figs.4** and **8**, and step **74** of **Fig.7** at least comprise selecting one or more NB-IoT anchor carriers and may optionally comprise selecting one or more NB-IoT non-anchor carriers. The base station/network may perform this selection, for example, by first determining for each candidate carrier how many of the client devices can be served on this candidate carrier (e.g. by determining whether a determined RSRP in the downlink or a measured signal strength in the uplink exceeds a certain threshold).

[0084] For example, a first candidate downlink carrier may be able to serve 85% of the client devices, a second candidate downlink carrier may be able to serve 82% of the client devices, a third candidate downlink carrier may be able to serve 78% of the client devices, and a fourth candidate downlink carrier may be able to serve 74% of the client devices. A first candidate uplink carrier may be able to serve 83% of the client devices, a second candidate uplink carrier may be able to serve 80% of the client devices, a third candidate uplink carrier may be able to serve 79% of the client devices, and a fourth candidate uplink carrier may be able to serve 76% of the client devices.

[0085] A single downlink carrier and/or a single uplink carrier may be selected or multiple downlink carriers and/or multiple uplink carriers may be selected. In the former case, the selected downlink carrier may be the first candidate downlink carrier (serving 85% of the client devices) and/or the selected uplink carrier may be the first candidate uplink carrier (serving 83% of the client devices), for example.

[0086] In the latter case, the base station/network may use, for example, one of the following criteria for selecting multiple carriers based on the determined information:

- 5 **A.** The base station/network selects the M downlink carriers (of which at least one is an anchor carrier) and/or uplink carriers (of which at least one is an anchor carrier) which together serve all the NB-IoT client devices, or as many of the NB-IoT client devices as possible. For example, the first and the fourth candidate downlink carriers are selected, because together they serve 95% of the client devices, while the first and the second candidate downlink carriers together serve, 90% of the client devices, and/or the first and the third candidate uplink carriers are selected, because together they serve 90% of the client devices, while the first and the second candidate uplink carriers together serve, 85% of the client devices.
- 10 **B.** The base station/network selects the M downlink carriers (of which at least one is an anchor carrier) and/or uplink carriers (of which at least one is an anchor carrier) which are ranked the highest. For example, the first candidate downlink carrier and the second candidate downlink carrier are selected and/or the first candidate uplink carrier and the second candidate uplink carrier are selected, because they are ranked highest according to the percentage of served client devices.
- 15

[0087] When determining how many client devices can be served with a candidate downlink carrier, it may be taken into account whether these client devices can be served by the statically configured uplink carriers or candidate uplink carriers. When determining how many client devices can be served with a candidate uplink carrier, it may be taken into account whether these client devices can be served by the statically configured downlink carriers or candidate downlink carriers. For example, the first candidate uplink carrier and the first candidate downlink carrier might together be able to serve 75% of the client devices in both uplink and downlink, while the second candidate downlink carrier and the second candidate uplink carrier might together be able to serve 80% of the client devices in both uplink and downlink. In this case, the latter combination may be preferred.

20

25

[0088] A combined quality of a paired downlink frequency resource and uplink frequency resource may be determined in one of the following ways, for example:

- 30 **1.** Determining the sum of the number of served client devices in the downlink and the number of served client devices in the uplink
- 2.** Determining the number of served client devices in the downlink, with the condition that the number of client devices served by the paired uplink carrier is no lower than a pre-defined threshold
- 35 **3.** Determining the number of served client devices in the uplink, with the condition that the number of client devices served by the paired downlink carrier is no lower than a pre-defined threshold

[0089] The measurements performed in step **53** of **Fig.3** and step **73** of **Figs.7** and **8** and the feedback received in steps **65** of **Fig.4** and step **72** of **Figs.7** and **8** may be used in step **55** to determine which time-frequency resources to allocate to a client device if multiple downlink NB-IoT carriers and/or multiple downlink NB-IoT have been selected/configured.

5 **[0090]** In the telecommunications system **200** of **Fig. 13**, three generations of networks are schematically depicted together for purposes of brevity. A more detailed description of the architecture and overview can be found in 3GPP Technical Specification TS 23.002 'Network Architecture' which is included in the present application by reference in its entirety. Other types of cellular telecommunication system can alternatively or additionally be used, e.g. a
10 5G cellular telecommunication system.

[0091] The lower branch of **Fig. 13** represents a GSM/GPRS or UMTS network.

[0092] For a GSM/GPRS network, a radio access network (RAN) system **220** comprises a plurality of nodes, including base stations (combination of a BSC and a BTS), not shown individually in **Fig. 13**. The core network system comprises a Gateway GPRS Support Node
15 **222** (GGSN), a Serving GPRS Support Node **221** (SGSN, for GPRS) or Mobile Switching Centre (MSC, for GSM, not shown in **Fig. 6**) and a Home Location Register **223** (HLR). The HLR **223** contains subscription information for user devices **201**, e.g. mobile stations MS.

[0093] For a UMTS radio access network (UTRAN), the radio access network system **220** also comprises a Radio Network Controller (RNC) connected to a plurality of base stations
20 (NodeBs), also not shown individually in **Fig. 13**. In the core network system, the GGSN **222** and the SGSN **221**/MSC are connected to the HLR **223** that contains subscription information of the user devices **201**, e.g. user equipment UE.

[0094] The upper branch of the telecommunications system in **Fig. 13** represents a next generation network, commonly indicated as Long Term Evolution (LTE) system or Evolved
25 Packet System (EPS).

[0095] The radio access network system **210** (E-UTRAN), comprises base stations (evolved NodeBs, eNodeBs or eNBs), not shown individually in **Fig. 13**, providing cellular wireless access for a user device **201**, e.g. user equipment UE. The core network system comprises a PDN Gateway (P-GW) **214** and a Serving Gateway **212** (S-GW). The E-UTRAN **210** of the
30 EPS is connected to the S-GW **212** via a packet network. The S-GW **212** is connected to a Home Subscriber Server HSS **213** and a Mobility Management Entity MME **211** for signalling purposes. The HSS **213** includes a subscription profile repository SPR for user devices **201**.

[0096] For GPRS, UMTS and LTE systems, the core network system is generally connected to a further packet network **202**, e.g. the Internet.

35 **[0097]** Further information of the general architecture of an EPS network can be found in 3GPP Technical Specification TS 23.401 'GPRS enhancements for Evolved Universal Terrestrial Radio Access Network (E-UTRAN) access'.

[0098] Fig. 14 depicts a block diagram illustrating an exemplary data processing system that may perform the methods as described with reference to Figs. 3-4 and 7-8.

[0099] As shown in Fig. 14, the data processing system 300 may include at least one processor 302 coupled to memory elements 304 through a system bus 306. As such, the data processing system may store program code within memory elements 304. Further, the processor 302 may execute the program code accessed from the memory elements 304 via a system bus 306. In one aspect, the data processing system may be implemented as a computer that is suitable for storing and/or executing program code. It should be appreciated, however, that the data processing system 300 may be implemented in the form of any system including a processor and a memory that is capable of performing the functions described within this specification.

[00100] The memory elements 304 may include one or more physical memory devices such as, for example, local memory 308 and one or more bulk storage devices 310. The local memory may refer to random access memory or other non-persistent memory device(s) generally used during actual execution of the program code. A bulk storage device may be implemented as a hard drive or other persistent data storage device. The processing system 300 may also include one or more cache memories (not shown) that provide temporary storage of at least some program code in order to reduce the number of times program code must be retrieved from the bulk storage device 310 during execution.

[00101] Input/output (I/O) devices depicted as an input device 312 and an output device 314 optionally can be coupled to the data processing system. Examples of input devices may include, but are not limited to, a keyboard, a pointing device such as a mouse, or the like. Examples of output devices may include, but are not limited to, a monitor or a display, speakers, or the like. Input and/or output devices may be coupled to the data processing system either directly or through intervening I/O controllers.

[00102] In an embodiment, the input and the output devices may be implemented as a combined input/output device (illustrated in Fig. 14 with a dashed line surrounding the input device 312 and the output device 314). An example of such a combined device is a touch sensitive display, also sometimes referred to as a “touch screen display” or simply “touch screen”. In such an embodiment, input to the device may be provided by a movement of a physical object, such as e.g. a stylus or a finger of a user, on or near the touch screen display.

[00103] A network adapter 316 may also be coupled to the data processing system to enable it to become coupled to other systems, computer systems, remote network devices, and/or remote storage devices through intervening private or public networks. The network adapter may comprise a data receiver for receiving data that is transmitted by said systems, devices and/or networks to the data processing system 300, and a data transmitter for transmitting data from the data processing system 300 to said systems, devices and/or networks.

Modems, cable modems, and Ethernet cards are examples of different types of network adapter that may be used with the data processing system 300.

[00104] As pictured in **Fig. 14**, the memory elements 304 may store an application 318. In various embodiments, the application 318 may be stored in the local memory 308, the one or more bulk storage devices 310, or separate from the local memory and the bulk storage devices. It should be appreciated that the data processing system 300 may further execute an operating system (not shown in **Fig. 14**) that can facilitate execution of the application 318. The application 318, being implemented in the form of executable program code, can be executed by the data processing system 300, e.g., by the processor 302. Responsive to executing the application, the data processing system 300 may be configured to perform one or more operations or method steps described herein.

[00105] Various embodiments of the invention may be implemented as a program product for use with a computer system, where the program(s) of the program product define functions of the embodiments (including the methods described herein). In one embodiment, the program(s) can be contained on a variety of non-transitory computer-readable storage media, where, as used herein, the expression "non-transitory computer readable storage media" comprises all computer-readable media, with the sole exception being a transitory, propagating signal. In another embodiment, the program(s) can be contained on a variety of transitory computer-readable storage media. Illustrative computer-readable storage media include, but are not limited to: (i) non-writable storage media (e.g., read-only memory devices within a computer such as CD-ROM disks readable by a CD-ROM drive, ROM chips or any type of solid-state non-volatile semiconductor memory) on which information is permanently stored; and (ii) writable storage media (e.g., flash memory, floppy disks within a diskette drive or hard-disk drive or any type of solid-state random-access semiconductor memory) on which alterable information is stored. The computer program may be run on the processor 302 described herein.

[00106] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a," "an," and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[00107] The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of embodiments of the present invention has been presented for

purposes of illustration, but is not intended to be exhaustive or limited to the implementations in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art without departing from the scope and spirit of the present invention. The embodiments were chosen and described in order to best explain the principles and some practical applications of the present invention, and to enable others of ordinary skill in the art to understand the present invention for various embodiments with various modifications as are suited to the particular use contemplated.

5

CLAIMS

1. A system (1) for scheduling transmissions to client devices, comprising:
at least one receiver (3); and
5 at least one processor (5) configured to:
- use said at least one receiver (3) to receive feedback about a plurality of
candidate downlink frequency resources from a plurality of client devices (11-15) and/or
measure channel qualities of a plurality of candidate uplink frequency resources from
receptions of transmissions by said plurality of client devices (11-15,
10 - select a subset of said plurality of candidate downlink frequency resources and/or
a subset of said plurality of candidate uplink frequency resources based on said received
feedback and/or said measured channel qualities, and
- schedule transmissions to said plurality of client devices on said selected subset
of candidate downlink frequency resources and/or transmissions from said plurality of client
15 devices (11-15) on said selected subset of uplink frequency resources.
2. A system (1) as claimed in claim 1, wherein said at least one processor (5) is
configured to use said at least one receiver (3) to receive said feedback about said plurality
of candidate downlink frequency resources on said plurality of candidate uplink frequency
20 resources and measure said channel quality of said plurality of candidate uplink frequency
resources from receptions of said feedback on said plurality of candidate uplink frequency
resources.
3. A system (1) as claimed in claim 1 or 2, wherein at least one of said plurality of
25 candidate downlink frequency resources is paired with at least one of said plurality of
candidate uplink frequency resources and said at least one processor (5) is configured to
use said at least one receiver (3) to receive said feedback about said at least one candidate
downlink frequency resource on the at least one candidate uplink frequency resource paired
with said at least one candidate downlink frequency resource.
30
4. A system (1) as claimed in any one of the preceding claims, wherein said feedback
comprises an identification of one or more candidate downlink frequency resources to which
said feedback relates.
- 35 5. A system (1) as claimed in any one of the preceding claims, wherein at least one of
said plurality of candidate downlink frequency resources is paired with at least one of said
plurality of candidate uplink frequency resources and said at least one processor (5) is
configured to determine at least one combined quality for at least one pair of candidate
downlink and uplink frequency resources and select a subset of said plurality of candidate

downlink frequency resources and a subset of said plurality of candidate uplink frequency resources based on said at least one combined quality.

6. A system (1) as claimed in any one of the preceding claims, wherein said at least one processor (5) is further configured to schedule transmissions to a mobile client device (16-19) on said selected subset of candidate downlink frequency resources and/or transmissions from said mobile client device (16-19) on said selected subset of uplink frequency resources, said selected subset of candidate downlink frequency resources not being based on feedback received from said mobile client device (16-19) and/or said selected subset of candidate uplink frequency resources not being based on a channel quality measured from a reception of a transmission by said mobile client device (16-19).

7. A system (1) as claimed in any one of the preceding claims, wherein said system further comprises at least one transmitter (3) and said at least one processor (5) is configured to use said at least one transmitter to transmit wireless signals on said plurality of candidate downlink frequency resources.

8. A system (1) as claimed in claim 7, wherein said wireless signals transmitted by said at least one processor (5) using said at least one transmitter (3) on said plurality of candidate downlink frequency resources are pilot signals.

9. A system (1) as claimed in claim 7 or 8, wherein said at least one processor is configured to use said at least one transmitter (3) to inform said plurality of client devices (11-15) of at least one time at which it will start transmitting said wireless signals on said plurality of candidate downlink frequency resources.

10. A client device (11-15) for transmitting feedback, said client device comprising:
at least one receiver (33);
at least one transmitter (33); and
at least one processor (35) configured to:
- use said at least one receiver (33) to measure at least one channel quality of at least one candidate downlink frequency resource from at least one reception of at least one transmission by a transmitting system (1) on said at least one candidate downlink frequency resource, and
- use said at least one transmitter (33) to transmit feedback based on one or more of said at least one measured channel quality to said transmitting system (1) on a plurality of candidate uplink frequency resources.

11. A method of scheduling transmissions to client devices, comprising:
- receiving feedback (65,72), about a plurality of candidate downlink frequency resources from a plurality of client devices and/or measuring (53,73) channel qualities of a plurality of candidate uplink frequency resources from receptions of transmissions by said plurality of client devices;
 - selecting (54,66,74) a subset of said plurality of candidate downlink frequency resources and/or a subset of said plurality of said candidate uplink frequency resources based on said received feedback and/or said measured channel qualities; and
 - scheduling (55) transmissions to said plurality of client devices on said selected subset of candidate downlink frequency resources and/or transmissions from said plurality of client devices on said selected subset of uplink frequency resources.
12. A method of transmitting feedback, comprising:
- measuring (63) at least one channel quality of at least one candidate downlink frequency resource from at least one reception of at least one transmission by a transmitting system on said at least one candidate downlink frequency resource; and
 - transmitting (71) feedback based on one or more of said at least one measured channel quality to said transmitting system on a plurality of candidate uplink frequency resources.
13. A computer program or suite of computer programs comprising at least one software code portion or a computer program product storing at least one software code portion, the software code portion, when run on a computer system, being configured for performing the method of any one of claims 11 to 12.

5

10

15

20

25

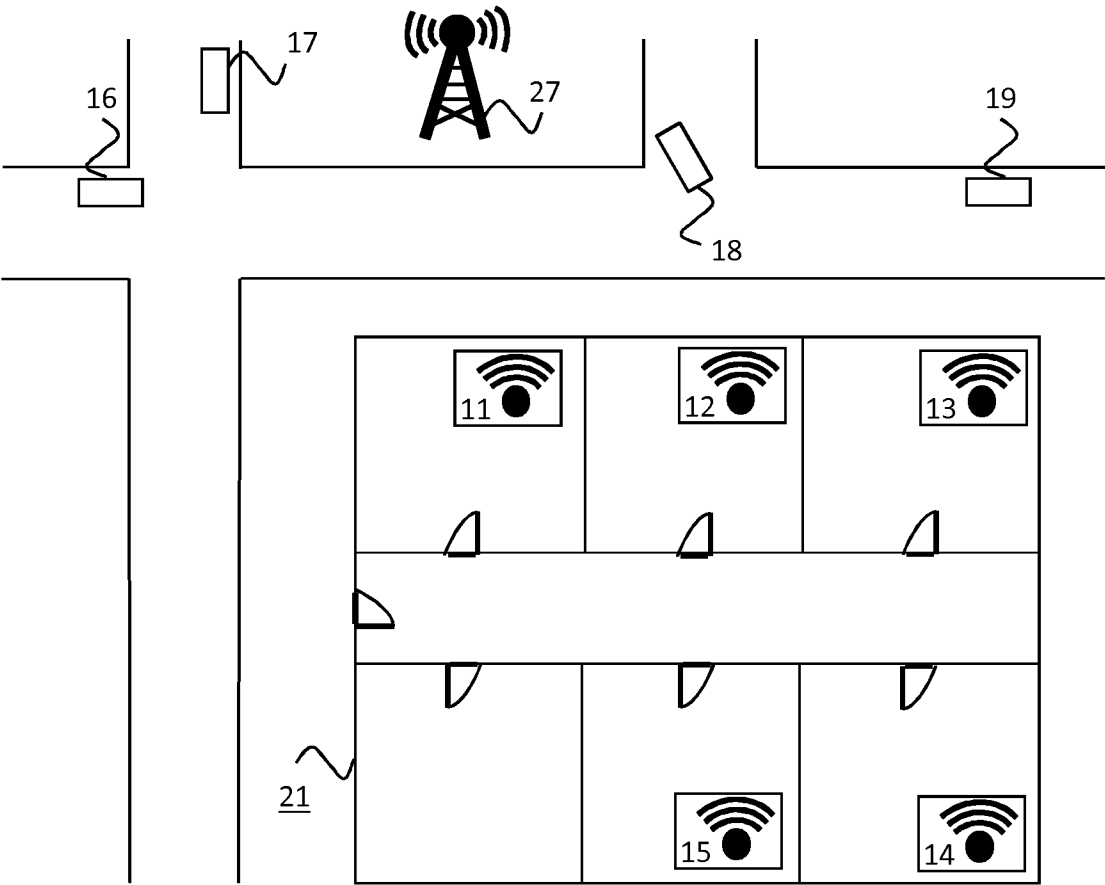


Fig. 1

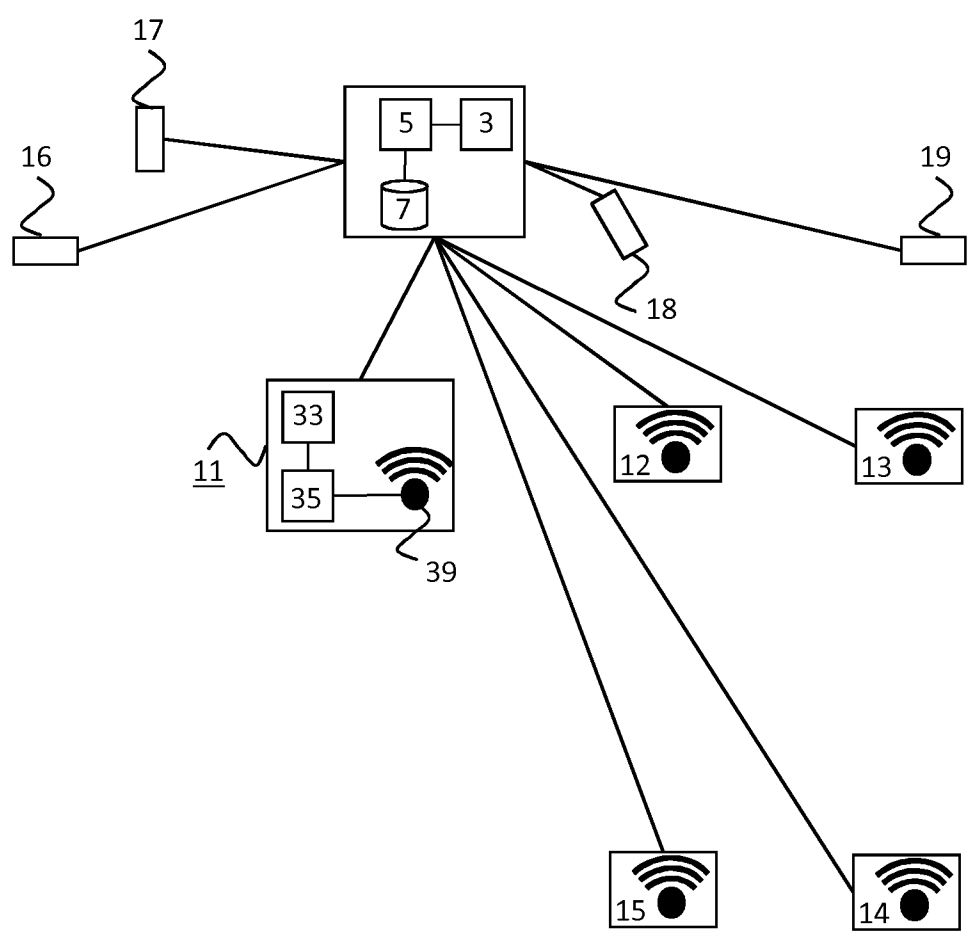


Fig. 2

3 / 13

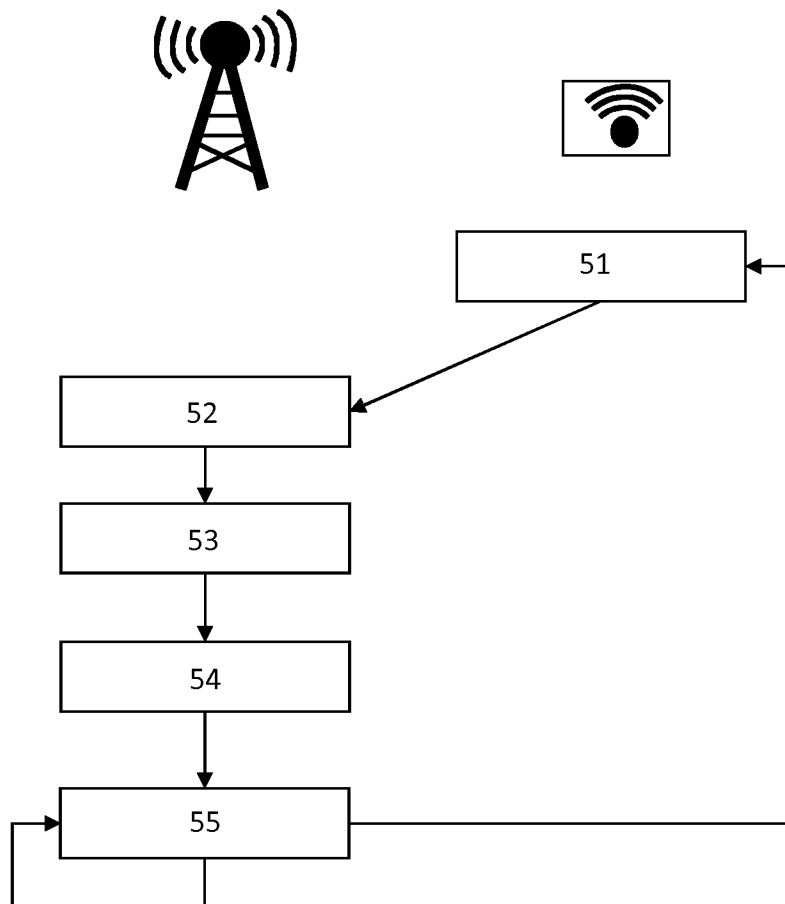


Fig. 3

4 / 13

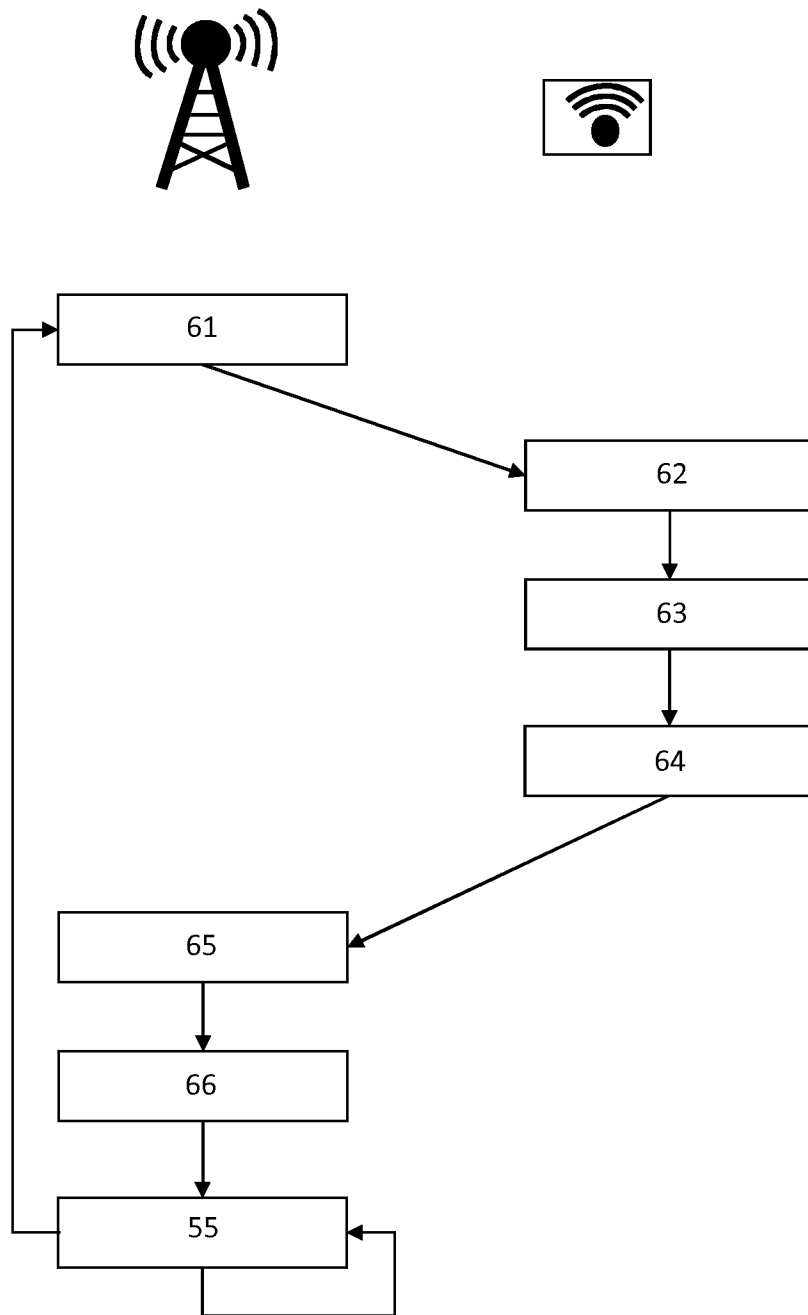


Fig. 4

5 / 13

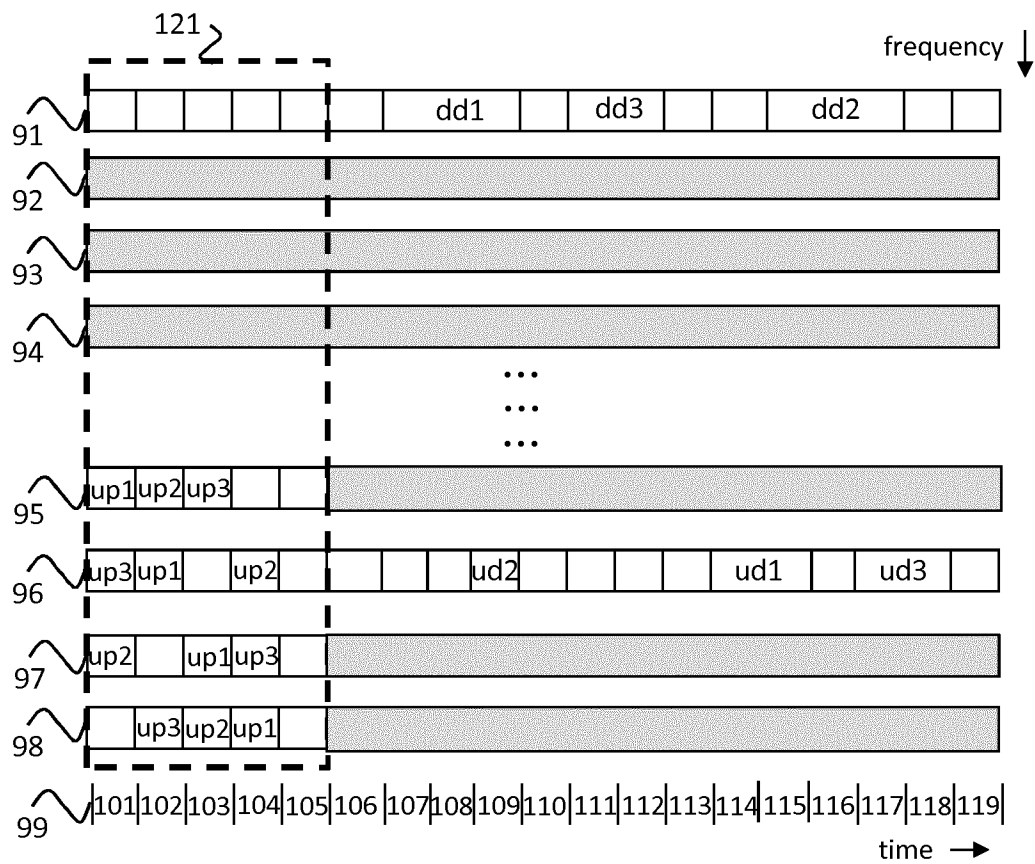


Fig. 5

6 / 13

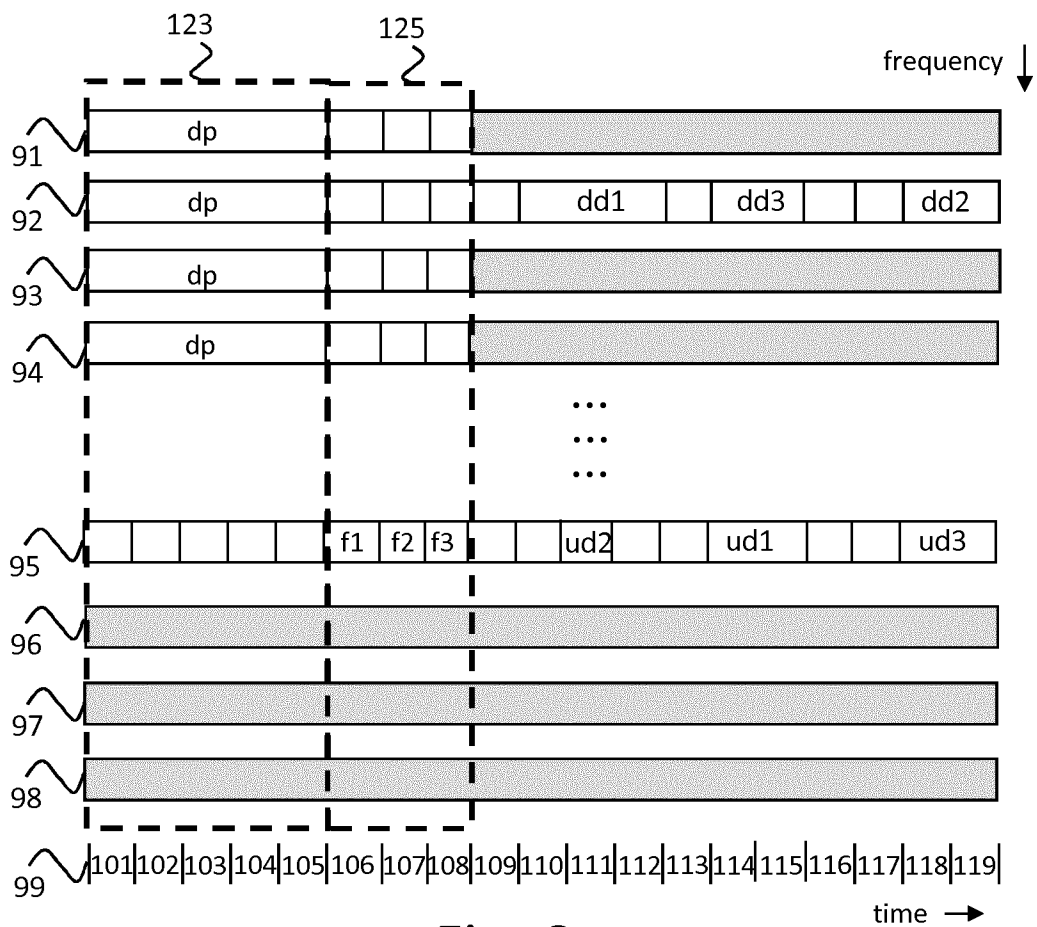


Fig. 6

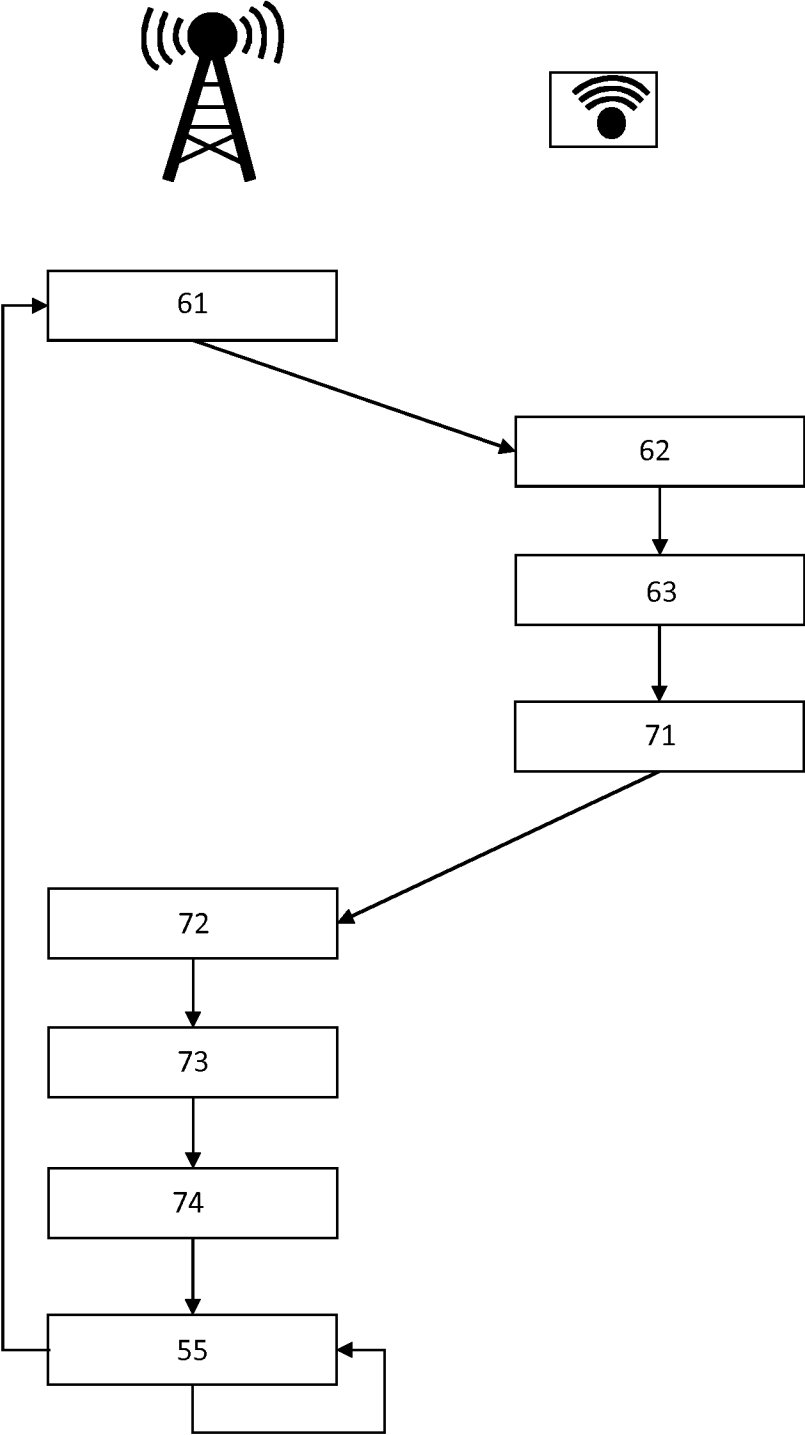


Fig. 7

8 / 13

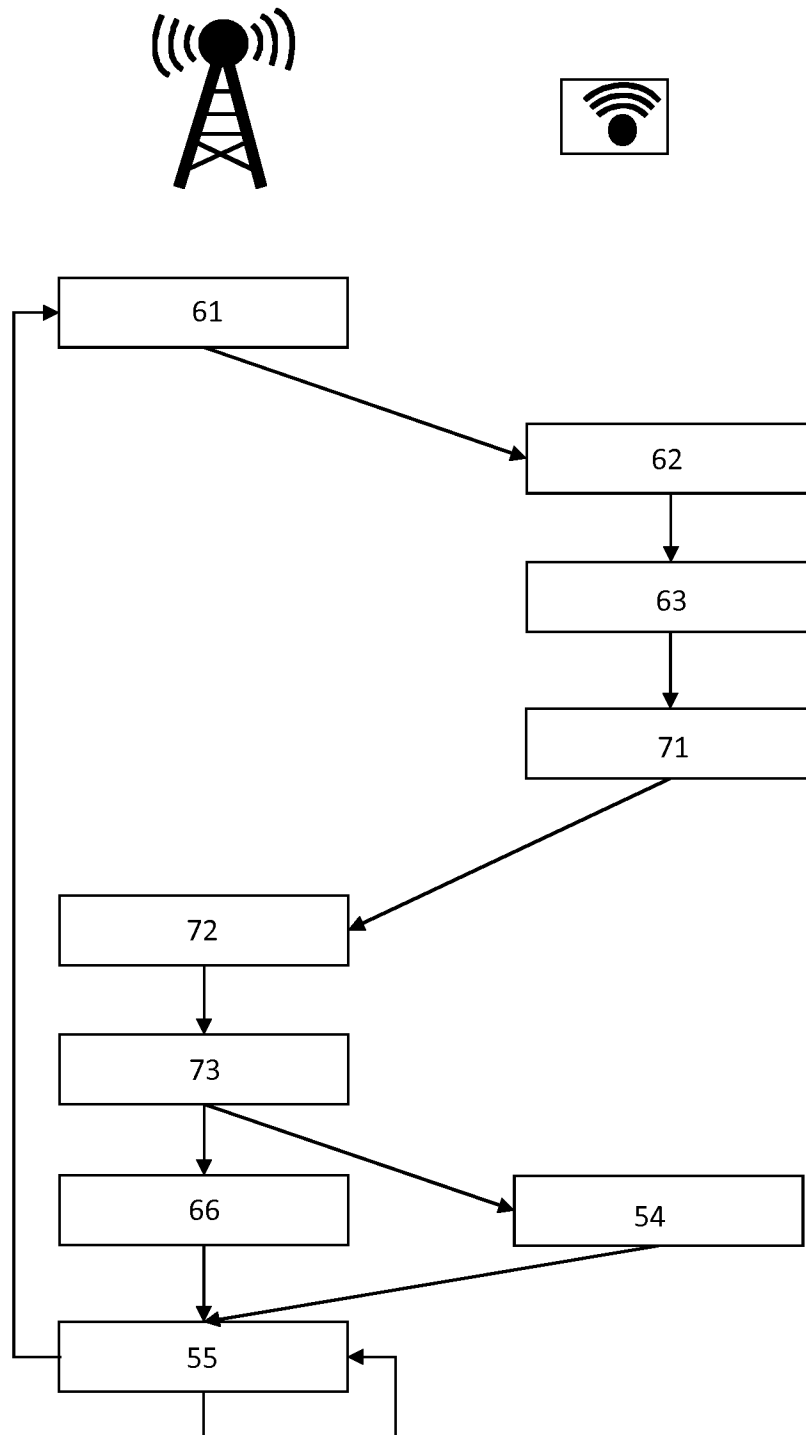


Fig. 8

9 / 13

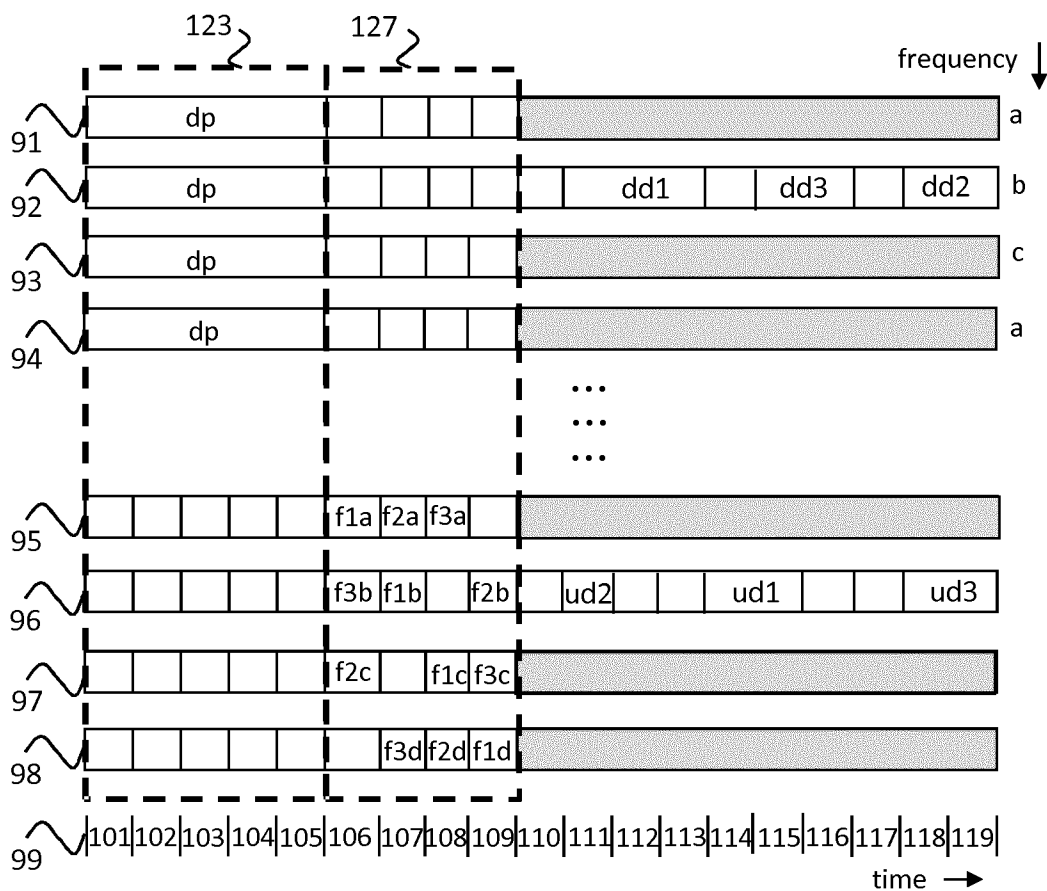


Fig. 9

10 / 13

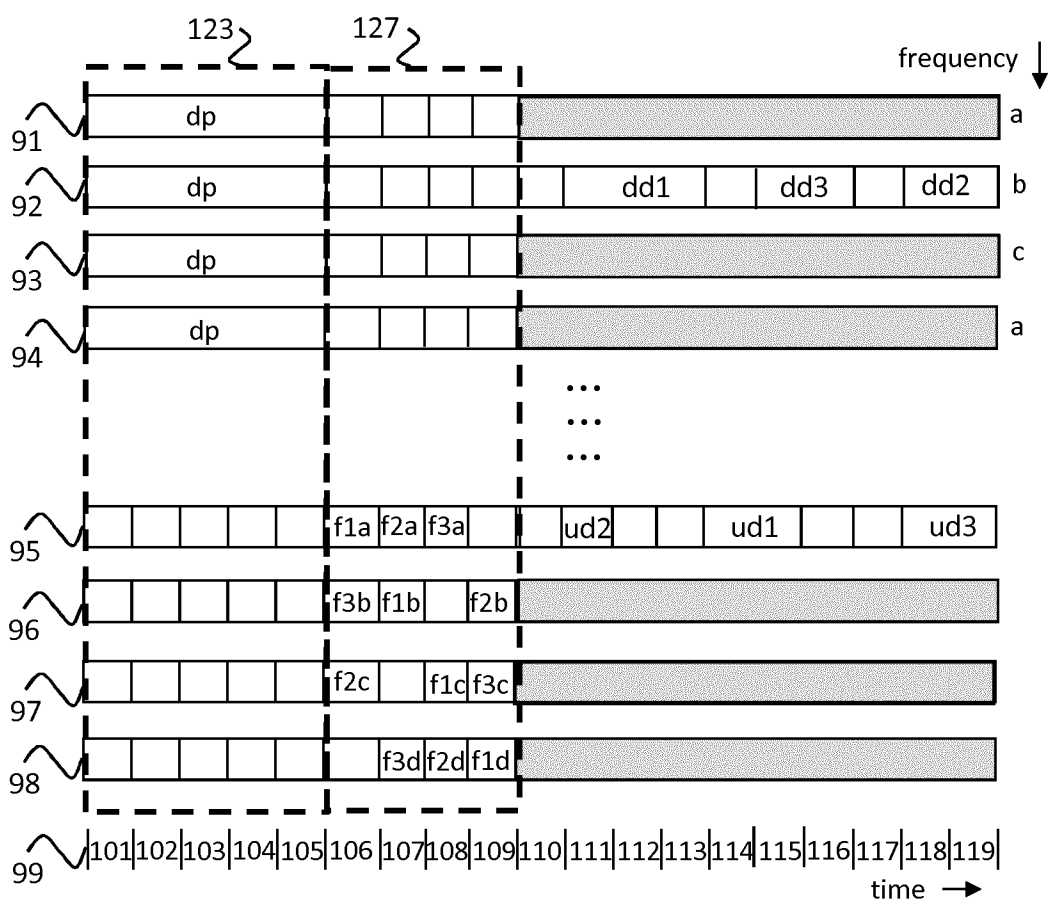


Fig. 10

11 / 13

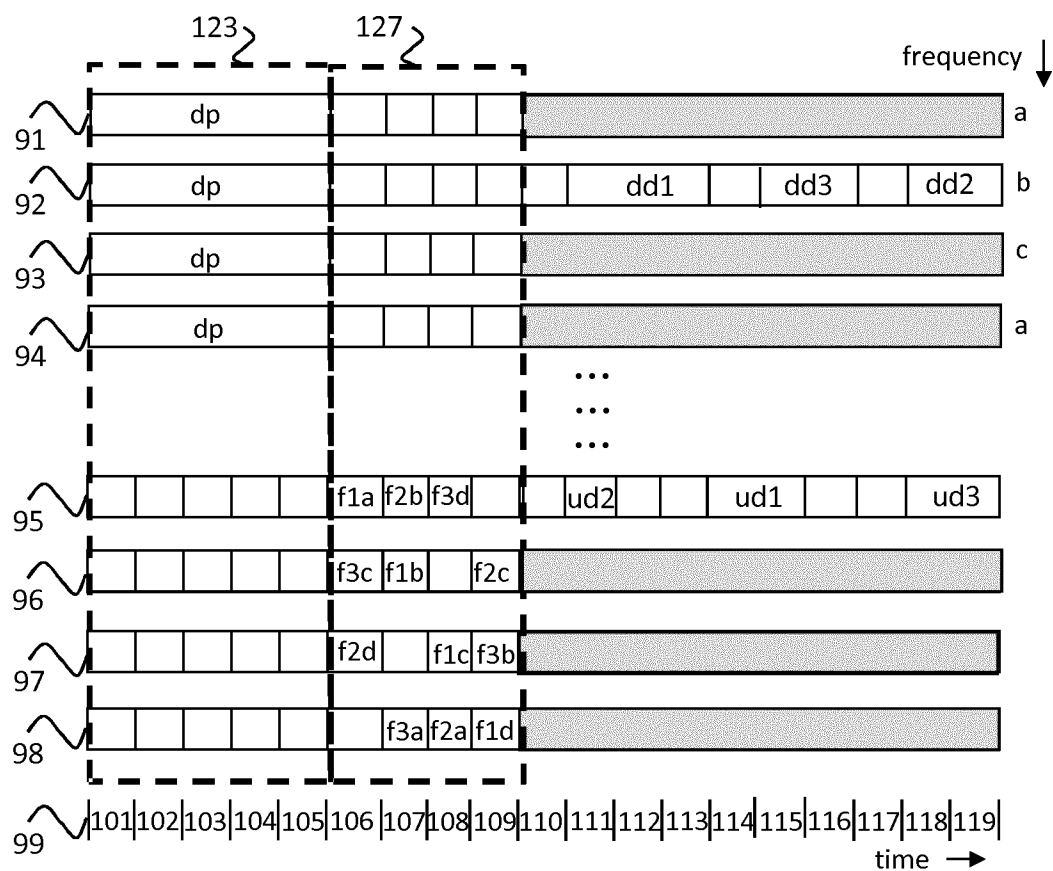


Fig. 11

12 / 13

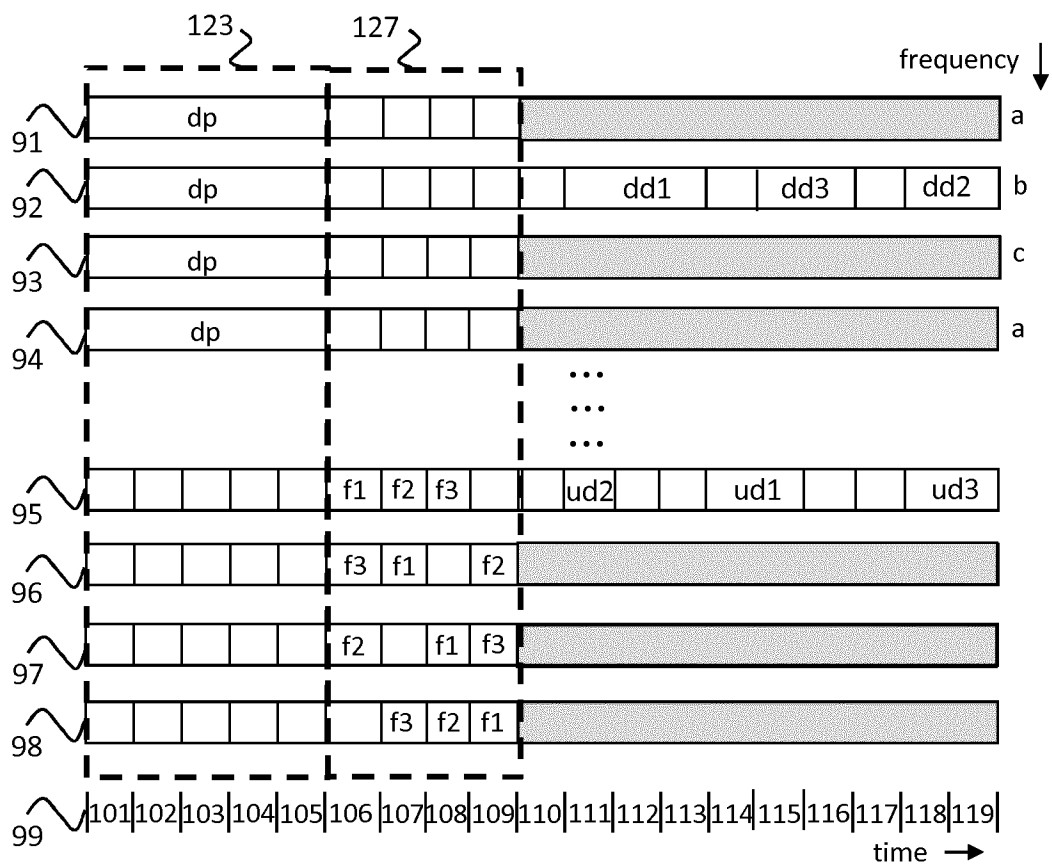


Fig. 12

13 / 13


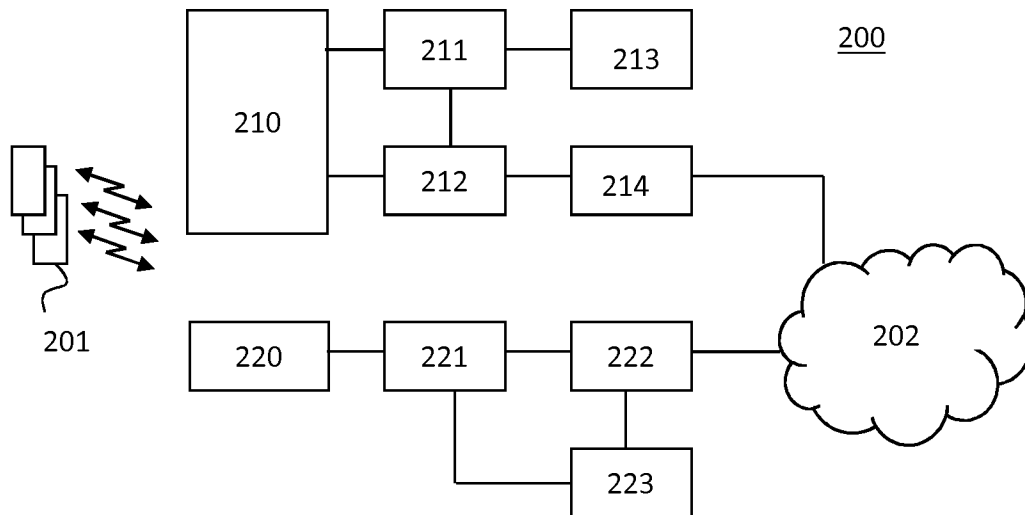


Fig. 13

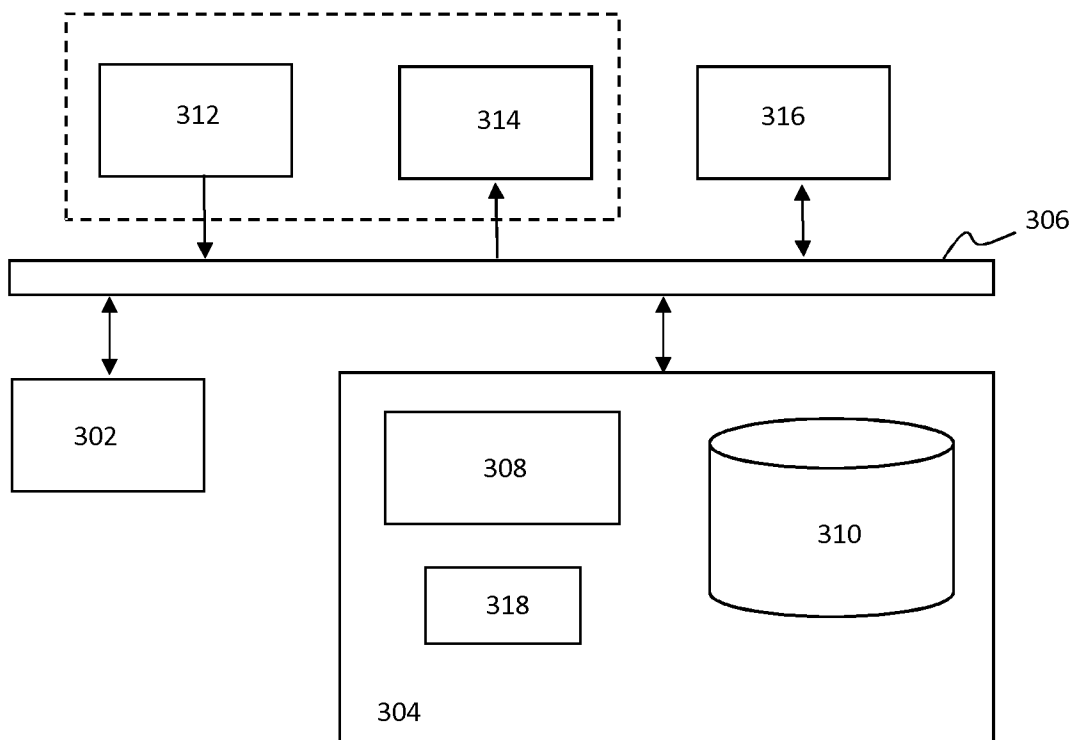

300

Fig. 14

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2018/069709

A. CLASSIFICATION OF SUBJECT MATTER
 INV. H04W72/12
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/047740 A2 (NXP BV [NL]; ZHANG XIAOBO [CN]; MA NI [CN]; WU GANG [CN]) 16 April 2009 (2009-04-16)	1-4,6-13
A	page 1, line 26 - page 3, line 11 page 5, line 18 - page 6, line 20; figure 4 page 8, line 29 - page 9, line 25 -----	5
X	US 2016/286556 A1 (LO TITUS [US] ET AL) 29 September 2016 (2016-09-29)	1-4, 6-10,12, 13
A	paragraph [0054] - paragraph [0066] -----	5
X	WO 2010/143821 A2 (LG ELECTRONICS INC [KR]; YANG SUCK CHEL [KR]; SEO DONG YOUN [KR]; KIM) 16 December 2010 (2010-12-16)	1-4, 6-10,12, 13
A	paragraph [0068] - paragraph [0074] paragraph [0053] - paragraph [0059] -----	5
	-/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 September 2018

Date of mailing of the international search report

26/09/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Martos Riaño, Demian

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2018/069709

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/039199 A1 (CHEN WANSHI [US] ET AL) 16 February 2012 (2012-02-16)	1-4, 6-10,12, 13
A	paragraph [0109] - paragraph [0117] -----	5

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2018/069709

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009047740 A2	16-04-2009	CN 101409883 A WO 2009047740 A2	15-04-2009 16-04-2009
US 2016286556 A1	29-09-2016	US 2013077551 A1 US 2014029491 A1 US 2016286556 A1 US 2018160417 A1 WO 2012050838 A1	28-03-2013 30-01-2014 29-09-2016 07-06-2018 19-04-2012
WO 2010143821 A2	16-12-2010	CN 102461030 A CN 104320233 A EP 2441192 A2 JP 5636045 B2 JP 6200395 B2 JP 2012529836 A JP 2015008544 A KR 20100131912 A US 2012076105 A1 US 2013039311 A1 US 2013051339 A1 US 2015092730 A1 US 2015163038 A1 US 2016135221 A1 US 2017064687 A1 WO 2010143821 A2	16-05-2012 28-01-2015 18-04-2012 03-12-2014 20-09-2017 22-11-2012 15-01-2015 16-12-2010 29-03-2012 14-02-2013 28-02-2013 02-04-2015 11-06-2015 12-05-2016 02-03-2017 16-12-2010
US 2012039199 A1	16-02-2012	BR 112013003563 A2 CN 103155463 A EP 2606591 A1 ES 2657953 T3 HU E035457 T2 JP 5694533 B2 JP 2013539281 A KR 20130049813 A US 2012039199 A1 WO 2012024180 A1	07-06-2016 12-06-2013 26-06-2013 07-03-2018 02-05-2018 01-04-2015 17-10-2013 14-05-2013 16-02-2012 23-02-2012