



- (51) **International Patent Classification:**
H04N 1/04 (2006.01)
- (21) **International Application Number:**
PCT/CN2015/076883
- (22) **International Filing Date:**
17 April 2015 (17.04.2015)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** HEWLETT-PACKARD DEVELOPMENT COMPANY, L. P. [US/US]; 11445 Compaq Center Drive West, Houston, Texas 77070 (US).
- (72) **Inventor; and**
- (71) **Applicant (for BZ only):** TANG, Song-Bo [CN/CN]; Building 6, No.690 Bi Bo Road, Zhangjiang Micro-Electric Port, Shanghai (CN).
- (72) **Inventors:** GUO, Fei; Building 6, No.690 Bi Bo Road, Zhangjiang Micro-Electric Port, Shanghai (CN). YANG, Ai-Qiang; Building 6, No.690 Bi Bo Road, Zhangjiang Micro-Electric Port, Shanghai (CN).
- (74) **Agent:** NTD PATENT AND TRADEMARK AGENCY LIMITED; 10th Floor, Block A, Investment Plaza, 27 Jin-rongdajie, Xicheng District, Beijing 100033 (CN).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

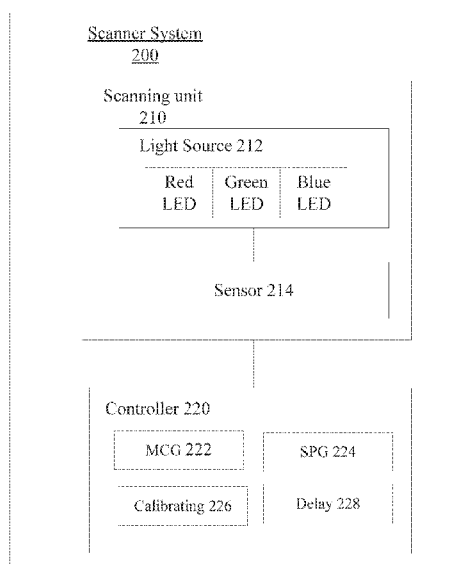
(54) **Title:** SCANNER

Fig. 2

(57) **Abstract:** A scanner is disclosed. The scanner includes a light source to emit light of a first color during a first turn-on period and emit light of a second color during a second turn-on period; a sensor to receive light from a scanning area, in response to the light of the first color directed to the scanning area, during a first sensing period, and receive light from the scanning area, in response to the light of the second color directed to the scanning area, during a second sensing period; and a controller to control the timing of the first turn-on period within the first sensing period and the second turn-on period within the second sensing period.

Scanner

BACKGROUND

[0001] A scanner is a device used to create a digital image from a printed page or from a 3-dimensional object placed on a scanning bed. There are many types of scanners, for example sheet feed scanners, flatbed scanners with/without automatic document feeder (ADF), stand-alone scanners and scanner integrated into multifunctional printers.

[0002] A scanner generally irradiates light onto document by using a light source and performs photoelectric transformation of reflected light from the irradiated light using an image sensor to generate image data. An example of the image sensor may be a contact image sensor (CIS). The CIS includes a light source which generates red, green and blue light for illuminating the document, a rod lens array and a sensor array which senses the reflected light from the document.

BRIEF DESCRIPTION OF THE DRAWINGS

[0003] FIG. 1 shows an isometric view of a flatbed scanner according to an example;

[0004] FIG. 2 shows a structure of a scanner system according to an example;

[0005] FIG. 3 shows scan lines according to an example;

[0006] FIGs. 4A and 4B show the timing of operation of a light source and a sensor according to an example;

[0007] FIGs. 5A and 5B show the timing of operation of a light source and a sensor according to an example;

[0008] FIG. 6 shows a structure of an ASIC for controlling scanning according to an example;

[0009] FIG. 7 shows a method for scanning according to an example.

DETAILED DESCRIPTION

[0010] A scanner is used to create digital images of documents or objects placed on the scanner. A color scanner captures color images from the scanned objects. To

describe the color of an object typically requires three different color values or components. The color components may be red, green and blue (RGB). A color scanner captures the red, green and blue values for each small area in the object being scanned. These small areas are typically called pixels. The color components are not limited to red, green and blue, and the number of color components is not limited. For example, orange, yellow and violet light may be used in addition to or instead of red, green and blue light. Other number and types of colors may be possible.

[0011] FIG. 1 is an isometric view of a flatbed scanner 100 according to an example. Flatbed scanner 100 comprises, without limitation, a scanner base 110, a top bezel 120, a scan platen 130 and a scan head 140. Scanner base 110 supports the scan platen 130 around its edges. Top bezel 120 fits the scan platen 130 and attaches to the scanner base 110 thereby holding the scan platen 130 in place. The scan platen 130 is fabricated from a transparent material such as glass. The top surface of the scan platen 130 forms a flatbed scan area. Scanner base 110 also supports a drive system (not shown in FIG. 1 for clarity) that moves the scan head 140 along the underside of the scan platen 130, as shown by arrow 150 and Y direction of the coordinates.

[0012] While moving along the Y direction, the scan head 140 may scan lines of an object as shown in FIG. 3 and generate data representing the scanned lines. The data may subsequently be used to create an image of the object being scanned. In the example as shown in FIG. 3, the scan head may move at a constant speed and repeatedly take three exposures in sequence using three different colors of light. For example, a red light is used for the first exposure, a green light is used for the second exposure, and a blue light is used for the third exposure. Each set of three exposures is used to create a scan line, which is illustrated as Line N or Line N+1 in FIG. 3. All the scan lines of an object may be used to create the image of the object.

[0013] FIG. 2 shows a structure of a scanner system 200 according to an example. The scanner system 200 includes, without limitation, a scanning unit 210 and a controller 220. The scanning unit 210 may be a part of the scan head 140. The scanning unit 210 includes a light source 212 and a sensor 214, which operate under

the control of the controller 220. The light source 212 may generate light of a color during a turn-on period and direct the light to a scanning area such as Line N or Line N+1 as shown in FIG. 3. A plurality of turn-on periods may occur, and light of a different color may be generated in each of the periods. The turn-on periods are controlled or activated by the controller 220.

[0014] As shown in FIG. 2, an example light source 212 may include, without limitation, three light emitting diode (LED) units, such as red, green and blue LED units, as shown in the dotted blocks. The number of the light emitting units is not limited, for example, there may be two light emitting units or may be more than three light emitting units. The colors of the generated light are not limited to red, green and blue, for example, orange, yellow and violet light may be employed in addition to or instead of red, green and blue light. Other colors are also possible. Each of the LED units may produce a color light to scan a line of the object. The light source may include a light guide element (not shown in the FIG. 2 for clarity) which directs the light to the scanning area. The sensor 214 may receive light in response to the light directed to the scanning area during a sensing period as shown in FIGs. 4A-5B. A plurality of sensing periods may occur, and the light may be sensed in each of the periods. The controller 220 controls the timing of the plurality of turn-on periods within the plurality of sensing periods.

[0015] FIG. 3 illustrates scan lines according to an example. As shown in FIG. 3, lines of an object may be scanned at a resolution such as 600 pixels per inch (PPI). Line N or N+1 is any one of the lines along the X direction being scanned. As shown in FIG. 1, while the scanner header 140 is moving, the red light, green light and blue light are emitted one by one to the scanning area to form the red, green and blue lines of Line N. D_{R2G} , D_{G2B} and D_{R2B} illustrate the distances among the red, green and blue lines of Line N.

[0016] FIGs. 4A and 4B show the timing of operation of the light source and the sensor under the control of the controller according to an example. As shown in FIG. 4A, one period for scanning a line is divided into three sensing periods, in each of

which the sensor 214 is reset to sense each of the red light, green light and blue light from the scanning area. Each sensing period is triggered by a start pulse shown in FIG. 4B. The red, green and blue activation signals are triggered by the start pulses. The red activation signal triggers the red LED to produce red light. The green activation signal triggers the green LED to produce green light. The blue activation signal triggers the blue LED to produce blue light. The red, green and blue activation signals decide the turn-on periods for emitting the red, green and blue lights. The produced red light, green light and blue light are directed to the scanning area via for example a lens unit, where the scanning area is the Line N or Line N+1 as shown in FIG. 3. In response to each of the red light, green light and blue light directed to the scanning area, the sensor 214 receives light from the scanning area. During such a three-pass, three-exposure procedure for the red, green and blue lines, data sensed by the sensor 214 may be used to form a scan line N, as illustrated in FIG. 3.

[0017] In such an example, the red, green and blue turn-on periods start substantially concurrently with the red, green and blue sensing periods respectively. The multiple sensing periods for different colors of light, such as the red, green and blue sensing periods in this example, are equal, that is, the start pulses occur at a fixed frequency and thus are evenly distributed in time. The frequency of a main clock may be fixed. Such a configuration may be helpful to simplify the timing control for the scanning. The even distribution of the exposures of the color lines may be helpful to improve image quality. In some examples, the sensing periods for different colors may also be unequal or different from each other.

[0018] The period for scanning a Line N may be determined based on some factors, such as scanning speed, scanning resolution, the size of the scan area or the scan platen and so on. For example, the number of pages that can be scanned per minute and the size of the scan area, such as that fitting A4 or A3 pages, are two parameters which may be desired for users. The relative moving speed between an object such as a page to be scanned and the sensing unit of the scanner may be determined from the two parameters. Then for a certain scanning resolution, for example 600 PPI, the

period for scanning a line may be determined by dividing 1/600 inch with the relative moving speed. After the period for scanning a line is determined, a suitable main clock may be chosen. The controller 220 may generate the main clock which may be fixed according to the example.

[0019] FIGs. 5A and 5B show the timing of the operation of the light source and the sensor under the control of the controller according to an example.

[0020] As shown in FIG. 5A, at least one of the red, green and blue turn-on periods is delayed relative to the beginning of the corresponding sensing periods. The delayed turn-on period is still within the corresponding sensing period in order to avoid potential overlap of two different colors of light during scanning. The delaying of the LED turn-on periods may reduce Color Registration (CR) error in Y direction of the scanner.

[0021] CR error is misalignment among the scanner's red, green and blue channels. Referring to FIG. 3, D_{R2G} , D_{G2B} and D_{R2B} illustrate the distances among the red, green and blue lines of Line N. The red, green and blue lines are positions at which the red light, green light and blue light are respectively directed while the scanner head is moving. The values of D_{R2G} , D_{G2B} and D_{R2B} may be used to determine the amount of CR error of the scanned image. The CR error may cause color fringing especially at the edges and blur the edges.

[0022] Referring to FIGs. 4A and 5A, T_{R2G} , T_{G2B} and T_{R2B} illustrate the time differences among the emitting times of the red, green and blue LEDs for Line N while the scanner head is moving. The values of D_{R2G} , D_{G2B} and D_{R2B} are proportionate to the values of T_{R2G} , T_{G2B} and T_{R2B} . By delaying the activation of at least one of the multiple LEDs in the example of FIG. 5A, the CR error may be alleviated along with the reduction of the time differences among the light emitting of the LEDs.

[0023] As shown in FIGs. 3, 4A, and 5A, the worst CR error is decided by the distance between the first color line and the last color line of the scan Line N, and accordingly by the time difference between the turn-on times of the first color light

and the last color light. Therefore reducing the distance between the first color line and the last color line may provide significant improvement for the CR error. To this end, the first red turn-on period may be delayed within the first red sensing period. For example, the red turn-on period may be delayed to a position substantially at the end of the first red sensing period as shown in FIGs. 5A and 5B.

[0024] Along with the delaying of the first red turn-on period, the second green turn-on period may be delayed. For example, the second green turn-on period may be delayed to a position substantially at the center of the second green sensing period as shown in FIGs. 5A and 5B. In this way, the delayed red, green and blue turn-on periods are evenly distributed and may be helpful for the quality of the scanned image and for avoiding potential color overlap. The positions of the delayed turn-on periods are not limited to the specific positions as shown in FIG. 5A, other positions are applicable.

[0025] As shown in FIG. 5B, once each of the start pulses for resetting the sensor occurs, the corresponding red, green or blue activation signal may be delayed so as to activate the corresponding LED at a delayed time. For example, the first red activation signal may be delayed in response to the corresponding start pulse by a time period indicated as: the duration between the corresponding start pulse and the next start pulse – the duration of the red turn-on period. The second green activation signal may be delayed in response to the corresponding start pulse by a time period indicated as: (the duration between the corresponding start pulse and the next start pulse – the duration of the green turn-on period) / 2.

[0026] Referring back to FIG. 2, the controller 220 may include, without limitation, a master clock generator (MCG) 222 that generates a master clock, a start pulse generator (SPG) 224 that generates start pulses for triggering resetting of the sensor 214, a calibrating module 226 that calibrates turn-on periods of the LED units, and a delay module 228 that delays activation signals for some of the LED units relative to the start pulses, as shown in the dotted blocks.

[0027] Although the master clock generator 222, the start pulse generator 224, the calibrating module 226 and the delay module 228 are shown being internal to the controller 220, some of them can also be individual circuits that are external to the controller 220 and are configured to communicate with the controller 220 via buses.

[0028] Although the controller 220 is shown as including respective modules 222 to 228, the controller 220 may be implemented as a whole to perform the various functions described herein without needing to physically or separately include such respective modules.

[0029] Although the light source 212 of the scanner 200 in FIG. 2 may generate red, green and blue light, the number and the sequence of the colors of light are not limited. In an example, the light source 212 may emit light of a first color during a first turn-on period and emit light of a second color during a second turn-on period. The sensor 214 may receive light from a scanning area, in response to the light of the first color directed to the scanning area, during a first sensing period, and receive light from the scanning area, in response to the light of the second color directed to the scanning area, during a second sensing period. The controller 220 may control the timing of the first turn-on period within the first sensing period and the second turn-on period within the second sensing period. For example, the controller 220 may delay the first turn-on period relative to the beginning of the first sensing period while ensuring that the delayed first turn-on period is still within the first sensing period.

[0030] In addition, the light source may emit light of a third color during a third turn-on period. The sensor may receive light from the scanning area, in response to the light of the third color directed to the scanning area, during a third sensing period. The controller 220 may delay the second turn-on period relative to the beginning of the second sensing period while ensuring that the delayed second turn-on period is within the second sensing period. The controller 220 may delay the first turn-on period to a position substantially at the end of the first sensing period. The controller 220 may delay the second turn-on period to a position substantially at the center of the

second sensing period. The controller 220 may start the third turn-on period substantially at the beginning of the third sensing period.

[0031] The controller 220 may execute a calibration process to determine turn-on periods such as the first, second and third turn-on periods. The calibration process may be executed at any suitable time, for example, at the time of manufacture, each time the scanner is powered up, each time a new scan task takes place, and so on.

[0032] The sensing periods may be fixed time periods which are determined based on at least one of a scanning resolution, a scanning speed, and a size of a scan area. The sensing periods may be counted with a fixed main clock. The controller 220 may delay the turn-on periods by counting with the fixed main clock.

[0033] The controller 220 can be a general-purpose micro-controller, a general-purpose microprocessor, a dedicated microprocessor or controller, a signal processor, an application-specific-integrated circuit (ASIC), or the like. In some examples, the controller 220 and its functions described herein are implemented in a combination of at least one of firmware, software, hardware, and the like. In an example, the controller 220 may be implemented as an ASIC, where each functional module in the ASIC may be implemented or understood as a circuit.

[0034] FIG. 6 shows a structure of the controller implemented as an ASIC according to an example. The ASIC may comprise a circuit to, in response to a signal to indicate a start of a first exposure period, trigger emission of a first light of a first color at a delayed time in the first exposure period. The ASIC may comprise a circuit to, in response to a signal to indicate a start of a second exposure period, trigger emission of a second light of a second color at a delayed time in the second exposure period. The ASIC may comprise a circuit to, in response to a signal to indicate a start of a third exposure period, trigger emission of a third light of a third color without delay. The emission of the first light may be delayed to occur during a period which is substantially at the end of the first exposure period. The emission of the second light may be delayed to occur during a period which is substantially in the middle of the second exposure period. The first light, second light and third light may be red light,

green light and blue light, and the signals indicating the start of the first, second and third exposure periods may be the start pulses as shown in FIG. 5B. Each exposure period or sensing period may be defined by the duration of two consecutive start pulses.

[0035] It should be understood that the ASIC may include other circuits for implementing the operations of the controller 220 described herein.

[0036] FIG. 7 shows a method for scanning according to an example. At 710, start-up pulses may be generated. The start-up pulses are used to trigger sensing of light. The start-up pulses may be evenly distributed in time. At 720, at least one of activation signals may be delayed to generate in response to at least one of the start-up pulses. The activation signals are used to activate emission of light of different colors to a scanning area.

[0037] For example, in the 710, the generation of a first one of the activation signals may be delayed in response to a first one of the start-up pulses. The first activation signal is used to activate emission of light of a first one of the different colors to the scanning area. More specifically, the generation of the first activation signal may be delayed by a time period indicated as: a duration between the first and a second consecutive ones of the start-up pulses – a duration of the first activation signal. The generation of a second one of the activation signals may be delayed in response to the second start-up pulse. The second activation signal is used to activate emission of light of a second one of the different colors to the scanning area. More specifically, the generation of the second activation signal may be delayed by a time period indicated as: (a duration between the second and a third consecutive ones of the start-up pulses – a duration of the second activation signal) / 2. A third one of the activation signals may be generated in response to a third one of the start-up pulses without delay.

[0038] The foregoing disclosure describes a number of examples for implementing scanning in a scanner. It should be appreciated the described examples intend to illustrate rather than limit the invention. Thus the claims are not intended to be limited

to the illustrated details of the examples, but are to be accorded the full scope consistent with the language of the claims.

CLAIMS:

1. A scanner, comprising

a light source to emit light of a first color during a first turn-on period and emit light of a second color during a second turn-on period;

a sensor to receive light from a scanning area, in response to the light of the first color directed to the scanning area, during a first sensing period, and receive light from the scanning area, in response to the light of the second color directed to the scanning area, during a second sensing period; and

a controller, coupled to the light source and the sensor, to control the timing of the first turn-on period within the first sensing period and the second turn-on period within the second sensing period.

2. The scanner of claim 1, wherein the controller is to delay the first turn-on period relative to the beginning of the first sensing period, and wherein the delayed first turn-on period is within the first sensing period.

3. The scanner of claim 2, wherein the light source is to emit light of a third color during a third turn-on period,

wherein the sensor is to receive light from the scanning area, in response to the light of the third color directed to the scanning area, during a third sensing period,

wherein the controller is to delay the second turn-on period relative to the beginning of the second sensing period, and wherein the delayed second turn-on period is within the second sensing period.

4. The scanner of claim 3, wherein the controller is to delay the first turn-on period to a position substantially at the end of the first sensing period.

5. The scanner of claim 4, wherein the controller is to delay the second turn-on period to a position substantially at the center of the second sensing period.
6. The scanner of claim 5, wherein the controller is to start the third turn-on period at the beginning of the third sensing period.
7. The scanner of claim 3, wherein the controller is to delay the first and the second turn-on periods by counting with a fixed main clock.
8. The scanner of claim 3, wherein the controller is to execute a calibration process to determine the first, the second and the third turn-on periods.
9. The scanner of claim 3, wherein the first, the second and the third sensing periods are fixed time periods which are determined based on at least one of a scanning resolution, a scanning speed, and a size of a scan area.
10. A method for scanning in a scanner, comprising:
 - generating start-up pulses which are evenly distributed in time; and
 - delaying generation of at least one of activation signals in response to at least one of the start-up pulses, wherein the activation signals are to activate emission of light of different colors to a scanning area.
11. The method of claim 10, wherein the delaying comprising:
 - delaying generation of a first one of the activation signals in response to a first one of the start-up pulses, wherein the first activation signal is to activate emission of light of a first one of the different colors to the scanning area.
12. The method of claim 11, wherein the delaying comprising:

delaying generation of the first activation signal by a time period indicated as: a duration between the first and a second consecutive ones of the start-up pulses – a duration of the first activation signal.

13. The method of claim 12, wherein the delaying comprising:

delaying generation of a second one of the activation signals in response to the second start-up pulse, by a time period indicated as: (a duration between the second and a third consecutive ones of the start-up pulses – a duration of the second activation signal) / 2, wherein the second activation signal is to activate emission of light of a second one of the different colors to the scanning area.

14. An Application Specific Integrated Circuit (ASIC) which controls scanning, comprising:

a circuit to, in response to a signal to indicate a start of a first exposure period, trigger emission of a first light of a first color at a delayed time in the first exposure period;

a circuit to, in response to a signal to indicate a start of a second exposure period, trigger emission of a second light of a second color at a delayed time in the second exposure period; and

a circuit to, in response to a signal to indicate a start of a third exposure period, trigger emission of a third light of a third color without delay.

15. The ASIC of claim 14, wherein the emission of the first light being delayed to occur during a period which is substantially at the end of the first exposure period, and wherein the emission of the second light being delayed to occur during a period which is substantially in the middle of the second exposure period.

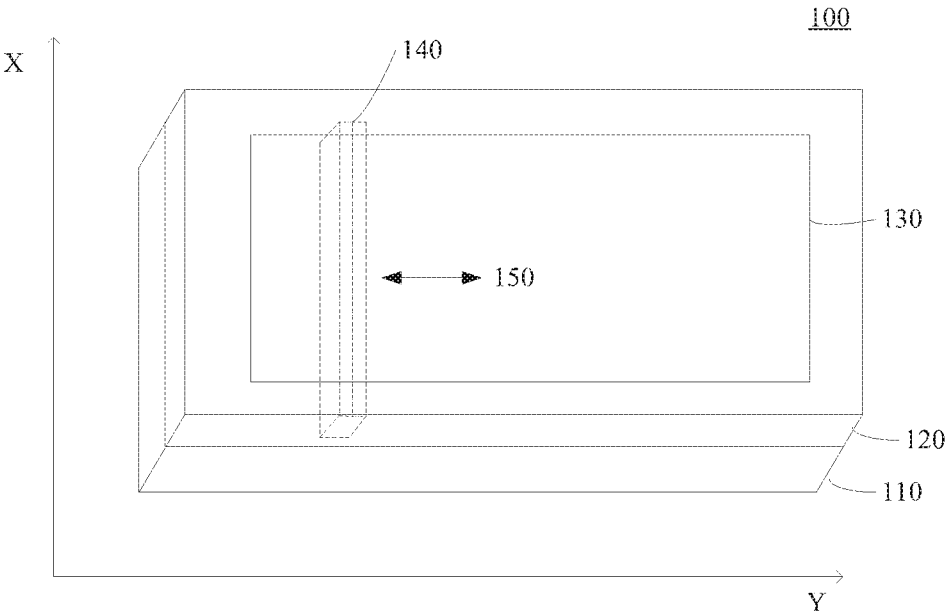


FIG. 1

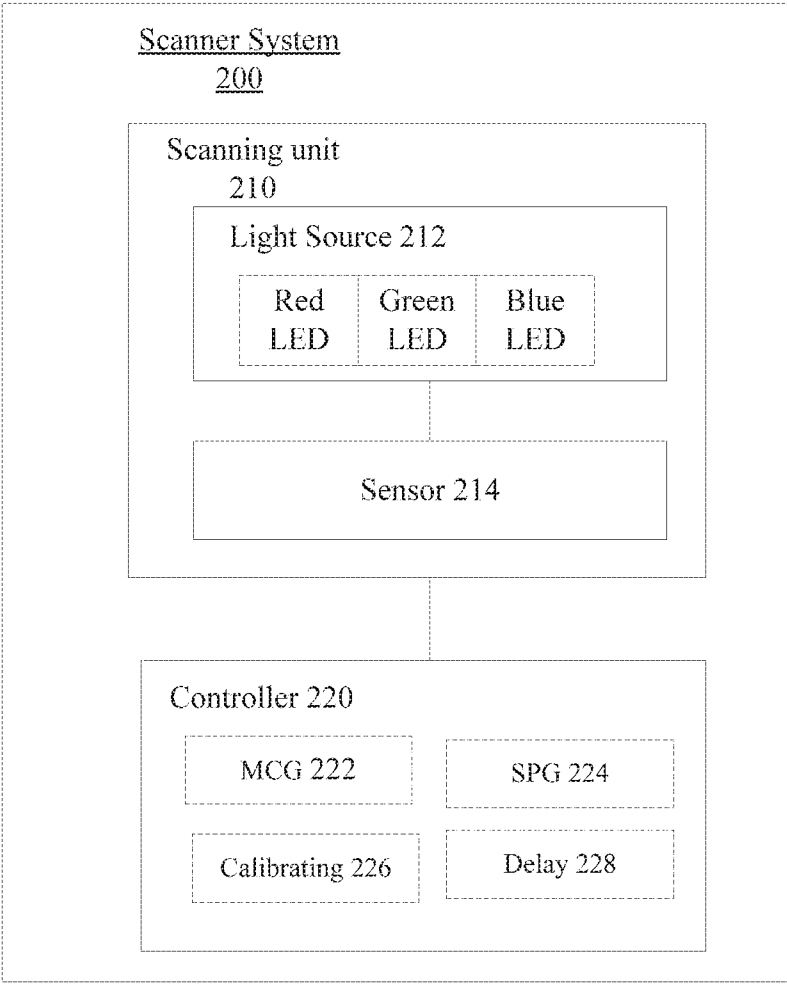


Fig. 2

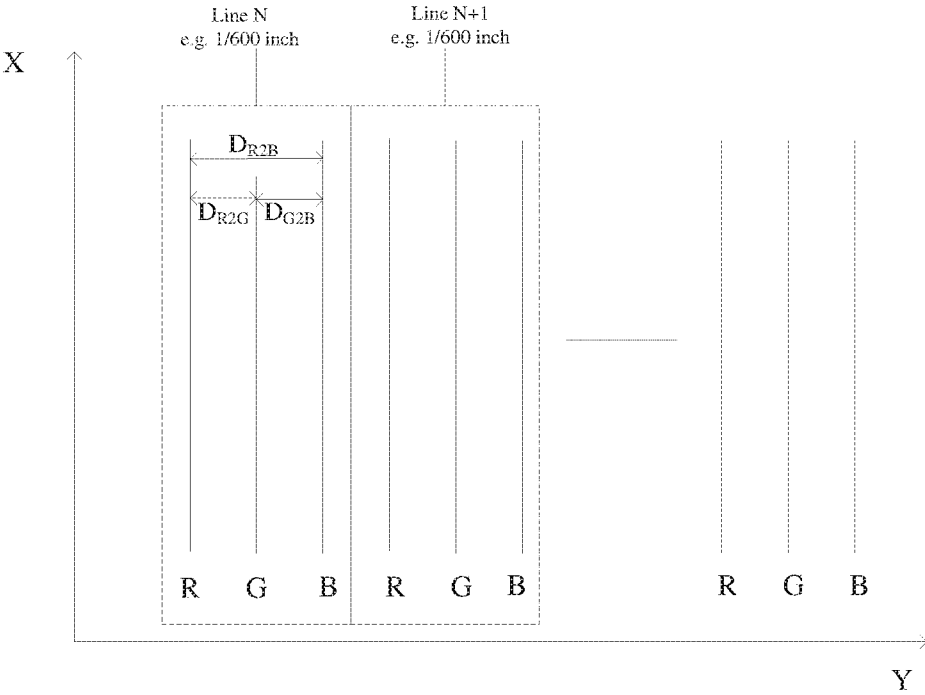


FIG. 3

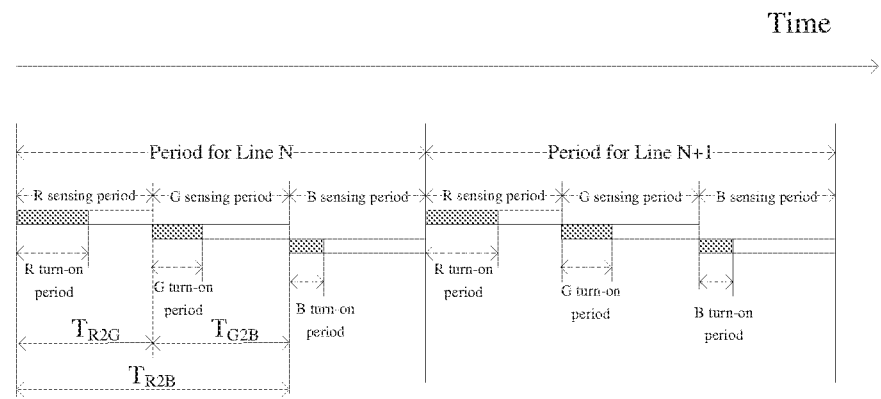


FIG. 4A

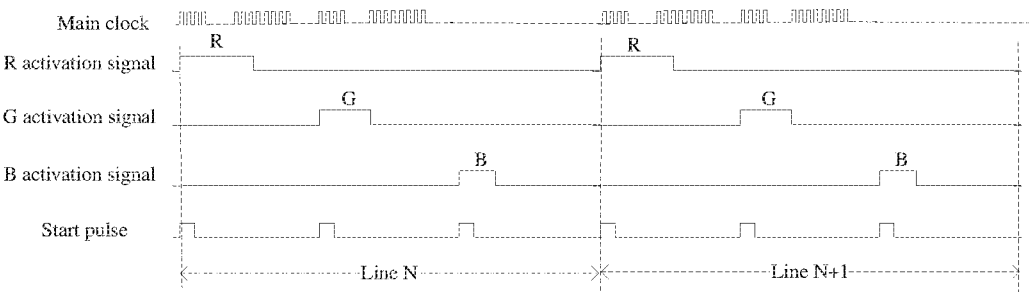


FIG. 4B

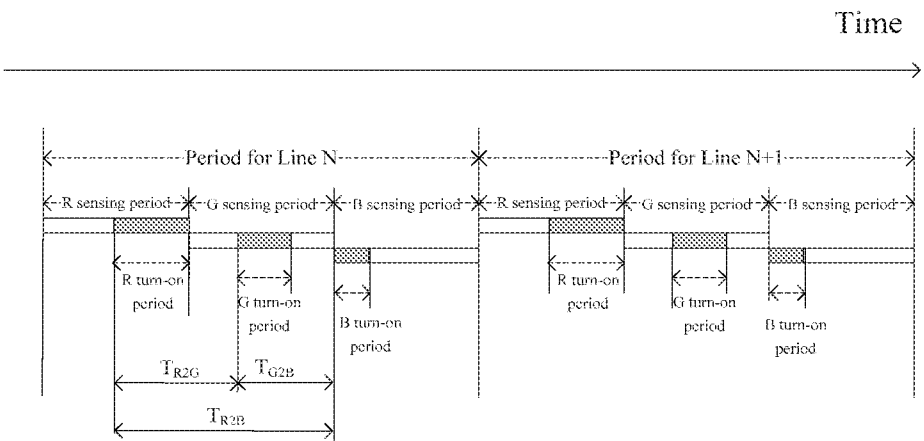


FIG. 5A

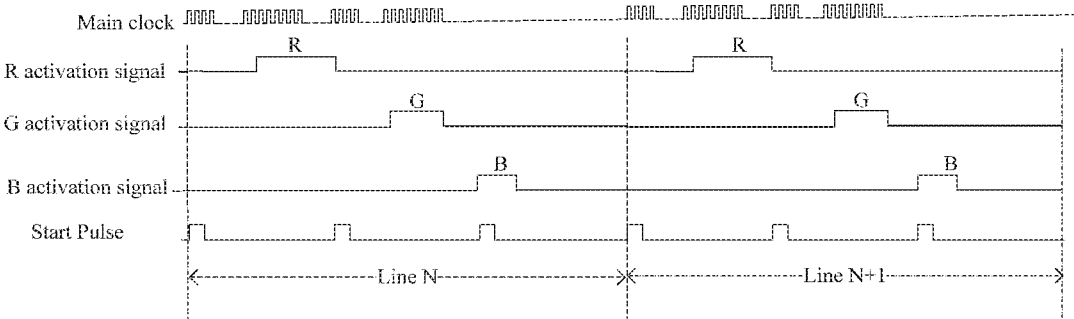


FIG. 5B

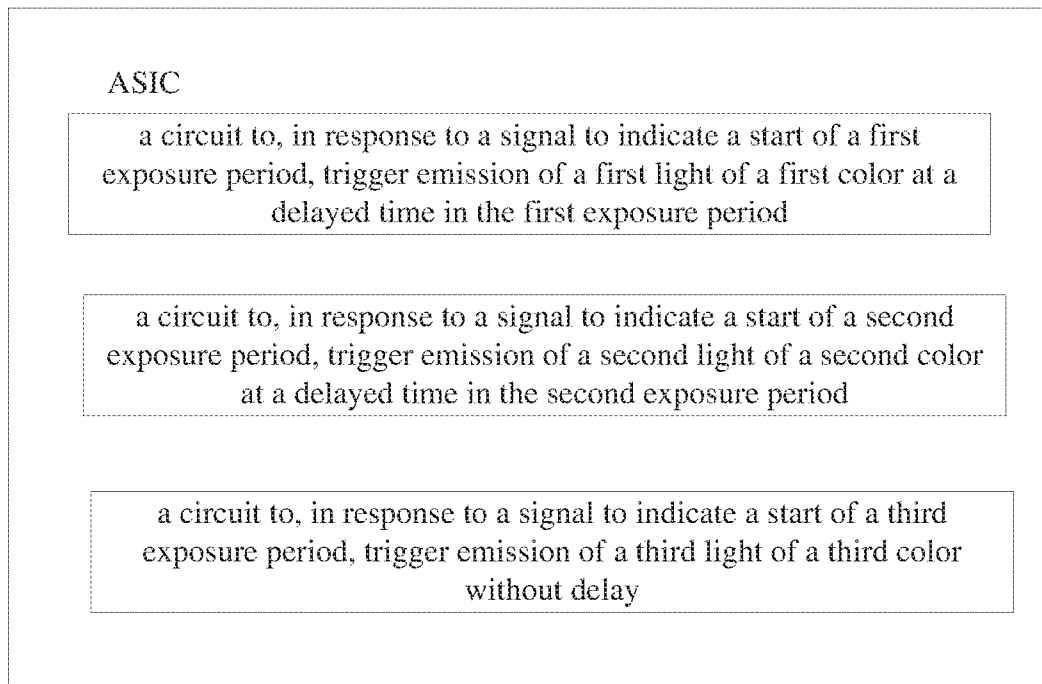


FIG. 6

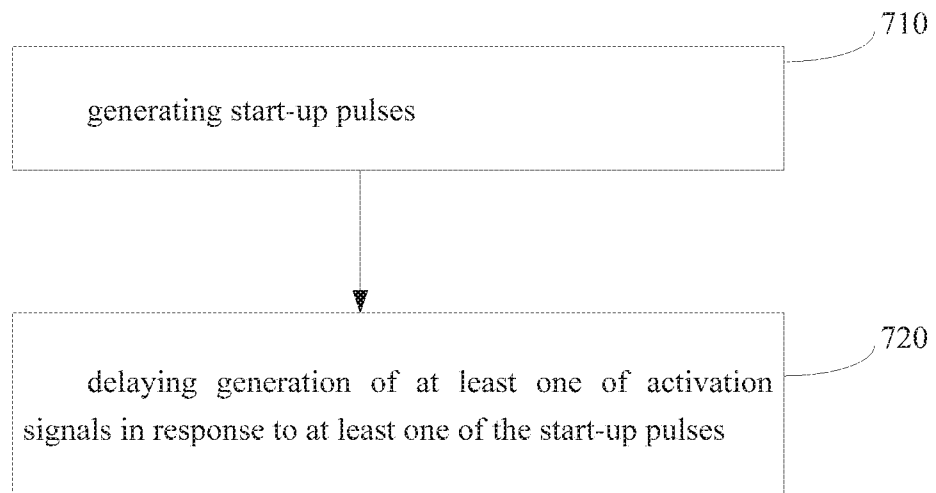


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/076883

A. CLASSIFICATION OF SUBJECT MATTER

H04N 1/04(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06T; H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI;EPODOC;CNPAT;CNKI;IEEE: scanner, light, emission, color, period, timing, delay, exposure, pulse

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2003152960 A (RICOH KK.) 23 May 2003 (2003-05-23) paragraphs 16,19,20,26,36; figures 1,4,7,8,10	1-15
A	US 2009219584 A1 (BOWE BELL & HOWELL SCANNERS L.L.C.) 03 September 2009 (2009-09-03) the whole document	1-15
A	US 2009147337 A1 (TRANSPACIFIC IP LTD.) 11 June 2009 (2009-06-11) the whole document	1-15
A	CN 104335566 A (HEWLETT PACKARD DEVELOPMENT CO.) 04 February 2015 (2015-02-04) the whole document	1-15

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

28 July 2015

Date of mailing of the international search report

27 August 2015

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088, China

Authorized officer

XIE,Xin

Facsimile No. (86-10)62019451

Telephone No. (86-10)62413670

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/076883

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
JP	2003152960	A	23 May 2003	None			
US	2009219584	A1	03 September 2009	WO	2009108610	A1	03 September 2009
US	2009147337	A1	11 June 2009	US	2004165233	A1	26 August 2004
CN	104335566	A	04 February 2015	WO	2013176653	A1	28 November 2013
				US	2015124300	A1	07 May 2015
				GB	201419289	D0	17 December 2014
				DE	112012006420	T5	26 February 2015