

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/110012 A1

(43) International Publication Date

25 July 2013 (25.07.2013)

(51) International Patent Classification:

G10H 3/18 (2006.01)

(21) International Application Number:

PCT/US2013/022333

(22) International Filing Date:

20 January 2013 (20.01.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/588,182 19 January 2012 (19.01.2012) US

(71) Applicant: GIBSON GUITAR CORP. [US/US]; 309 Plus Park Blvd., Nashville, Tennessee 37217 (US).

(72) Inventors; and

(71) Applicants (for US only): WHORTON, Phillip [US/US]; Gibson Custom Division, 1612 Elmhill Pike, Nashville, Tennessee 37210 (US). KLINE, Mathew [US/US]; Gibson Custom Division, 1612 Elmhill Pike, Nashville, Tennessee 37210 (US).

(74) Agent: COX, Kathryn; Bates & Bates LLC, 1890 Marietta Blvd, Atlanta, Georgia 30318 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: MUSICAL INSTRUMENT TRANSDUCER CAVITY

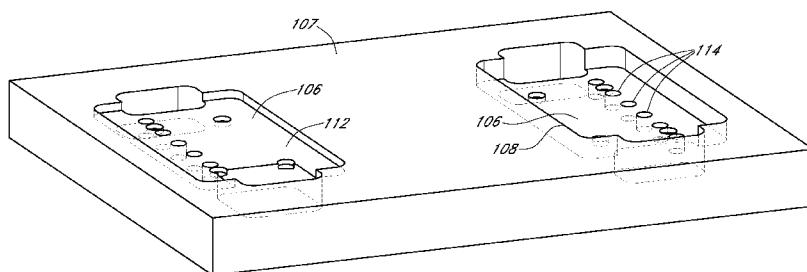


FIG. 2B

(57) **Abstract:** A pickup unit cavity for a stringed musical instrument is provided. The pickup unit cavity comprises a top, a bottom, at least one side, and at least one aperture in the cavity bottom, wherein the depth of the aperture allows for adjustment of a pole piece of a pickup unit. In some embodiments, the depth of the cavity from the top to the bottom is about inch and the depth of the at least one aperture is inch. In certain embodiments, the pickup unit cavity is in a housing. An electrical stringed musical instrument in combination with the pickup unit cavity is additionally provided.

MUSCIAL INSTRUMENT TRANSDUCER CAVITY

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This Application claims priority to U.S. Provisional Patent Application Serial No. 61/588,182, filed January 19, 2012, which application is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The field of the disclosure relates generally to cavities in musical instrument bodies for transducers or pickup units. When placed in the cavities, these transducers convert the vibration of the strings of electrical musical instruments into a measurable voltage. More particularly, the disclosure relates to one or more cavities in an electric stringed musical instrument capable of accommodating various transducers, wherein the one or more cavities has a particular depth within a housing attached to an electric stringed musical instrument body or a particular depth directly in the electric stringed musical instrument body.

BACKGROUND

[0003] Electromagnetic pickup devices are used in conjunction with electric stringed musical instruments such as electric guitars and basses to convert the vibrations resulting from the movement or “picking” of the strings into electrical signals, for subsequent transmission to amplification devices to produce a desired sound. The pickup is generally positioned under the strings of the instrument on the base surface and the signal transmitted by an electromagnetic pickup is dependent upon the motions of each string.

[0004] Pickup devices are commonly fit into cavities within housings that are attached to the musical instrument body or directly into cavities within the body of the musical instrument. In the past, the depth of these cavities was determined by how much depth was needed to adjust particular components of the pickup up or down. For example, the pickup cavity in a Les Paul electric guitar is approximately 7/8th inch. However, conventional wisdom holds that the

shallower the pickup cavity, the better the tone because of a reduction in the amount of material removed from the cavity.

[0005] The most essential components of a pickup are a permanent magnet and a coil of wire. There are several types of pickups with varying coil configurations known in the art. One type of electromagnetic pickup device is a single coil pickup. In a single coil pickup, a single coil portion has a plurality of magnetic pole pieces, with each pole piece associated with a string of the instrument. The pole pieces lie in a place spaced from the common plane of the strings, with each string disposed in a play extending through a space between two adjacent pole pieces, so that a given string at rest is located above and between two adjacent pole pieces. Another type of pickup is a dual coil pickup or a humbucking pickup. In a humbucking pickup, two coils are associated or connected in a manner so as to reduce hum. Dual Coil pickups may also have pole pieces.

[0006] There is significant value in a cavity design for a pickup which allows for the least amount of material to be removed from cavity while still allowing the pickup to work for its intended purpose. In many cases, it is also valuable for the cavity design to allow the pickup to be placed on the musical instrument body in an esthetically pleasing manner.

SUMMARY

[0007] In one aspect, the present disclosure is directed toward a pickup unit cavity wherein the cavity has a bottom, at least one side, and at least one aperture in the cavity bottom, wherein the depth of the aperture allows for adjustment of a pole piece of a pickup unit. In certain embodiments, the cavity is directly in the body of an electric stringed musical instrument. In other embodiments, the cavity is in a housing which is then connected with the body of a stringed musical instrument. In embodiments utilizing a housing, the housing may be placed in a void such as a standard pickup cavity in the electrical stringed musical instrument body.

[0008] In certain aspects, the depth of the pickup unit cavity from the opening of the cavity to the bottom, as well as the depth of the apertures in the cavity bottoms are about $\frac{1}{2}$ inch.

[0009] Consistent with yet a further aspect of the disclosure, a guitar with a disclosed pickup unit cavity is claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] **FIG. 1** depicts a front elevational view of a stringed electrical musical instrument with the pickup cavities of the present disclosure.

[0011] **FIGS. 2A** and **2B** demonstrate from two angles a close up of an example pickup unit cavity.

[0012] **FIG. 3** shows different shaped pickup cavities applicable for use with the present disclosure.

[0013] **FIG. 4** depicts a side view of the pickup cavity showing the depths of the cavity and the apertures.

[0014] **FIG. 5** illustrates various shaped apertures within the floor of the pickup cavity.

DETAILED DESCRIPTION

[0015] Before describing the exemplary embodiments in detail, it is to be understood that the embodiments are not limited to particular apparatuses or methods, as the apparatuses and methods can, of course, vary. It is also to be understood that the terminology used herein is for the purpose of describing particular embodiments only, and is not intended to be limiting. Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which an embodiment pertains. Many methods and materials similar, modified, or equivalent to those described herein can be used in the practice of the current embodiments without undue experimentation.

[0016] As used in this specification and the appended claims, the singular forms “a”, “an” and “the” can include plural referents unless the content clearly indicates otherwise. Thus, for example, reference to “a component” can include a combination of two or more components.

[0017] Pickup, pickup unit and transducer are used interchangeably throughout this disclosure.

[0018] Exemplary embodiments of the pickup cavity will now be explained with reference to the figures. This description is provided in order to assist in the understanding of the invention and is not intended to limit the scope of the invention to the embodiments shown in the figures or described below. **FIG. 1** demonstrates a electrical stringed musical instrument. In the embodiment of **FIG. 1**, the stringed instrument is a six stringed guitar. However, the components and advantages currently disclosed are applicable to other types of electrical stringed instruments, such as bass guitars, ukuleles, mandolins, violins or guitars with a different number of strings. Referring now to **FIG. 1**, guitar **100** comprises a neck **101** and a main body **102**. The guitar **100** includes guitar strings **103** that are secured on one end to a tuning head **104** and on the other end to a bridge **105** in a manner well known in the art.

[0019] **FIG. 1** further demonstrates a pair of pickup cavities **106** arrayed beneath the strings **103** in a conventional manner. The pickups cavities may be placed in various positions on the main body **102** of the guitar. The number of pickup cavities in the main body of the guitar is not limiting. In certain embodiments, there will be a single pickup cavity. In other embodiments, there will be two, three, or more pickup cavities. In the event there is more than a single pickup cavity and more than one pickup is used, the pickups may be connected via switches such that one, or more than one, pickup may transmit at a time.

[0020] The angle of cavity **106** in respect to the plane **109** of the strings **103** of the musical instrument can vary. In many embodiments, length **113** cavity **106** will generally be perpendicular to plane **109**. In other embodiments, the cavity **106** will be at an angle that is not perpendicular to plane **109** of strings **103**.

[0021] **FIGS. 2A** and **2B** demonstrate pickup unit cavity **106** having an opening **108** on the top of body **102** of musical instrument **100**, sides **110**, and a bottom **112** containing at least one

aperture **114** as well as an opening for connecting the musical instrument electronics (not shown). Although cavity **106** in **FIGS. 2A** and **2B** is placed directly in the body **102** of musical instrument **100**, it is contemplated that cavity **106** can be placed in a housing, which is then connected with body **102** of musical instrument **100**. As used herein, “housing” is not the same as body **102**. In exemplary embodiments, the housing containing the cavity will be connected with the body of musical instrument **100** in the same configuration as would be seen if cavity **106** were directly in the musical instrument body **102**. In some embodiments, the housing containing cavity **106** will be placed into a void in the musical instrument body. In other embodiments, the housing will be placed on top of the musical instrument body and connected. The shape of the housing is not met to be limiting. In certain embodiments, the housing will be rectangular in shape.

[0022] In most embodiments, cavity **106** is designed to accommodate a pickup unit with at least one permanent magnet, and a coil. The pickup unit will commonly have pole pieces. In certain embodiments, the pole pieces are the permanent magnet, whereas in other embodiments, the pole pieces are magnetizable material in contact with the permanent magnet. Generally, any type of pickup unit containing a permanent magnet and a coil is contemplated for use in cavity **106**. Cavity **106** may be further designed to accommodate different types, as well as numbers and shapes of magnets.

[0023] Although cavity **106** may be designed for pickup units without pole pieces, exemplary cavities designed for pickup units with pole pieces are particularly useful, such as the cavities shown in **FIG. 2A** and **FIG. 3**. The particular pole piece in a pickup unit for use in cavity **106** is not limiting and the aperture **114** of cavity **106** may accommodate any type of pole piece. In most embodiments, the aperture **114** of cavity **106** will accommodate non-adjustable pole pieces, adjustable pole pieces or both adjustable and non-adjustable pole pieces. In addition to embodiments where the aperture **114** of cavity **106** accommodates a pole piece for each string of the musical instrument **100**, aperture **114** of cavity **106** may be designed for pole pieces for less than or more than the number of strings **103** of musical instrument **100** or shaped as a blade or as a rail.

[0024] The general shape (versus the depth or apertures) of cavity **106** is not limiting. As demonstrated best in the illustrative embodiment of **FIG. 3**, the shape of cavity **106** may accommodate different shapes of pickup units such as rectangular, rectangular with ears **115**, slot shaped, etc. **FIG. 3** demonstrates the general shape of some of the commonly known pickup unit cavities currently in use.

[0025] **FIG. 4** illustrates the important depths of cavity **106**. As measured from the top **107** of body **102** of musical instrument **100** or the top of the housing containing cavity **106** (such tops which are equivalent for depth measurement to the opening of cavity **106**), in one embodiment, the depth **116** from the top **107** of body **102** or the top of the housing containing cavity **106** to the bottom **112** of cavity **106** is $\frac{1}{2}$ inch. Depth **116** is also present in an embodiment where a housing contains cavity **106**. In that event, the depth will be measured from the top of the housing to the bottom **112** of cavity **106**. In both the embodiment shown in **FIG. 4** and an embodiment where cavity **106** is in a housing, depth **118** from bottom **112** of cavity **106** to bottom **120** of aperture **114** is $\frac{1}{2}$ inch. In another embodiment, depth **116** is less than $\frac{1}{2}$ inch, with aperture depth **118** of more than $\frac{1}{2}$ inch. In yet another embodiment, depth **116** is $\frac{3}{4}$ inch, with aperture depth **118** of $\frac{1}{2}$ inch. Generally depth **116** plus aperture depth **118** allow for the pickup unit pole pieces to be fully adjustable.

[0026] In certain embodiments, a housing containing cavity **106** is the shape of a block. This block can be placed into a pickup unit cavity using any method known in the art. In many embodiments, the pickup unit cavity will be a standard pickup unit cavity. The resulting depth of the pickup unit cavity is reduced by the block while apertures **114** in the block still allow for adjustment of a pickup unit. Similarly to disclosed cavities **106** directly in body **102**, the shape versus depth of cavities having housings with apertures **114** is not limiting and may be any shape known in the art.

[0027] The number of apertures **114** is not meant to be limiting. In many embodiments, the number of apertures **114** will be equal to the number of pole pieces of the desired pickup unit plus connector apertures **122** for assisting in attachment of the pickup unit to the musical instrument body. Connector apertures **122** are commonly shallower than apertures **114**, which

accept the pole pieces. In most embodiments, connector apertures **122** will be sized to accept connectors such as screws. In some embodiments, connector apertures **122** have a depth capable of allowing adjustment of the entire pickup unit. In exemplary embodiments, such as those demonstrated in **FIG. 4** and **FIG. 5**, only apertures **114** are present and equal to the number of pole pieces. In these embodiments, the pickup unit is fitted into cavity **106** using methods not requiring screw type fasteners.

[0028] The position of apertures **114** may also vary. In many embodiments, all of apertures **114** will be linear in relation to each other. In other embodiments, some of apertures **114** will be linear in relation to each other while other of apertures **114** will be in different configurations.

[0029] In musical instruments having more than a single pickup unit cavity **106**, depth **116** and depth **118** may be either the same or different in different cavities **106**. For example, in a musical instrument having two cavities **106**, the first cavity may have a depth **116** of $\frac{1}{2}$ inch, whereas the second cavity may have a depth **116** of $\frac{3}{4}$ inch. In these cavities, aperture depth **118** may also be the same or different.

[0030] In many embodiments, apertures **114** are generally the same shape as the pole piece such that the pole piece is surrounded by the body **102** of musical instrument **100** when a pickup unit is placed in cavity **106**. In these embodiments, aperture **114** is slightly larger than the size of the pole piece of the pickup unit. In other embodiments, such as those demonstrated by **FIG. 5**, aperture **114** is a different shape than the pole piece (assuming that the pole piece is cylindrical). Generally, as long as aperture **114** allows for adjustment of the pole piece in a plane perpendicular to plane **109**, aperture **114** may be any shape. For example, **FIG. 5** demonstrates apertures **114** as cylindrical (common shape of pole pieces), rectangular, square, slot, etc.

[0031] Any aspect or design described herein as "exemplary" is not necessarily to be construed as preferred or advantageous over other aspects or designs. Exemplary embodiments may be implemented as a method, apparatus, or article of manufacture. The word "exemplary" is used herein to mean serving as an example, instance, or illustration.

[0032] From the above discussion, one skilled in the art can ascertain the essential characteristics of the invention, and without departing from the spirit and scope thereof, can make various changes and modifications of the embodiments to adapt to various uses and conditions. Thus, various modifications of the embodiments, in addition to those shown and described herein, will be apparent to those skilled in the art from the foregoing description. Such modifications are also intended to fall within the scope of the appended claims.

CLAIMS

What is claimed is:

1. A pickup unit cavity for a stringed electrical musical instrument comprising:
a cavity with an opening, bottom, and at least one side; and
at least one aperture in the cavity bottom, wherein a depth of the at least one aperture allows for adjustment of a pole piece of a pickup unit.
2. The pickup unit cavity of claim 1, wherein the cavity has four sides.
3. The pickup unit cavity of claims 1-2, wherein the cavity is rectangular.
4. The pickup unit cavity of claim 3, further comprising ears.
5. The pickup unit cavity of claims 1-2, wherein the cavity is slot shaped.
6. The pickup unit cavity of claims 1-2, wherein the cavity is oval.
7. The pickup unit cavity of claims 1-6, wherein a depth from the opening to the bottom is about $\frac{1}{2}$ inch.
8. The pickup unit cavity of claims 1-6, where a depth from the opening to the bottom is about $\frac{3}{4}$ inch.
9. The pickup unit cavity of claims 1-6 wherein the aperture in the cavity bottom is cylindrical.
10. The pickup unit cavity of claims 1-9, further comprising six apertures.
11. The pickup unit cavity of claims 1-10, wherein a depth of the aperture is about $\frac{1}{2}$ inch.

12. The pickup unit cavity of claims 1-10, wherein a depth of the aperture is less than about $\frac{1}{2}$ inch.
13. The pickup unit cavity of claims 1-10, wherein a depth of the aperture is more than about $\frac{1}{2}$ inch.
14. The pickup unit cavity of claims 1-13 further comprising two cavities.
15. The pickup unit cavity of claims 1-13 further comprising more than two cavities.
16. The pickup unit cavity of claims 1-14 further comprising a housing, wherein the housing contains the cavity.
17. The pickup unit cavity of claims 1-16, wherein a pickup unit cavity is perpendicular to a string plane of the musical instrument.
18. The pickup unit cavity of claims 1-16, wherein a pickup unit cavity is not perpendicular to a string plane of the musical instrument.
19. A method for adjusting a pickup unit within a pickup cavity, comprising:
adjusting at least one pole piece of a pickup unit in an aperture in the pickup cavity of claim 1.
20. The method of claim 19, wherein the aperture has a same general shape as the pole piece.
21. A stringed musical instrument comprising:
a body, wherein the body has a top surface;
a neck attached to with the body;
a bridge attached with the top surface of the body; and
at least one pickup unit cavity in the top surface of the body, wherein the pickup unit cavity comprises:

an opening, bottom and at least one side; and
at least one aperture in the cavity bottom, wherein the depth of the at least one aperture allows
for adjustment of a pole piece of a pickup unit.

1 / 6

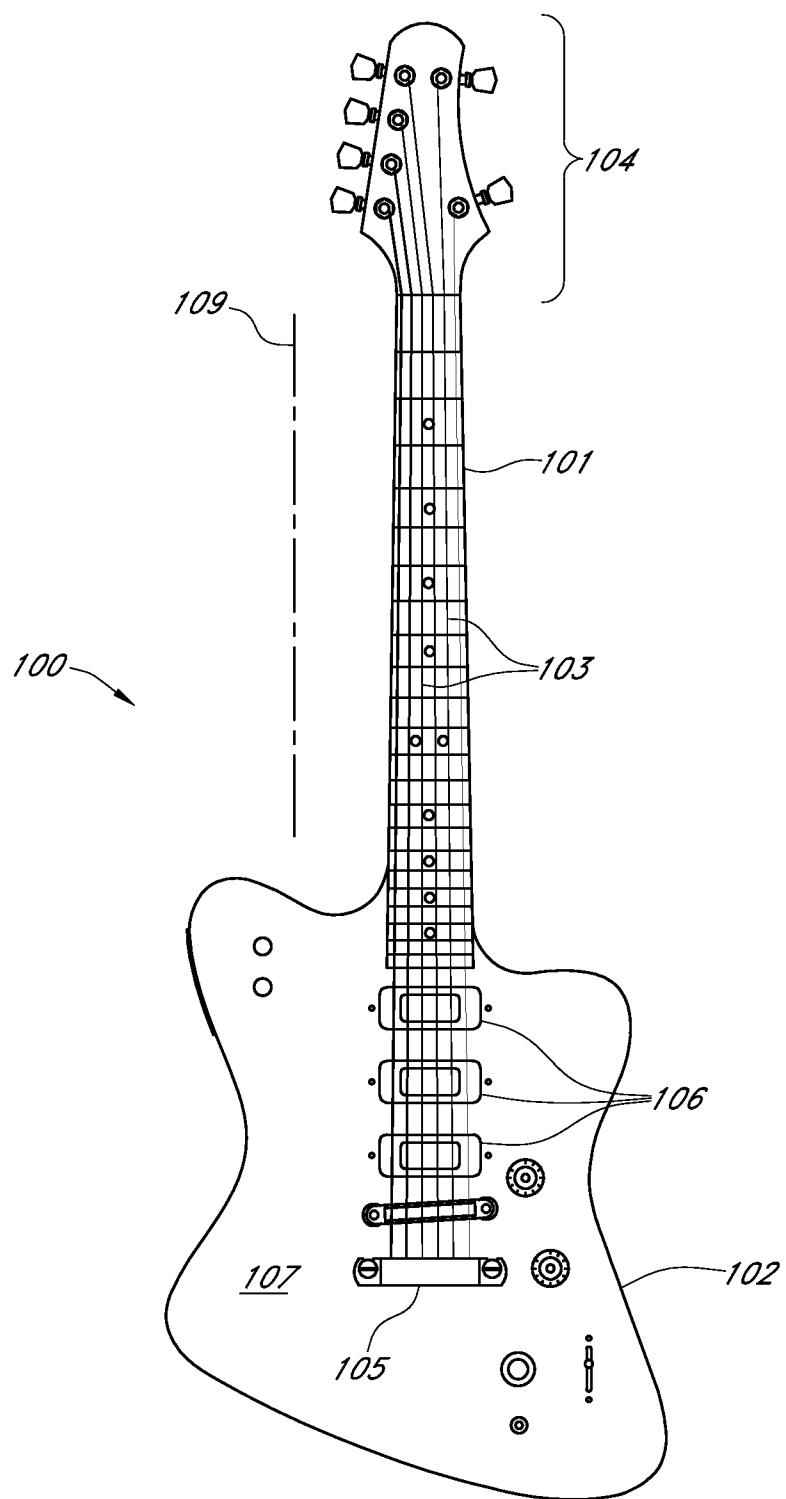


FIG. 1

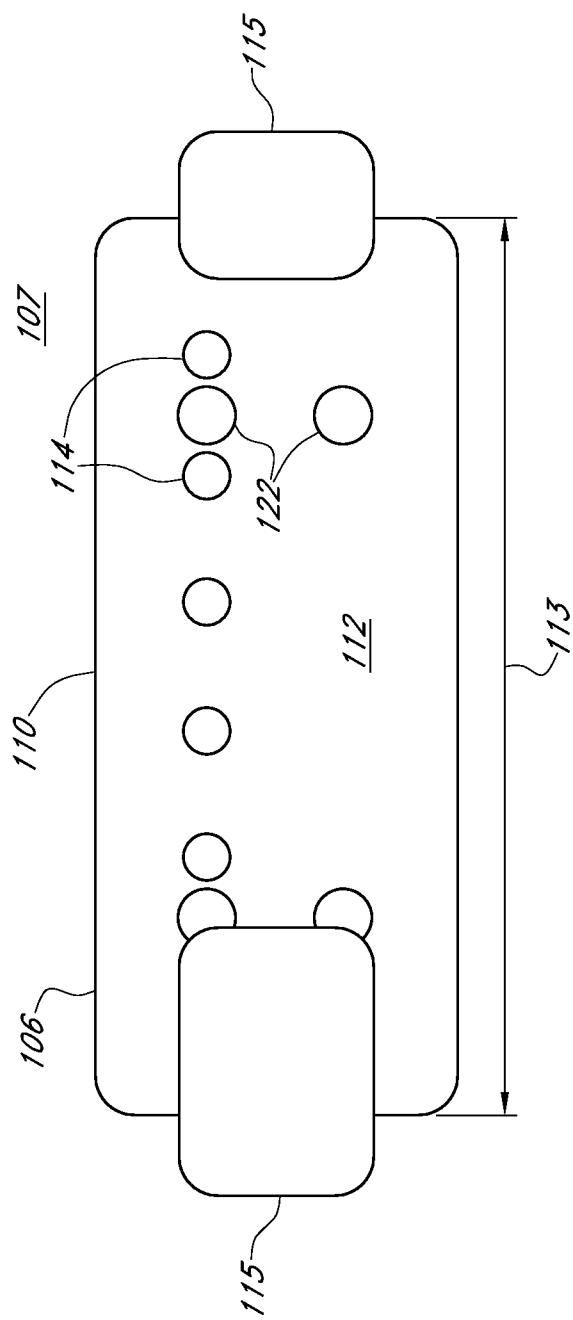


FIG. 2A

3/6

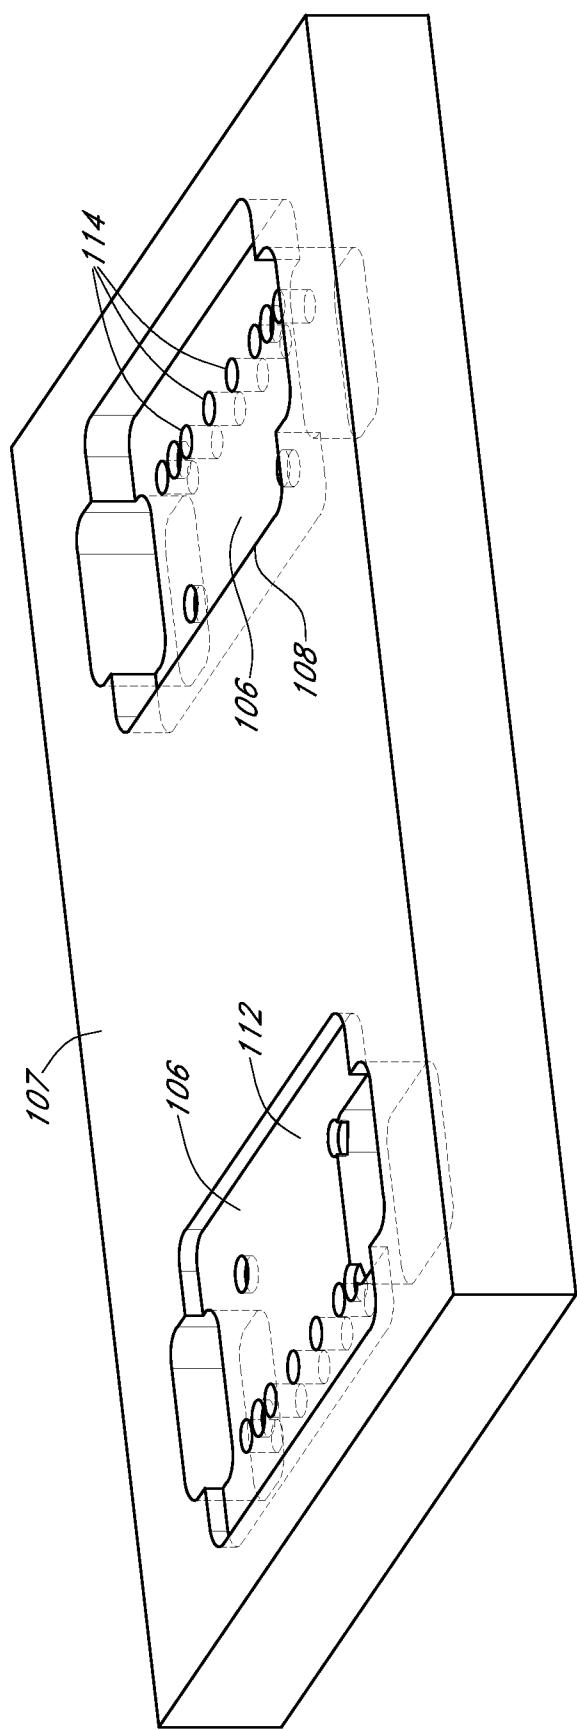


FIG. 2B

4/6

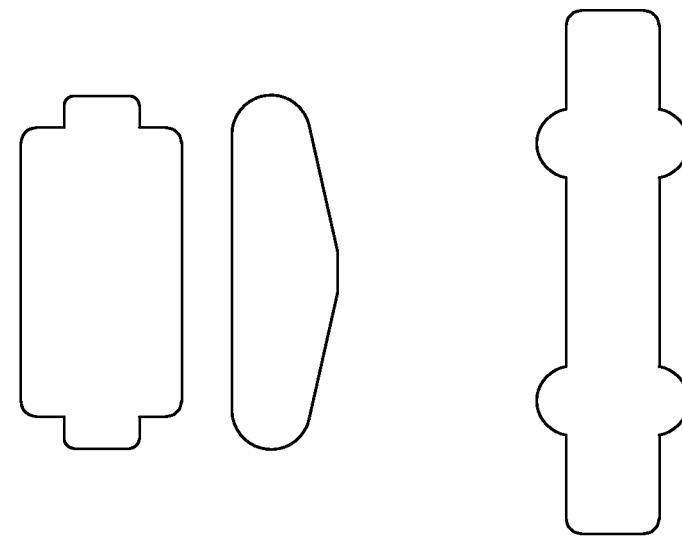
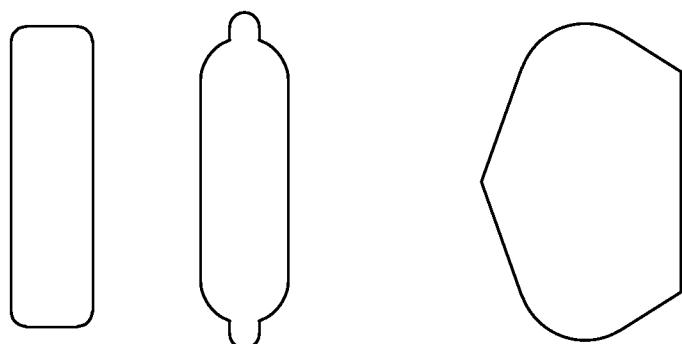
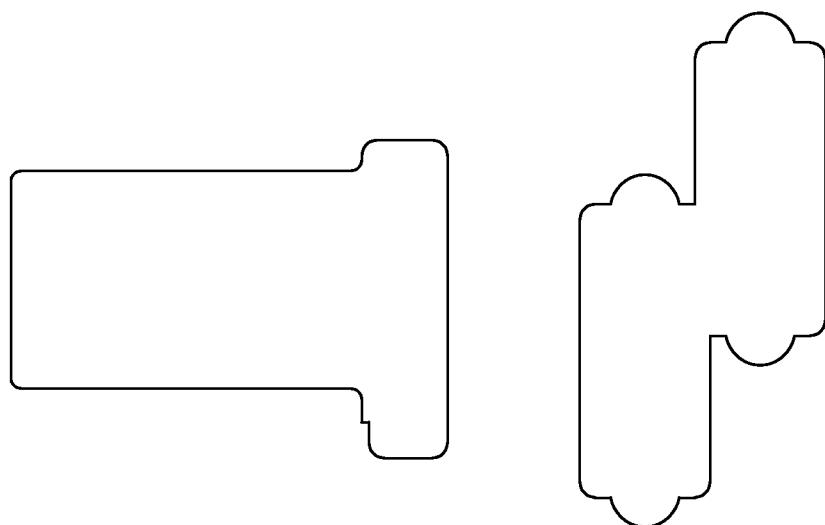


FIG. 3

5/6

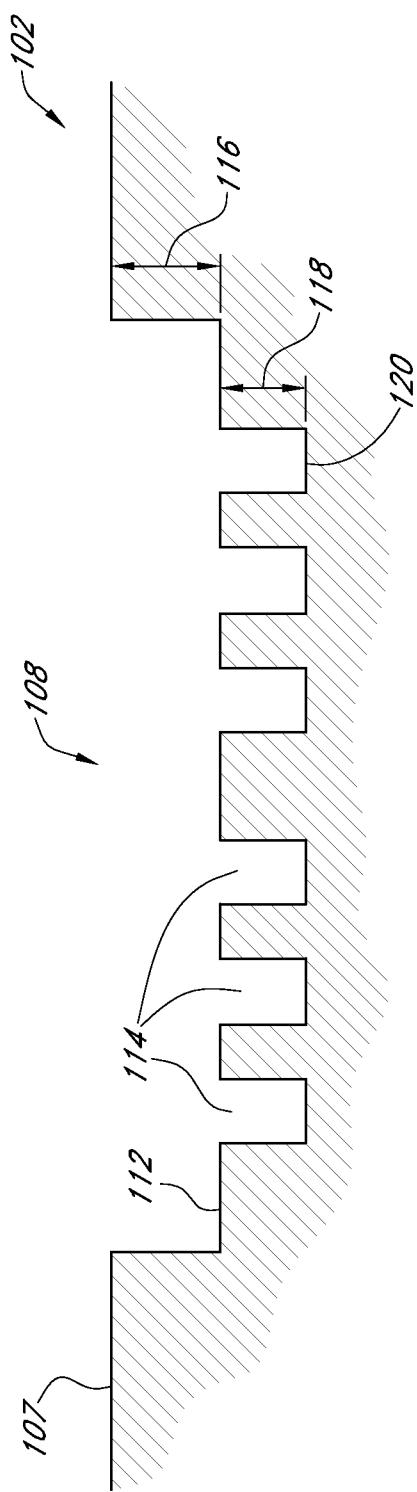


FIG. 4


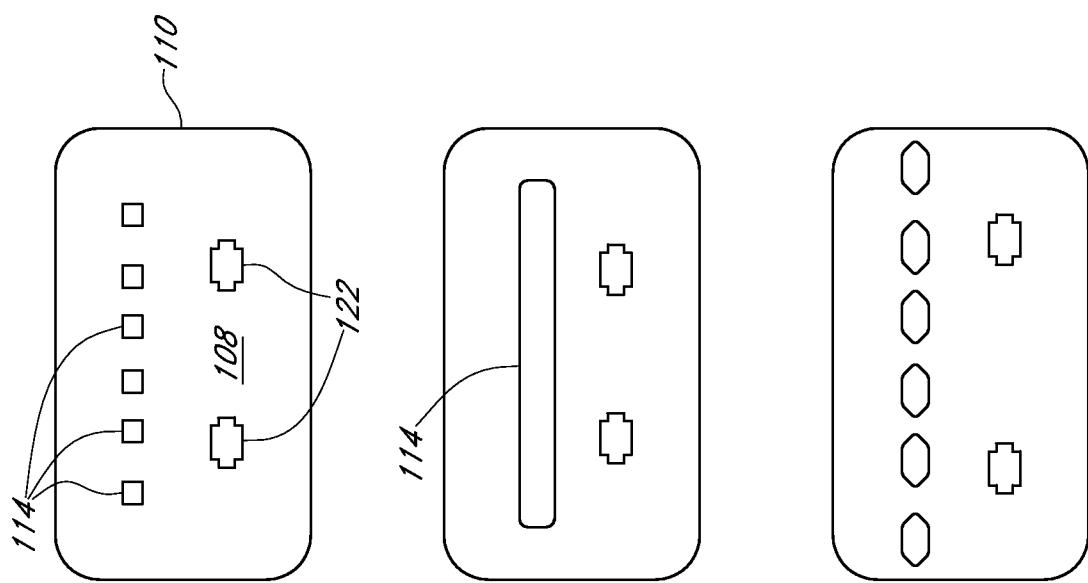


FIG. 5

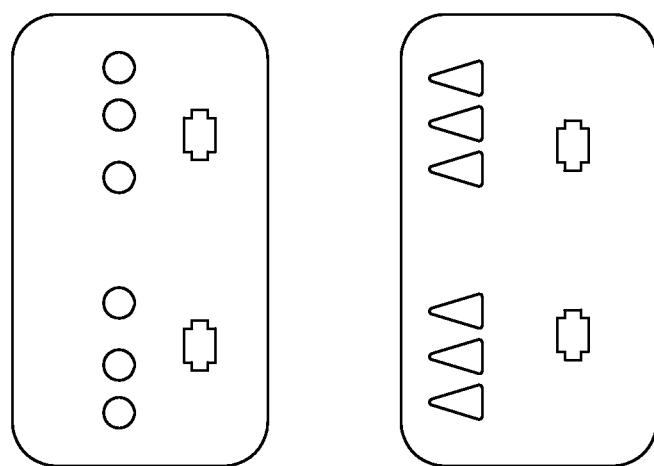

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/022333**A. CLASSIFICATION OF SUBJECT MATTER****G10H 3/18(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G10H 3/18

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
Korean utility models and applications for utility models
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
eKOMPASS(KIPO internal) & Keywords: guitar, pickup unit cavity, aperture**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2010-0031807 A1 (DANIEL FIOCCO et al.) 11 February 2010 See paragraphs [0035]-[0049]; and figures 1-3.	1-21
A	US 2005-0211052 A1 (PATRICK JAMES GIGLIOTTI) 29 September 2005 See paragraph [0022]; and figure 1.	1-21
A	US 6255567 B1 (KIYOSHI MINAKUCHI) 3 July 2001 See column 3, line 12 - column 4, line 6; and figure 3.	1-21
A	US 2009-0249946 A1 (WILLIAM J. HUNTER) 8 October 2009 See paragraphs [0020]-[0028]; and figure 4.	1-21
A	JP 2006-251244 A (YAMAHA CORP.) 21 September 2006 See paragraphs [0011]-[0024]; and figure 2.	1-21

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
30 May 2013 (30.05.2013)

Date of mailing of the international search report

30 May 2013 (30.05.2013)Name and mailing address of the ISA/KR

 Korean Intellectual Property Office
 189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
 302-701, Republic of Korea
 Facsimile No. 82-42-472-7140

Authorized officer

KIM, Do Weon

Telephone No. 82-42-481-5560



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/022333

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2010-0031807 A1	11.02.2010	None	
US 2005-0211052 A1	29.09.2005	None	
US 6255567 B1	03.07.2001	DE 60024339 D1 DE 60024339 T2 EP 1022719 A2 EP 1022719 A3 EP 1022719 B1 JP 2000-276167 A	05.01.2006 17.08.2006 26.07.2000 03.04.2002 30.11.2005 06.10.2000
US 2009-0249946 A1	08.10.2009	None	
JP 2006-251244 A	21.09.2006	JP 04356630 B2	04.11.2009