




(86) Date de dépôt PCT/PCT Filing Date: 2014/12/15
(87) Date publication PCT/PCT Publication Date: 2015/06/25
(45) Date de délivrance/Issue Date: 2021/11/02
(85) Entrée phase nationale/National Entry: 2016/04/14
(86) N° demande PCT/PCT Application No.: IB 2014/066910
(87) N° publication PCT/PCT Publication No.: 2015/092649
(30) Priorité/Priority: 2013/12/19 (IT BS2013A000184)

(51) Cl.Int./Int.Cl. *F01K 13/02* (2006.01),
F01K 25/08 (2006.01)
(72) Inventeurs/Inventors:
BINI, ROBERTO, IT;
PIETRA, CLAUDIO, IT;
COLOMBO, DAVIDE, IT
(73) Propriétaire/Owner:
TURBODEN S.R.L., IT
(74) Agent: MLT AIKINS LLP

(54) Titre : PROCÉDE DE COMMANDE POUR UN CYCLE ORGANIQUE DE RANKINE
(54) Title: CONTROL METHOD FOR AN ORGANIC RANKINE CYCLE

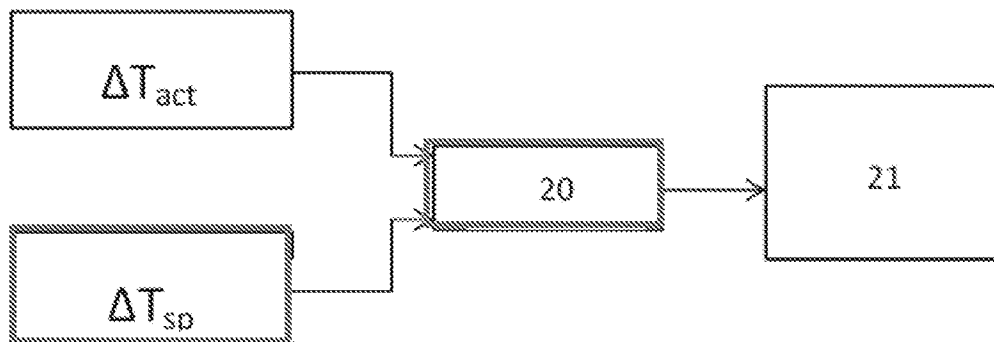

(57) Abrégé/Abstract:

An embodiment of the present invention is a method of controlling an Organic Rankine Cycle system, the system comprising at least one feed pump (2), at least one heat exchanger (3), an expansion turbine (5) and a condenser (6), the organic Rankine Cycle comprising a feeding phase of an organic working fluid, a heating and vaporization phase of the same working fluid, an expansion and condensation phase of the same working fluid, wherein said method controls an adjusted variable (X), which is a function of an overheating of the organic fluid, by means of a controller (20) that acts by varying a control variable (Y), which is a parameter of the organic fluid in its liquid phase, and wherein the adjusted variable (X) is a temperature difference (ΔT) between a current temperature of the organic fluid in vapor phase at the turbine inlet and a temperature threshold (T_{lim}), under which the expansion phase involves the formation of a liquid phase of the organic fluid.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(10) International Publication Number
WO 2015/092649 A1

(43) International Publication Date
25 June 2015 (25.06.2015)

- (51) **International Patent Classification:**
F01K 13/02 (2006.01) *F01K 25/08* (2006.01)
- (21) **International Application Number:**
PCT/IB2014/066910
- (22) **International Filing Date:**
15 December 2014 (15.12.2014)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
BS2013A000184 19 December 2013 (19.12.2013) IT
- (71) **Applicant:** **TURBODEN S.R.L.** [IT/IT]; Via Cernaia 10, I-25124 Brescia (IT).
- (72) **Inventors:** **BINI, Roberto**; Via Genova, 34, I-25121 Brescia (IT). **PIETRA, Claudio**; Via Re Rotari 32, I-25100 Brescia (IT). **COLOMBO, Davide**; Via Tiraboschi 2, I-20100 Milano (IT).
- (74) **Agent:** **BRUNI, Giovanni**; Laforgia, Bruni & Partners, Corso Duca degli Abruzzi, 78, I-10129 Torino (IT).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** CONTROL METHOD FOR AN ORGANIC RANKINE CYCLE

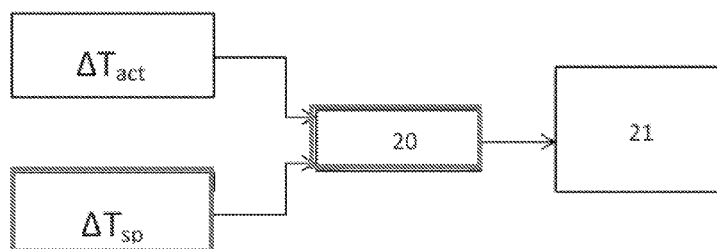


Fig. 6

(57) **Abstract:** An embodiment of the present invention is a method of controlling an Organic Rankine Cycle system, the system comprising at least one feed pump (2), at least one heat exchanger (3), an expansion turbine (5) and a condenser (6), the organic Rankine Cycle comprising a feeding phase of an organic working fluid, a heating and vaporization phase of the same working fluid, an expansion and condensation phase of the same working fluid, wherein said method controls an adjusted variable (X), which is a function of an overheating of the organic fluid, by means of a controller (20) that acts by varying a control variable (Y), which is a parameter of the organic fluid in its liquid phase, and wherein the adjusted variable (X) is a temperature difference (ΔT) between a current temperature of the organic fluid in vapor phase at the turbine inlet and a temperature threshold (T_{lim}), under which the expansion phase involves the formation of a liquid phase of the organic fluid.

CONTROL METHOD FOR AN ORGANIC RANKINE CYCLE

DESCRIPTION

Technical field

5 The present invention is related to a control method for vapor thermodynamic cycles and is particularly suitable for an organic Rankine cycle (hereafter also ORC).

Background Art

As known, a thermodynamic cycle is a cyclical finite sequence of thermodynamic transformations (for example, isotherm, isochoric, isobar or adiabatic). At the end of each
10 cycle the system comes back to its initial state. In particular, a Rankine cycle is a thermodynamic cycle composed of two adiabatic transformations and two isobar transformations. Aim of the Rankine cycle is to transform heat in mechanical work and all kind of vapor machines are based on such a cycle. This cycle is mainly used in thermo-electrical plants for electrical energy production and uses water as working fluid, both in
15 liquid and in vapor state, in the so called vapor turbine.

Organic Rankine cycles (ORC), using organic fluid having a high molecular mass, have been realized for a huge number of applications, in particular also for using thermal sources, having low-middle enthalpy values. As for other vapor cycles, an ORC apparatus comprises one or more pumps for the organic fluid feeding, one or more heat
20 exchangers for performing pre-heating, vaporization and eventually overheating, a vapor turbine for expanding the fluid, a condenser for transforming the vapor into liquid and in some cases a regenerator for heat recovering, downstream of the turbine, i.e. upstream of the condenser.

With respect to steam cycles, one of the advantages of ORC cycles is that organic
25 fluids, having a high molecular mass, show a saturation curve (in the graph temperature-

entropy, T-S) with a right branch 12' having a positive slope (Fig.2). Instead, the steam saturation curve shows a right branch 11' having a negative slope (Fig.1).

As a consequence, even expanding saturated vapor in the turbine, the vapor expansion does not fall inside the saturation curve, but outwards, in the overheated vapor area. Therefore, during the expansion in the turbine, there is no liquid formation, which can damage the turbine or at least worsen the turbine efficiency.

On the other hand, if the evaporation pressure is close to the fluid critical pressure or even higher (hypercritical cycle, Fig. 3) and at the same time the fluid temperature is not enough high, it can happen that the expansion curve of the vapor in the turbine, in the T-S diagram, intersects the saturation curve: in this case, there is liquid formation in the turbine also for ORC cycles, as shown in Fig. 3, reference 15'.

The intersection can arise in the upper portion of the right branch of the saturation curve – quasi-critical or hypercritical cycles (Fig. 3) – or in the lower portion of the right branch, in case of organic fluids having a lower molecular mass, which can have the right branch of the saturation curve either with a small positive slope or even with a small negative slope.

Therefore, there is the need of a new control method for ORC cycles, which avoids any turbine expansion falling inside the saturation curve, in other words, any liquid formation during the expansion, with consequent worsening of the lifetime and the efficiency of the turbine.

Invention summary

An aspect of the present invention is a control method for ORC cycles, said method controlling the liquid supply to the heat exchangers of the high pressure portion of the ORC cycle, in order to avoid the mentioned inconvenience.

Another aspect of the invention is an apparatus configured to execute the above

method.

The dependent claims outline further specific and advantageous embodiment of the invention.

A first aspect of the invention is a method of controlling an Organic Rankine Cycle system, the system comprising at least one feed pump, at least one heat exchanger, an expansion turbine and a condenser, the organic Rankine cycle comprising a feeding phase of an organic working fluid, a heating and vaporization phase of the same working fluid, an expansion and condensation phase of the same working fluid, eventually a regeneration phase, wherein said method controls an adjusted variable, hereafter defined as "similar to an overheating" of the organic fluid by means of a controller that acts by varying a control variable, which is a parameter of the organic fluid in its liquid phase. In particular, said adjusted variable is a temperature difference between a current temperature of the organic fluid in vapor phase at the turbine inlet and a temperature threshold under which the expansion phase involves the formation of a liquid phase of the organic fluid.

Consequently, an apparatus is described, the apparatus being configured to realize the above method and comprising means for controlling said adjusted variable, "similar to a overheating" of the organic fluid, said means acting by varying a control variable, which is a parameter of the organic fluid in its liquid phase, wherein said adjusted variable is a temperature difference between a current temperature of the organic fluid in vapor phase at the turbine inlet and a temperature threshold under which the expansion phase involves the formation of a liquid phase of the organic fluid.

An advantage of this aspect is that the difference between a current temperature of the organic fluid in vapor phase at the turbine inlet and a temperature threshold under which the expansion phase involves the formation of a liquid phase of the organic fluid

can be easily determined, when the thermodynamic characteristics of the organic fluid are known as a function of the supply pressure of said fluid and, for certain organic fluids, also as a function of the condensation pressure. In this way, during the expansion in the turbine, the liquid formation is avoided, and consequently the risk to worsen the turbine efficiency.

According to another embodiment, said control variable is the flow rate of the organic fluid at the inlet of said at least one heat exchanger.

Consequently, said control means are configured for acting on the flow rate of the organic fluid at the inlet of said at least one heat exchanger.

An advantage of this embodiment is to keep the adjusted variable equal to the predetermined set-point, by means of the adjustment of the flow rate of the organic fluid .

According to a further embodiment, the adjustment of the flow rate of the organic fluid at the inlet of the heat exchanger is realized by varying the rotational speed of the feed pump of the organic fluid.

Consequently, said control means are configured for varying the rotational speed of the feed pump of the organic fluid.

An advantage of this embodiment is that the rotational speed of the feed pump can be easily controlled.

According to still another embodiment, the adjustment of the flow rate of the organic fluid at the inlet of the heat exchanger is realized by varying the opening degree of a valve, located downstream of the feed pump of the organic fluid.

Consequently, said control means are configured for varying the opening degree of a valve, located downstream of the feed pump of the organic fluid.

An advantage of this embodiment is to execute an alternative flow rate adjustment, if the feed pump of the organic fluid operates at fixed revolution number.

According to another aspect of the invention an organic Rankine cycle system is disclosed, the system comprising at least one feed pump, at least one heat exchanger, an expansion turbine, a condenser and a controller configured to operate a method according to one of the above embodiments.

5 The method according to one of its embodiments can be carried out with the help of a computer program comprising a program-code for carrying out all the steps of the method described above, and in the form of computer program product comprising the computer program.

10 The computer program product can be configured as a control apparatus for an organic Rankine cycle, comprising an Electronic Control Unit (ECU), a data carrier, associated to the ECU, and a computer program stored in the data carrier, so that the control apparatus defines the embodiments described in the same way as the method. In this case, when the control apparatus executes the computer program all the steps of the method described above are carried out.

15 Brief description of drawings

The invention will be now described by reference to the enclosed drawings, which show some non-limitative embodiments, namely:

- Figure 1 shows in the diagram temperature-entropy a thermal cycle of an inorganic fluid, having a low molecular mass.
- 20 - Figure 2 shows in the diagram temperature-entropy a thermal cycle of an organic fluid, having a high molecular mass.
- Figure 3 shows in the diagram temperature-entropy a hypercritical thermal cycle of the organic fluid of Fig. 2.
- Figure 4 shows in the diagram temperature-entropy a hypercritical thermal cycle
25 of the organic fluid of Fig. 2, having defined an adjusted variable "similar to an

overheating” according to an embodiment of the present method.

- Figure 5 shows the behavior of the temperature threshold as a function of the feeding pressure of the organic fluid, as in the previous figures.
- Figure 6 shows a block diagram of the control of the “similar to an overheating” temperature according to an embodiment of the present method.
- Figure 7 schematically represents an ORC system, for which the present method can be utilized.

Detailed description

With reference to Fig. 7, an ORC system typically comprises at least a feed pump 2 for supplying an organic fluid in liquid phase to at least a heat exchanger 3. In the heat exchanger, which on its turn can comprise a pre-heater, an evaporator and an over-heater, the organic fluid is heated until the transformation in saturated vapor or even in overheated vapor happens. After exiting the heat exchanger, the vapor crosses an expansion turbine (where the mechanical work of the ORC cycle is obtained) and finally crosses a condenser 6, which transforms the vapor into liquid, and can come back to the feed pump for the subsequent cycle. Advantageously, between the turbine 5 and the condenser 6, a regenerator can be provided. The regenerator exchanges heat between the organic fluid in liquid phase, flowing from the feed pump to the heat exchanger, and the organic fluid in vapor phase, flowing towards the condenser.

With reference to Figs 1-2, representing a thermodynamic diagram of the temperature as a function of the entropy (T-S diagram), the substantial difference between a saturation curve 12 of an organic fluid (having a middle or high molecular mass, with respect to the water molecular mass) and a saturation curve 11 of the water is that for the organic fluid the right branch 12' of the curve shows a positive slope, while for the water-steam system the right branch 11' of the curve shows a negative slope. A

typical cycle, without overheating, i.e. with a saturated vapor expansion, is respectively referenced with 13 (steam cycle, Fig. 1) and with 14 (ORC cycle, Fig. 2). Due to the different shape of the saturation curve, the two cycles differ because the steam expansion 13' in the turbine fall inside its own saturation curve, with liquid formation, while the organic fluid expansion 14' in the turbine arises outside the saturation curve, that is to say in the overheated vapor area. Therefore, during the turbine expansion, there is no liquid formation and, consequently, no turbine damage.

On the other hand, in some cases, such an advantage of the ORC fluids is not available. For example, Fig. 3 shows a hypercritical thermodynamic cycle 15 of an organic fluid (it can be the same as in Fig. 2). The cycle is called hypercritical, since the evaporation pressure at the expansion start 16 is higher than the pressure of the critical point 16'. In this case or in case of subcritical cycles (though in presence of saturated vapor, the cycle operates close to the critical point, that is to say with an evaporation pressure very similar to the critical pressure of the fluid) the expansion curve 15' of the vapor in the turbine can intersect the saturation curve of the T-S diagram and therefore, also for ORC cycles there is liquid formation in the turbine.

The present invention start considering that for each feeding pressure value of the vapor in the turbine, there is a temperature threshold T_{lim} , under which the expansion would intersect the saturation curve. On the contrary, if a higher temperature than this temperature threshold is kept, the expansion in the turbine takes place in a safety area, in other words in the overheated vapor area, without intersecting the saturation curve.

With reference to Fig. 4, the temperature difference ΔT between the vapor temperature at the turbine inlet and this temperature threshold T_{lim} is called "similar to an overheating". In other words, such parameter "similar to an overheating" represents a safety margin with respect to the critical condition, which would cause liquid formulation

during the expansion in the turbine. This condition is expressed by the temperature threshold T_{lim} , to whom an expansion phase E_{lim} tangent to the saturation curve corresponds. A map or a theoretical-experimental curve can be defined, associating for each pressure value in the turbine a corresponding temperature threshold. For each
5 point, such temperature threshold can be calculated, simulating the vapor expansion in the turbine. It can be observed that, in case of subcritical cycles, for a certain portion of the expansion curve, such couples of points are the couples saturation pressure – saturation temperature of the fluid, since that, in this expansion curve portion the saturation temperature ensures not to have expansion inside the saturation curve.

10 To easier implement this temperature – pressure curve in the system control software, it can be advantageous to interpolate such a discrete curve with an algebraic function $T = f(p)$, as shown in Fig. 5. It has to be remarked that, increasing the pressure also the temperature value at the turbine inlet must be progressively increased, to avoid the risk that the expansion curve intersects the saturation curve.

15 Therefore, the control apparatus (a possible embodiment of which is shown in Fig. 6) performs a cycle adjustment to keep the parameter “similar to an overheating” equal to the predetermined set point. The adjustment is typically performed by acting on the flow rate of the organic fluid entering the heat exchangers, which heats and vaporizes said fluid. More in detail, the predetermined set point value ΔT_{sp} is compared with the current
20 “similar to an overheating” parameter ΔT_{act} (the adjusted variable) and the control action is carried out by a controller 20, for example a PID controller (proportional, integral and derivative), whose output is the adjustment 21 of the control variable, that is to say the flow rate of the fluid entering the heat exchangers. Usually, this set point ranges between a few degrees and a few decades of degrees and consequently a high accuracy in
25 calculating the above mentioned points of the curve and/or interpolating said curve is not

required.

The map associating a temperature threshold to each pressure value of the vapor in the turbine is predetermined and is an input parameter of the control method.

As an example, the control action can be related to the rotational speed V of the feed pump 2 or to the opening degree χ of a valve, located downstream of said feed pump (working the pump at a fixed revolution number) or to another control parameter, influencing the parameter to be adjusted (for example, the hot source temperature).

In case of organic fluids having the right branch of the saturation curve either with a small positive slope or even with a small negative slope, the intersection of the saturation curve can arise in the lower portion of the right branch of the T-S diagram, corresponding to lower condensation pressures. For the same fluid, starting from the same evaporation pressure, such a phenomenon does not appear at higher condensation pressures. Therefore, for such fluids the threshold temperature values can be more conveniently corrected as a function of the condensation pressure.

The present method can also be suitable for a slow ramp up of the system. In fact, beginning the starting phase with substantially high values of the temperature difference ΔT would lead to a quite low pressure values in the turbine: the temperature difference value is limited on the upper part by the maximum temperature of the hot thermal source and therefore, increasing the variable ΔT , the maximum pressure value reachable in the ORC cycle decreases. Later, it would be possible to gradually decrease the value of the temperature difference ΔT , until the ORC cycle will reach the target conditions (either subcritical or hypercritical). In this way, for example, the transient phase from a subcritical cycle to a hypercritical cycle can be gradually performed.

Other than the embodiments of the invention, as above disclosed, it is to be understood that a vast number of variations exist. It should also be appreciated that the

exemplary embodiment or exemplary embodiments are only examples and are not intended to limit the scope, applicability, or configuration in any way. Rather, the foregoing summary and detailed description will provide those skilled in the art with a convenient road map for implementing at least one exemplary embodiment, it being
5 understood that various changes may be made in the function and arrangement of elements described in an exemplary embodiment without departing from the scope as set forth in the appended claims and their legal equivalents.

CLAIMS

1. Method of controlling an organic Rankine cycle system,

the system comprising at least one feed pump (2), at least one heat exchanger (3), an expansion turbine (5) and a condenser (6),

the organic Rankine cycle comprising a feeding phase of an organic working fluid, a heating and vaporization phase of the same working fluid, an expansion and condensation phase of the same working fluid,

wherein said method controls an adjusted variable (X), which is a function of an overheating of the organic fluid by means of a controller (20) that acts by varying a control variable (Y), which is a parameter of the organic fluid in its liquid phase,

the method being characterized in that said adjusted variable (X) is a temperature difference (ΔT) between a current temperature of the organic fluid in vapor phase at an inlet of the turbine and a temperature threshold (T_{lim}) under which the expansion phase involves the formation of a liquid phase of the organic fluid.

2. Method according to claim 1, wherein said temperature threshold (T_{lim}) is a function of the vapor pressure in the turbine.

3. Method according to claim 1 or 2, wherein said control variable (Y) is the flow rate (Q) of the organic fluid at an inlet of said at least one heat exchanger.

4. Method according to claim 3, wherein the adjustment of the flow rate (Q) of the organic fluid at the inlet of the heat exchanger is realized by varying the rotational speed (V) of the feed pump (2) of the organic fluid.

5. Method according to claim 3 or 4, wherein the adjustment of the flow rate (Q) of the organic fluid at the inlet of the heat exchanger is realized by varying the opening degree (x) of a valve, located downstream of the feed pump of the organic fluid.

6. Organic Rankine cycle system comprising at least one feed pump (2), at least one heat exchanger (3), an expansion turbine (5), a condenser (6) and a controller (20) configured to operate a method according to any one of claims 1 to 5.
7. A computer readable memory having recorded thereon computer readable instructions for execution by a computer for performing the method according to any one of claims 1 to 5.
8. A computer program product comprising a computer readable memory according to claim 7.
9. A control apparatus for an Organic Rankine Cycle system, comprising a controller, a data carrier associated with the controller, wherein the data carrier stores computer readable instructions thereon for performing the method according to any one of claims 1 to 5.

1/4

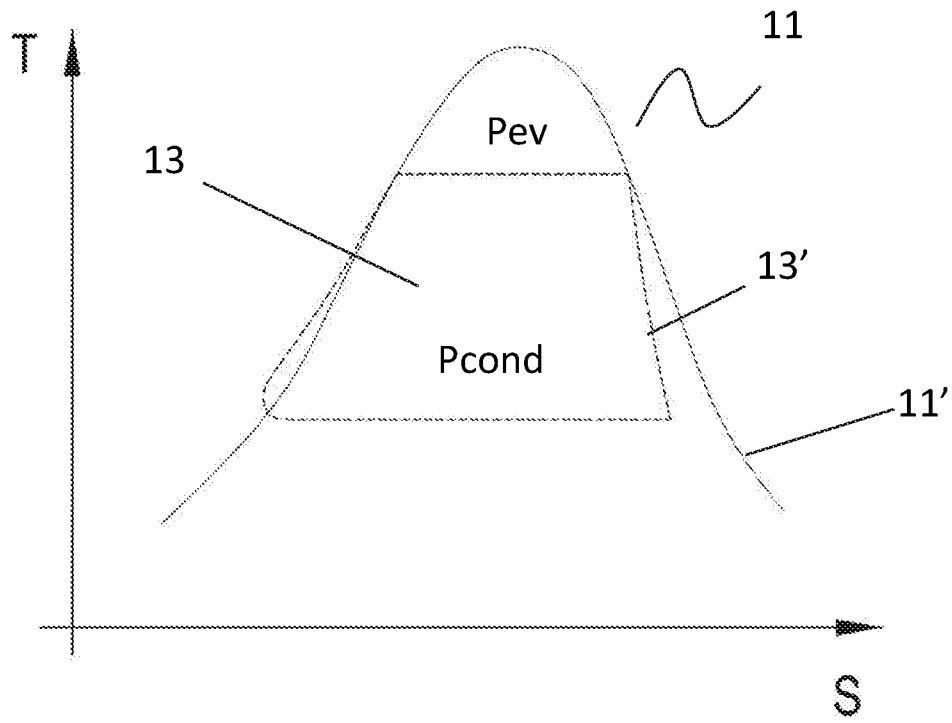


Fig. 1

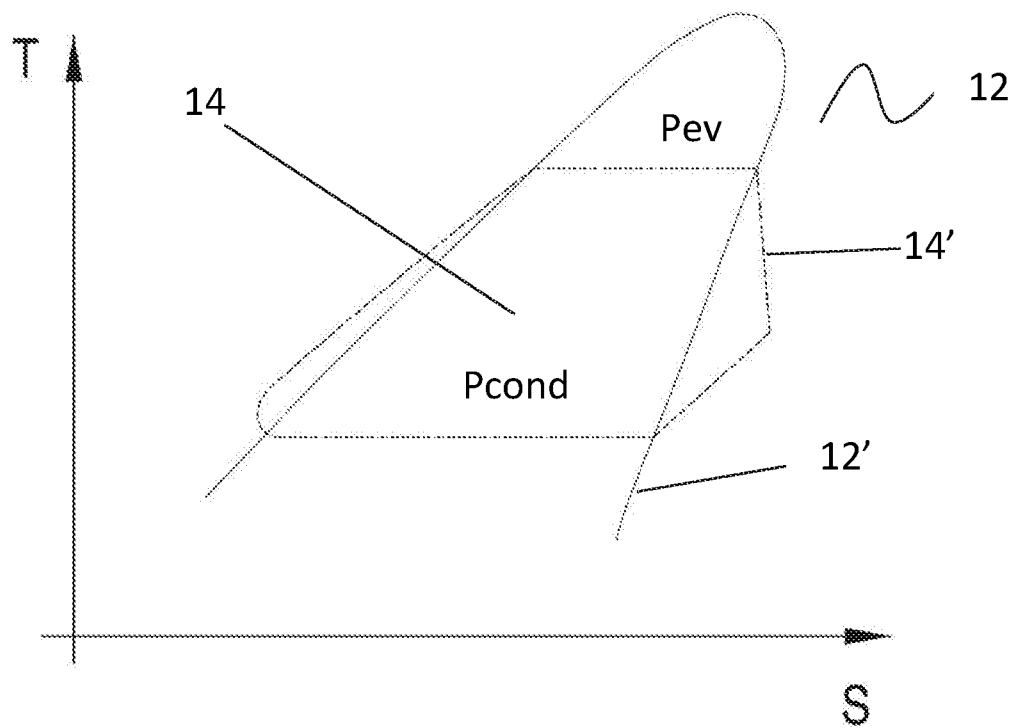


Fig. 2

2/4

16

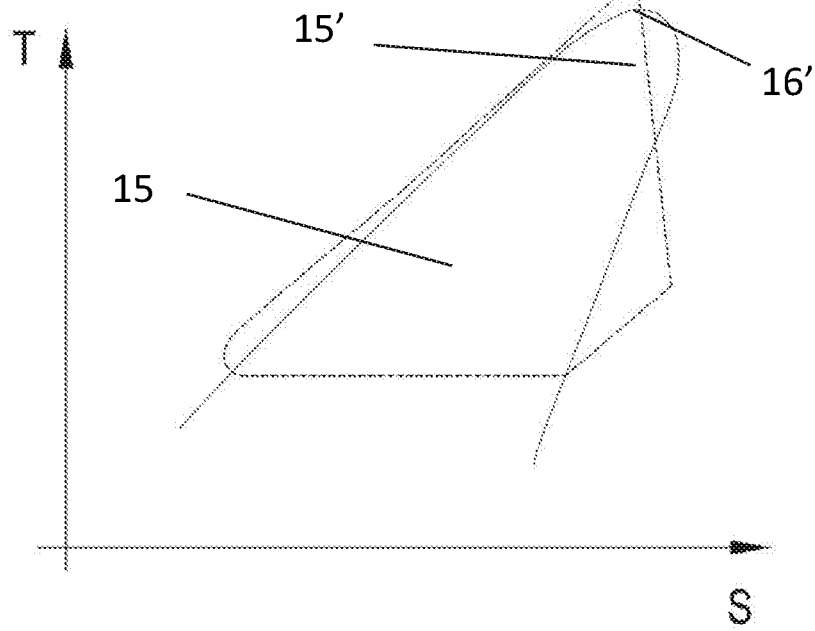


Fig. 3

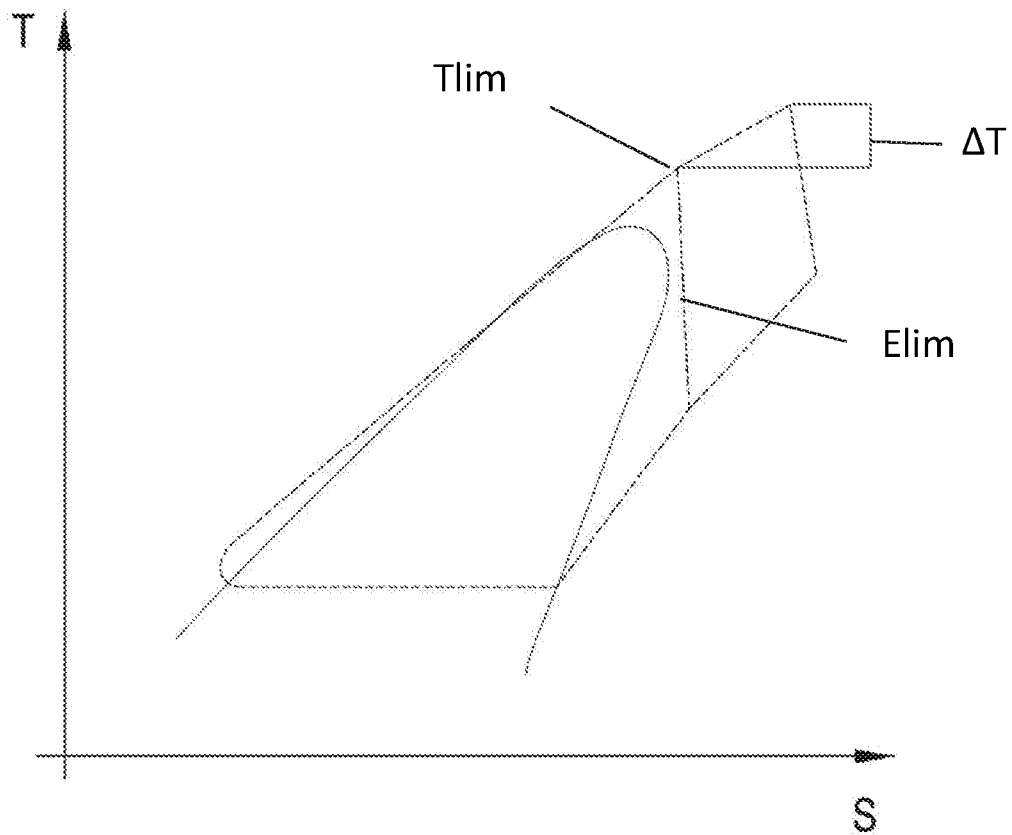


Fig. 4

3/4

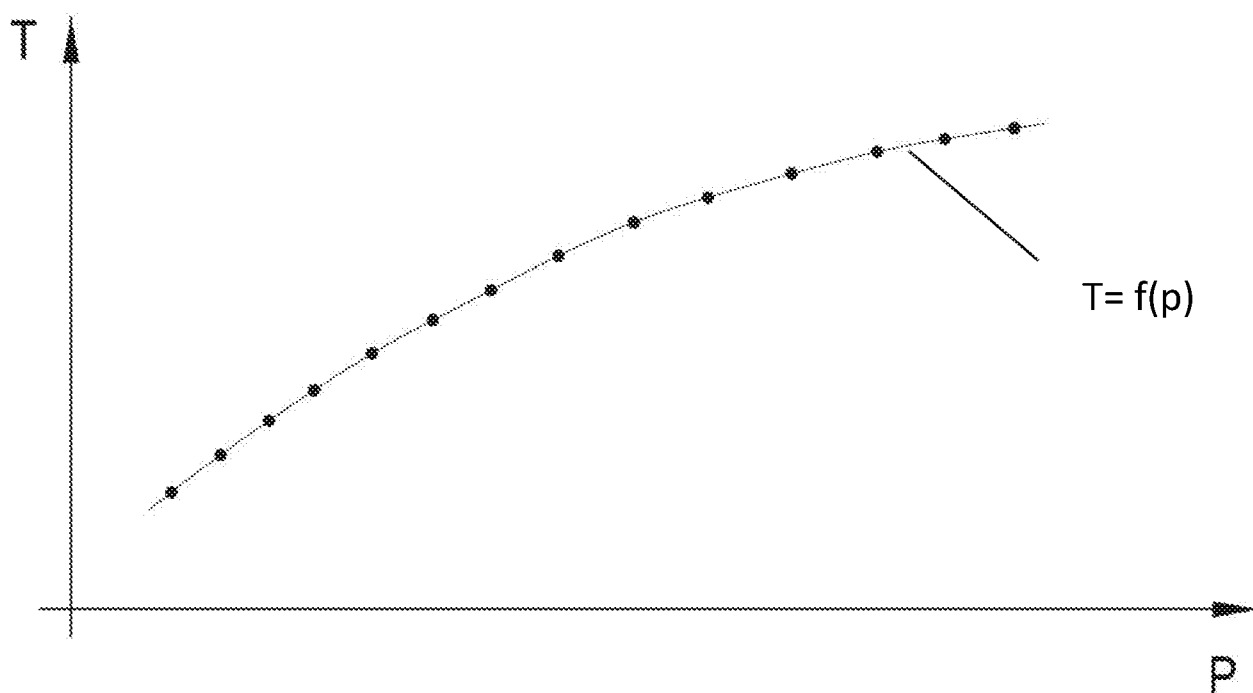


Fig. 5

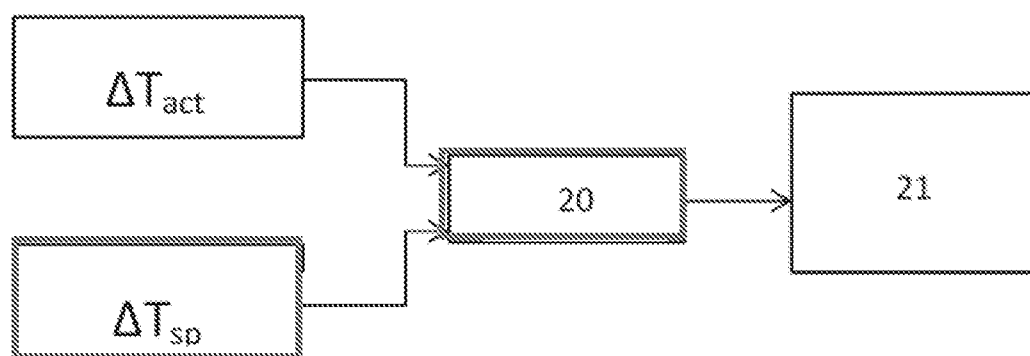


Fig. 6

