



- (51) International Patent Classification:
A61M 25/00 (2006.01) *B29C 45/26* (2006.01)
A61M 25/01 (2006.01)
- (21) International Application Number:
PCT/US2015/066733
- (22) International Filing Date:
18 December 2015 (18.12.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/574,494 18 December 2014 (18.12.2014) US
- (71) Applicant: **DENTSPLY INTERNATIONAL INC.**
[US/US]; 221 West Philadelphia Street, Suite 60w, York,
PA 17401-2991 (US).
- (72) Inventors: **GUSTAVSSON, Evelina**; Onsala Bergvag 9,
SE-439 92 Onsala (SE). **NESTENBORG, Daniel**; Skad-
degatan 22, SE-426 58 Vastra Frolunda (SE).
- (74) Agents: **HURA, Douglas** et al.; Dentsply International
Inc., 221 West Philadelphia Street, Suite 60W, York, PA
17401-2991 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,

[Continued on next page]

(54) Title: CATHETER WITH INTEGRATED INSERTION AID

(57) Abstract: A catheter, and preferably a urinary catheter, is disclosed, comprising an elongate shaft, an insertable end formed in or connected to one end of the elongate shaft, and a discharge end formed in or connected to the opposite end of the elongate shaft. Further, the catheter further comprises an insertion aid at least partly encircling the discharge end, and being integrally and releasably connected to the discharge end. Hereby, easy production is achieved, and at the same time, the insertion aid may easily be removed for use as an insertion aid when using the catheter.

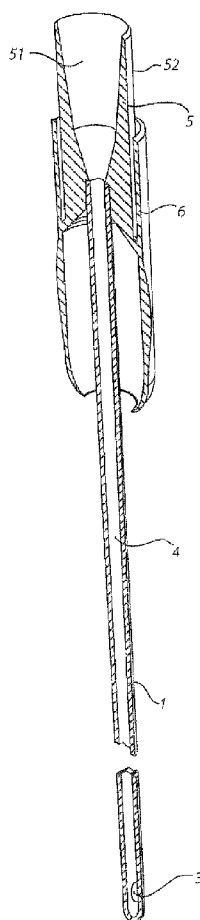


Fig. 3





HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

— *with international search report (Art. 21(3))*

CATHETER WITH INTEGRATED INSERTION AID

TECHNICAL FIELD OF THE INVENTION

[0001] The present invention is related to a catheter, and in particular a urinary catheter, with an insertion aid to facilitate handling of the catheter.

BACKGROUND

[0002] Catheters, such as urinary catheters, and in particular catheters having hydrophilic coatings, are relatively difficult to handle, since the surface before application is very slippery. Further, direct contact with the insertable part of the catheter should preferably be avoided, in order to avoid contamination of the catheter, and thereby minimize the risk of e.g. urinary tract infections. Still further, many users of intermittent urinary catheterization are disabled or have poor dexterity for other reasons, and consequently, there is also for this ground a need for means for making insertion of catheters easier and cleaner/safer.

[0003] To overcome these problems, many alternative insertion aids have been proposed during the last years. For example, EP 1 131 022 discloses an applicator which is formed as an integrated and detachable hose member arranged in the catheter package in which the catheter is arranged. However, as a consequence, the catheter package becomes relatively complicated and costly, and also, the operation this catheter assembly is relatively cumbersome.

[0004] Further, EP 2 106 821 discloses a catheter assembly in which an insertion aid is arranged as a tubular part arranged over the connector part of the catheter. Upon use, the tubular insertion aid may easily be loosened from its position on the connector, and moved along the catheter shaft. However, this solution is also relatively complicated and costly, since it requires the use of multiple components which are to be assembled together, and does consequently not lend itself for fully automated production.

[0005] There is therefore still a need for a catheter assembly having an insertion aid which is easier to use and/or easier and more cost-efficient to produce.

SUMMARY OF THE INVENTION

[0006] There is therefore an object of the present invention to provide a catheter and a method of manufacture that at least partly overcome the above-discussed problems of the prior art.

[0007] This object is achieved by means of a catheter and a method for manufacture according to the

enclosed claims.

[0008] According to a first aspect of the invention there is provided a catheter comprising an elongate shaft, an insertable end formed in or connected to one end of said elongate shaft, and a discharge end formed in or connected to the opposite end of said elongate shaft, wherein said catheter further comprises an insertion aid at least partly encircling said discharge end, and being integrally and releasably connected to said discharge end.

[0009] Hereby, the insertion aid is formed as an integrated and unitary part of the catheter, which can be produced concurrently with the remainder of the catheter in an automated procedure. Further, the insertion aid will always be kept securely in place before it is removed and used as an insertion aid. At the same time, if the user does not need an insertion aid, the insertion aid can be allowed to remain in its non-released state during the entire use. Accordingly, the insertion aid is released and activated if or when it is needed, but will otherwise function as an integral part of the connector end of the catheter.

[0010] The insertion aid is further easy to remove, and thereafter to move along the length of the elongate shaft, thereby facilitating contamination free handling of the catheter, which reduces the risk of urinary tract infections and the like. Preferably, the discharge end and the insertion aid are formed and connected by means of injection molding. Hereby, these parts are easily produced and connected together. Most preferably, the discharge end and the insertion aid are formed and connected by means of injection molding in a single molding cycle. However, alternatively, the discharge end and the insertion aid may be formed and connected by means of injection molding in at least two separate molding cycles, and preferably without opening the mold(s). This is e.g. preferred if there is a need for different materials in the insertion aid and the discharge end of the catheter. If two separate molding cycles are used, the integration of the discharge end and the insertion aid may still be directly molded together. However, alternatively, it is possible to use a two-step molding process in which the discharge end and the insertion aid are formed in two separate molding cycles, preferably without opening the molds, and mechanically interconnected within the molding apparatus. The connection may in this case e.g. be accomplished by a bayonet joint.

[0011] By molding cycle is here meant the sequence of events during the injection mold of a component or part, including injecting and solidifying of a material. Optionally, and depending on the circumstances, a molding cycle may also include closing the mold around a mold cavity, and, once the part is sufficiently cool, opening the mold and ejecting the part. Thus, when several molding cycles are used without opening of the mold(s), this corresponds to several injection steps within a single overall molding cycle.

[0012] The discharge end and the insertion aid are preferably connected by means of at least one breakable connection arms extending between the discharge end and the insertion aid. Hereby, the breakable connection arms securely maintain the insertion aid and the discharge end connected during production assembly, storage and before the intended use. When the insertion aid is to be used as an insertion aid, the insertion aid may easily be broken off, and removed from its initial position. For example, the removal may be accomplished by means of applying a force in a certain direction and

exceeding a certain value. Most preferably, the arms have a longer extension in the length direction of the catheter than in the circumferential direction of the catheter. Hereby, the insertion aid is easy to remove by applying a rotational force to the insertion aid in relation to the discharge end, and at the same time, the insertion aid is not involuntarily removed during ordinary handling of the catheter, where forces are normally applied in the axial direction. Further, the connection between the insertion aid and the discharge end is preferably arranged to be released upon a rotational movement of the insertion aid in relation to the discharge end.

[0013] The insertion aid preferably comprises a tubular part arranged at least partly over the discharge end.

[0014] In a preferred embodiment, the discharge end forms an inwardly funnel shaped end, whereby the discharge opening increases in cross-sectional dimensions in a direction away from the insertable end, and an outwardly facing, cylindrical surface having an essentially uniform diameter. Hereby, it is easy to provide the connection between the discharge end and the insertion aid, and at the same time, the normal connectability of the catheter in the inwardly tapering opening to external tubing, such as a tube leading to a urine collection bag can be obtained in a normal way.

[0015] The discharge end and the insertion aid are preferably formed by the same material. Further, the elongate shaft and the tip portion may also be of the same material. Alternatively, the various components of the catheter may be of different materials. For example, the discharge end and the insertion aid may be formed by two different materials. Other parts of the catheter, such as the tip portion, may optionally also be formed by a different material than the rest of the elongate shaft.

[0016] The at least one material may be any thermoplastic and/or thermosetting plastic materials which are useable for providing sufficient strength and flexibility for the intended use.

[0017] In order to further facilitate insertion of the catheter, the elongate shaft may comprise a hydrophilic material at the surface, said hydrophilic material providing a low-friction character to the catheter surface when wetted. For example, the elongate shaft can be made essentially entirely of a hydrophilic material. Alternatively, the elongate shaft may be provided with a hydrophilic surface coating.

[0018] According to another aspect of the invention there is provided a method of producing a catheter comprising the steps: providing or forming an elongate shaft having an insertable end formed in or connected to one end of the elongate shaft;

[0019] forming a discharge end formed in or connected to the opposite end of said elongate shaft; and

[0020] forming an insertion aid at least partly encircling said discharge end, and being integrally and releasably connected to said discharge end.

[0021] By means of this aspect of the invention, similar advantages and possible additional features as discussed above in relation to the first aspect of the invention are obtainable.

[0022] In a preferred embodiment, the discharge end and the insertion aid are formed by injection molding, using one or several materials. It is further preferred that the entire catheter is formed by injection molding, using one or several materials.

[0023] These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] For exemplifying purposes, the invention will be described in closer detail in the following with reference to embodiments thereof illustrated in the attached drawings, wherein:

[0025] FIG. 1 is a side view in perspective of a catheter according to an embodiment of the present invention.

[0026] FIG. 2 is a cross-sectional view of the catheter of FIG. 1 in plane II.

[0027] FIG. 3 is a cross-sectional view of the catheter of FIG. 1 in plane III.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0028] In the following detailed description, preferred embodiments of the present invention will be described. However, it is to be understood that features of the different embodiments are exchangeable between the embodiments and may be combined in different ways, unless anything else is specifically indicated. It may also be noted that, for the sake of clarity, the dimensions of certain components illustrated in the drawings may differ from the corresponding dimensions in real-life implementations. Even though in the following description, numerous specific details are set forth to provide a more thorough understanding of the present invention, it will be apparent to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well known constructions or functions are not described in detail, so as not to obscure the present invention.

[0029] The following discussion is in particular concerned with hydrophilic urinary catheters for intermittent use. However, the invention can also be used in relation to other types of urinary catheters, or other types of catheters in general.

[0030] A urinary catheter according to a preferred embodiment is illustrated in FIGS. 1-3. The catheter comprises an elongate shaft 1 with an insertion end 2. The insertion end 2 is preferably provided with one or several openings 3, in fluid communication with an internal lumen 4 of the catheter.

[0031] The catheter further comprises a discharge end 5 with an integrally formed and connected insertion aid 6.

[0032] As is best seen in FIG. 3, the discharge end 5 is preferably arranged with an inwardly tapering inner surface 51, arranged to be connectable to a frusto-conical connection to external tubing or a urine collection bag. The discharge end is further preferably arranged with a cylindrical outer or outwardly facing surface 52. As shown in the drawings such as Fig. 3, inner surface 51 is tapered as described but outward surface 52 is essentially or substantially uniform in diameter, again in a preferred embodiment. However, alternatively, the outer surface may have other shapes, such as having a tapering cross-section, a non-circular circumference, or the like.

[0033] The insertion aid 6 is preferably formed as a tubular part, with an inner cross-sectional dimension slightly larger than the corresponding outer surface of the discharge end. However, the insertion aid may also incorporate a slit opening extending over part of the axial length of the tubular part, or even extending over the entire axial length. Further, the insertion aid may have cross-sectional shapes other than circular.

[0034] The insertion aid 6 is releasably connected to the discharge end, so that it may be released by will, e.g. by applying a certain force in a certain direction. The released insertion aid may then be moved along the elongate shaft, for aiding during catheterization.

[0035] The insertion aid is preferably sufficiently flexible to be compressed, e.g. by applying a pressure between the thumb and the index finger, over the elongate shaft. Sufficient flexibility of the insertion aid may be accomplished by forming it by a sufficiently flexible material, and/or by having a sufficiently narrow thickness. Further, the thickness may vary over the tubular part, thereby making some parts more flexible than others. Preferably, the tubular part has a Shore A hardness in the range 60-80.

[0036] The connection between the insertion aid and the discharge end is preferably formed by means of one or several breakable connection arms 7 extending between the discharge end and the insertion aid. Preferably, at least two, and most preferably three or four connection arms 7 are provided. The plurality of connection arms are preferably evenly distributed around the circumference of the discharge end.

[0037] Preferably, the arms 7 have a longer extension in the length direction of the catheter than in the circumferential direction of the catheter. Hereby, the resistance to axial forces are greater than the resistance to rotational forces.

[0038] In order to further facilitate removal of the insertion aid, gripping means 71, such as protruding portions, may be arranged on the outer surface of the insertion aid.

[0039] The catheter may be of any size suitable for catheterization. For use by female users the elongate shaft preferably has a length in the range of 5-20 cm, such as in the size of 15 cm. Hereby, a very

compact and discrete catheter is obtained. For male users, the elongate shaft preferably has a length in the range 18-45 cm, such as in the size of 40 cm.

[0040] Preferably, the discharge end and the insertion aid are formed and connected by means of injection molding. Most preferably, the discharge end and the insertion aid are formed and connected by means of injection molding in a single molding cycle. However, alternatively, the discharge end and the insertion aid may be formed and connected by means of injection molding in at least two separate molding cycles. This is e.g. preferred if there is a need for different materials in the insertion aid and the discharge end of the catheter. If two separate molding cycles are used, the integration of the discharge end and the insertion aid may still be directly molded together. However, alternatively, it is possible to use a two-step molding process in which the discharge end and the insertion aid are formed in two separate molding cycles, and mechanically interconnected within the molding apparatus. Hereby, the insertion aid and the discharge end may be formed at a distance from each other, and then moved together while still within the molds after sufficiently solidified. The connection may in this case e.g. be accomplished by a bayonet joint.

[0041] The discharge end and the insertion aid are preferably formed by the same material. Further, the elongate shaft and the tip portion may also be of the same material. Alternatively, the various components of the catheter may be of different materials. For example, the discharge end and the insertion aid may be formed by two different materials.

[0042] The at least one material may be any thermoplastic and/or thermosetting plastic materials which are useable for providing sufficient strength and flexibility for the intended use. For example, the material may be one or several of: a polymer material, such as polyurethanes, thermoplastic rubbers, polyvinylchloride, other vinyl polymers, polyesters, polyether block amid, polypropene, polyethen polyamide and styren-ethen/butadiene-styren co-polymer and polyacrylates. The material may also be a polymer blend comprising a polyolefin and a composition having molecules with active hydrogen groups, and preferably a composition having molecules with active hydrogen groups. The polyolefin can comprise at least one polymer selected from the group: polyethene, polypropene, and styrene block copolymer (SCBS). The composition having molecules with active hydrogen groups can be a polymer having active hydrogen groups bound to the polymer via nitrogen, such as polyamide or polyurethane.

[0043] In order to further facilitate insertion of the catheter, the elongate shaft may comprise a hydrophilic material at the surface, said hydrophilic material providing a low-friction character to the catheter surface when wetted. For example, the elongate shaft can be made essentially entirely of a hydrophilic material. Alternatively, the elongate shaft may be provided with a hydrophilic surface coating.

[0044] The hydrophilic material may e.g. be polyvinyl pyrrolidone (PVP), but many other types of hydrophilic coatings are known in the art, and may be used in the context of the present invention. The hydrophilic coating provides a low-friction character to the catheter when wetted, thereby facilitating insertion of the catheter into the urethra, and reducing the risk of pain etc.

[0045] More specifically, the hydrophilic material may comprise material(s) selected from polyvinyl compounds, polysaccharides, polyurethanes, polyacrylates or copolymers of vinyl compounds and acrylates or anhydrides, especially polyethyleneoxide, polyvinyl-pyrrolidone, heparin, dextran, xanthan gum, polyvinyl alcohol, hydroxy propyl cellulose, methyl cellulose, copolymer of vinylpyrrolidone and hydroxy ethylmethyl acrylate or copolymer of polymethylvinyl ether and maleinic acid anyhydride. The preferred hydrophilic polymer is polyvinylpyrrolidone. In case the hydrophilic material is arranged as a coating, the coating preferably forms a polyurea network, whereby said polyurea network forms a covalent bond to said active hydrogen groups in the substrate. Alternatively, the hydrophilic coating may form an ester bond or an epoxy bond to said active hydrogen groups in the substrate.

[0046] The coating may also comprise an osmolality-increasing compound, as is e.g. taught in EP 0 217 771.

[0047] The above-discussed and other obvious modifications must be considered to be within the scope of the present invention, as it is defined by the appended claims. It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting to the claim. The word "comprising" does not exclude the presence of other elements or steps than those listed in the claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements.

What is claimed is:

1. A catheter comprising an elongate shaft, an insertable end formed in or connected to one end of said elongate shaft, and a discharge end formed in or connected to the opposite end of said elongate shaft, wherein said catheter further comprises an insertion aid at least partly encircling said discharge end, and being integrally and releasably connected to said discharge end; and wherein the discharge end forms an inwardly funnel shaped end, whereby the discharge opening increases in cross-sectional dimensions in a direction away from the insertable end, and an outward surface having an essentially uniform diameter.
2. The catheter of claim 1, wherein the discharge end and the insertion aid are formed and connected by means of injection molding.
3. The catheter of claim 2, wherein the discharge end and the insertion aid are formed and connected by means of injection molding in a single molding cycle.
4. The catheter of claim 2, wherein the discharge end and the insertion aid are formed and connected by means of injection molding in at least two separate molding cycles, without opening the molds.
5. The catheter of claim 4, wherein the discharge end and the insertion aid are formed in two separate molding cycles without opening the molds, and mechanically interconnected within the molding apparatus.
6. The catheter of claim 1, wherein the discharge end and the insertion aid are connected by means of at least one breakable connection arms extending between the discharge end and the insertion aid.
7. The catheter of claim 6, wherein the arms have a longer extension in the length direction of the catheter than in the circumferential direction of the catheter.
8. The catheter of claim 1, wherein the insertion aid comprises a tubular part arranged at least partly over said discharge end.

9. The catheter of claim 1, wherein the discharge end and the insertion aid are formed by the same material.



10. The catheter of claim 1, wherein the discharge end and the insertion aid are formed by two different materials.

11. The catheter of claim 1, wherein the connection between the insertion aid and the discharge end is arranged to be released upon a rotational movement of the insertion aid in relation to the discharge end.

12. Method of producing a catheter comprising the steps: providing or forming an elongate shaft having an insertable end formed in or connected to one end of the elongate shaft; forming a discharge end formed in or connected to the opposite end of said elongate shaft; and forming an insertion aid at least partly encircling said discharge end, and being integrally and releasably connected to said discharge end; wherein the discharge end forms an inwardly funnel shaped end, whereby the discharge opening increases in cross-sectional dimensions in a direction away from the insertable end, and an outward surface having an essentially uniform diameter.

13. The method of claim 12, wherein the discharge end and the insertion aid are formed by injection molding.

14. The method of claim 13, wherein the entire catheter is formed by injection molding.

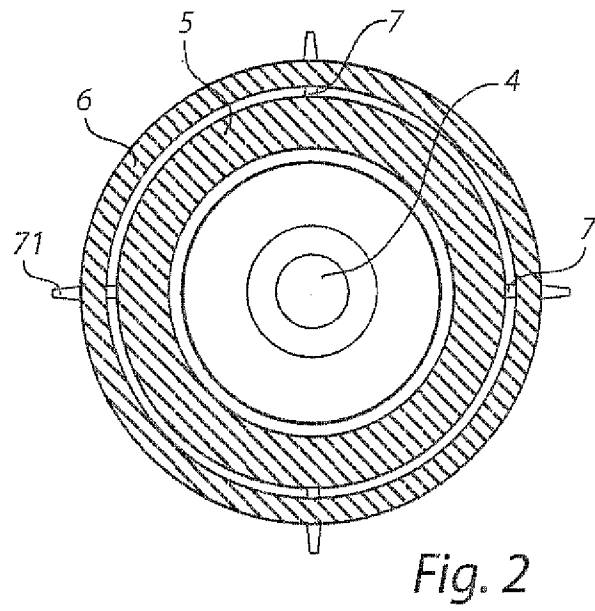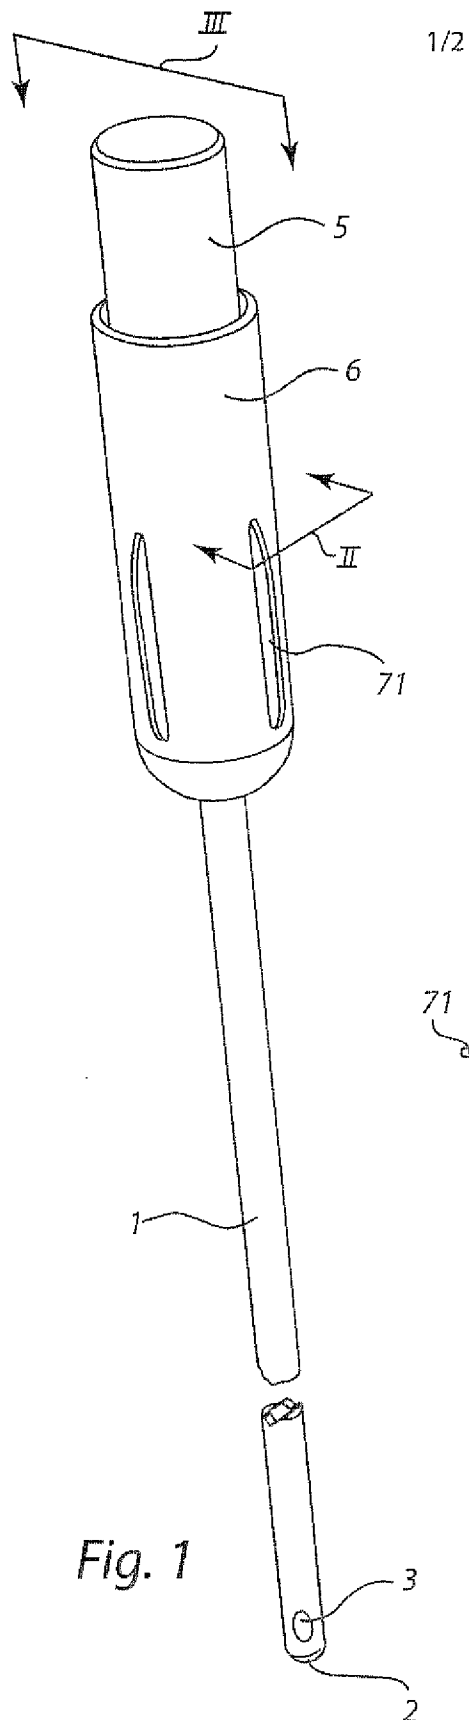

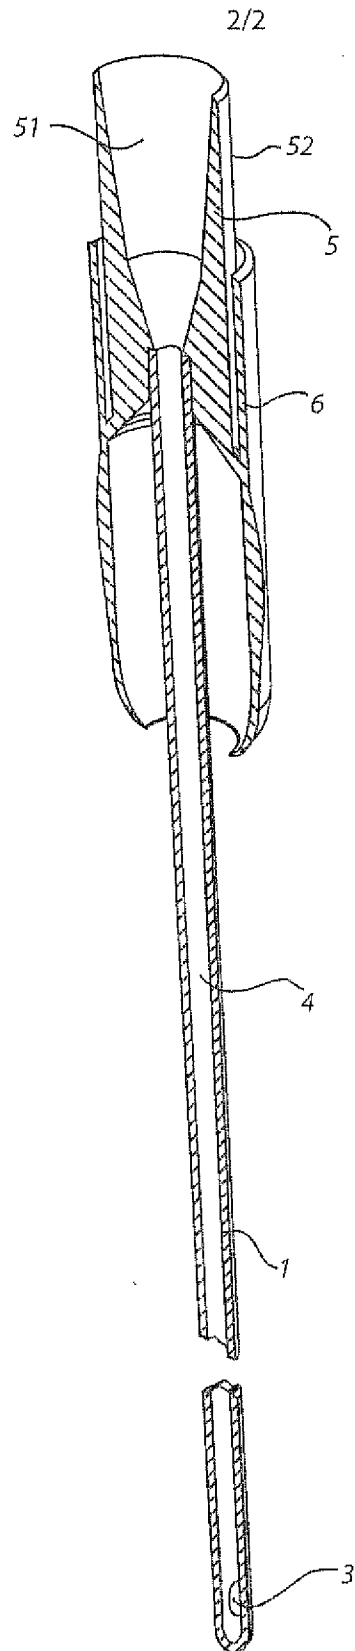


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2015/066733

A. CLASSIFICATION OF SUBJECT MATTER
INV. A61M25/00 A61M25/01 B29C45/26
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A61M B29C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 471 569 A1 (ASTRA TECH AB [SE]) 4 July 2012 (2012-07-04) paragraphs [0011], [0012], [0013], [0015], [0016], [0019], [0032], [0036]; figures 1,2,3 -----	1-14
X	EP 2 292 294 A1 (ASTRA TECH AB [SE]) 9 March 2011 (2011-03-09) paragraphs [0013] - [0015], [0032] - [0039]; figures 1-3 -----	1,6-13
A	EP 2 636 421 A1 (DENTSPLY IH AB [SE]) 11 September 2013 (2013-09-11) paragraphs [0011], [0037] - [0046]; figures 1,3a,3b ----- -/-	1-14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 March 2016

Date of mailing of the international search report

08/03/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bielsa, David

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2015/066733

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 2 609 956 A1 (DENTSPLY IH AB [SE]) 3 July 2013 (2013-07-03) paragraphs [0057], [0058]; figure 2 -----	1-14
A	EP 2 106 821 A1 (ASTRA TECH AB [SE]) 7 October 2009 (2009-10-07) paragraphs [0054] - [0058]; figures 4-6 -----	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/066733

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2471569	A1	04-07-2012	AU 2011351446 B2 03-12-2015
		CN 103269743 A 28-08-2013	
		EP 2471569 A1 04-07-2012	
		RU 2013134469 A 10-02-2015	
		US 2012172848 A1 05-07-2012	
		WO 2012089737 A1 05-07-2012	
EP 2292294	A1	09-03-2011	AU 2010291224 A1 09-02-2012
		CA 2769111 A1 10-03-2011	
		CN 102481434 A 30-05-2012	
		EP 2292294 A1 09-03-2011	
		EP 2674185 A1 18-12-2013	
		JP 5861216 B2 16-02-2016	
		JP 2013503670 A 04-02-2013	
		US 2011060317 A1 10-03-2011	
		US 2016051802 A1 25-02-2016	
		WO 2011026929 A1 10-03-2011	
EP 2636421	A1	11-09-2013	CN 103930155 A 16-07-2014
		EP 2636421 A1 11-09-2013	
		JP 2015509410 A 30-03-2015	
		KR 20140139477 A 05-12-2014	
		US 2013231641 A1 05-09-2013	
		US 2015141966 A1 21-05-2015	
		WO 2013131732 A1 12-09-2013	
EP 2609956	A1	03-07-2013	EP 2609956 A1 03-07-2013
		US 2013161227 A1 27-06-2013	
		WO 2013098190 A1 04-07-2013	
EP 2106821	A1	07-10-2009	NONE