



(51) International Patent Classification:
E21B 33/13 (2006.01) *C09K 8/508* (2006.01)

(21) International Application Number:
PCT/US2010/026995

(22) International Filing Date:
11 March 2010 (11.03.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/402,667 12 March 2009 (12.03.2009) US

(71) Applicant (for all designated States except US): **BAKER HUGHES INCORPORATED** [US/US]; PO Box 4740, Houston, TX 77210-4740 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CASTILLO, Robert, O.** [US/US]; 822 Robinwood Drive, Stafford, TX 77477 (US). **ARLINE, Darwin, D.** [US/US]; 13350 Northborough Drive, Houston, TX 77067 (US). **BADKE, Gregory, C.** [US/US]; 6503 Oakland Hills Drive, Houston, TX 77069 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: DOWNHOLE SEALING DEVICE AND METHOD OF MAKING

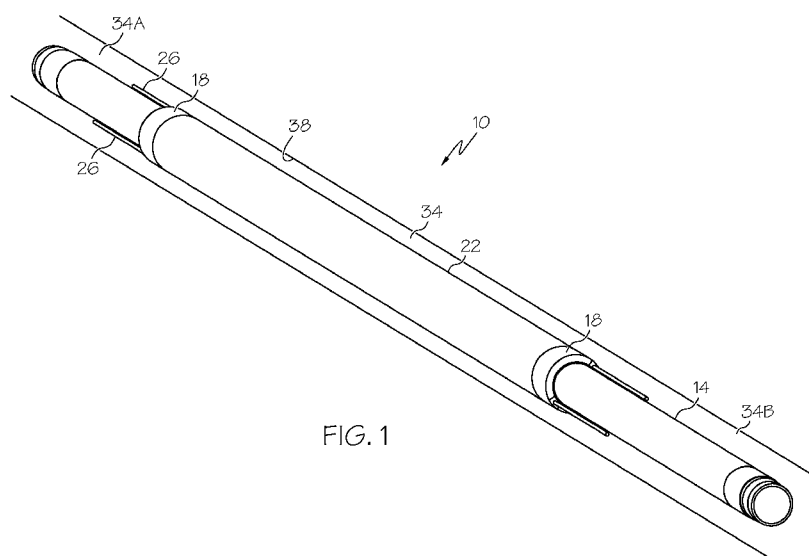


FIG. 1

(57) Abstract: Disclosed herein is a downhole sealing device. The device includes, a swellable member, and a passageway having a perimetrically continuous wall. The swellable member is configured to cause sealing between a downhole structure and a plurality of tubulars when in a swelled condition, the plurality of tubulars are routed through a plurality of voids extending longitudinally through the swellable member, each of the plurality of voids has perimetrically continuous walls surrounding each of the plurality of tubulars.

DOWNHOLE SEALING DEVICE AND METHOD OF MAKING

**Inventor(s): CASTILLO, Robert O.; ARLINE, Darwin D. &
BADKE, Gregory C.**

BACKGROUND

5 [0001] It is common in the hydrocarbon recovery industry to have a need to plug an annular space defined by a tubular and a downhole wellbore structure, such as, a liner, casing or open hole, for example, within which the tubular is positioned. One sealing method includes positioning a swellable member perimetrically about the tubular prior to positioning the tubular within the downhole structure. The swellable member
10 swells in response to exposure to downhole fluids such as oil or water for example. The swelling of the swellable member causes the swellable member to fill the annular space and to sealingly engage with walls of both the tubular and the downhole structure.

[0002] Establishing and maintaining a well secured communication from one side of
15 the swellable seal to the other can be useful in well operations. Unsecured communication lines can have a far greater operational cost, which may result in having to exit from the borehole in order to make further securing repairs. Excessive vibration caused by one tool traveling down the borehole may adversely affect the performance of other tools obtaining valuable downhole data. That vibration creation
20 along with unsecure communication lines may only amplify false results. Such amplification from those unsecure lines would be in comparison to a tuning fork when strike. In most gamma ray equipped downhole tools, the smooth transition of multiple or single photo multiplier tubes are important in order to provide the necessary pulse of light via the tubes. Any sharp bends or vibration may only destroy
25 this very important light communication. Another example is on a telemetry downhole tool, mud pulses are registered by these types of tools via an electrical sensor. Any additional impacts from unsecured communication lines will only amplify noises or even provide false readings that are important to this data gathering. Systems and methods, therefore, that permit sealing and maintaining a solid lock
30 down in an annular space while maintaining a communication passageway across the seal are desirable in the art.

BRIEF DESCRIPTION

[0003] Disclosed herein is a downhole sealing device. The device includes, a swellable member, and a passageway having a perimetrically continuous wall. The swellable member is configured to cause sealing between a downhole structure and a plurality of tubulars when in a swelled condition, the plurality of tubulars are routed through a plurality of voids extending longitudinally through the swellable member, each of the plurality of voids has perimetrically continuous walls surrounding each of the plurality of tubulars.

[0004] Further disclosed herein is a downhole swellable sealing system with passageway. The system includes, at least one substantially nonswellable member, and a swellable member in operable communication with the at least one substantially nonswellable member. The swellable member is configured to cause sealing between a downhole structure and a plurality of tubulars when in a swelled condition, the plurality of tubulars are routed through a plurality of voids that extend longitudinally through at least one of the swellable member and the at least one substantially nonswellable member, and each of the plurality of voids has perimetrically continuous walls surrounding each of the plurality of tubulars.

[0005] Further disclosed herein is a method of making a downhole swellable seal with a passageway therethrough. The method includes, perimetrically surrounding a first tubular with a first substantially nonswellable material, perimetrically surrounding at least one second tubular with a second substantially nonswellable material, positioning the at least one second tubular adjacent the first tubular, perimetrically surrounding the first tubular and the at least one second tubular with a swellable material, curing the first substantially nonswellable material, curing the second substantially nonswellable material, and curing the swellable material.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] The following descriptions should not be considered limiting in any way. With reference to the accompanying drawings, like elements are numbered alike:

FIG. 1 depicts a perspective view of a downhole swellable sealing system with passageway as disclosed herein;

FIG. 2 depicts a magnified side view of a portion of the downhole swellable sealing system of **Fig. 1**;

Fig. 3 depicts a cross sectional side view of an embodiment of the swellable sealing system of **Fig. 2**;

5 **Fig. 4** depicts a perspective view of the swellable sealing system of **Fig. 1** during a forming operation of perimetrically continuous voids; and

Fig. 5 depicts a cross sectional side view of an alternate embodiment of the swellable sealing system of **Fig. 2**.

DETAILED DESCRIPTION

10 **[0007]** A detailed description of one or more embodiments of the disclosed apparatus and method are presented herein by way of exemplification and not limitation with reference to the Figures.

15 **[0008]** Referring to **Figures 1** and **2**, an embodiment of the swellable sealing system **10** with passageway disclosed herein is illustrated. The swellable sealing system **10** includes, a substantially nonswellable member **18**, a swellable member **22**, and at least one void **28** with a perimetrically continuous wall extending longitudinally through at least one of the substantially nonswellable member **18** and the swellable member **22**. The substantially nonswellable member **18** perimetrically surrounds a first tubular **14** and at least one second tubular **26** is positioned within the void **28**.
20 The second tubular **26** is preferably constructed of a rigid material such as stainless steel, for example, and has an inner cavity defining a passageway **30** (as best illustrated in the cross sectioned views in **Figures 3** and **5**). The swellable sealing system **10** is configured to seal an annular space **34** defined in this embodiment by the first tubular **14** and a downhole structure **38** that the system **10** is positioned
25 substantially concentric with, such as, a liner, casing or open hole, for example, while providing the passageway **30** therethrough, via the second tubular **26**. It should be noted that alternate embodiments could be configured to seal an annular space that is defined radially inwardly of the first tubular **14** and radially outwardly of a downhole structure positionable within at least a portion of the first tubular. The passageway
30 fluidically connects a portion of the annular space **34A** beyond one longitudinal end

of the nonswellable member **18** to a portion of the annular space **34B** beyond an opposite longitudinal end of the nonswellable member **18**. The passageway **30** can be used as a control line directly with hydraulic fluid being ported therethrough, for example, or as a conduit for running a separate control line (not shown), such as, electric line or fiber optic cable, for example.

[0009] The swellable member **22** may be constructed of any swellable material known in the industry such as polymers that swell when exposed to conditions commonly encountered downhole such as oil or water, for example. In contrast, the nonswellable member **18** may be constructed of known materials that tend to be substantially nonswellable when exposed to the same downhole conditions mentioned above.

[0010] Referring to **Fig. 3**, the perimetrically continuous void **28** extends longitudinally through the nonswellable member **18**. Since walls **42** of the void **28** are continuous they have no perimetrical interruptions, such as a longitudinal slit through the nonswellable member **18**, for example, and are therefore easily sealed to an outer radial surface **46** of the second tubular **26**. Optionally, a mechanical device **48** can be sealably attached to both the second tubular **26** and the nonswellable member **18** at both ends where the second tubular **26** exits from the nonswellable member **18** thereby preventing any movement between the second tubular **26** and the nonswellable member **18**. Additionally, by making the mechanical device **48** metal the seal between the second tubular **26** and the mechanical device can be a metal-to-metal seal. Embodiments of processes to make the swellable sealing system **10** and particularly the perimetrically continuous void **28** will be described below.

[0011] Referring to **Fig. 4**, an embodiment of a process to make the swellable sealing system **10** is illustrated generally at **50**. A first nonswellable material **54** is wrapped perimetrically around the first tubular **14**. At least one second tubular **26** is positioned substantially parallel to the first tubular **14** and a second nonswellable material **58** is wrapped around both the first tubular **14** and the second tubular **26**. Wrapping additional layers of a third nonswellable material **60** around both the first tubular **14** and the second tubular **26** forms a first dam **62A** and a second dam **62B**. Nylon (not shown) or other material capable of holding the nonswellable materials **54**, **58** and **60** in position while being heated to curing temperatures is wrapped around all of the

nonswellable materials **54**, **58** and **60**. The full assembly is heated to cure the nonswellable materials **54**, **58** and **60**. After curing, the nylon is removed and a swellable material **66** is wrapped perimetrically around the nonswellable materials **54**, **58** between the dams **62A** and **62B**. Nylon or other material is then wrapped around
5 the swellable material **66** and the full assembly is again heated, this time to cure the swellable material **66**. The nylon is removed after curing.

[0012] Optionally, the step of wrapping the second tubular **26** with the nonswellable material **58**, could be replaced with wrapping a rod **70** (or other reusable manufacturing tubular). This may be desirable to avoid oxidation and possible
10 contamination of the passageway **30** of the second tubular **26** that could occur during manufacture or during the high temperature curing processes. If the rod **70** were used it would be employed to form the perimetrically uninterrupted longitudinal void **28** in the nonswellable material **58**. Doing so, however, would require withdrawal of the rod **70** upon completion of the last curing cycle. Application of a release agent, such
15 as, mold release, for example, to the rod **70** prior to it being wrapped in the nonswellable material **58** could facilitate its withdrawal upon completion of the curing process. A step of inserting the second tubular **26** into the void **28** could be done in conjunction with the withdrawal of the rod **70**, by attaching an end of the second tubular **26** to an end of the rod **70**. The action of withdrawing the rod **70** would then
20 also insert the second tubular **26** into the void **28**.

[0013] Referring to **Fig. 5**, optionally, the nonswellable materials **54**, **58**, **60** could be wrapped only at the dams **62A** and **62B**. In such case, the swellable material **66** would be wrapped directly over the first tubular **14** and the second tubular **26** (or rods **70**) between the dams **62A** and **62B** as desired by a well operator.

[0014] While the invention has been described with reference to an exemplary embodiment or embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the
25 invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed as the best mode contemplated for carrying out this invention, but that the invention will include
30

- all embodiments falling within the scope of the claims. Also, in the drawings and the description, there have been disclosed exemplary embodiments of the invention and, although specific terms may have been employed, they are unless otherwise stated used in a generic and descriptive sense only and not for purposes of limitation, the
- 5 scope of the invention therefore not being so limited. Moreover, the use of the terms first, second, etc. do not denote any order or importance, but rather the terms first, second, etc. are used to distinguish one element from another. Furthermore, the use of the terms a, an, etc. do not denote a limitation of quantity, but rather denote the presence of at least one of the referenced item.
- 10 **[0015]** While one or more embodiments have been shown and described, modifications and substitutions may be made thereto without departing from the spirit and scope of the invention. Accordingly, it is to be understood that the present invention has been described by way of illustrations and not limitation.

CLAIMS

What is claimed is:

- 1 1. A downhole sealing device, comprising:
 - 2 (a) a swellable member; and
 - 3 (b) a passageway having a perimetrically continuous wall, the swellable
 - 4 member configured to cause sealing between a downhole structure and
 - 5 a plurality of tubulars in response to being in a swelled condition, the
 - 6 plurality of tubulars being routed through a plurality of voids extending
 - 7 longitudinally through the swellable member, each of the plurality of
 - 8 voids having perimetrically continuous walls surrounding each of the
 - 9 plurality of tubulars.
- 1 2. The downhole sealing device of claim 1, wherein the passageway is through
- 2 one of the plurality of tubulars.
- 1 3. The downhole sealing device of claim 1, wherein the swellable member is
- 2 polymeric.
- 1 4. The downhole sealing device of claim 1, wherein the passageway is a control
- 2 line.
- 1 5. The downhole sealing device of claim 1, wherein the passageway permits
- 2 passage of at least one selected from a group consisting of fluid, electrical
- 3 conductors and fiber optic cable.
- 1 6. A downhole swellable sealing system with passageway, comprising:
 - 2 (a) at least one substantially nonswellable member; and
 - 3 (b) a swellable member in operable communication with the at least one
 - 4 substantially nonswellable member configured to cause sealing
 - 5 between a downhole structure and a plurality of tubulars in response to
 - 6 being in a swelled condition, the plurality of tubulars being routed
 - 7 through a plurality of voids extending longitudinally through at least
 - 8 one of the swellable member and the at least one substantially
 - 9 nonswellable member, each of the plurality of voids having

10 perimetrically continuous walls surrounding each of the plurality of
11 tubulars.

1 7. The downhole swellable sealing system with passageway claim 6, wherein one
2 of the at least one substantially nonswellable member forms a dam for the
3 swellable member.

1 8. The downhole swellable sealing system with passageway claim 6, wherein the
2 at least one substantially nonswellable member is two substantially
3 nonswellable members forming two dams with one dam being located on
4 either longitudinal end of the swellable member.

1 9. The downhole swellable sealing system with passageway claim 6, wherein the
2 swellable member perimetrically surrounds the at least one substantially
3 nonswellable member.

1 10. The downhole swellable sealing system with passageway claim 6, wherein at
2 least one of the at least one substantially nonswellable member is polymeric.

1 11. The downhole swellable sealing system with passageway claim 6, wherein the
2 plurality of voids extend longitudinally through the at least one substantially
3 nonswellable member.

1 12. The downhole swellable sealing system with passageway claim 6, wherein the
2 plurality of voids extend longitudinally through the swellable member.

1 13. A method of making a downhole swellable seal with a passageway
2 therethrough, comprising:
3 (a) perimetrically surrounding a first tubular with a first substantially
4 nonswellable material;
5 (b) perimetrically surrounding at least one second tubular with a second
6 substantially nonswellable material;
7 (c) positioning the at least one second tubular adjacent the first tubular;
8 (d) perimetrically surrounding the first tubular and the at least one second
9 tubular with a swellable material;
10 (e) curing the first substantially nonswellable material;

- 11 (f) curing the second substantially nonswellable material; and
12 (g) curing the swellable material.
- 1 14. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 13, further comprising:
3 (a) withdrawing the at least one second tubular from the second
4 substantially nonswellable material;
5 (b) leaving a void with perimetrically continuous walls in the second
6 substantially nonswellable material; and
7 (c) inserting a third tubular into the void.
- 1 15. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 14, further comprising connecting the third tubular to
3 the at least one second tubular prior to withdrawing the at least one second
4 tubular.
- 1 16. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 13, further comprising sealing the first tubular to the
3 first substantially nonswellable material and sealing the at least one second
4 tubular to the second substantially nonswellable material.
- 1 17. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 13, further comprising applying a release agent to the at
3 least one second tubular prior to the surrounding with substantially
4 nonswellable material.
- 1 18. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 13, further comprising damming the swellable material
3 with at least one of the substantially nonswellable materials.
- 1 19. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 18, further comprising sealably attaching a mechanical
3 device to the at least one second tubular and to the substantially nonswellable
4 material that is damming the swellable material.

- 1 20. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 19, wherein the sealably attaching of the mechanical
3 device to the at least one second tubular is a metal-to-metal seal.
- 1 21. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 19, wherein the sealably attaching includes
3 immobilizing the at least one second tubular with respect to the substantially
4 nonswellable material that is damming the swellable material.
- 1 22. The method of making the downhole swellable seal with a passageway
2 therethrough of claim 13, further comprising perimetrically surrounding at
3 least one of the first substantially nonswellable material and the second
4 substantially nonswellable material with the swellable material.

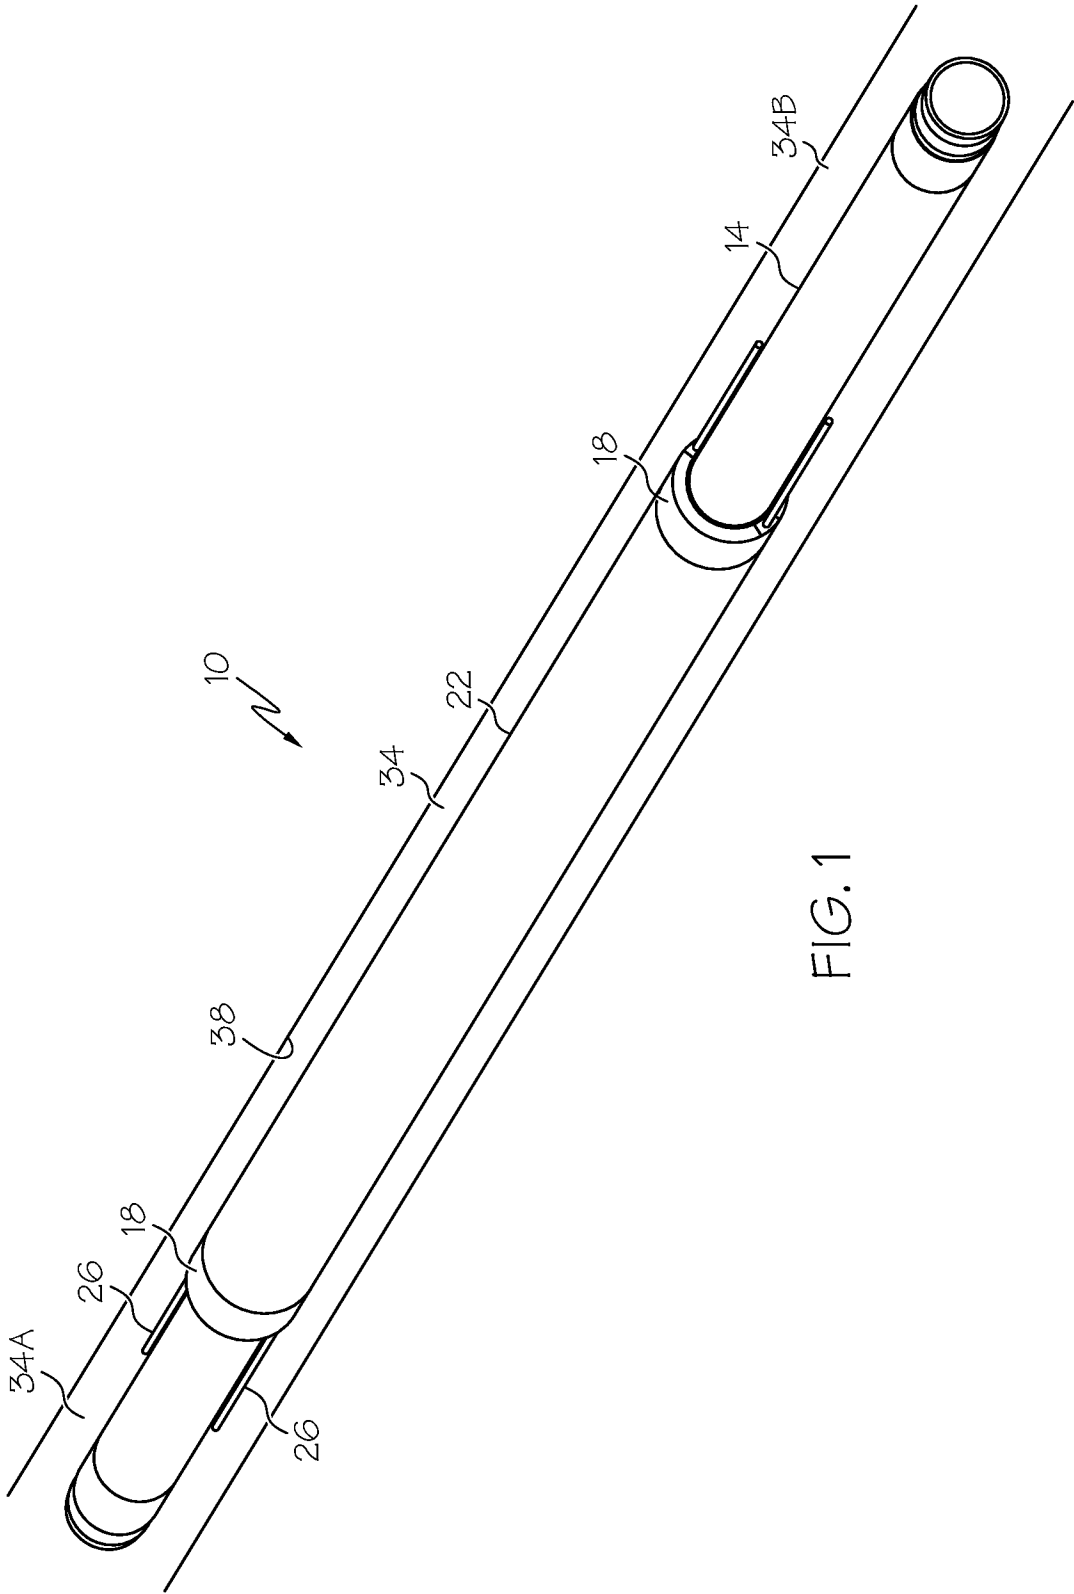


FIG. 1

2 / 5

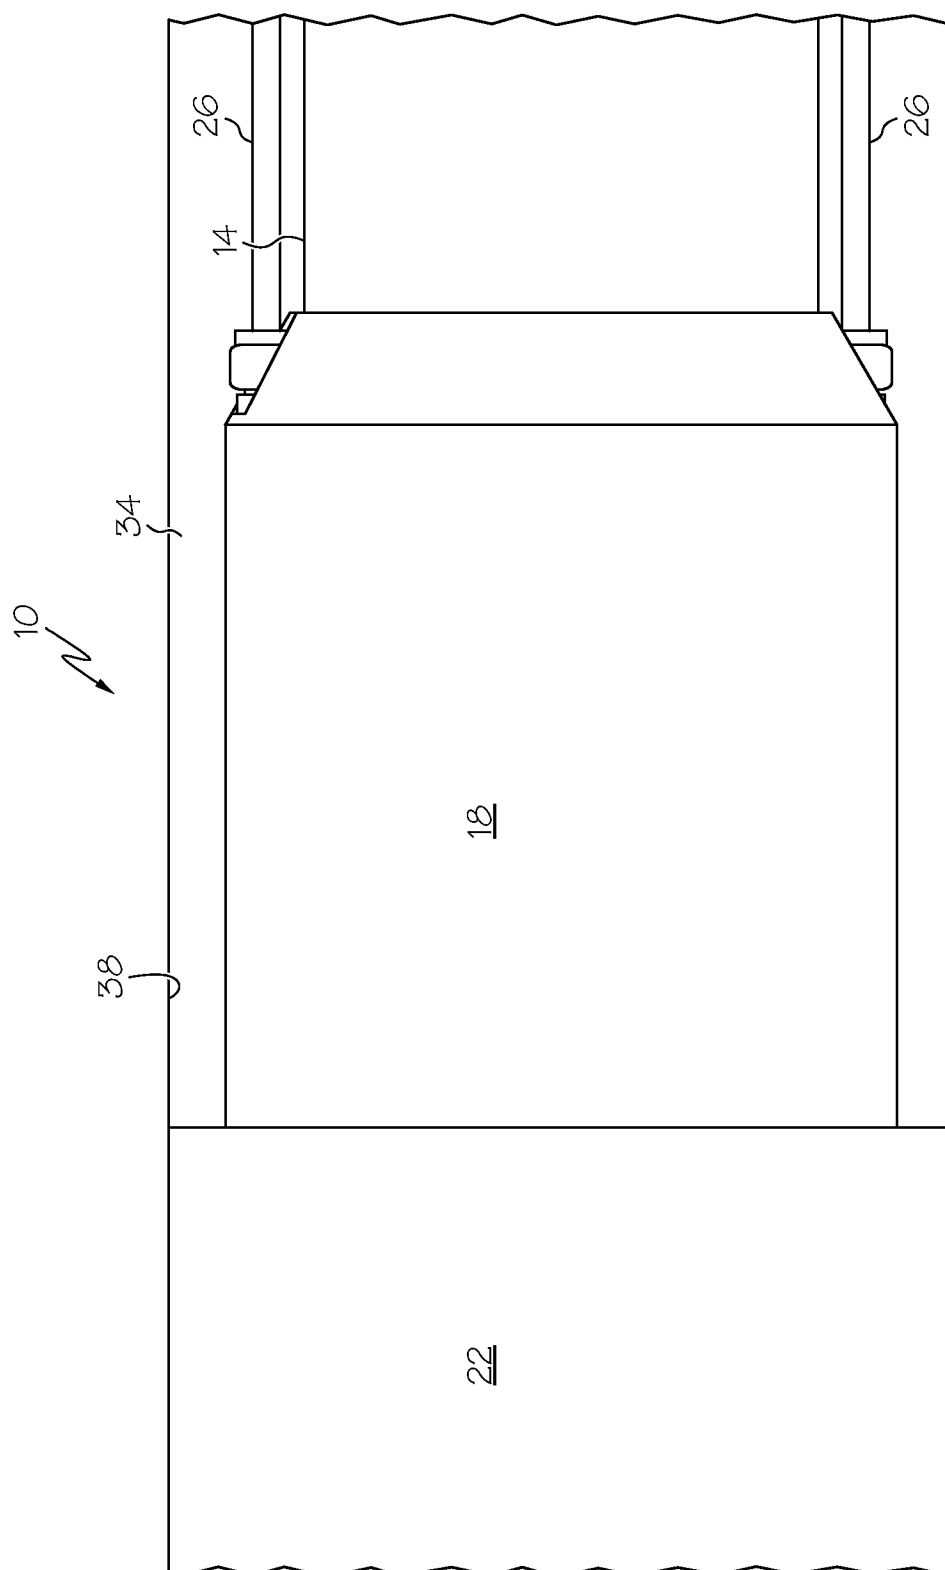
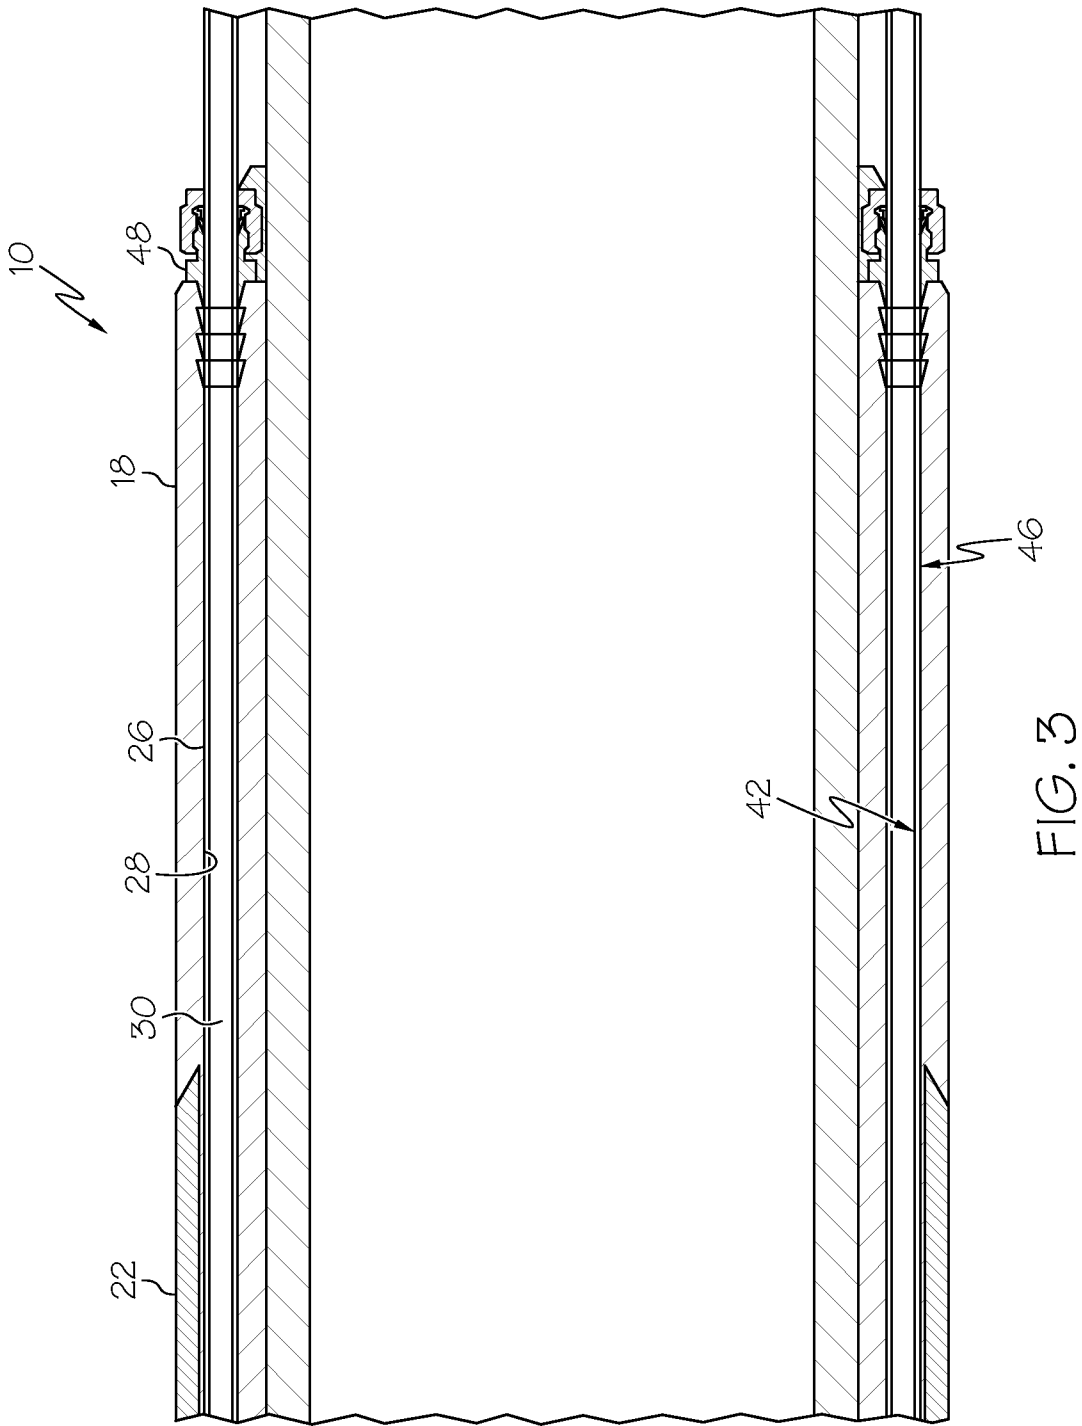


FIG. 2



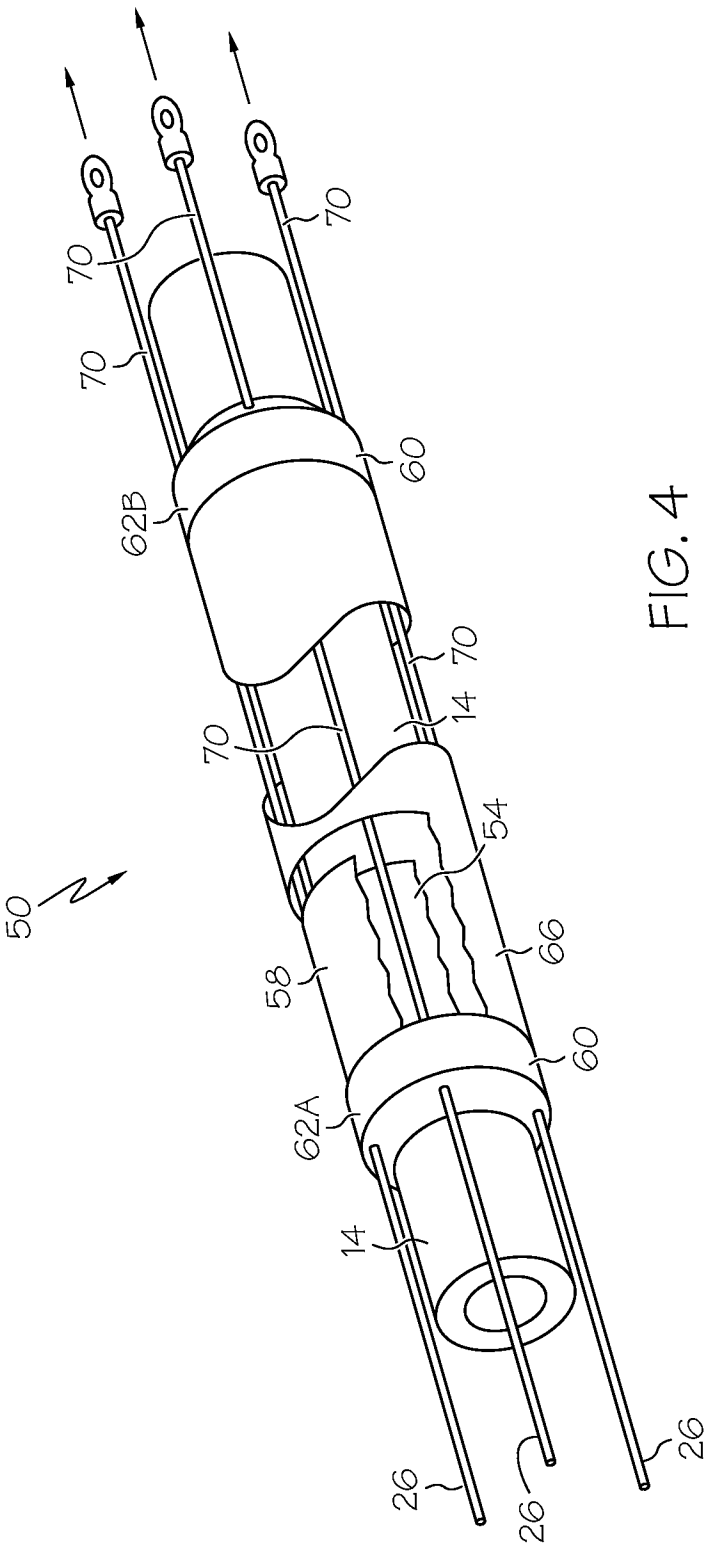


FIG. 4

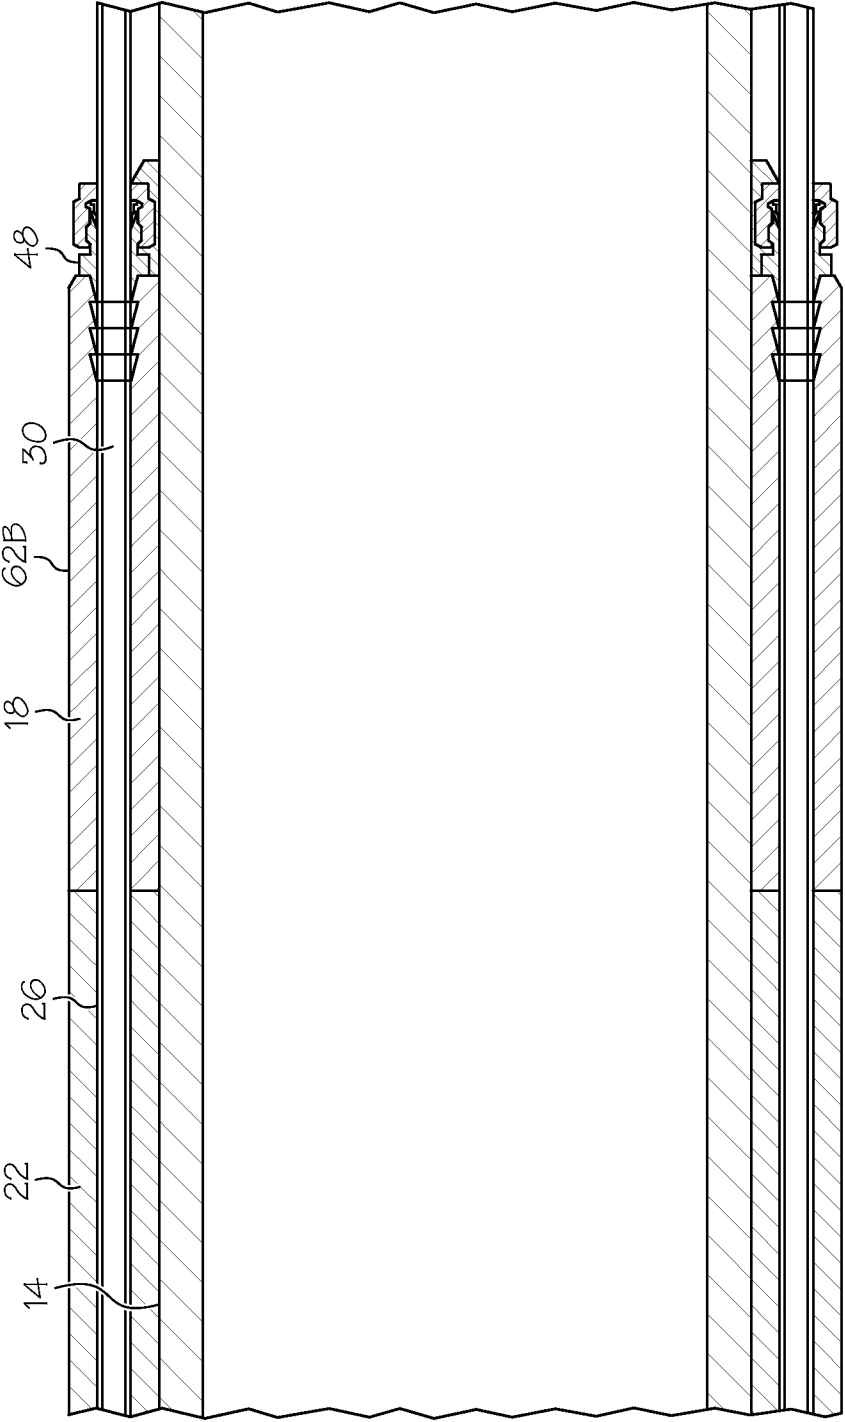


FIG. 5