(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
14 June 2018 (14.06.2018)

WIPO | PCT

(10) International Publication Number
WO 2018/102927 A1

(51) International Patent Classification:
B22D 39/04 (2006.01) *B22D 37/00* (2006.01)
B22D 35/04 (2006.01)

(21) International Application Number:
PCT/CA2017/051483

(22) International Filing Date:
07 December 2017 (07.12.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/431,705 08 December 2016 (08.12.2016) US

(71) Applicant: **DYNAMIC CONCEPT** [CA/CA]; 2400 rue Alexis-le-Trotteur, Saguenay, Québec G7X 0J7 (CA).

(72) Inventors: **DESMEULES, Jean-Francois**; 3074 rue Dickie, Saguenay, Québec G7S 2L4 (CA). **NERON, Jean-Benoit**; 1889 Rue Powell, Jonquiere, Québec G7S 2Z5 (CA).

(74) Agent: **BENOIT & CÔTÉ INC.**; 560 Crémazie E. Suite 300, Montreal, Québec H2P1E8 (CA).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: SYSTEM AND METHOD FOR POURING MOLTEN METAL FROM A CRUCIBLE

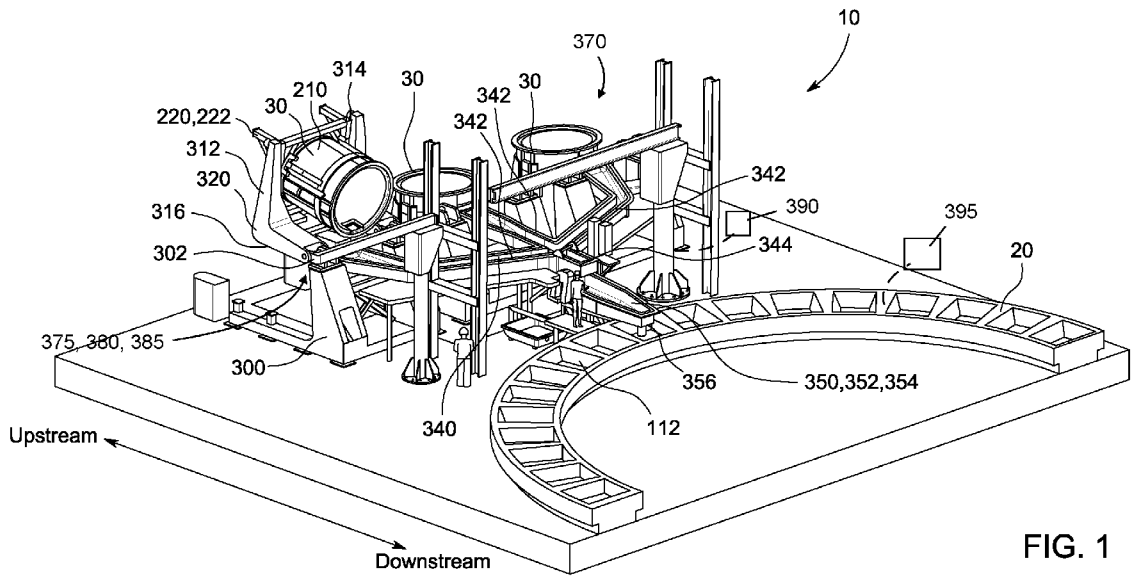


FIG. 1

(57) Abstract: A system for feeding molten metal provided by a feeding component to a receiving component. The system comprises a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds the launder circuit with molten metal at the upstream end and the launder circuit feeds molten metal to the receiving component at the downstream end. The system also comprises a feed tilting mechanism located at the upstream end for tilting the feeding component between a holding angle for holding molten metal in the feeding component and a feeding angle for feeding molten metal to the launder circuit, a feeding scale for measuring weight of molten metal contained in the feeding component and generating weight signals accordingly; and a controller.

WO 2018/102927 A1

[Continued on next page]

TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

— *in black and white; the international application as filed contained color or greyscale and is available for download from PATENTSCOPE*

SYSTEM AND METHOD FOR POURING MOLTEN METAL FROM A CRUCIBLE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from US patent provisional application 62/431,705 entitled SYSTEM AND METHOD FOR FEEDING A SOW CARROUSEL WITH MOLTEN METAL and filed December 8, 2016, the specification of which is hereby incorporated herein by reference in its entirety.

BACKGROUND

(a) Field

[0002] The subject matter disclosed generally relates to systems and methods for pouring molten metal from a crucible. More particularly, the subject matter disclosed relates to systems and methods of feeding molten metal to sow moulds.

(b) Related Prior Art

[0003] Nowadays, the solutions used to cast sows of metal involve a series of steps usually performed in two distinct environments: a smelter and a casting facility. Typically, the process involves crucibles containing molten metal to be transported by trucks from one location to the other. The handling of the crucibles within the smelter in the casting facility is performed using high capacity overhead cranes which handle crucibles which typically are used to transport about five (5) to twelve (12) tons of molten metal.

[0004] In the casting facility, crucibles of molten metal are typically tipped in order to pour the molten metal into sow moulds. That process requires a series of hydraulic components able to tip the heavy charge of the crucible. That process does not typically provide the desired result of precisely controlling the weight of the resulting sows.

[0005] Another solution involves pouring molten metal into a mobile launder used to pour the molten metal into the sow moulds. As discussed above, that process does not typically provide the desired result of precise weight control of the resulting sows.

[0006] There is therefore a need for improvements in the field of casting sows that would overcome some of the drawbacks of the existing solutions.

SUMMARY

[0007] According to an embodiment, there is disclosed a system for feeding molten metal provided by a feeding component to a receiving component, the system comprising:

- a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds

the launder circuit with molten metal at the upstream end and the launder circuit feeds molten metal to the receiving component at the downstream end;

- a feed tilting mechanism located at the upstream end for tilting the feeding component between a holding angle for holding molten metal in the feeding component and a feeding angle for feeding molten metal to the launder circuit;

- a feeding scale for measuring weight of molten metal contained in the feeding component and generating weight signals indicative of a measured weight of molten metal in the feeding component; and

- a controller operatively connected to the feed tilting mechanism and to the feeding scale for controlling a feeding of molten metal to the launder circuit based on the weight signals received from the feeding scale.

[0008] According to an aspect, the system further comprises:

- a pouring launder for containing molten metal along the flow path;

- a pouring launder scale for measuring weight of molten metal contained in the pouring launder and generating weight signals indicative of a measured weight of molten metal in the pouring launder; and

- a launder tilting mechanism for controlling operating positions of the pouring launder, wherein the operating positions comprise a holding position wherein molten metal is held in the pouring launder and a feeding position wherein molten metal is fed downstream out of the pouring launder;

wherein the controller is connected operatively to the launder tilting mechanism to control operating positions of the launder tilting mechanism based on weight signals from the pouring launder scale.

[0009] According to an aspect, the launder tilting mechanism comprises a hydraulic cylinder for tilting the pouring launder between a holding position in which the pouring launder is in the holding position and a feeding position in which the pouring launder is in the feeding position.

[0010] According to an aspect, the pouring launder comprises a pouring spout fluidly connecting the flow path with the receiving component.

[0011] According to an aspect, the pouring launder comprises a lug extending inwardly in the pouring spout, wherein the lug alters flow of molten metal in the pouring spout.

[0012] According to an aspect, the launder circuit comprises inlet channels and an outlet channel, wherein each one of the inlet channels is fluidly connected to the outlet channel.

[0013] According to an aspect, the system comprises the receiving component which comprises a sow mould.

[0014] According to an aspect, the system comprises the feeding component which comprises a crucible assembly.

[0015] According to an aspect, the molten metal is provided by a plurality of feeding components and wherein the feed tilting mechanism comprises a plurality of feed tilting mechanisms, each one of the feed tilting mechanisms is associated to one of the plurality of feeding components, and wherein the controller coordinates handling of each one of the plurality of feed tilting mechanisms for controlling a feeding of molten metal to the launder circuit.

[0016] According to an embodiment, there is disclosed a system for feeding molten metal provided by a feeding component to a receiving component, the system comprising:

- a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds the launder circuit with molten metal at the upstream end and the launder circuit feeds molten metal to the receiving component at the downstream end;
- a pouring launder for containing molten metal, the pouring launder being located on the flow path between the upstream end and the downstream end;
- a pouring launder scale for measuring weight of molten metal contained in the pouring launder and generating weight signals indicative of a measured weight of molten metal in the pouring launder;
- a launder tilting mechanism for controlling the pouring launder to operate in a holding position for holding molten metal in the pouring launder and in a feeding position for feeding molten metal downstream out of the pouring launder; and
- a controller, wherein the controller is operatively connected to the launder tilting mechanism and to the pouring launder scale for controlling operating positions of the launder tilting mechanism based on weight signals received from the pouring launder scale.

[0017] According to an aspect, the system further comprises:

- a feed tilting mechanism located at the upstream end of the launder circuit for tilting the feeding component between a holding angle for holding molten metal in the feeding component and a feeding angle for feeding molten metal to the launder circuit; and

- a feeding scale mounted for measuring weight of molten metal contained in the feeding component and generating weight signals indicative of a measured weight of molten metal in the feeding component,

wherein the controller is further connected operatively to the feed tilting mechanism for controlling a feeding of molten metal to the launder circuit based on weight signals received from the feeding scale.

[0018] According to an aspect, the molten metal is provided by a plurality of feeding components and wherein the feed tilting mechanism comprises a plurality of feed tilting mechanisms, each one of the feed tilting mechanisms is associated to one of the plurality of feeding components, and wherein the controller coordinates handling of each one of the plurality of feed tilting mechanisms for controlling a feeding of molten metal to the launder circuit.

[0019] According to an aspect, the pouring launder has a longitudinal axis, two extremities according to the longitudinal axis, and a pivot axis located between the two extremities.

[0020] According to an aspect, the launder tilting mechanism comprises a hydraulic cylinder joined to the pouring launder and distant from the pivot axis.

[0021] According to an aspect, the system comprises the receiving component which comprises a sow mould.

[0022] According to an aspect, the system comprises the feeding component which comprises a crucible assembly.

[0023] According to an aspect, the launder circuit comprises inlet channels and an outlet channel, wherein each one of the inlet channels is fluidly connected to the outlet channel.

[0024] According to an aspect, the launder circuit comprises a connection connecting at least one of the inlet channels to the outlet channel, with the pouring launder being located downstream to the connection.

[0025] According to an aspect, the pouring launder comprises a pouring spout fluidly connecting the flow path with the receiving component.

[0026] According to an aspect, the pouring spout comprises a lug extending inwardly in the pouring spout, wherein the lug alters flow of molten metal in the pouring spout.

[0027] According to an embodiment, there is disclosed a molten metal pouring system for feeding molten metal provided by a feeding component to a receiving component, the molten metal pouring system comprising:

- a pouring launder fed with molten metal by the feeding component and feeding molten metal to the receiving component, the pouring launder comprises a floor portion and a pouring spout which extends downwardly from the floor portion;
- a pouring launder scale for measuring weight of the molten metal in the pouring launder; and
- a launder tilting mechanism for tilting the pouring launder between a holding angle for holding molten metal in the pouring launder and a feeding angle for feeding molten metal to the receiving component,

wherein the launder tilting mechanism sets the pouring launder in one of the holding angle and the feeding angle based on a measurement by the pouring launder scale of the weight of the molten metal in the pouring launder.

[0028] According to an aspect, the floor portion is substantially flat.

[0029] According to an aspect, the pouring spout extends substantially perpendicularly from a flat part of the floor portion.

[0030] According to an aspect, the pouring spout comprises a lug extending inwardly in the pouring spout, wherein the lug alters flow of molten metal in the pouring spout.

[0031] According to an aspect, the pouring spout comprises two lugs extending inwardly in the pouring spout, wherein the two lugs alter flow of molten metal in the pouring spout.

[0032] According to an aspect, the pouring launder has a longitudinal axis, two extremities according to the longitudinal axis and a pivot axis located between the two extremities.

[0033] According to an aspect, the launder tilting mechanism comprises a hydraulic cylinder joined to the pouring launder and distant from the pivot axis.

[0034] According to an embodiment, there is disclosed a tilting table mounted to a structure fluidly connecting the tilting table to a sow carrousel, wherein the tilting table is adapted to receive a crucible assembly, the tilting table comprising:

- an L-shaped body defining a vertical portion and a horizontal portion;
- a pivot axis along the vertical portion, the pivot axis about which the L-shaped body is adapted to be mounted to the structure;
- a feed tilting mechanism for tilting controllingly the L-shape body about the pivot axis; and
- a fork-like structure along the horizontal portion, the fork-like structure comprises a first fork arm and a second fork arm movable toward each other to handle and to hold the crucible assembly,

wherein the tilting table is adapted when rotating about the pivot axis to pour molten metal from the crucible assembly onto the structure so that the molten metal flows into the sow carrousel.

[0035] According to an aspect, the tilting table further comprises hydraulic cylinder and wherein at least one of the first fork arm and the second fork arm is mobile under control of the hydraulic cylinder.

[0036] According to an aspect, tilting table further comprises:

- a feeding scale for measuring weight of molten metal contained in the crucible assembly and generating weight signals indicative of a measured weight of molten metal in the crucible assembly; and
- a controller operatively connected to the feed tilting mechanism and to the feeding scale for controlling a feeding of molten metal to a launder circuit based on the weight signals received from the feeding scale.

[0037] Accordingly, in relation with the above aspects, all of the different components or characteristics of the embodiments aim to control the flow of molten metal from a feeding component, i.e. a crucible assembly, to a receiving component, i.e. a sow carrousel, such that the quantity and quality of cast sows are improved over the prior art.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] Further features and advantages of the present disclosure will become apparent from the following detailed description, taken in combination with the appended drawings, in which:

[0039] Fig. 1 is a left partial perspective view of the system for feeding a sow carrousel with molten metal in accordance with an embodiment;

[0040] Fig. 2 is a right partial perspective view of the system for feeding a sow carrousel with molten metal in accordance with an embodiment;

[0041] Fig. 3 close-up partial perspective view of some of the components of the system for feeding a sow carrousel with molten metal according to an embodiment;

[0042] Fig. 4 is a schematic illustration showing the control components of the system for feeding a sow carrousel in according with an embodiment;

[0043] Fig. 5 is a flow chart illustrating the steps from the reception of a crucible full of molten metal from a delivery truck to the pickup of the emptied crucible from the system by a delivery truck;

[0044] Fig. 6 is a rear partial perspective view of the system for feeding a sow carrousel with molten metal shown in Fig. 1;

[0045] Fig. 7 is a front partial perspective view of a system for feeding a sow carrousel comprising a control center and additional environmental components in accordance with an embodiment;

[0046] Fig. 8 is a rear partial perspective view of the system for feeding a sow carrousel shown in Fig. 7; and

[0047] Figs. 9 and 10 are perspective side cross-section views specifically of the launder tilting mechanism and the pouring launder in distinct operative positions in accordance with an embodiment.

[0048] It will be noted that throughout the appended drawings, like features are identified by like reference numerals.

DETAILED DESCRIPTION

[0049] Referring now to the drawings, and more particularly to Figs. 1 to 3 and 6, there is shown a system **10** for feeding molten metal to a sow carrousel **20** that overcomes the necessity of using high capacity overhead cranes in the casting facility to handle crucibles arriving by truck from a foundry. The system **10** has the advantages over the existing solutions of accelerating the process by optionally avoiding the use of high capacity overhead cranes to handle the crucibles and by providing a more precise control over the weight of molten metal poured into the sow moulds and thereby providing more precise control of the weight of the sows.

[0050] According to another embodiment, the system **10** has the advantage, regardless of the devices and method used to feed the system **10** with molten metal, to accept a plurality of parallel feedings while providing a precise control of the weight of the sows.

[0051] The casting facility typically features a sow carrousel **20** consisting in a circular structure comprising a plurality of receiving components, namely, sow moulds **112**, disposed side by side. The sow carrousel **20** is mobile and able to perform a rotation, typically a full rotation, during which the sow will be cooled down, using either an air-based cooling system or a water-based cooling system, and removed from the sow mould **112**. Accordingly, during a full cycle, a sow mould **112** is filled with molten metal at a casting location, moved out of the casting location, with the sow being cooled down along the rotation of the sow carrousel **20** and removed from the sow mould **112** before the sow mould **112** returns to the casting location.

[0052] The system **10** for feeding a sow carrousel with molten metal is adapted to handle feeding components containing molten metal, namely crucible assemblies **30** (aka crucibles), delivered by trucks or alternatively by automatic guided vehicles (AGVs) and other automated transportation means. According to an embodiment, the crucible assemblies **30** transported by trucks comprise a container **210** and a support portion **220**. The support portion **220** comprises a series of legs **222**, i.e. four (4) legs **222**, capable of supporting the crucible assembly **30** in

an elevated and stable position above the ground. The container **210** defines an enclosing space above the ground with an open top where molten metal is temporarily stored for its transportation from the foundry to the casting facility.

[0053] According to an embodiment, the system **10** is able to handle independently three (3) crucible assemblies **30**. Accordingly, a crucible assembly **30** may be delivered to the system **10**, one used by the system **10** and one picked up by a truck from the system **10** simultaneously and independently. The system **10** comprises, in the delivery portion, delivery control components for controlling the sequence of events which are part of the delivery and the pickup actions. The delivery control components comprise set of light towers disposed in vicinity of the delivery locations of the crucible assemblies **30** and providing light signals (direction arrow lights, green lights, red lights, etc.) informing the driver of a delivery truck on the state (delivery authorized, busy or pick up authorized) of a delivery location.

[0054] According to an embodiment, a location detection system embodied as a series of lasers detecting the precise location of a delivery truck is connected operationally to light towers to guide the driver in the exact location to unload a crucible assembly **30**.

[0055] The delivery control components comprise a detection coil or another type of detection system able to detect the presence of a delivery truck in the vicinity or in the delivery location. The detection system is connected to a controller **390** that, for security reasons, activates some processes and locks some functions when a truck is detected out of normal circumstances.

[0056] According to an embodiment, the delivery control components comprise a human presence detection system connected to the controller **390**. The controller **390** activates a security light curtain for blocking any moving component.

[0057] The system **10** further comprises security components that a person located beside the system **10** must manually activate to reactivate the system **10** after the controller **390** enters in a fault condition. Another security component allows a person close to the system to manually activate a shut-down process resulting in a crucible currently in a pouring process to be tilted back in a vertical position (if needed) and moved down. The shut-down process further releases the grabbing components from grabbing the crucible assembly **30** thereby releasing the crucible assembly **30**. Thus, the crucible assembly **30** and the system **10** returns in a default initial condition.

[0058] Still referring to Fig. 1, the system **10** comprises a structure **300**. The structure **300**, at an upstream end, comprises a feed tilting mechanism embodied as tilting tables **320** adapted to receive one or more crucible assemblies **30**, i.e., three (3) crucibles disposed side by side,

to handle the crucible assemblies **30** delivered by trucks, to empty the crucible assemblies **30** from their content of molten metal and to place the empty crucible assemblies **30** in a pick-up condition in which the crucible assemblies **30** will be ready to be picked up by trucks.

[0059] Each of the tilting tables **320** are pivotally mounted to the structure **300**. The tilting tables **320** are of a substantially L-shape, pivotally mounted at the top end of the L-shape, and defining at a lower portion a fork-like structure. The fork-like structure comprises a first fork arm **312** and a second fork arm **314**, under control of a fork control mechanism **385** (Fig. 4), adapted to handle and hold crucible assemblies **30**, and a table body **316**. The tilting tables **320**, when in a feeding position, are disposed such that the fork-like structure defined by the horizontal portion of the L-Shape is in a substantially horizontal position. The fork-like structure further defines a space between the fork arms **312**, **314** wherein a truck may backup to deliver a crucible assembly **30**. At least one of the fork arms **312**, **314** is mobile, driven by hydraulic cylinders, and able to move toward and away from the other fork arm **312**, **314** so that a crucible assembly **30** disposed between the fork arms **312**, **314** can be firmly gripped and held by the fork arms **312**, **314** once the delivery truck has driven away from the structure **300**.

[0060] According to an embodiment, four (4) hydraulic cylinders drive the fork arms **312**, **314** during the process of gripping the crucible assembly **30**. Detectors are mounted on the fork arms **312**, **314** to detect whether or not the crucible assembly **30** is gripped adequately. The detectors are mounted in a serial manner with a cable. In this configuration, a single one of the detectors failing to provide the right signal prevents the continuation of the process.

[0061] Two (2) lock arms (not shown), driven by hydraulic cylinders (not shown), are for locking the crucible assembly **30** in place between the fork arms **312**, **314** once the fork arms **312**, **314** are gripping the crucible assembly **30**. The lock arms are distant from the table body **316**, and define, in combination with the table body **316** and the fork arms **312**, **314**, a semi-enclosed perimeter from which the crucible cannot move out without the lock arms and the fork arms **312**, **314** moving away from the crucible assembly **30**. Pressure detectors are mounted on the lock arms and connected to the controller **390** (Fig. 2 and Fig. 4).

[0062] Each of the tilting tables **320** are further driven by additional hydraulic cylinders to rotate over about ninety degrees (90°) around their pivot axis **302** in order to pour the molten metal contained in the crucible assemblies **30** into a launder circuit **340**. The tilting tables **320** are for controllably pouring the molten metal by precisely controlling the angle of the tilting table **320**, thus of the crucible assembly **30**, during the pouring process. The angle is determined by the controller **390** based on a continuous monitoring of the weight of the crucible, or in other

words as a function of the weight decrease rate of the crucible during the process according to the angle of the tilting table **320** at the time. The fork arms **312**, **314** remain in a holding position during the pouring process, keeping a tight grip on the crucible assembly **30** during the whole process.

[0063] According to an embodiment, the forks arms **312**, **314** comprises alternative components to grab the crucible assemblies **30**, to hold them and to lift them up securely. Furthermore, the forks arms **312**, **314** are motorized with a different number and combination of hydraulic cylinders to perform the grabbing, holding/securing, lifting and tilting processes.

[0064] The fault monitoring system comprise detectors adapted to monitor the operation as to detect malfunction of any of the grabbing, holding, securing, lifting and tilting processes comprises a combination of at least some of contact detectors, position detectors, distance detectors, pressure detectors, scale, heat detectors, solenoids, and cameras. Some of the monitoring components are arranged in parallel, while other are arranged in series for security purpose. Furthermore, some redundancy may be provided among the monitoring components to allow a second monitoring component, of the same kind or of another kind, to trigger a malfunction if one main detector fails.

[0065] According to an embodiment shown in Fig. 2, a feeding scale **370** is mounted to each of the tilting tables **320**. The feeding scale **370** is communicatively connected to the controller **390**, and adapted to continually determine the weight of molten metal that is contained in the crucible assembly **30**, through either the measure of the weight of the crucible assembly **30** and its content or the combination of the crucible assembly **30** (and its content) and the tilting table **320**. Accordingly, the controller **390** is able to determine the rate of molten metal (e.g., in kg per second) flowing down in the launder circuit **340** and therefore the weight of molten metal poured into the sow mould **112**. It therefore allows the controller **390** connected operatively to the tilting tables **320** to command the tilting tables **320** to modify their angle accordingly. Their angle can be modified from a holding angle in which a crucible assembly **30** is in position to hold its contained molten metal, to a feeding angle in which a crucible assembly **30** is in a feeding position to feed the launder circuit **340** with its contained molten metal, and various angles in between for various flows.

[0066] Once a crucible assembly **30** is emptied, i.e., when the content of molten metal has entirely been poured out of the crucible assembly **30**, the tilting table **320** is tilted back from a feeding angle into a holding angle.

[0067] As discussed and shown in Fig. 1, the structure **300** has a launder circuit **340** mounted thereto (or incorporated therein), the launder circuit **340** defining a flow path fluidly connecting crucible pouring location(s) (at an upstream location) to the sow carrousel **20** (at a downstream location). The launder circuit **340**, according to an embodiment, comprises a plurality of individual launder segments **342** connecting inlet channels **332**, each associated with a tilting table **320**, to a main launder segment **344** connected to an outlet channel **334** leading the molten metal to the sow mould **112**. According to an embodiment, the individual launder segments **342** are connected to the main launder segment **344** at a single point, a connection **336** (see Fig. 3). According to another embodiment, a connection **336** connects two (2) upstream launder segments and a single downstream launder segment.

[0068] The launder circuit **340** is heated prior to the beginning of the pouring process. The pre-heating process prevents moisture to affect the casting process (moisture explosions) and prevents freezing of the metal in the launder circuit **340**. According to one embodiment, the pre-heating process involves a series of gas heaters disposed under at least some segments **342**, **344** of the launder circuit **340**. According to one embodiment, the gas heaters are propane gas heaters and / or natural gas heaters. According to an embodiment, moisture on the launder circuit **340** is removed using electrical radiant heaters, electrical forced air heaters or gas burners.

[0069] According to an embodiment, at least some of the segments **342**, **344** of the launder circuit **340** comprise level detectors **375** (Fig. 4) connected to a controller **390**. If one of the level detectors **375** detects a level of molten metal over a predetermined limit level, a signal is transmitted by the level detector **375** to the controller **390** which enters in an overflow process and decreases or stops the feeding of molten metal from at least one of the crucible assembly **30** based on the location of the level detector **375**.

[0070] According to an embodiment, one of the main launder segment **344** and all of the individual launder segments **342** are equipped with controllable combs (not shown) adapted to block the flow of big impurities in the molten metal. The combs are controllable to operate in collaboration with the level detectors **375** to prevent overflow and to allow drainage of the launder segments **342**, **344** to ensure operative conditions of the system **10**.

[0071] According to an embodiment, the launder segments **342**, **344** are sloped downwardly from the individual launder segments **342** at the upstream end to the main launder segment **344** to facilitate the downstream flow of molten metal by gravity. According to an embodiment, each of the launder segments **342**, **344** are individually sloped accordingly.

[0072] According to an embodiment, the launder circuit **340** comprises a pouring launder **350** for containing and feeding molten metal. The main launder segment **344** is adapted to pour molten metal into the pouring launder **350** located downstream to the connection **336**, and according to one embodiment at the downstream end of the main launder segment **344**. The pouring launder **350** comprises an elevated shape defining a volume container **352** capable of holding a predetermined weight of molten metal required to cast a sow, typically 1 to 2 times the weight of molten metal necessary for casting a single sow. The pouring launder **350** is mounted in association with a pouring launder scale **360** for controlling the weight of molten metal poured into a sow mould **112** by controlling the weight of molten metal received from the upstream portion of the launder circuit **340**. According to an embodiment, the pouring launder scale **360** measures the weight of molten metal contained in the pouring launder **350** at all times. According to an embodiment, the pouring launder scale **360** is communicatively connected to the controller **390**.

[0073] The volume container **352** of the pouring launder **350** comprises a floor portion **354** that is substantially downwardly sloped toward a pouring spout **356** (when the pouring launder **350** is tilted in the feeding position as discussed below) which is controllably closable and is located above the sow carrousel **20**. Thus, by opening the pouring spout **356**, the molten metal contained in the volume container **352** flows down into the sow mould **112** located below. According to an embodiment, the floor portion **354** is substantially flat and the pouring spout **356** extends downwardly from a flat part of the floor portion **354**. According to an embodiment, the pouring spout **356** extends downwardly substantially at a right angle from the floor portion **354**; i.e., the general direction of the pouring spout **356** is substantially perpendicular to the flat floor portion **354**. Having the pouring spout **356** located in the floor portion **354** makes it much easier to control the flow of molten metal and ensures that all molten metal is emptied from the pouring launder **350**. In known prior art pouring launders, the pouring spout is at an end of the pouring launder; i.e., not in a flat part of the floor, but rather at the upper end of a vertical wall which extends from the floor. Hence the pouring launder of the prior art cannot be emptied completely since some molten metal will remain where the floor and the bottom of the vertical wall meet.

[0074] According to an embodiment, the pouring spout **356** is controllable by the controller **390** in operating positions, namely a holding position wherein molten metal is held in the pouring launder **350** and a metal feeding position wherein the molten metal flows out of the pouring launder **350**.

[0075] According to an embodiment illustrated on Fig. 9 and 10, the pouring spout **356** features a series of lugs **358** extending inwardly. The lugs **358** have sloped top faces relative to the longitudinal orientation easing the downward flow of molten metal while slowing the general flow of said molten metal to prevent spilling.

[0076] According to embodiments, one or more alternative spout components comprise similar lugs to control speed of flow and prevent spilling.

[0077] According to embodiments, the size of the lugs **358**, namely the height and the inward length of the lugs from the inside face of the pouring spout **356**, and the distance between the lugs are configured based on operational parameters, namely the characteristics of the molten metal, the desired flow and the total length of the pouring spout **356**.

[0078] According to other embodiments (not shown), alternative flow controlling means are embedded in the pouring spout **356** and/or other molten metal guiding conduits. Examples of alternative flow controlling means comprise a helical panel extending inwardly from the inside wall of the pouring spout **356** and mechanically controlled flow hindering components.

[0079] According to an embodiment, the pouring launder **350** is mounted to a pivot axis **366** and a hydraulic cylinder **364** controllable by the controller **390** to control tilting actions of the pouring launder **350** to transition between the holding position (at a holding angle) and feeding position (at a feeding angle), the latter being when molten metal pours out of the pouring launder **350** into a sow mould **112**. The tilt angle of the pouring launder **350** is controlled by the controller **390** (Fig. 4) controlling a proportional control valve connected to the hydraulic cylinder driving the tilting movement of the pouring launder **350**. As with the control of the flow of molten metal out of the crucible assemblies **30**, the controller **390**, through signals continuously transmitted by the pouring launder scale **360**, controls the weight of molten metal poured in a sow mould **112**.

[0080] The present system **10** is capable of pouring about 750 kg of molten metal in a controlled manner in a sow mould **112** in about 10 to 60 seconds, repeatedly or over an unrestricted period of time.

[0081] Now referring to Figs. 9 and 10, according to another embodiment as discussed above, the controller **390** of the system **10** for pouring molten metal operates a tilting pouring launder **350** mounted to a combination of a pivot axis **366** and a hydraulic cylinder **364**. The combination of a pivot axis **366** and a hydraulic cylinder **364** is for tilting the pouring launder **350** forth (Fig. 10, in a substantially horizontal position), to pour molten metal downstream, and back (Fig. 9, in a back-sloped position), to pour molten metal in the pouring launder **350**. A

pouring launder scale **360** measures the weight of the molten metal present in the pouring launder **350** at all times. The position of the pouring launder **350** is controlled by the controller **390** which determines when to tilt the pouring launder **350** based on measurements from the pouring launder scale **360** and commands the hydraulic cylinder.

[0082] As illustrated, the pouring launder **350** is fed with molten metal at one end by a main launder segment **344**, and feeds a sow mould **112** at the other end. Alternative embodiments comprise alternative molten metal feeding systems that may feed molten metal to the pouring launder **350**, and/or the pouring launder **350** may pour a precise quantity of molten metal into an alternative type of receiving component, such as a crucible. Another alternative comprises the location of the pouring launder **350** being elsewhere along the flow path, for example somewhere upstream to the illustrated location closer to the connection **336** show in Fig. 3.

[0083] According to an embodiment (not illustrated), the system **10** comprises an emergency draining bin located about the pouring launder. The emergency draining bin is adapted to receive the content of the pouring launder in case the carrousel is not ready. For example, the carrousel may not have been indexed, having the ready-to-receive-molten-metal sow mould already filled, or having no sow mold ready to receive molten metal from the pouring launder. In such conditions, with the pouring launder filled with molten metal and requiring emptying, the molten metal may be redirected to the emergency draining bin. The emergency feeding comprises the opening of a gate redirecting the molten metal toward the emergency draining bin.

[0084] Referring to Fig. 4, a schematic illustration of the control components of the system for feeding a sow carrousel is provided. It is to be noted that the direction of the arrows illustrates the data collected and transmitted as commands transmitted to operating components. The signals exchanged for diagnostic purposes and involved in communication protocols have been voluntarily omitted in order to more clearly illustrate the flow of actions from the sensing of physical conditions performed by components to the commands translated into actions performed by functional components of the system.

[0085] According to an embodiment, the controller **390** is communicatively connected to at least one of a feed tilting mechanism **380** controlling the hydraulic cylinder(s) responsible for pivoting the tilting tables **320,** and a launder tilting mechanism **365** controlling the pouring spout **356** and/or the hydraulic cylinder **364** and thus responsible for operating the pouring launder between a holding position or a feeding position. The controller **390** determines if additional

molten metal must be poured based on signals from at least one of the feeding scale **370**, the pouring launder scale **360** and the level detectors **375**.

[0086] According to an embodiment, the controller **390** is communicatively connected to the fork control mechanism **385** which control the first fork arm **312** and the second fork arm **314** (see Figs 1 and 2).

[0087] According to an embodiment, the controller **390** is communicatively connected to one feed tilting mechanism **380** per tilting table **320**, and independently transmits command signals to each of the feed tilting mechanisms **380**.

[0088] According to an embodiment, the controller **390** is communicatively connected to the sow carrousel control sub-system **395**, and transmits command signals, for example indexing initiation commands, to the sow carrousel control sub-system **395** associated with the sow carrousel **20**. According to an embodiment, the controller **390** is communicatively connected to a sow carrousel detection system (not shown); the controller **390** receiving and processing input signal from the sow carrousel detection system.

[0089] Now referring to Figs. 7 and 8, a system **10** for feeding molten metal comprises a control center **400** is illustrated. Fig. 7 illustrates the embodiment through a front partial perspective view through which the launder circuit, hence the molten metal following the flow path of the launder circuit, is shown readily visible by an operator located in the control center **400**. Fig. 8 illustrates the embodiment through a rear partial perspective view where the launder circuit and the crucible assemblies **30** currently in the system **10** are readily visible by an operator located on the control center **400**. Footbridges are illustrated above some of the components of the system **10**, for the operator to monitor more easily the operation, and access components for maintenance. One must note that additional security and environmental components discussed above, such as fences, are also illustrated.

[0090] Fig. 6 illustrates the system **10** from a rear partial perspective view showing components more particularly involved in the delivery of crucible assemblies **30**. The controller **390** is communicatively connected to a guiding system **620** controlling guiding towers **610**. Detectors **630** and sensors **640** are communicatively connected to the controller **390**, transmitting signals based on conditions detected in each of the individual delivery areas **650**. Detectors **630** and sensors **640** comprise, for example, optical detectors, movement detectors, weight sensors and proximity sensors.

[0091] It is worth mentioning that according to an embodiment, the components used to feed molten metal to the launder circuit may take many forms, such as the above described truck

delivery solution, an automated ground-level delivery solution, and further alternatives comprising elevated delivery solutions such as overhead cranes delivering crucibles or crucible assemblies. The ground level at the upstream end and the downstream end of the system **10** may differ according to some embodiments, while keeping a slope between the upstream end and the downstream end of the system **10** to maintain natural unforced flow of molten metal in the launder circuit.

[0092] Now referring to Fig. 5, a flow chart illustrates the steps from the reception of a crucible full of molten metal from a delivery truck to the pick-up of the emptied crucible from the system by a delivery truck.

[0093] The method comprises step **502** of validating that a delivery area is free for delivery of a crucible.

[0094] Step **504** comprises guiding the delivery truck during the delivery process of the crucible, comprising light signals. It further comprises guiding the truck out of the delivery area once the crucible is left in the delivery area.

[0095] Step **506** comprises validating that the delivery truck has left the delivery area, and that no person or object is in the delivery area and risks to interfere with the crucible holding process.

[0096] Step **508** comprises grabbing and lifting the crucible at the pouring height.

[0097] Step **510** comprises monitoring the pouring conditions. Before pouring any molten metal into the launder circuit, and at all times during the pouring process, the system monitors the conditions using the different detectors and scales, including the carrousel control sub-system, to control the correct realization of the pouring process.

[0098] Step **512** comprises performing the casting process. It comprises tilting, or in other words controlling the angle of the crucible to pour molten metal into the launder circuit. It also comprises controlling the pouring launder, thus at least one of controlling the pouring spout operating condition and controlling the pouring launder angle for controlling the flow of molten metal over the whole system, including the casting of molten metal in a sow mould at the downstream end.

[0099] Step **514** comprises, when the crucible is detected as being empty, tilting back the tilting table and therefore the crucible in the vertical position. This step may also comprise operating the pouring launder to interrupt the casting process.

[00100] It has to be mentioned that steps **512** and **514** may intertwine at the feeding end and the casting end, one being in a holding position while the other in a delivering position and vice-versa, to perform a relatively continuous casting process.

[00101] Step **516** comprises moving the tilting table down to put down the crucible, ready for pick up.

[00102] Step **518** comprises releasing the crucible from the grip of the fork arms and lock arms. After the release of the crucible, the crucible is ready to be picked up.

[00103] Step **520** comprises guiding the truck to pick up the crucible, and thereby freeing the delivery area for another crucible.

[00104] Step **522** illustrates the steps performed upon detection of problematic conditions. Whenever a problem arises during the steps **508**, **510**, **512**, and **514**, the system is adapted to initiate a safe condition through the initiation of steps **516** and **518**. A safe condition is defined as when the crucible is on the tilting table in its support portion. Accordingly, whenever a problem arises, the crucible(s) on the tilting table(s) is or are tilted back to the vertical (wherein no pouring of molten metal out of the crucible can occur) and moved down on the ground.

[00105] While preferred embodiments have been described above and illustrated in the accompanying drawings, it will be evident to those skilled in the art that modifications may be made without departing from this disclosure. Such modifications are considered as possible variants comprised in the scope of the disclosure.

CLAIMS:

1. A system for feeding molten metal provided by a feeding component to a receiving component, the system comprising:
- a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds the launder circuit with molten metal at the upstream end and the launder circuit feeds molten metal to the receiving component at the downstream end;
- a feed tilting mechanism located at the upstream end for tilting the feeding component between a holding angle for holding molten metal in the feeding component and a feeding angle for feeding molten metal to the launder circuit;
- a feeding scale for measuring weight of molten metal contained in the feeding component and generating weight signals indicative of a measured weight of molten metal in the feeding component; and
- a controller operatively connected to the feed tilting mechanism and to the feeding scale for controlling a feeding of molten metal to the launder circuit based on the weight signals received from the feeding scale.

2. The system of claim 1, wherein the system further comprises:
- a pouring launder for containing molten metal along the flow path;
- a pouring launder scale for measuring weight of molten metal contained in the pouring launder and generating weight signals indicative of a measured weight of molten metal in the pouring launder; and
- a launder tilting mechanism for controlling operating positions of the pouring launder, wherein the operating positions comprise a holding position wherein molten metal is held in the pouring launder and a feeding position wherein molten metal is fed downstream out of the pouring launder;
wherein the controller is connected operatively to the launder tilting mechanism to control operating positions of the launder tilting mechanism based on weight signals from the pouring launder scale.

3. The system of claim 2, wherein the launder tilting mechanism comprises a hydraulic cylinder for tilting the pouring launder between a holding position in which the pouring launder is in the holding position and a feeding position in which the pouring launder is in the feeding position.

4. The system of claim 2, wherein the pouring launder comprises a pouring spout fluidly connecting the flow path with the receiving component.

5. The system of claim 4, wherein the pouring launder comprises a lug extending inwardly in the pouring spout, wherein the lug alters flow of molten metal in the pouring spout.

6. The system of claim 1, wherein the launder circuit comprises inlet channels and an outlet channel, wherein each one of the inlet channels is fluidly connected to the outlet channel.

7. The system of claim 1, wherein the system comprises the receiving component which comprises a sow mould.

8. The system of claim 1, wherein the system comprises the feeding component which comprises a crucible assembly.

9. The system of claim 1, wherein the molten metal is provided by a plurality of feeding components and wherein the feed tilting mechanism comprises a plurality of feed tilting mechanisms, each one of the feed tilting mechanisms is associated to one of the plurality of feeding components, and wherein the controller coordinates handling of each one of the plurality of feed tilting mechanisms for controlling a feeding of molten metal to the launder circuit.

10. A system for feeding molten metal provided by a feeding component to a receiving component, the system comprising:
- a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds the launder circuit with molten metal at the upstream end and the launder circuit feeds molten metal to the receiving component at the downstream end;

- a pouring launder for containing molten metal, the pouring launder being located on the flow path between the upstream end and the downstream end;
- a pouring launder scale for measuring weight of molten metal contained in the pouring launder and generating weight signals indicative of a measured weight of molten metal in the pouring launder;
- a launder tilting mechanism for controlling the pouring launder to operate in a holding position for holding molten metal in the pouring launder and in a feeding position for feeding molten metal downstream out of the pouring launder; and
- a controller, wherein the controller is operatively connected to the launder tilting mechanism and to the pouring launder scale for controlling operating positions of the launder tilting mechanism based on weight signals received from the pouring launder scale.

11. The system of claim 10, further comprising:
- a feed tilting mechanism located at the upstream end of the launder circuit for tilting the feeding component between a holding angle for holding molten metal in the feeding component and a feeding angle for feeding molten metal to the launder circuit; and
- a feeding scale mounted for measuring weight of molten metal contained in the feeding component and generating weight signals indicative of a measured weight of molten metal in the feeding component,
wherein the controller is further connected operatively to the feed tilting mechanism for controlling a feeding of molten metal to the launder circuit based on weight signals received from the feeding scale.

12. The system of claim 11, wherein the molten metal is provided by a plurality of feeding components and wherein the feed tilting mechanism comprises a plurality of feed tilting mechanisms, each one of the feed tilting mechanisms is associated to one of the plurality of feeding components, and wherein the controller coordinates handling of each one of the plurality of feed tilting mechanisms for controlling a feeding of molten metal to the launder circuit.

13. The system of claim 10, wherein the pouring launder has a longitudinal axis, two extremities according to the longitudinal axis, and a pivot axis located between the two extremities.

14. The system of claim 13, wherein the launder tilting mechanism comprises a hydraulic cylinder joined to the pouring launder and distant from the pivot axis.

15. The system of claim 10, wherein the system comprises the receiving component which comprises a sow mould.

16. The system of claim 10, wherein the system comprises the feeding component which comprises a crucible assembly.

17. The system of claim 10, wherein the launder circuit comprises inlet channels and an outlet channel, wherein each one of the inlet channels is fluidly connected to the outlet channel.

18. The system of claim 17, wherein the launder circuit comprises a connection connecting at least one of the inlet channels to the outlet channel, with the pouring launder being located downstream to the connection.

19. The system of claim 10, wherein the pouring launder comprises a pouring spout fluidly connecting the flow path with the receiving component.

20. The system of claim 19, wherein the pouring spout comprises a lug extending inwardly in the pouring spout,
wherein the lug alters flow of molten metal in the pouring spout.

21. A molten metal pouring system for feeding molten metal provided by a feeding component to a receiving component, the molten metal pouring system comprising:
- a pouring launder fed with molten metal by the feeding component and feeding molten metal to the receiving component, the pouring launder comprises a floor portion and a pouring spout which extends downwardly from the floor portion;
- a pouring launder scale for measuring weight of the molten metal in the pouring launder; and
- a launder tilting mechanism for tilting the pouring launder between a holding angle for holding molten metal in the pouring launder and a feeding angle for feeding molten metal to the receiving component,

wherein the launder tilting mechanism sets the pouring launder in one of the holding angle and the feeding angle based on a measurement by the pouring launder scale of the weight of the molten metal in the pouring launder.

22. The molten metal pouring system of claim 21, wherein the floor portion is substantially flat.

23. The molten metal pouring system of claim 21, wherein the pouring spout extends substantially perpendicularly from a flat part of the floor portion.

24. The molten metal pouring system of claim 21, wherein the pouring spout comprises a lug extending inwardly in the pouring spout,
wherein the lug alters flow of molten metal in the pouring spout.

25. The molten metal pouring system of claim 21, wherein the pouring spout comprises two lugs extending inwardly in the pouring spout, wherein the two lugs alter flow of molten metal in the pouring spout.

26. The molten metal pouring system of claim 21, wherein the pouring launder has a longitudinal axis, two extremities according to the longitudinal axis and a pivot axis located between the two extremities.

27. The molten metal pouring system of claim 26, wherein the launder tilting mechanism comprises a hydraulic cylinder joined to the pouring launder and distant from the pivot axis.

28. A tilting table mounted to a structure fluidly connecting the tilting table to a sow carrousel, wherein the tilting table is adapted to receive a crucible assembly, the tilting table comprising:

- an L-shaped body defining a vertical portion and a horizontal portion;
- a pivot axis along the vertical portion, the pivot axis about which the L-shaped body is adapted to be mounted to the structure;
- a feed tilting mechanism for tilting controllingly the L-shape body about the pivot axis; and

- a fork-like structure along the horizontal portion, the fork-like structure comprises a first fork arm and a second fork arm movable toward each other to handle and to hold the crucible assembly,
wherein the tilting table is adapted when rotating about the pivot axis to pour molten metal from the crucible assembly onto the structure so that the molten metal flows into the sow carrousel.

29. The tilting table of claim 28, further comprising hydraulic cylinder and wherein at least one of the first fork arm and the second fork arm is mobile under control of the hydraulic cylinder.

30. The tilting table of claim 29, further comprising:
- a feeding scale for measuring weight of molten metal contained in the crucible assembly and generating weight signals indicative of a measured weight of molten metal in the crucible assembly; and
- a controller operatively connected to the feed tilting mechanism and to the feeding scale for controlling a feeding of molten metal to a launder circuit based on the weight signals received from the feeding scale.

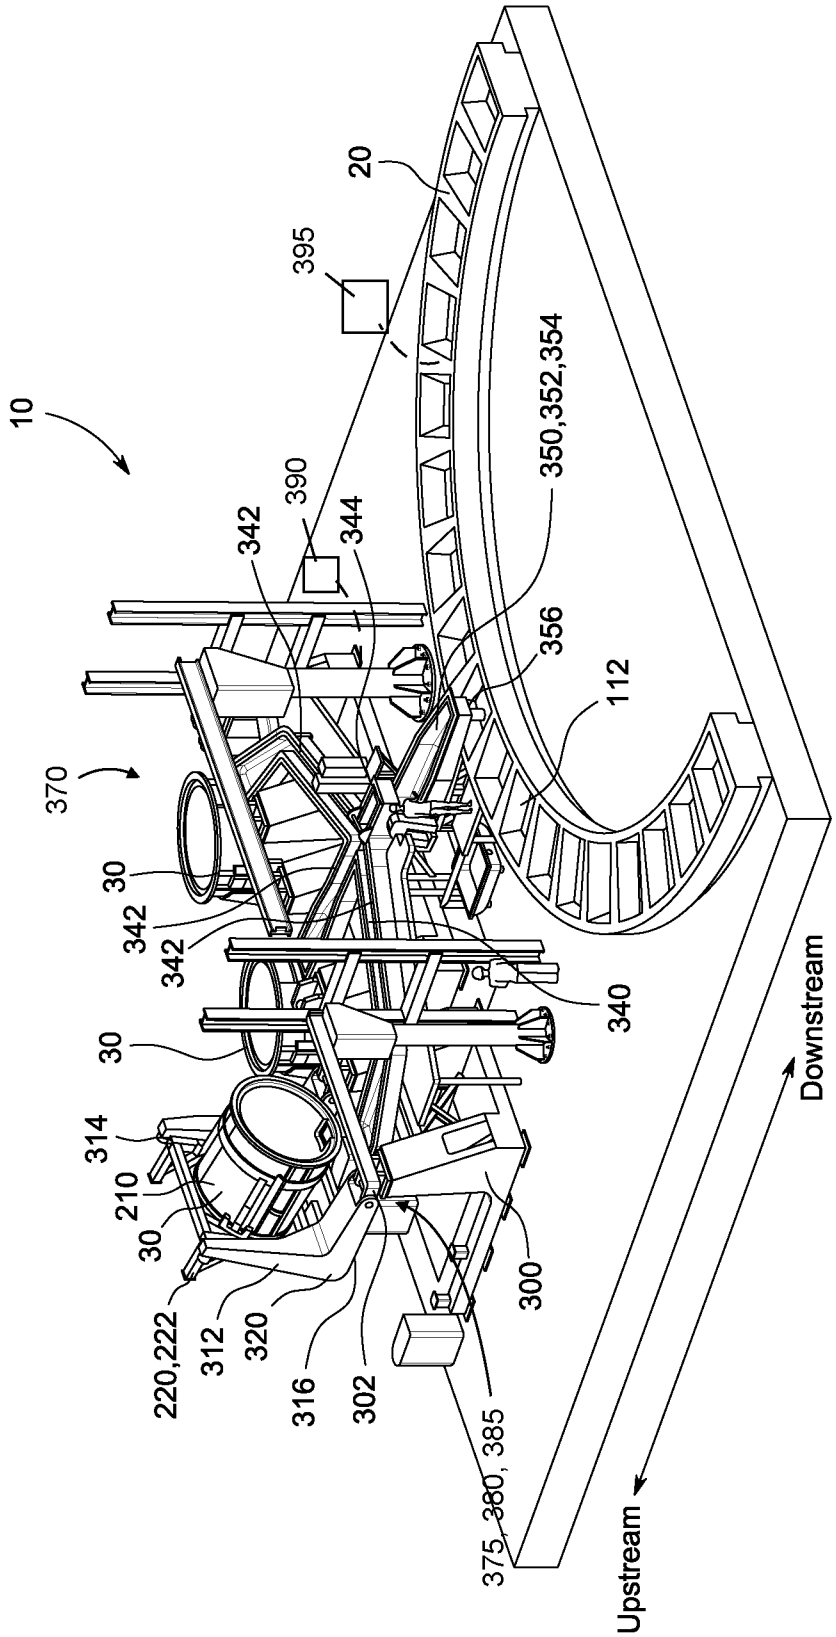

10
20
395
350,352,354
390
342
344
356
112
370
30
342
342
340
30
314
210
30
220,222
312
320
316
302
300
375, 380, 385
Upstream
Downstream

FIG. 1

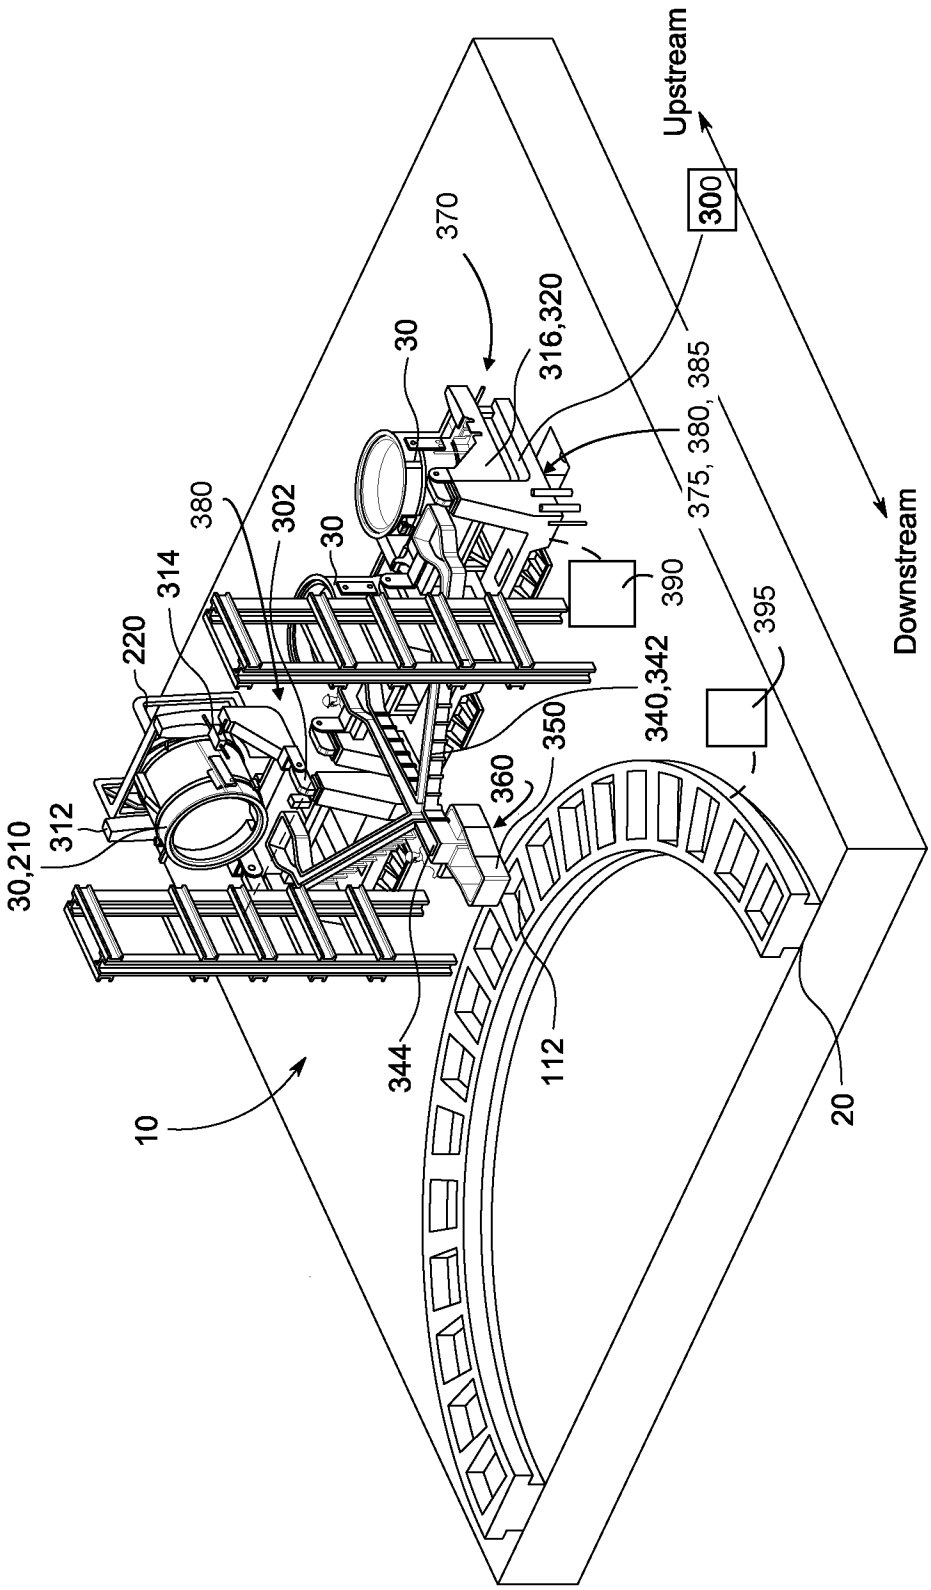

Upstream
300
370
316,320
30
375, 380, 385
380
302
30
314
220
390
395
Downstream
340,342
350
360
30,210
312
344
112
10
20

FIG. 2

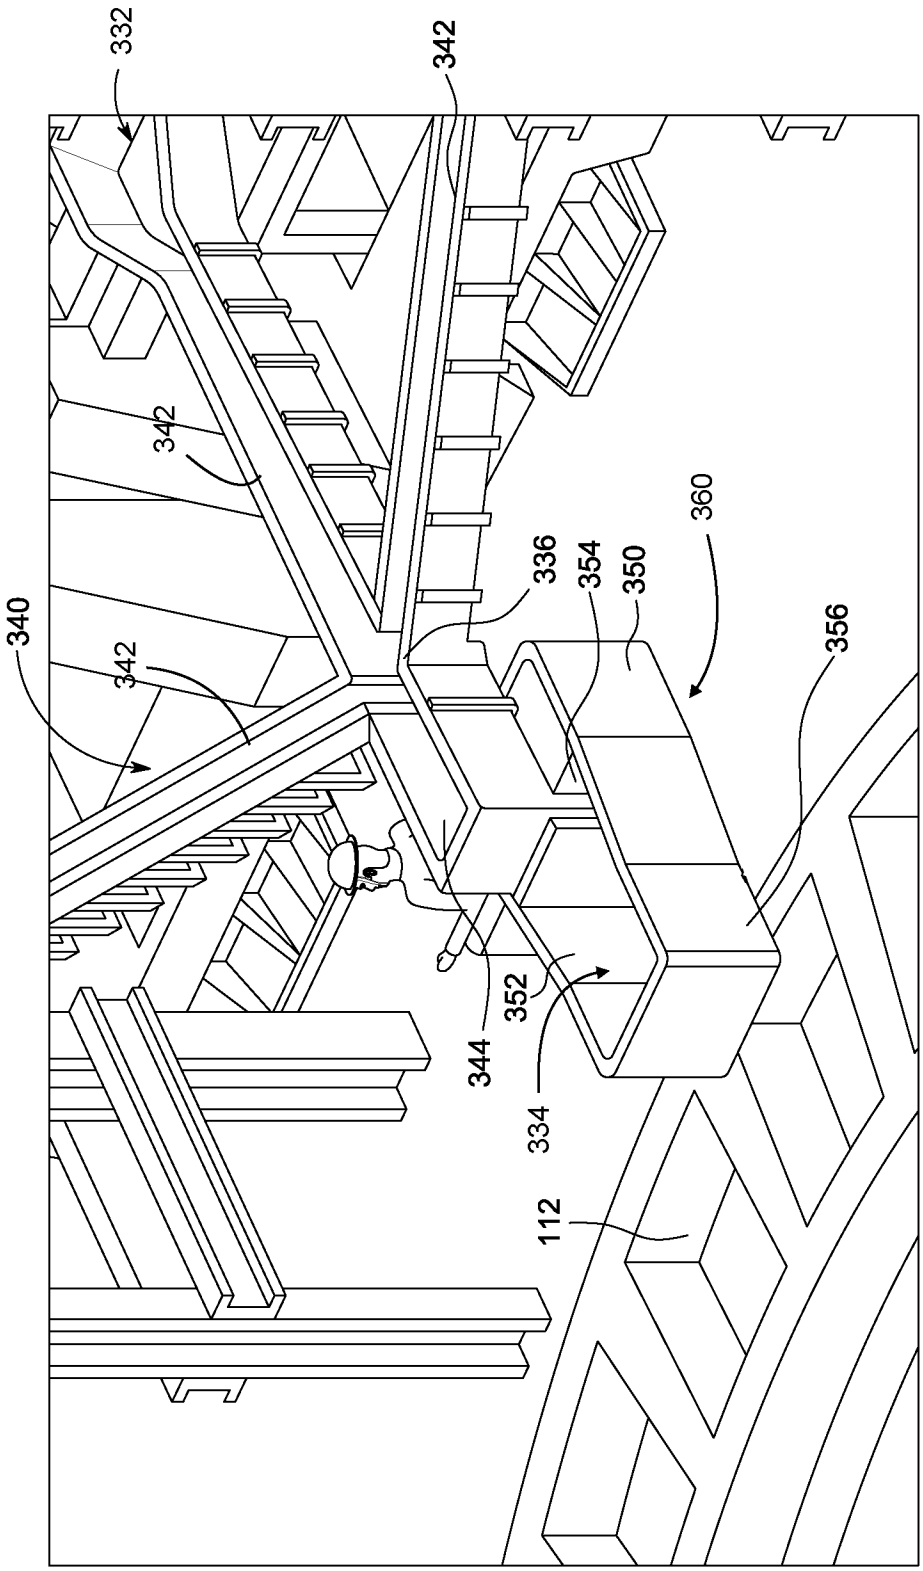


FIG. 3

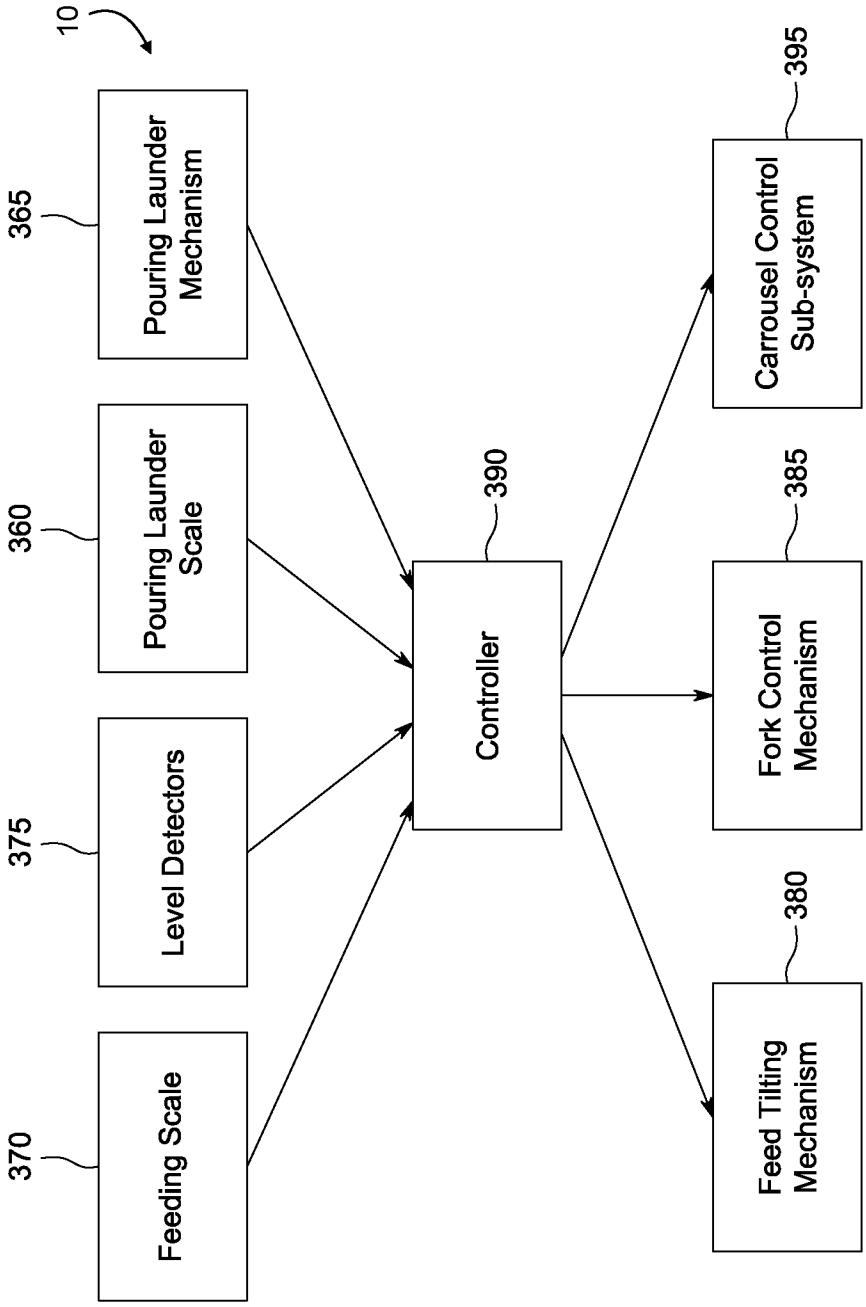

10
365
Pouring Launder Mechanism
360
Pouring Launder Scale
375
Level Detectors
370
Feeding Scale
390
Controller
395
Carrousel Control Sub-system
385
Fork Control Mechanism
380
Feed Tilting Mechanism

FIG. 4

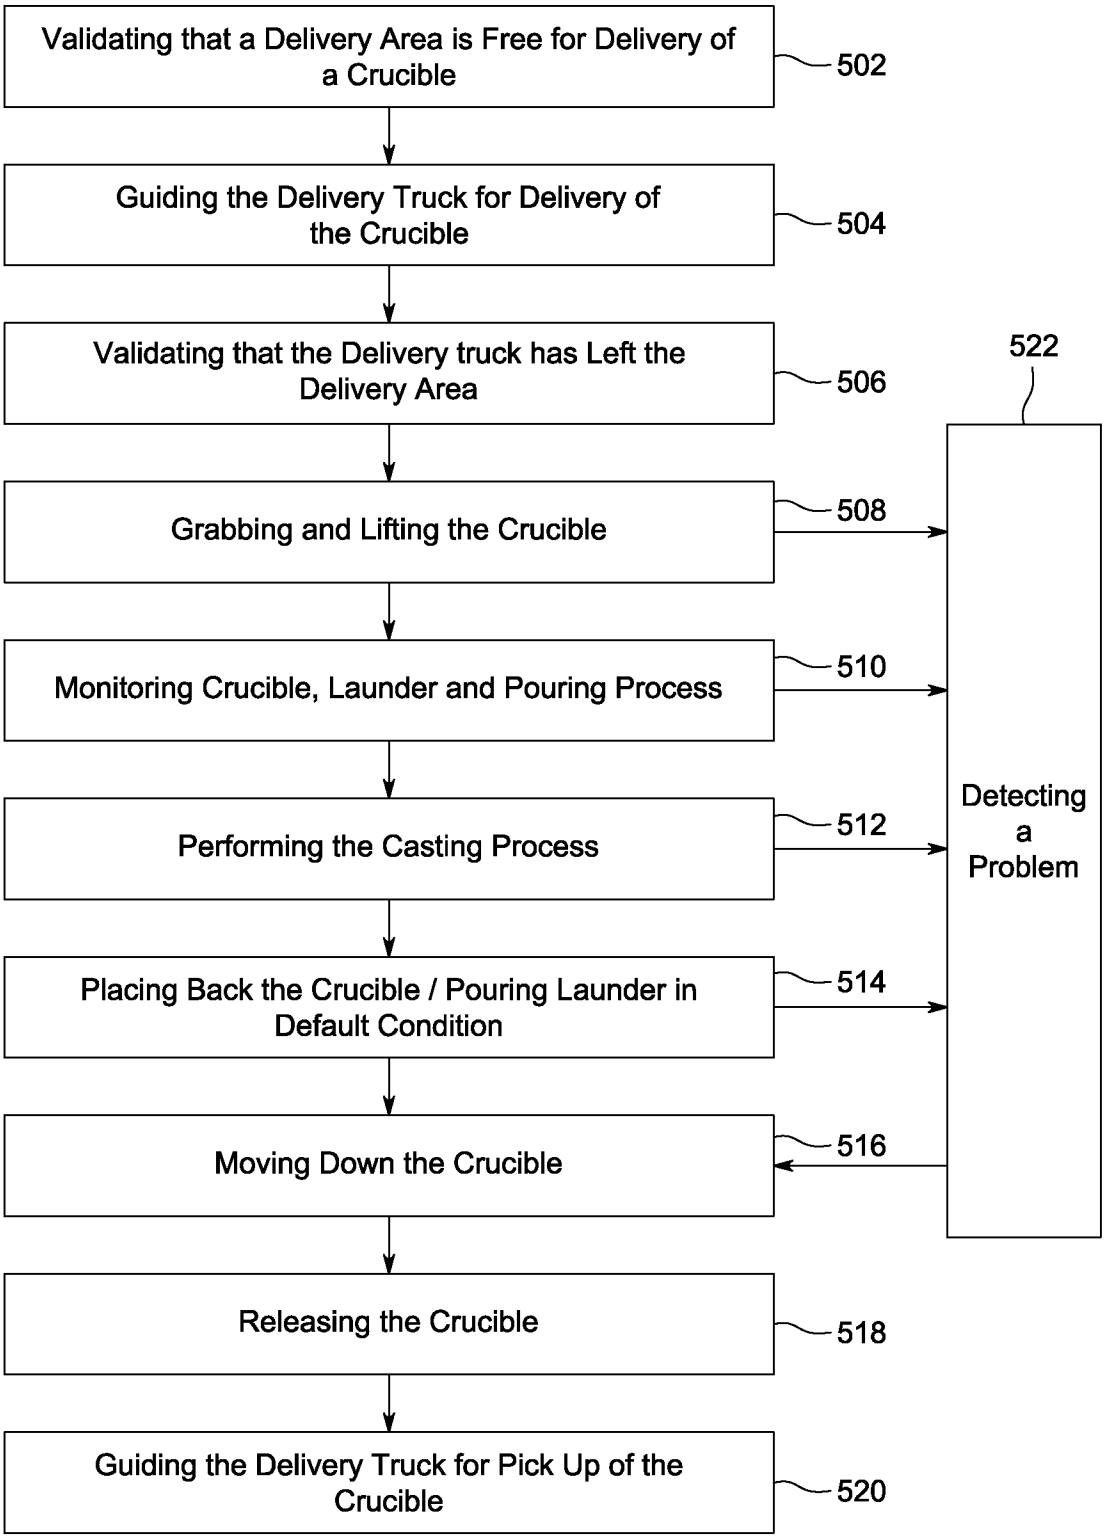

Validating that a Delivery Area is Free for Delivery of a Crucible
502
Guiding the Delivery Truck for Delivery of the Crucible
504
Validating that the Delivery truck has Left the Delivery Area
506
522
Grabbing and Lifting the Crucible
508
Monitoring Crucible, Launder and Pouring Process
510
Performing the Casting Process
512
Placing Back the Crucible / Pouring Launder in Default Condition
514
Moving Down the Crucible
516
Releasing the Crucible
518
Guiding the Delivery Truck for Pick Up of the Crucible
520
Detecting a Problem

FIG. 5

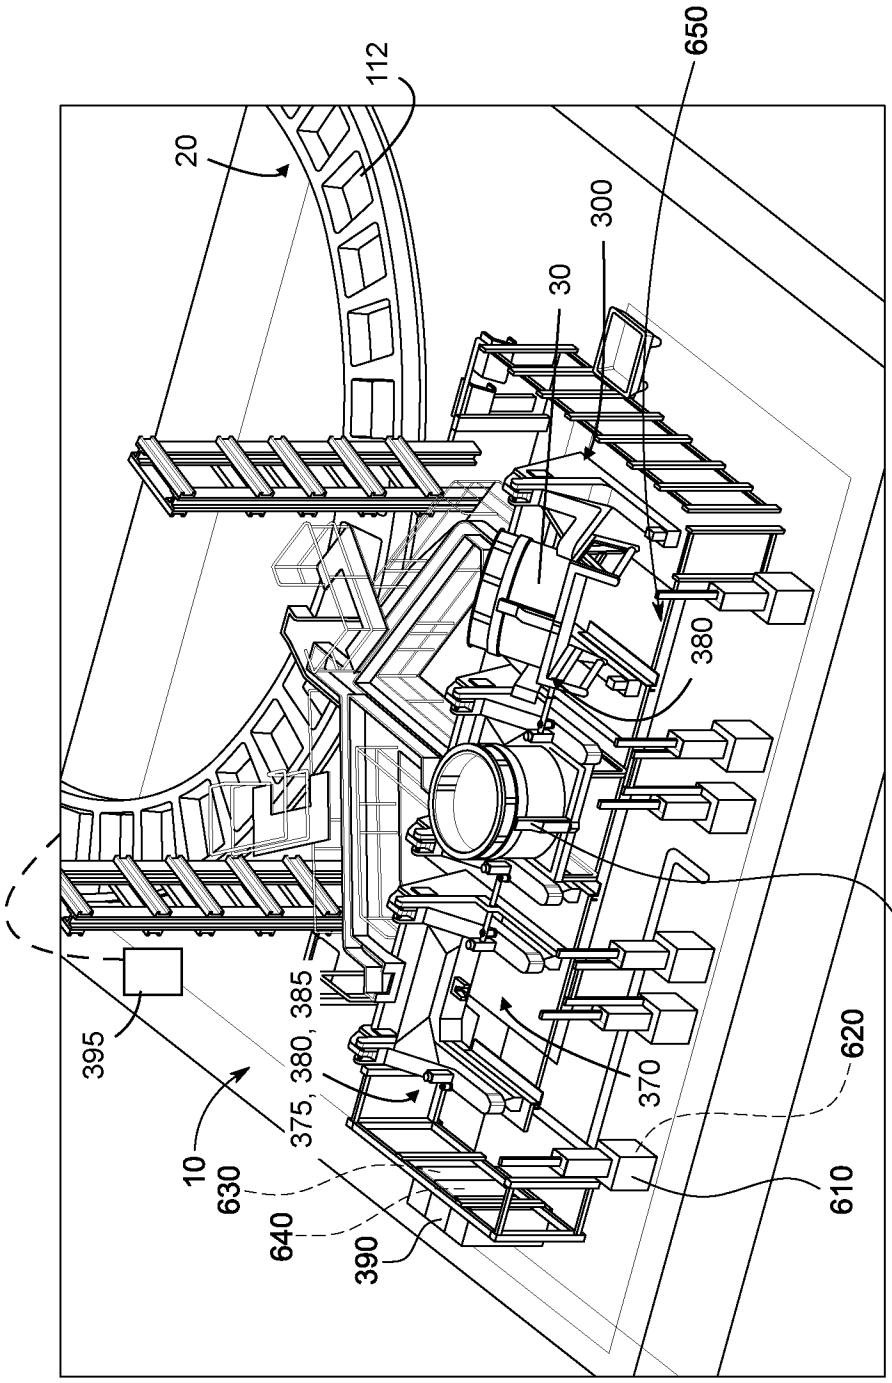

650
112
20
300
30
380
30
620
370
395
375, 380, 385
10
630
640
390
610

FIG. 6

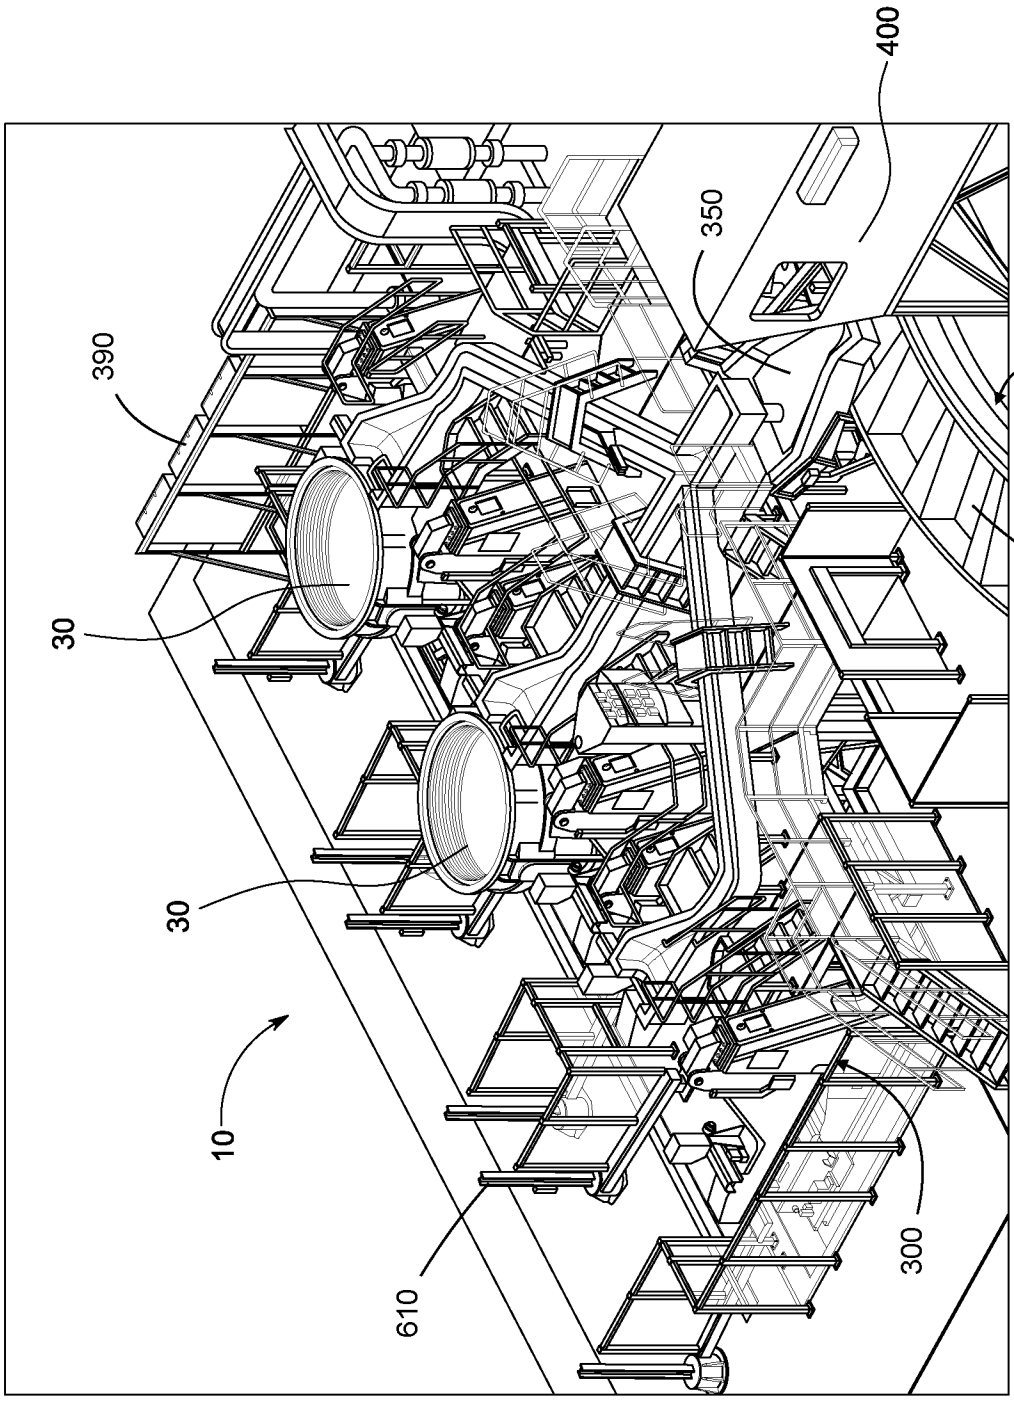


FIG. 7

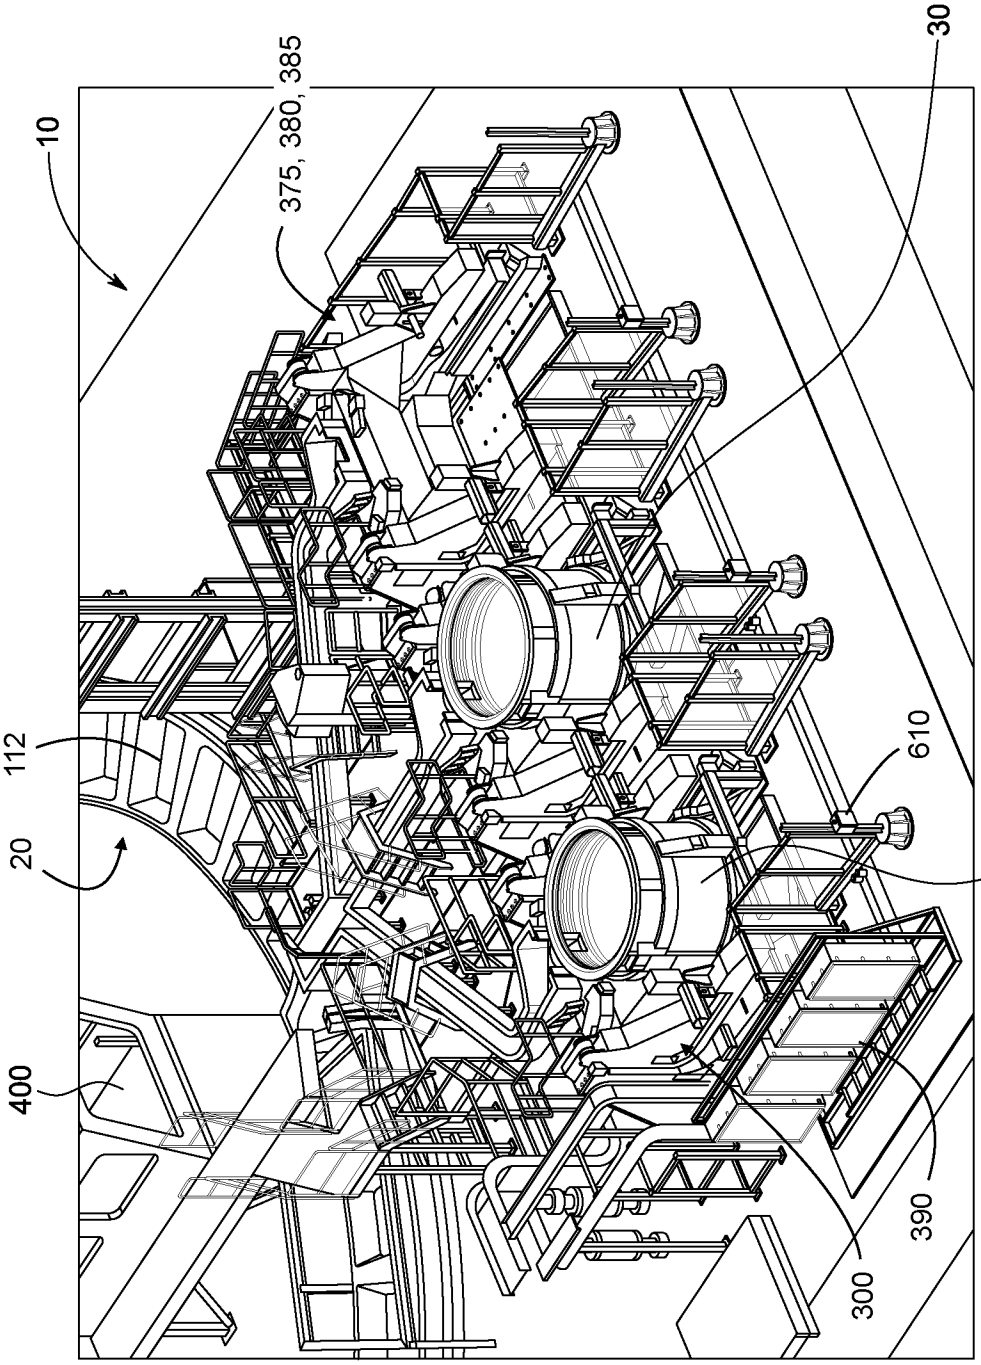


FIG. 8

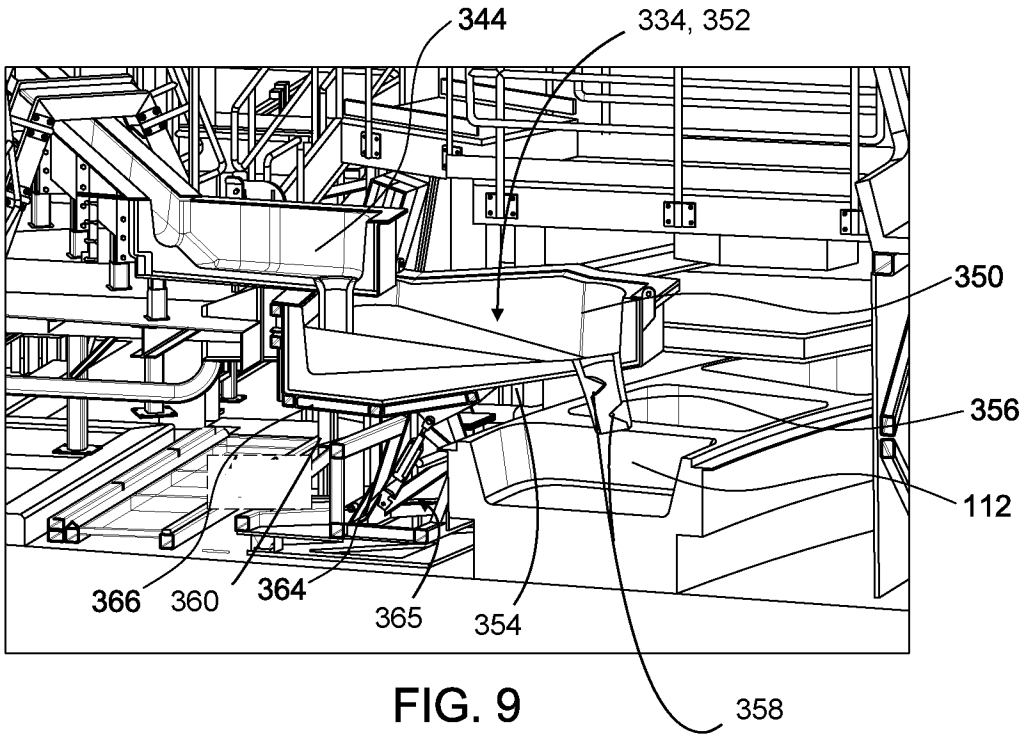

344
334, 352
350
356
112
366
360
364
365
354
358

FIG. 9

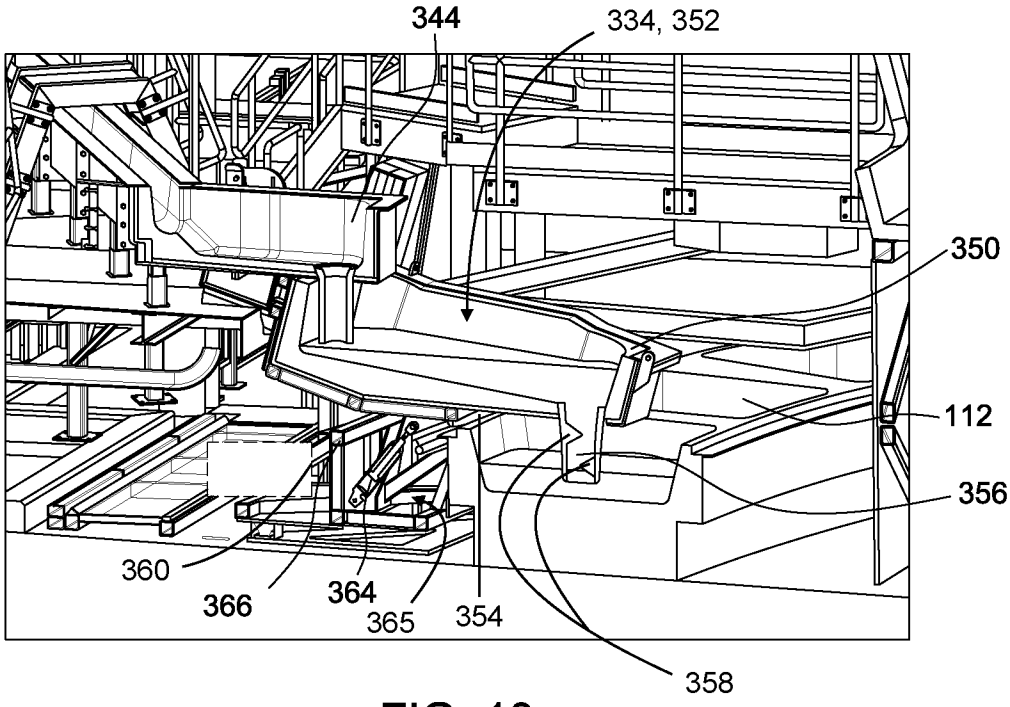

344
334, 352
350
112
356
360
366
364
365
354
358

FIG. 10

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2017/051483

A. CLASSIFICATION OF SUBJECT MATTER
IPC: ***B22D 39/04*** (2006.01) , ***B22D 35/04*** (2006.01) , ***B22D 37/00*** (2006.01)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC: ***B22D 39/04*** (2006.01) , ***B22D 35/04*** (2006.01) , ***B22D 37/00*** (2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)
Databases: Orbit Questel, Scopus
Keywords: molten metal, crucible, pouring, smelter, launder, sow, weight

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO2016158055 A1 (TADASHI ET AL.) 6 Oct. 2016 (06-10-2016) *the entire document*	
A	WO9706060 A1 (CHRISTENSEN ET AL.) 20 Feb. 1997 (20-02-1997) *the entire document*	
A	CN 201592243 U (QIFENG ET AL.) 23 September 2010 (23-09-2010) *the entire document*	

☐ Further documents are listed in the continuation of Box C.

☑ See patent family annex.

*	Special categories of cited documents:
"A"	document defining the general state of the art which is not considered to be of particular relevance
"E"	earlier application or patent but published on or after the international filing date
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O"	document referring to an oral disclosure, use, exhibition or other means
"P"	document published prior to the international filing date but later than the priority date claimed
"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&"	document member of the same patent family

Date of the actual completion of the international search 01 March 2018 (01-03-2018)	Date of mailing of the international search report 01 March 2018 (01-03-2018)
Name and mailing address of the ISA/CA Canadian Intellectual Property Office Place du Portage I, C114 - 1st Floor, Box PCT 50 Victoria Street Gatineau, Quebec K1A 0C9 Facsimile No.: 819-953-2476	Authorized officer: Patrick Mamputu (819) 639-5527

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2017/051483

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of the first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claim Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☐ Claim Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. ☐ Claim Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:
The claims are directed to a plurality of inventive concepts as follows:

Group A - Claims 1-27 are directed to a system for feeding molten metal provided by a feeding component, comprising a launder circuit having an upstream end and a downstream end and a flow path fluidly connecting the upstream end to the downstream end, wherein the feeding component feeds the launder circuit feeds molten metal to the a receiving component at the downstream end; and

Group B - Claims 28-30 are directed to a tilting table mounted to a structure fluidly connecting the tilting table to a sow carrousel, wherein the tilting table is adapted to receive a crucible assembly.

The claims must be limited to one inventive concept as set out in PCT Rule 13.

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. ☑ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claim Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claim Nos.:

Remark on Protest

☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/CA2017/051483

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
CN201592243U	29 September 2010 (29-09-2010)	None	
WO2016158055A1	06 October 2016 (06-10-2016)	WO2016158055A1	06 October 2016 (06-10-2016)
		CN106255562A	21 December 2016 (21-12-2016)
		EP3231535A1	18 October 2017 (18-10-2017)
		JPWO2016158055A1	01 February 2018 (01-02-2018)
		KR20170132720A	04 December 2017 (04-12-2017)
		TW201636131A	16 October 2016 (16-10-2016)
		US2018009027A1	11 January 2018 (11-01-2018)
WO9706060A1	20 February 1997 (20-02-1997)	WO9706060A1	20 February 1997 (20-02-1997)
		AT233198T	15 March 2003 (15-03-2003)
		CA2229039A1	20 February 1997 (20-02-1997)
		DE69626396D1	03 April 2003 (03-04-2003)
		DE69626396T2	30 October 2003 (30-10-2003)
		EP0844966A1	03 June 1998 (03-06-1998)
		EP0844966A4	14 April 1999 (14-04-1999)
		EP0844966B1	26 February 2003 (26-02-2003)
		JP2001525765A	11 December 2001 (11-12-2001)
		JP4393583B2	06 January 2010 (06-01-2010)