



(43) International Publication Date  
28 January 2016 (28.01.2016)

- (51) International Patent Classification:  
G01L 3/10 (2006.01)
- (21) International Application Number:  
PCT/US2015/041892
- (22) International Filing Date:  
24 July 2015 (24.07.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
62/028,894 25 July 2014 (25.07.2014) US
- (71) Applicant: LORD CORPORATION [US/US]; 111 Lord Drive, Cary, North Carolina 27511 (US).
- (72) Inventors: HAMEL, Michael; 5 Ridge Road, Essex Junction, Vermont 05495 (US). O'NEIL, Daniel; 2677 Ethan Allen Highway, St Albans, Vermont 05428 (US). SPRAGUE, Harrison; 226 Gould Road, Whitefield, New Hampshire 03598 (US).
- (74) Agent: MILLER, Richard G.; LORD Corporation, 111 Lord Drive, Attn: IP Legal Dept., Cary, North Carolina 27511 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: REMOTELY POWERED AND REMOTELY INTERROGATED TORQUE MEASUREMENT DEVICES, SYSTEMS, AND METHODS

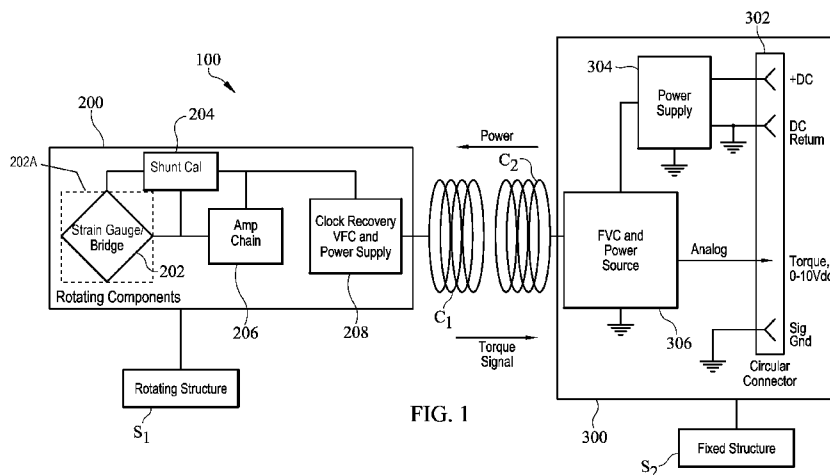


FIG. 1

(57) Abstract: Torque measurement devices, systems, and methods are provided. Exemplary torque measurement devices, systems, and methods include providing rotating electronics and non-rotating electronics configured for remote power transmission and remote interrogation via near field and switched reactance communications. The rotating electronics and the non-rotating electronics can communicate analog information without batteries or a physical connection therebetween.

WO 2016/014891 A1

## **REMOTELY POWERED AND REMOTELY INTERROGATED TORQUE MEASUREMENT DEVICES, SYSTEMS, AND METHODS**

### **CROSS-REFERENCE TO RELATED APPLICATIONS**

[0001] This application claims priority to U.S. Provisional Appl. No. 62/028,894, entitled Analog and Remotely Powered/Remotely Interrogated Torque Measurement Devices, Systems, and Methods, filed July 25, 2014, and incorporated herein by reference in its entirety.

### **TECHNICAL FIELD**

[0002] The subject matter herein generally relates to the field of torque measurement devices, systems, and methods, and more particularly to remotely powered, and remotely interrogated, wideband torque measurement devices, systems, and methods.

### **BACKGROUND**

[0003] Acquiring torque measurements on rotating equipment at high revolution rates may expose rotating electronic components to massive centrifugal forces. For example, a 4 inch (10.16 cm) diameter shaft rotating at 9600 revolutions per minute (RPM) has 5200 gravitational forces (also referred to as G-forces or Gs) at the surface of the shaft. As electronics are mounted above the shaft surface, the forces increase exponentially with an increasing radius of rotation. For example, electronics weighing 10 grams, mounted 1 inch above the surface of the example shaft will be exposed to 7850 Gs, and 173 lbs (about 769.5 N) of centrifugal force. Centrifugal forces are problematic and limit the life and/or tolerance of circuit components or elements.

[0004] Limiting factors for tolerance of such forces in traditional electronic circuits typically include utilizing timing control circuits with crystals, and any other non-solid state components such as electrolytic capacitors containing liquids, and micro-electro-mechanical (MEMs) devices. Modern solid dielectric capacitors may easily be substituted for electrolytic types in circuits where high centrifugal forces are anticipated. However, using digital and embedded systems electronics is more difficult without crystals.

[0005] Resistor-capacitor (RC) oscillators are unaffected by centrifugal forces. In some conventional devices and systems, RC oscillators are utilized in high-G digital circuits where precise timing, normally critical for communications, is not needed due to use of clocked

synchronous data encoding formats. Even though RC oscillators drift much more with temperature than crystal controlled oscillators, synchronous data encoding formats that multiplex the data rate clock with the data stream are tolerant of much more drift than is typical of RC timing control. A problem occurs, however, when precise timing is needed and must be maintained.

[0006] For example, with the onset of Voltage to Frequency Converter (VFC) type analog systems, precise timing must be maintained for accuracy of the information being converted to the frequency domain. Analog systems are desirable in applications where simplicity and high bandwidth are required and in high reliability and safety critical applications where the complexity of software and firmware must be scrutinized to Design Assurance standards, such as DO-178.

[0007] Accordingly, a need exists for remotely powered and remotely interrogated torque measurement systems, devices, and/or methods that may be implemented entirely in the analog domain.

## SUMMARY

[0008] Remotely powered and remotely interrogated wideband torque measurement devices, systems, and related methods are disclosed herein that are implemented entirely in the analog domain. Devices, systems, and methods herein include analog sensors, such as strain gauges and/or strain bridges as well as analog devices for DC voltage output on the non-rotating side.

[0009] An exemplary embodiment of a torque measurement device includes a strain sensor configured to output a voltage signal that is proportional to a measured or detected strain, a Voltage to Frequency Converter (VFC) in electrical communication with the strain sensor, and a coil. The VFC is configured to receive the voltage signal from the strain sensor, and convert the voltage signal into a frequency signal that is proportional to the strain. The coil includes a rotating receiver coil, which is inductively coupled to a remotely located non-rotating electrical component, and configured to power the strain sensor via power received from the non-rotating electrical component and transmit the frequency signal to the non-rotating electrical component without physically contacting the non-rotating electrical component.

[0010] An exemplary embodiment of a torque measurement system comprises rotating electronics and non-rotating electronics. The rotating electronics include at least one sensor

for measuring a strain, and a VFC configured to output a frequency signal that is proportional to the measured strain. The non-rotating electronics are remotely located from the rotating electronics and configured to remotely power and remotely interrogate the rotating electronics via near field and switched reactance communications. The rotating electronics and the non-rotating electronics are configured to communicate analog information without batteries or a physical connection therebetween.

**[0011]** An exemplary embodiment of a torque measurement method comprises: providing a strain sensor on or over a rotating component for outputting a voltage signal that is proportional to a strain. The method further includes electrically connecting a VFC to the strain sensor, as the VFC is configured to receive the voltage signal and convert the voltage signal into a frequency signal that is proportional to the strain. The method further includes providing a rotating coil in electrical communication with the VFC and inductively coupling the rotating coil to a remotely located, non-rotating coil for remotely powering the strain sensor and receiving frequency signals transmitted from the rotating coil, without any contact (e.g., physical or mechanical contact) between the rotating coil and the non-rotating coil.

**[0012]** Torque measurement devices, systems, and methods herein are configured to measure torque associated with components or structures that rotate at approximately 9,000 revolutions per minute (RPM) or more, approximately 10,000 RPM or more, or approximately 12,000 RPM or more. Devices, systems, and methods herein are also operable in high G-force applications, for example, at approximately 5,000 G-forces (Gs) or more, approximately 7,500 Gs or more, or approximately 10,000 Gs or more.

**[0013]** In some embodiments, the strain sensor provided in torque measurement devices and/or systems herein includes a strain gauge rosette or a Wheatstone bridge.

**[0014]** In some embodiments, the torque measurement devices and/or systems provided herein are configured to attach to and/or measure torque associated with an aircraft component, a helicopter component, an engine component, a rotor, a shaft, or a turbine component.

**[0015]** In some embodiments, torque measurement devices and/or systems provided herein are devoid of software or firmware. In some embodiments, torque measurement devices and/or systems further comprise an onboard calibrator, an amplifier, a power supply, and/or a controlled clock source.

[0016] In some embodiments, torque measurement devices and/or systems provided herein comprise a measurement bandwidth that is approximately 50 kHz or more. Devices and/or systems provided herein are operable at temperatures of between approximately  $-55^{\circ}\text{C}$  and  $125^{\circ}\text{C}$ .

[0017] Minimizing the number of components and circuit complexity directly translates to increased reliability. Additionally, implementing torque measurement functionality entirely in the analog domain and therefore not requiring any firmware development, increases value proposition by lowering development costs and shortening time to market, relative to a digital system requiring DO-178 software design assurance scrutiny.

[0018] Numerous objects and advantages of the subject matter will become apparent as the following detailed description of the preferred embodiments is read in conjunction with the drawings, which illustrate such embodiments.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0019] FIG. 1 is a schematic block diagram of a torque measurement system including rotating and non-rotating torque measurement devices according to one embodiment.

[0020] FIGS. 2A and 2B are more detailed schematic block diagrams of a torque measurement system including rotating and non-rotating torque measurement devices according to one embodiment.

[0021] FIG. 3 is a schematic block diagram of an aircraft incorporating an exemplary torque measurement system according to one embodiment.

[0022] FIG. 4 is a process flow diagram of an exemplary method of providing and/or utilizing torque measurement systems and/or devices according to one embodiment of the subject matter described herein.

#### **DETAILED DESCRIPTION**

[0023] Figures (also "FIGS.") 1 to 4 illustrate various aspects, views, and/or features associated with torque measurement devices, systems, and methods that operate entirely in the analog domain, thereby avoiding problems that occur when digital circuitry components are subjected to centrifugal forces. Devices, systems, and methods herein are also configured to maintain high precision timing without the use of a clock on the rotating side. Devices, systems, and methods herein are configured to measure torque associated with high

revolution components or structures that rotate at approximately 9,000 revolutions per minute (RPM) or more, approximately 10,000 RPM or more, or approximately 12,000 RPM or more. Devices, systems, and methods herein are also operable in high G-forces applications, for example, at approximately 5,000 G-forces (Gs) or more, approximately 7,500 Gs or more, or approximately 10,000 Gs or more.

[0024] The subject matter herein preserves the advantages associated with not requiring the use of a crystal on rotating electronics, while maintaining the precise timing required for Voltage to Frequency Converter (VFC) type analog operation. In some aspects, by incorporating VFC analog technology in place of microcontroller and/or other digital elements used in the commonly owned and assigned U.S. Patent No. 7,256,695, which is incorporated herein by reference in the entirety, and in particular FIG. 2a, reference item 54, FIG. 13, reference item 302, Col. 5, line 33 – Col. 6, line 5, and Col. 13, lines 41-51 of U.S. Patent No. 7,256,695. U.S. Patent No. 7,256,695 describes remotely powered, remotely interrogated digital telemetry system, a high bandwidth and more mechanically robust system is realized. Specifically, digital hardware (e.g., including the microcontroller, memory and A/D converter) in the rotating electronics may be replaced with analog devices, for example, that meet military standards described in AD652S/883B in regards to a MIL-Spec VFC.

[0025] Devices, systems, and methods herein include “non-contact” devices for non-contact torque sensing and power transmission. The term “non-contact” indicates that there is no mechanical or physical connection between the rotating and non-rotating electronics, components, or assemblies described herein, thus providing for more robust non-contact torque measurement devices and systems. Devices, systems, and methods described herein utilize a small, light, and balanced electronic package disposed on or over a rotating structure, or any other rotating component, such that data and/or power may be transmitted to the non-rotating portion without the need for physical or mechanical contact. Near field communications (NFC) and contactless power transmission via switched reactance are utilized.

[0026] As used herein the term “strain sensor” refers to a strain bridge or strain gauge and is not limited in any aspect other than being capable of determining a strain from a rotating component or structure.

[0027] FIG. 1 is a schematic block diagram of a torque measurement system generally designated **100** that includes one or more torque measurement devices according to one

embodiment. Referring to FIG. 1, system **100** includes a rotating torque measurement device including one or more rotating electronics **200** (also referred to as rotating assemblies or rotating components) and a non-rotating torque measurement device including one or more non-rotating electronics **300** (also referred to as non-rotating assemblies or non-rotating components). Rotating electronics **200** are disposed on or over a rotating structure **S<sub>1</sub>** or a portion thereof, for example, a shaft, a motor, a rotor, a mast, a rod, a fan, a bar, a gear, etc. Rotating electronics **200** do not mechanically and/or physically contact or connect to non-rotating electronics **300**. Non-rotating electronics **300** may be disposed at a location that is remote from rotating electronics **200** for remotely interrogating and remotely powering rotating electronics **200**, thereby providing for an inexpensive but precise torque measurement system **100** that is operable entirely in the analog domain. In some embodiments, non-rotating electronics **300** are fixedly disposed over a fixed structure **S<sub>2</sub>** or component, such as a frame member, a support beam, a fixed substrate, a support structure, or a wall.

[0028] Rotating electronics **200** may be disposed on or over a rotating structure (e.g., a shaft, a rotor, a motor, a fan, a gear, or the like) or machinery including at least one strain measuring sensor or device, such as a strain gauge or bridge **202**, at least one calibrating device, such as a shunt calibrator **204**, an amplifier chain **206**, and a VFC **208** having clock recovery and power supply capabilities. Strain bridge **202** includes a strain sensor configured to convert torque into an electrical signal (e.g., a voltage) usable by VFC **208**. Strain bridge **202** may be provided within an optional housing **202A** or carrier body for physical, mechanical, and/or environmental protection thereof. Housing **202A** is shown in broken lines for illustration purposes only, as provision thereof is optional. VFC **208** may convert an electrical signal (e.g., voltage) that is output from strain bridge **202** into a frequency, which may then be output therefrom and converted back into an electrical signal by a component of non-rotating electronics **300**, namely by an analog Frequency to Voltage Converter (FVC) **306**.

[0029] VFC **208** includes an analog device configured to maintain precise timing and accuracy of voltage measurements being converted to the frequency domain. Rotating electronics **200** receive contactless power, frequency, and/or timing information from remotely disposed non-rotating electronics **300**. Rotating electronics **200** are configured to transmit or send a torque signal (e.g., a VFC frequency) to the remote, non-rotating

electronics **300**, where the torque signal includes VFC strain information that may subsequently be converted into a torque value via non-rotating electronics **300**.

[0030] Regarding calibration, and to achieve a measurement accuracy of about 0.1% of full scale, a pre-installation calibration process based on existing calibration methods may be performed. Each instrumented shaft may undergo a full range of torque/speed combinations. This battery of tests may optionally be repeated at about 20 °C increments across the range of operational temperature, typically about -54 °C to 71 °C. Calibration via a shunt calibrator **204** may compensate for variations in shaft geometry, strain gauge alignment and in shaft stiffness due to temperature. Shunt calibration may be used to verify the output of a strain bridge **202** relative to a predetermined mechanical input or strain.

[0031] A sensor for measuring torque may include a strain gauge or string bridge **202**, such as a Wheatstone bridge circuit or a strain gauge rosette. Output of a torque specific strain bridge **202** is represented by the following equation:

$$\text{EQ. (1)} \quad \tau_{xy} = \frac{E * \epsilon_{IND}}{4(1-\nu)}$$

[0032] Where shear stress ( $\tau_{xy}$ ) is dependent on the substrate modulus of elasticity (E), the strain bridge output ( $\epsilon_{IND}$ ) and Poisson's ratio ( $\nu$ ). Signal error and noise, either induced via extraneous excitation or internal to system electronics may be minimized through several different installation practices. Strain bridge **202** is configured to measure small changes in electrical resistance proportional to compression and tension. The output of strain bridge **202** may be relatively small. Thus, a strain bridge amplifier such as an amplifier chain **206** is configured to boost the signal level to increase resolution and improve signal-to-noise ratios.

[0033] In some embodiments, strain bridge **202** includes a full bridge rosette utilized for aircraft applications, which may be bonded to a rotor mast while ensuring exact 180° opposed gauges. Precisely installed gauges eliminate signal imbalance between opposite sides of the bridge rosette, which potentially contribute to output signal noise. Where possible, wiring is shielded with an electrically insulating material or covering to reduce electromagnetic coupling with undesirable sources.

[0034] In other embodiments, strain bridge **202** includes a Wheatstone bridge type of strain measuring sensor. The premise of a Wheatstone bridge is to capture very small voltage differentials as inflicted by strain influence on the surface mounted strain bridge **202**. Wheatstone bridges may be configured several ways to cancel out specific loading effects; in

one embodiment, the gauges are configured to cancel electrical excitation as caused by shaft bending loads, axial loads, and temperature effects as caused by material susceptibility to thermal expansion. Apparent to those skilled in the art, this is accomplished via gauge orientation and opposing placement on the drive shaft. This gauge positioning causes a voltage differential when shear stress due to torsion is imparted on the shaft. In this embodiment, bending, axial loads, and temperature changes do not cause a bridge unbalance and therefore the bridge voltage output is zero (0).

[0035] VFC **208** can receive the analog voltage output of the strain gauge rosette or strain bridge **202** and send it across an inductive link to the fixed frame, non-rotating electronics **300**. In some embodiments, the inductive link between rotating electronics **200** and non-rotating electronics **300** includes a first coil  $C_1$  that is inductively coupled to a second coil  $C_2$ . First coil  $C_1$  is associated with rotating electronics **200** and second coil  $C_2$  is associated with non-rotating electronics **300**. Data on the fixed side (e.g., non-rotating side, **300**) may be filtered onboard (factory adjustable), and output as a 0-10V analog signal via, for example, a circular connector **302** and output to a customer system (not shown). In an exemplary embodiment, circular connector **302** includes a MIL-DTL-38999 Series III device connected to a power supply **304** and a customer system (not shown). Due to the direct connections between the non-rotating mechanical substrate and the sensing system coupled with high-speed electronics and efficient algorithms, system latency is held at or below about 2 milliseconds, making it ideal for near real-time applications. In some aspects, latency at or below about 20 microseconds is expected.

[0036] In some aspects, accuracy results indicate a about 0.1% of full scale with excellent data resolution. Allowing for 150% of nominal torque, resolution of the system would be about 2.54 mV/ft-lb. Torque measurement via strain gauge voltage differential is a linear system, i.e., output changes linearly with respect to torque loading. This linearity correlates to consistent system measurement accuracy across the full range of torque loading scenarios.

[0037] Still referring to FIG. 1 and in some embodiments, first coil  $C_1$  includes a rotating receiver coil, and second coil  $C_2$  includes a fixed excitation coil. The torque signal (e.g., a VFC frequency signal) received on the excitation coil  $C_2$  is demodulated and the received demodulated VFC signal is applied to a FVC **306** that includes a power source. Connector **302** outputs an analog torque signal as an output voltage (in VDC) to a customer system (not shown). In some aspects, first and second coils  $C_1$  and  $C_2$ , respectively, may be optionally split for ensuring VFC signal coupling for an entire 360° of rotation.

[0038] FIGS. 2A and 2B are more detailed views of aspects of FIG. 1. FIG. 2A illustrates additional aspects of rotating electronics **200** disposed on or over a rotating structure (e.g., **S<sub>1</sub>**, FIG. 1) and FIG. 2B illustrates fixed, non-rotating electronics **300** disposed on or over a fixed structure (e.g., **S<sub>2</sub>**, FIG. 1). Rotating electronics **200** are inductively coupled to non-rotating electronics **300** for providing contactless power and signal transmission therebetween via NFC and switch reactance circuitry components.

[0039] The need for precise timing required by VFC **208** and rotating electronics **200** is addressed by extracting the frequency from the received excitation power signal and applying it to a clock input of the VFC **208** as illustrated in FIGS. 2A and 2B. In this way, VFC **208**, or portions thereof, may be exposed to very high Gs and still utilize the timing precision and stability provided by a stable signal source **308** (FIG. 2B) derived from non-rotating electronics **300**. In some embodiments, the stable signal source **308** includes an oscillator that may be, but does not have to be a crystal controlled clock source. That is in some embodiments rotating electronics **200** and circuitry are devoid of a crystal controlled clock source but advantageously utilize a controlled clock source associated with non-rotating electronics **300**.

[0040] Exemplary specifications of system **100** are listed in Table 1 below.

<b>TABLE 1</b>	
Linearity Error:	0.05% max
Gain Error:	1% max
Measurement Bandwidth (BW):	50 kHz or more
Operating Temp:	-55C to +125C
Communication Type:	NFC-VFC
Communication Frequency:	4.00 MHz typical
Operating Current:	150 mA

[0041] Referring to FIG. 2A, strain gauge sensors, bridges, and amplifiers (e.g., **202**, **206**) of rotating electronics **200** are powered from direct current (DC) derived from an excitation coil or antenna (e.g., **C<sub>2</sub>**, FIG. 1) coupled to an AC electromagnetic (EM) excitation field

located remotely with non-rotating electronics **300**. The power receive or receiver coil (e.g., **C<sub>1</sub>**, FIG. 1) may be positioned so that inductive coupling is maintained over the entire rotation of the shaft or structure it is mounted on, allowing for measurements at zero (0) RPM independent of a rotation rate. Strain gauges or sensors (e.g., **202**) may include a torque sensing Wheatstone bridge circuit that transmits power and data via near field technology to non-rotating electronics **300**, in some aspects via VFC **208** and power systems, such as a switched reactance **210** system or circuitry.

[0042] Rotating electronics **200** may include strain sensor (e.g., bridge **202**), amplifier (e.g., **206**), and VFC power system **208**. Rotating electronics **200** may further include an RF to DC power conditioning and voltage regulator **212** circuitry or components for use in converting RF signal received from non-rotating electronics **300** into DC power and voltages (e.g., VFC) usable by strain bridge **202** and VFC **208**. Strain bridge **208** is configured to measure torque by converting rotating strain measurements (e.g., resistance) into electrical signals, such as voltage signals. VFC **208** is configured to convert the voltage signals into frequency signals which may be converted back into voltage signals (e.g., via FVC, FIG. 2B) indicative of a measured torque. Strain gage-based signal conditioners such as the RF to DC conditioning and voltage regulator **212** can provide a constant voltage source to power strain bridge **202** and detect torque.

[0043] Referring to FIG. 2B, non-rotating electronics **300** may include a power supply **304** configured to supply power to a stable signal source **308**, such as a stable clock source. A power amplifier **310** is used to contactlessly (e.g., inductively) transmit RF power and clock information from power supply **304** and signal source **308**, respectively, to rotating electronics **200**.

[0044] In applications where it may be desirable to retrofit a torque measurement system **100** over a rotating shaft without disassembling the shaft (e.g., or other rotating component) to be monitored, the rotating receive coil (e.g., **C<sub>1</sub>**, FIG. 1) of system **100** may optionally be split into two coils, each mounted on a carrier assembly occupying half of the circumference of the shaft. The two carrier assemblies may be bolted together on the shaft *in situ* without disconnecting the shaft. The coils from each carrier assembly half may be electrically connected in series with an environmentally sealed connector. Mounting the carrier assemblies in this manner necessitates a gap in the rotating coil visibility to the fixed excitation coil (e.g., **C<sub>2</sub>**, FIG. 1) over a small portion of shaft rotation. This may be mitigated by also splitting the fixed excitation coil (e.g., **C<sub>2</sub>**) into two series connected coils and

positioning them so that at least one excitation coil is always coupled with at least one rotating receive coil. This split coil method is optional, but one method of ensuring power and VFC signal coupling throughout the entire  $360^\circ$  of shaft rotation. Splitting the rotating coil for the sensor in each half of a clam shell style device, also allows the torque measurement device (e.g., non-rotating portion, **200**) to receive power, even at 0 speed (i.e., 0 RPM).

[0045] For improved power transfer efficiency between the fixed excitation coil (e.g., **C<sub>2</sub>**, FIG. 1) and the rotating pickup coil or antenna (e.g., **C<sub>1</sub>**, FIG. 1), the rotating coil or antenna is electrically resonant at the frequency of the EM excitation field. Strain bridge **202** and respective amplifiers **206** output a DC voltage proportional to strain. Amplifier **206** gain is set according to measurement requirements for strain per volt sensitivity. The amplified analog voltage proportional to sensor value is converted to a frequency in VFC **208**. VFC **208** includes an integrated circuit (IC) and/or circuitry device having one or more inputs and outputs. The range of frequency output over the range input voltage may be set according to resolution requirements.

[0046] VFC **208** may be powered by DC derived from the received EM excitation field. One aspect of the instant subject matter is the ability to use ratiometric conversion. The DC sensor bridge **202** excitation is also the reference for the VFC **208** conversion, which has the advantage of enabling stable measurements when the DC sensor bridge **202** excitation voltage varies.

[0047] In some embodiments, the frequency output from VFC **208** is proportional to a strain value measured via strain sensor (i.e., strain bridge **202**) and is used to shift the resonance of the rotating receive coil/antenna (e.g., **C<sub>1</sub>**, FIG. 1A) using a switched reactance components **210**, such as a capacitor or other coil at a rate determined by VFC **208**, and ultimately the strain that is measured. Switched reactance components **210** cause the receive coil (e.g., **C<sub>1</sub>**, FIG. 1) electrical resonant frequency to change at a rate in accordance with the VFC **208** frequency. In turn, this shift of resonant frequency at the VFC rate in the rotating coil (e.g., **C<sub>1</sub>**, FIG. 1) modulates the amplitude of the power signal on the fixed excitation coil (e.g., **C<sub>2</sub>**, FIG. 1), resulting in amplitude modulation (AM). The AM signal on the excitation coil may be demodulated and the received demodulated VFC signal applied to FVC **306**, converting the VFC frequency generated on the rotating electronics **200** back to an analog DC value in the fixed, non-rotating electronics **300**. In this way, analog information (e.g., VFC strain information such as frequency) is conveyed over an air gap without batteries or a

physical connection, and precise timing is maintained without centrifugal forces influencing the accuracy of the VFC **208** frequency. Switched reactance components **210** have an advantage as they obviate the need for an onboard power supply, and receive all of their power for operation from power transmitted to them by an external (i.e., remote) component or reader.

[0048] Still referring to FIG. 2B and in some embodiments, VFC strain information is received by a peak detector **312** on the fixed side of non-rotating electronics **300** and may be filtered using a low pass filter **314**. A comparator **316** may receive the filtered VFC strain information and provide it in a form usable by FVC **306**. FVC **306** may output an electrical signal indicative of the measured torque to a customer system (not shown). The electrical signal output by FVC **306** may include an output voltage indicative of an amount of resistance, or torque experienced by a rotating structure (e.g.,  $S_1$ , FIG. 1). Torque measurements may be used for any suitable application, such as vibration control, vibration reduction, or the like.

[0049] As persons of skill in the art will appreciate, FIGS. 1 to 2B are exemplary aspects of torque measurement systems and/or devices. Torque measurement systems and devices are not limited to the exact structures or configurations illustrated by FIGS. 1 to 2B. Portions of torque measurement systems, devices, and/or functionalities thereof, may be integrated, separated, and/or co-located with other portions of torque measurement devices and/or systems via electrical connections in configurations other than that shown. Each figure is for exemplary purposes only, and is not limited in any respect.

[0050] FIG. 3 is a schematic block diagram of an aircraft **A** incorporating an exemplary torque measurement system **400** proximate each engine **E** according to one embodiment. FIG. 3 is one exemplary embodiment of a torque measuring system **400**, for example, for use in aircraft **A**, which may utilize two sets of sensors (e.g., strain gauges or strain bridges), one for each engine **E** output shaft. Each set of torque sensors includes a rotating frame package comprising rotating electronics **200** and a fixed frame package comprising non-rotating electronics **300**. The fixed (non-rotating) electronics **300** are attached to a stable structure alongside the engine output shaft. In some aspects, the stable structure includes a fixed frame **404** or fixed frame component (e.g., a fixed beam, strut, or the like). Rotating electronics **200** may attach directly to each rotating engine shaft **204**. Rotating electronics **200** communicate with fixed frame electronics **300** via a non-contact inductive couple, obviating the need for mechanical slip rings, batteries, and/or complex wired connections.

[0051] In some embodiments, the analog output from rotating electronics **200** may be converted by the fixed electronics **300** into ft-lbs (Nm) of torque. System **400** may include at least one sensor (e.g., **202**, FIG. 1) per shaft **402** to be monitored. Sensor (e.g., **202**, FIG. 1) can comprise a Wheatstone bridge or a strain gauge rosette. In some aspects, 28 VDC aircraft power conditioning and conversion is input to the low voltage internal supplies of rotating electronics **200**. Devices and systems herein may provide anywhere from about 0V to about 10V of analog output directly correlated to shaft torque.

[0052] By installing electronics **200** including a strain gauge on a rotating substrate or shaft **402** and continually measuring bridge voltage differential, it is possible to correlate system torque to the output voltage of the strain bridge (e.g., **202**, FIG. 1A). This results in a novel non-contact form of inductive powering and data transfer.

[0053] Still referring to the exemplary embodiment of a torque measuring system **400** for aircraft, strain gauge sensors may be mounted on shaft **402** and oriented so that they respond to torque and have minimal response to bending forces. Electronics **200** containing signal conditioning for the torque sensors (e.g., **202**, FIG. 1) can be mounted on the shaft using a carrier or housing (e.g., **202A**, FIG. 1) that physically covers the torque sensor and provides environmental protection for the torque sensing strain gauges. This carrier and the electronics **200** disposed within are designed to withstand the centrifugal forces associated with very high-speed rotation, without introducing balance issues.

[0054] The torque sensor (e.g., **202**, FIG. 1) portions of electronics **200** may receive 28 VDC power from the host system (e.g., aircraft **A** system). Both power and torque measurements may be transferred across and/or between the rotating electronics **200** to non-rotating electronics **300** air gap using inductive coupling and switched reactance communications. The rotating electronics **200** contain one or more coils (e.g., **C<sub>1</sub>**, FIG. 1) that are electromagnetically coupled to a nearby stationary coil (e.g., **C<sub>2</sub>**, FIG. 1) on the non-rotating side. The non-rotating excitation coil (e.g., **C<sub>2</sub>**, FIG. 1) may be driven by an AC high frequency signal of sufficient strength to power rotating electronics **200**. The rotating coil (e.g., **C<sub>1</sub>**, FIG. 1) or coils are tuned to the high frequency signal emanating from the stationary coil for converting the AC to DC for power.

[0055] Torque measurements are then encoded into a second signal in rotating electronics **200** and communicated to the non-rotating electronics **300** by switched reactance. The pick-up coil(s) (e.g., **C<sub>1</sub>**, FIG. 1) on the rotating assembly are normally tuned to resonance at the

AC power frequency. To transfer information, the electrical resonant frequency of the pick-up coil(s) is switched between two different states in accordance with the encoded torque signal. This in turn modulates the loading on the stationary excitation coil (e.g., **C<sub>2</sub>**, FIG. 1) causing amplitude modulation (AM) on the stationary coil AC signal. This AM is demodulated and converted back to torque values in the stationary electronics **300**, and formatted for delivery to the aircraft **A** system using the torque information. This switched reactance method of communications is capable of supporting both analog and digital encoding of sensor measurements.

[0056] Improved features include for example and without limitation, *inter alia*: obviating the need for firmware or software; improving tolerance to extreme acceleration forces while remaining operational and accurate; maintaining precision timing without crystals on rotating electronics; retrofitting to existing applications without disassembly of the application; operability at zero rotation rate and at any rotational position; providing environmental protection to sensors, which are housed in covers (e.g., strain gauges are covered); improving the geometry of pick-up coils provides a low profile housing; ratiometric reference in V-F Conversion; complying with MIL-STD-810 and 461 testing.

[0057] Any suitable size of torque measurement devices and/or systems described herein may be provided. In one embodiment, exemplary sizes or dimensions of a torque monitoring system **400** (per rotating engine shaft, **402**) is approximately 4.25 inches x 3.5 inches (about 10.8 cm x 8.9 cm) long for the rotating component (i.e., **200** including the measurement device structure, board, and/or coils) and approximately 2 inches x 3 inches x 3 inches (about 5.1 cm x 7.6 cm x 7.6 cm) for the fixed, non-rotating electronics **300** package. Reducing clearances to approximately 0.25 inches (about 0.6 cm) between the fixed and rotating transmitter coils improves the non-contact communications and power transfer between the rotating/non-rotating frames. However, any size, shape, and/or clearance dimension of devices, systems, and/or components thereof is contemplated.

[0058] In some aspects, a low overall system weight is desired. For example, a system weighing approximately 4 lbs (about 1.8 kg) or less is desirable; however, any weight is contemplated. In some aspects, the rotating components may weigh approximately 2 lbs (about 0.9 kg), and the fixed components may weight approximately 1.6 lbs (about 0.7 kg).

[0059] In some aspects, all electrical connections (e.g., of **200**, **300**) are made with MIL-Spec wire/cable. A MIL-DTL-38999 Series III environmentally rated connector may be used

at the electronics housing to integrate devices/systems herein with a system to be monitored/measured, including but not limited to an aircraft avionics system. The electronics housing may include aluminum and be configured for mounting to rigid aircraft structure as part of the fixed frame package.

[0060] FIG. 3 is for exemplary purposes only, and is not limited in any respect as will be appreciated by those in the art. Torque measurement systems and devices are not limited to the exact structures or configurations illustrated. Portions of torque measurement system **400**, electronics **200**, **300** and/or the functionalities thereof, may be integrated, separated, and/or co-located with other portions of the aircraft **A** or engine **E** in configurations other than that shown.

[0061] FIG. 4 is a process flow diagram of an exemplary method **500** of providing and/or utilizing torque measurement devices and systems according to one embodiment of the subject matter described herein. In block **502**, a strain sensor is provided. The strain sensor may include a strain gage or strain bridge (e.g., **202**, FIG. 1), such as a Wheatstone bridge or a strain gauge rosette. The strain sensor is provided on or over a rotating component for outputting a voltage signal that is proportional to a strain.

[0062] In block **504**, a VFC is electrically connected to the strain sensor. The VFC (e.g., **208**, FIG. 1) is configured to receive the voltage signal from the strain sensor, and convert the voltage signal into a frequency signal that is proportional to the strain.

[0063] In block **506**, a rotating coil is provided. The rotating coil is electrically connected to the VFC.

[0064] In block **508**, the rotating coil is inductively coupled to a remotely located, non-rotating coil for remotely powering the strain sensor and receiving frequency signals transmitted from the rotating coil. There is no physical or mechanical contact between the rotating coil and the non-rotating coil.

[0065] Devices, systems, and methods herein may be used to sense, detect, monitor and/or measure torque associated with any rotating component, shaft, or system, not limited to aircraft components; aircraft engines; helicopter components; rotor components; tail rotor components; drive shaft components; structural components (e.g., components of buildings, dams, bridges, etc.); biomedical implants; engines; jet engines; propeller engines; turbines; rotating shafts; shakers; conveyors; fan shafts; ammunition feed systems; fitness equipment, etc. Devices, systems, and methods herein may be deployed in any personal, industrial,

commercial, aerospace, aeronautical, and/or defense application including rotating components.

**[0066]** Other embodiments of the current subject matter will be apparent to those skilled in the art from a consideration of this specification or practice of the subject matter disclosed herein. Thus, the foregoing specification is considered merely exemplary of the current subject matter with the true scope thereof being defined by the following claims.

## CLAIMS

What is claimed is:

1. A torque measurement device (200) comprising:
  - a strain sensor (202) configured to output a voltage signal that is proportional to a strain;
  - a Voltage to Frequency Converter (VFC) (208) in electrical communication with the strain sensor, wherein the VFC is configured to receive the voltage signal and convert the voltage signal into a frequency signal that is proportional to the strain; and
  - a coil (C1) in electrical communication with the VFC, wherein the coil is inductively coupled to a remotely located non-rotating electrical component (300), and wherein the coil is configured to power the strain sensor via power received from the non-rotating electrical component and transmit the frequency signal to the non-rotating electrical component without physically contacting the non-rotating electrical component.
2. The device according to claim 1, wherein the strain sensor (202) comprises a strain gauge rosette or a Wheatstone bridge.
3. The device according to claim 1 or 2, wherein the device (200) is configured to measure a torque associated with a structure (S1) that is rotating at approximately 10,000 Revolutions Per Minute (RPM) or more.
4. The device according to claim 3, wherein the structure (S1) that is rotating comprises an aircraft component, a helicopter component, an engine component, a rotor, a shaft, or a turbine component.
5. The device according to any of the above claims, wherein the device (200) is operable at approximately 5,000 G-forces (Gs) or more.
6. The device according to any of the above claims, wherein the device (200) is devoid of software or firmware.
7. The device according to any of the above claims, wherein the device (200) is disposed on or over a rotating shaft (S1), and wherein the device is operable over the entire rotation of the shaft enabling measurements at zero (0) Revolutions Per Minute (RPM) and at any rotational position independent of a rotation rate.

8. The device according to any of the above claims, further comprising an onboard calibrator (204) electrically connected to the strain sensor for calibrating the strain sensor (202).
9. The device according to any of the above claims, further comprising an amplifier (206) electrically connected to the strain sensor for amplifying the voltage signal that is output from the strain sensor.
10. The device according to any of the above claims, wherein the non-rotating electrical component (300) comprises a controlled clock source (308) for sending precise timing information to the VFC.
11. The device according to any of the above claims, wherein the non-rotating electrical component (300) includes a power supply (304) for remotely powering the strain sensor and the VFC.
12. The device according to any of the above claims, wherein the device (200) comprises a measurement bandwidth of approximately 50 kHz or more.
13. The device according to any of the above claims, wherein the device (200) is operable at a range of temperatures between approximately  $-55^{\circ}\text{C}$  and  $125^{\circ}\text{C}$ .
14. The device according to any of the above claims, further comprising a housing (202A) disposed over the strain sensor.
15. The device according to any of the above claims, wherein the coil (C1) comprises a rotating receiver coil that is configured to receive power and signal coupling throughout an entire  $360^{\circ}$  of rotation.
16. A torque measurement system (100) comprising:
  - rotating electronics (200) including:
    - at least one sensor (202) for measuring a strain; and
    - a Voltage to Frequency Converter (VFC) (208) configured to output a frequency signal that is proportional to the measured strain; and
  - non-rotating electronics (300) that are remotely located from the rotating electronics, the non-rotating electronics being configured to remotely power and interrogate the rotating electronics via near field and switched reactance communications;

wherein the rotating electronics (200) and the non-rotating electronics (300) are configured to communicate analog information without batteries or a physical connection therebetween.

17. The torque measurement system according to claim 16, wherein the sensor (202) comprises a strain gauge rosette or a Wheatstone bridge.

18. The torque measurement system according to claim 16 or 17, wherein the non-rotating electronics (300) comprise a Frequency to Voltage Converter (FVC) (306) configured to receive the frequency signal from the VCF and convert the frequency signal into a torque.

19. The torque measurement system according to any of claims 16-18, wherein the system (100) is devoid of software or firmware.

20. The torque measurement system according to any of claims 16-19, wherein the system (100) is configured to measure a torque associated with a structure that is rotating at approximately 10,000 Revolutions Per Minute (RPM) or more.

21. The torque measurement system according to any of claims 16-20, wherein the system (100) is operable at approximately 5,000 G-forces (Gs) or more.

22. The torque measurement system according to any of claims 16-21, wherein the rotating electronics (200) further comprise an onboard calibrator (204) for calibrating the sensor.

23. The torque measurement system according to any of claims 16-22, wherein the non-rotating electronics (300) comprise a controlled clock source (308).

24. The torque measurement system according to any of claims 16-23, wherein the VFC (208) comprises a clock recovery and power supply.

25. The torque measurement system according to any of claims 16-24, wherein the system (100) comprises a measurement bandwidth of approximately 50 kHz or more.

26. The torque measurement system according to any of claims 16-25, wherein the system (100) is operable at a range of temperatures between approximately  $-55^{\circ}\text{C}$  and  $125^{\circ}\text{C}$ .

27. The torque measurement system according to any of claims 16-26, further comprising a low profile housing (202A) disposed over portions of the rotating electronics.
28. The torque measurement system according to any of claims 16-27, wherein the rotating electronics (200) comprise a rotating receiver coil (C1) that is configured to receive power and VFC signal coupling throughout an entire 360° of rotation.
29. The torque measurement system according to any of claims 16-28, wherein the system (100) is configured to measuring torque associated with an aircraft component, a helicopter component, a rotor, a shaft, an engine component, or a turbine component.
30. A method of providing a torque measurement system, the method comprising:  
providing a strain sensor (202) on or over a rotating component (S1) for outputting a voltage signal that is proportional to a strain;  
electrically connecting a Voltage to Frequency Converter (VFC) (208) to the strain sensor, wherein the VFC is configured to receive the voltage signal and convert the voltage signal into a frequency signal that is proportional to the strain;  
providing a rotating coil (C1) in electrical communication with the VFC; and  
inductively coupling the rotating coil to a remotely located, non-rotating coil (C2) for remotely powering the strain sensor and receiving the frequency signal without any contact between the rotating coil and the non-rotating coil.
31. The method according to claim 30, wherein providing the strain sensor (202) comprises providing a strain gauge rosette or a Wheatstone bridge.
32. The method according to claim 30 or 31, further comprising measuring a torque associated with a structure (S1) that is rotating at approximately 10,000 Revolutions Per Minute (RPM) or more.
33. The method according to any of claims 30-32, further comprising measuring a torque associated with an aircraft component, a helicopter component, an engine component, a rotor, a shaft, or a turbine component.
34. The method according to any of claims 30-33, further comprising operating the strain sensor (202) at approximately 5,000 G-forces (Gs) or more.

35. The method according to any of claims 30-34, further comprising calibrating the strain sensor via an onboard calibrator (204).
36. The method according to any of claims 30-35, further comprising amplifying the voltage signal that is output from the strain sensor via an amplifier (206).
37. The method according to any of claims 30-36, further comprising transmitting timing information from a controlled clock source (308) to the VFC.
38. The method according to any of claims 30-37, further comprising remotely powering the strain sensor (202) and the VFC (208).

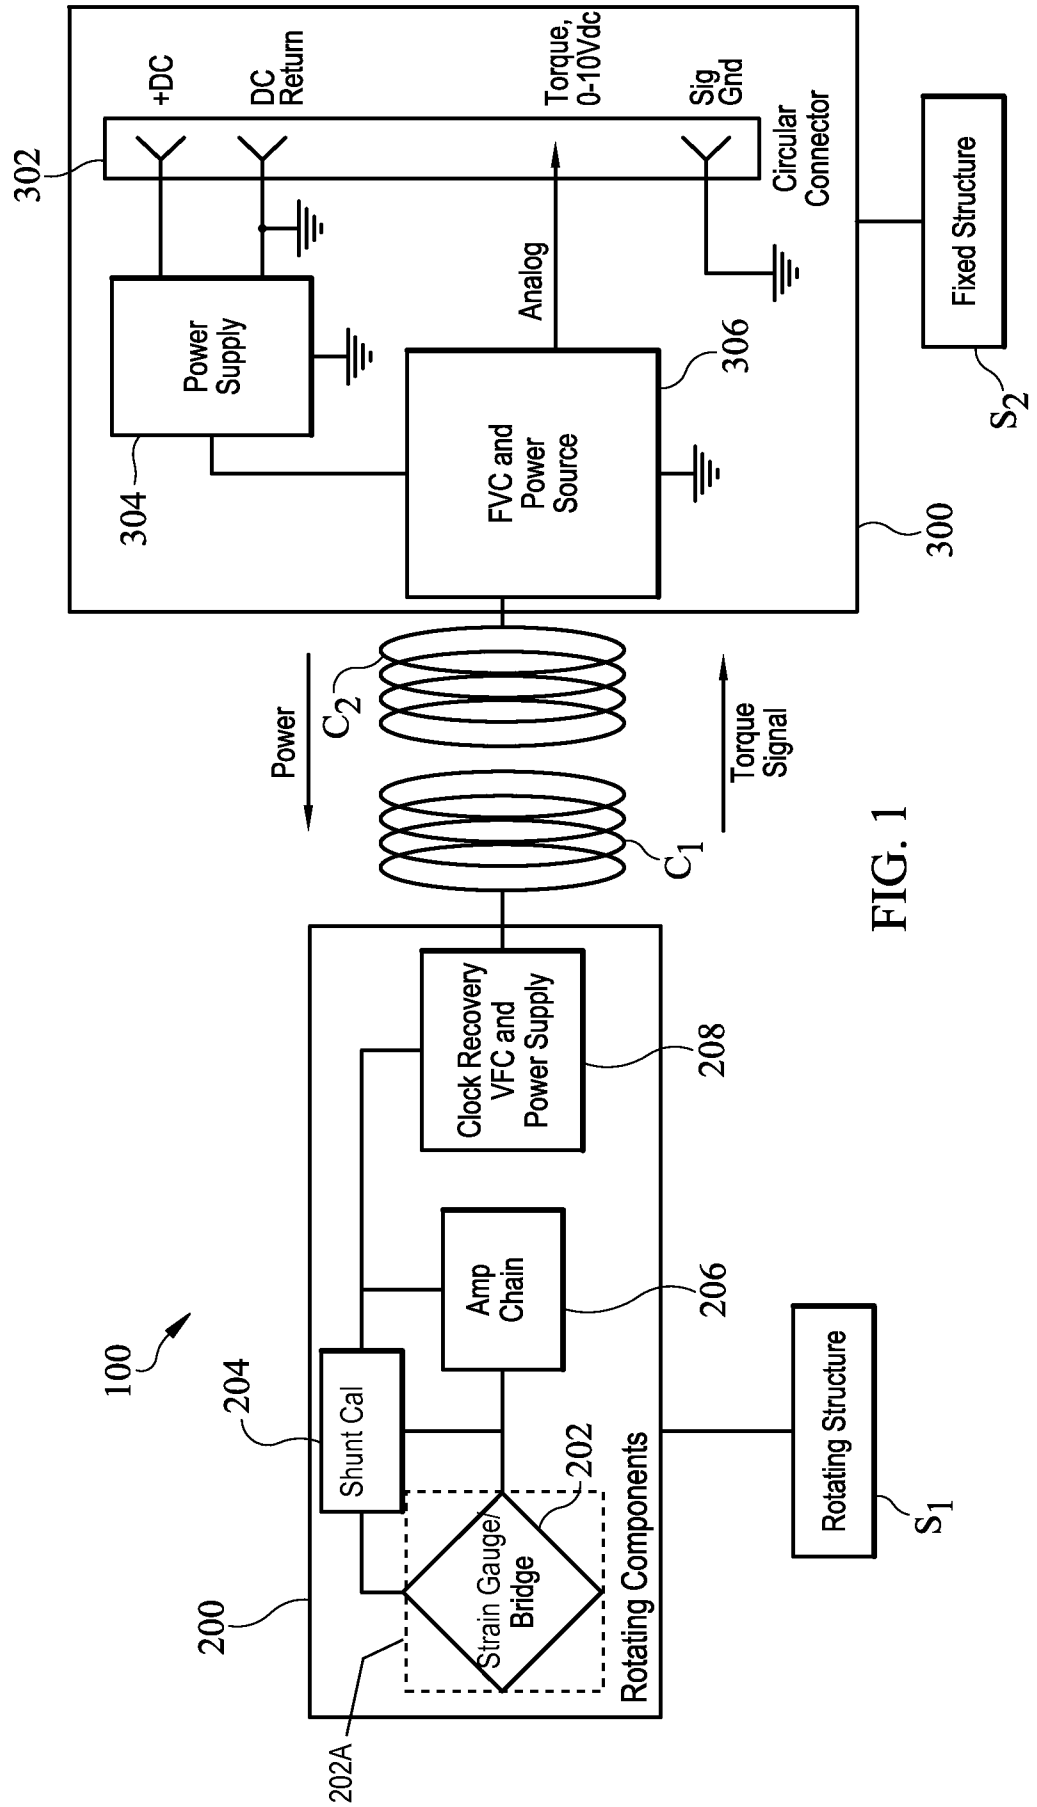


FIG. 1

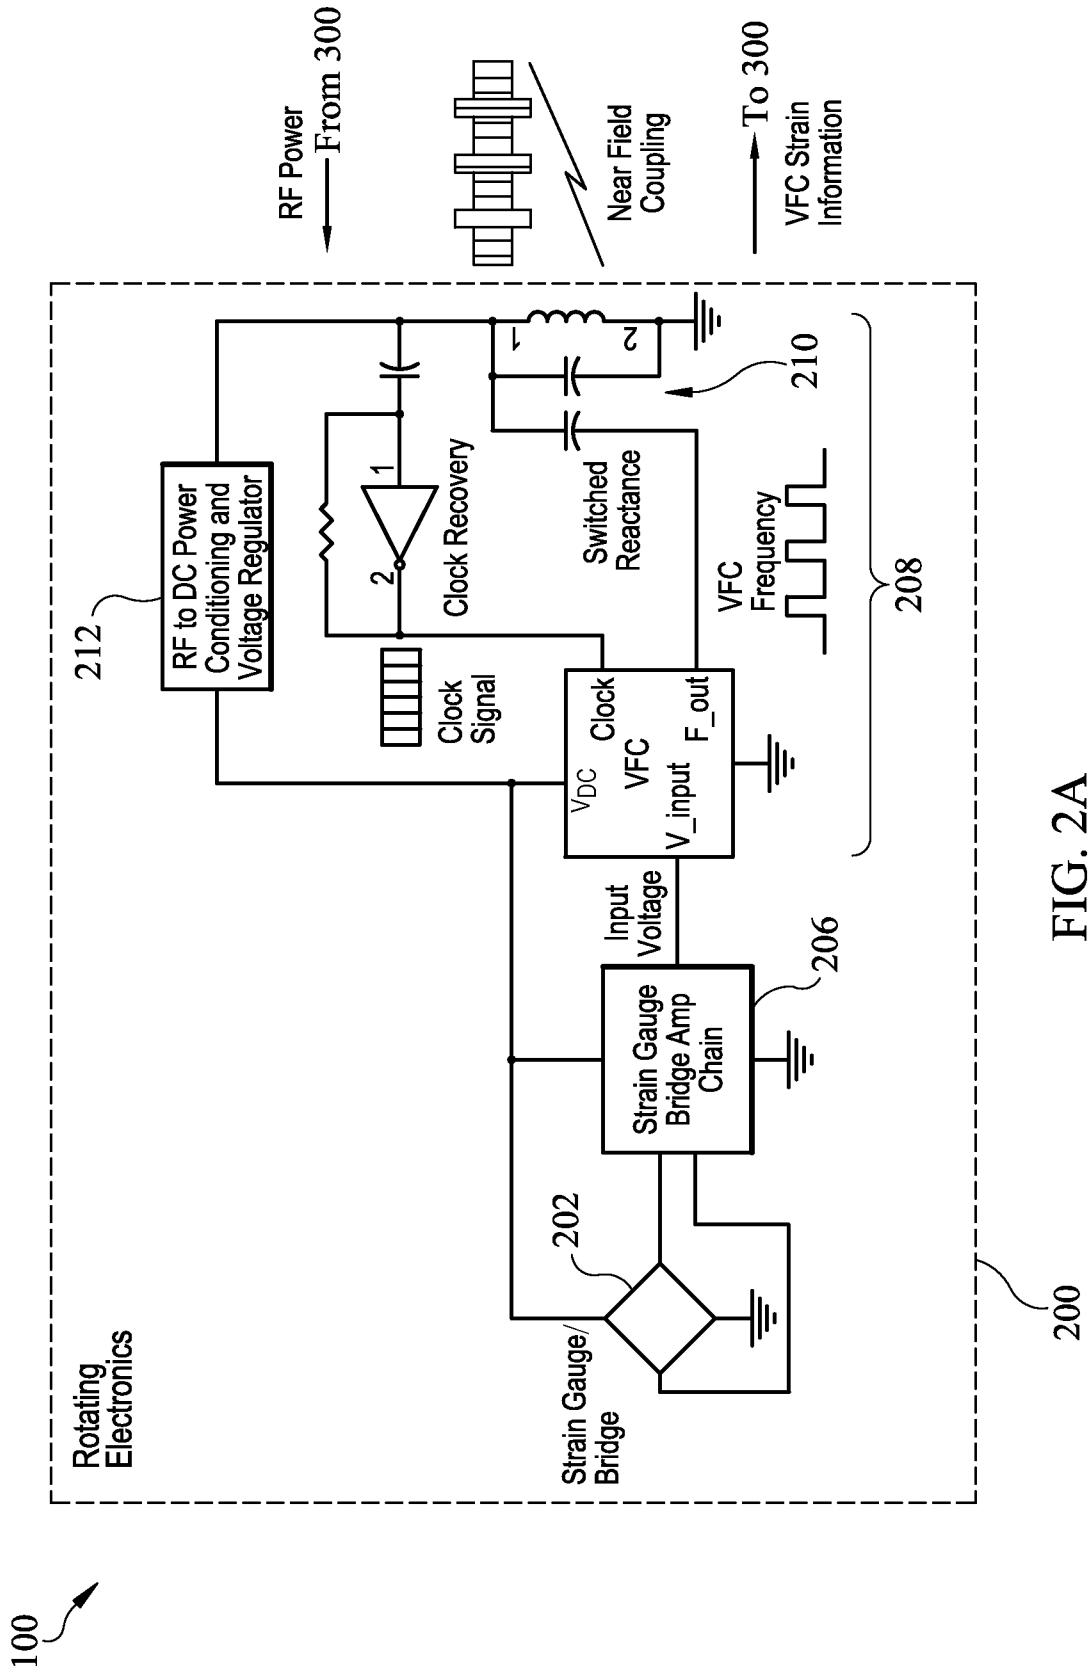


FIG. 2A

100 ↗

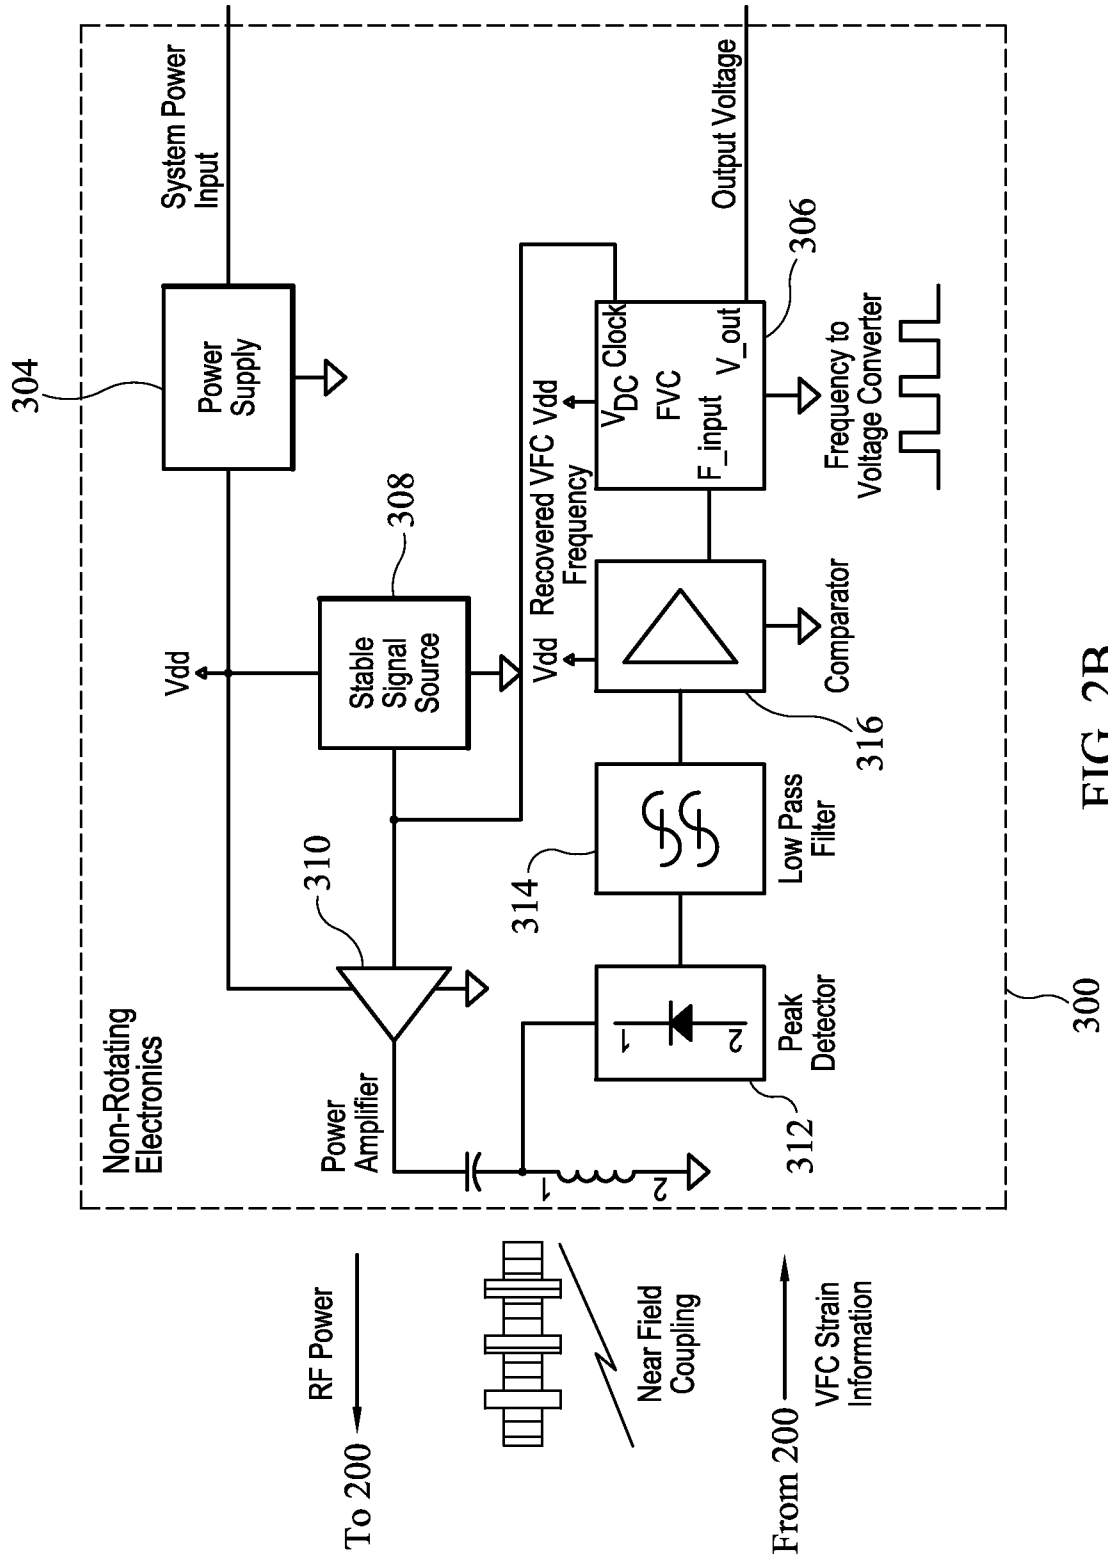


FIG. 2B

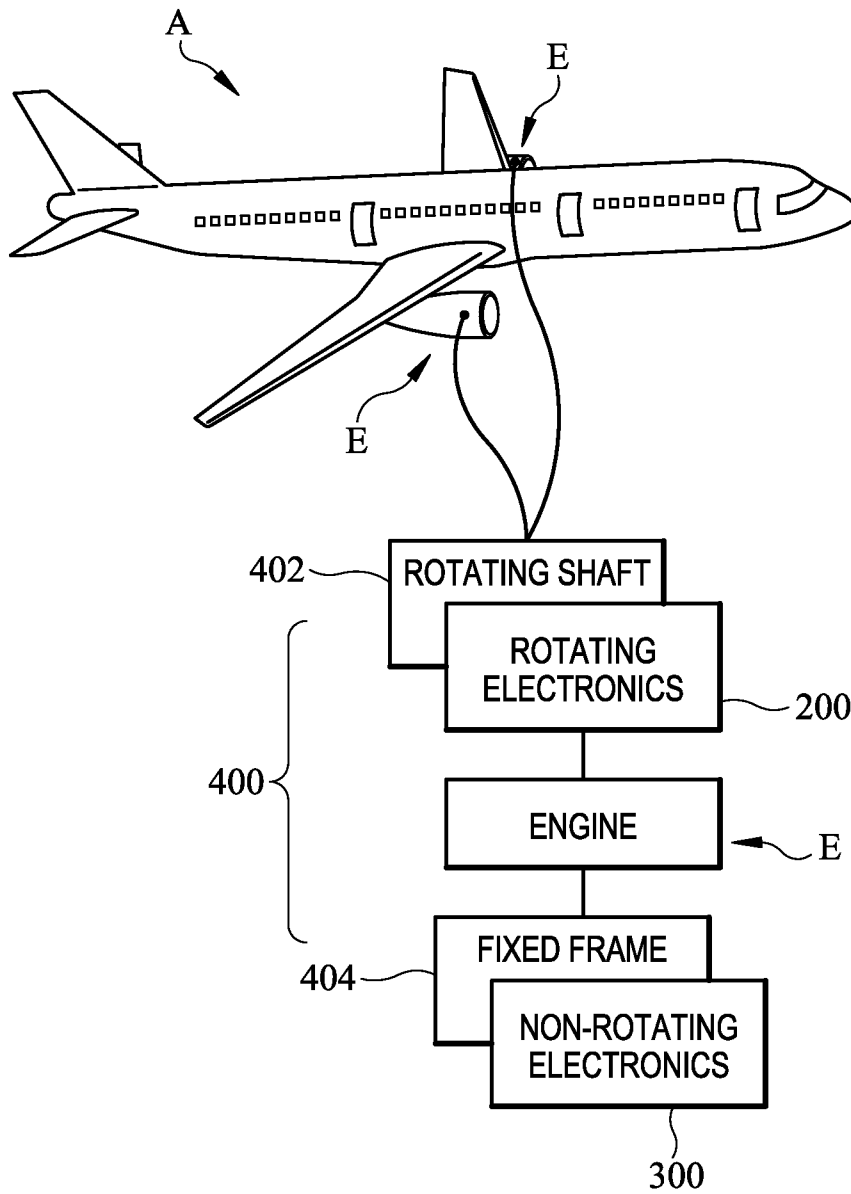


FIG. 3

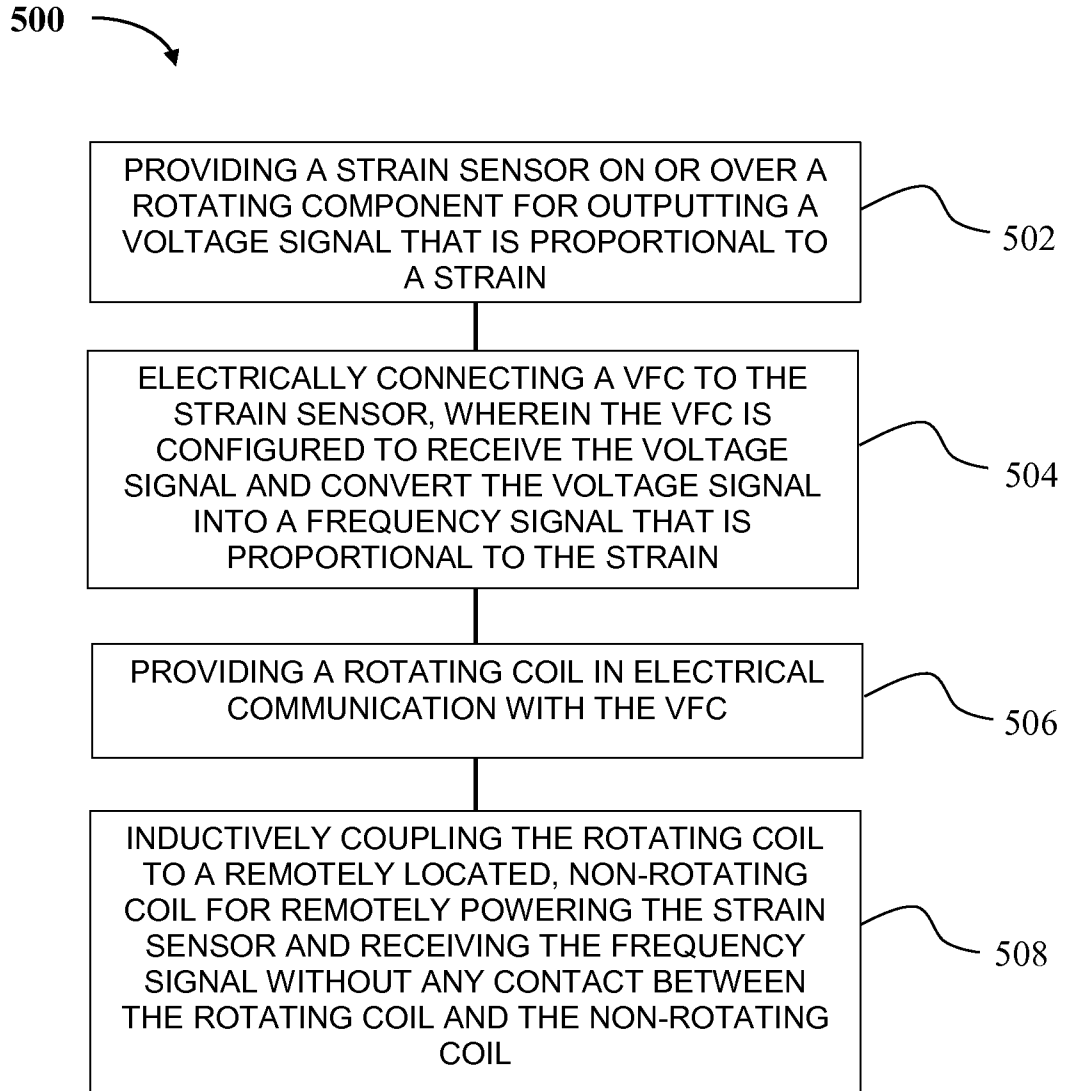


FIG. 4

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2015/041892

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. G01L3/10  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
G01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EPO-Internal, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/098383 A1 (HOTTINGER MESSTECHNIK BALDWIN [DE]; KREUZER MANFRED [DE]) 20 October 2005 (2005-10-20) the whole document	1-36,38
X	DE 40 25 279 A1 (SIEMENS AG [DE]) 13 February 1992 (1992-02-13)  the whole document	1,2,4,6, 7,9,11, 15-19, 28-31, 33,36,38

Further documents are listed in the continuation of Box C.       See patent family annex.

\* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>
---	---

Date of the actual completion of the international search  2 September 2015	Date of mailing of the international search report  21/09/2015
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer  Stavroulis, Stefanos
--	--

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2015/041892

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>GB 1 510 126 A (LOUGHBOROUGH CONSULT LTD) 10 May 1978 (1978-05-10)</p> <p>the whole document -----</p>	<p>1,2,4, 6-11, 14-19, 22-24, 27-31, 33,35-38</p>
X	<p>DE 199 62 596 A1 (KESSLER KARL H [DE]) 5 July 2001 (2001-07-05)</p> <p>the whole document -----</p>	<p>1,4,8, 14,16, 22,27, 30,35</p>

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2015/041892

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2005098383	A1	20-10-2005	DE 102004015771 A1
			EP 1733196 A1
			US 2006207347 A1
			WO 2005098383 A1
-----			
DE 4025279	A1	13-02-1992	NONE
-----			
GB 1510126	A	10-05-1978	DE 2544932 A1
			FR 2287690 A1
			GB 1510126 A
			IT 1049700 B
-----			
DE 19962596	A1	05-07-2001	NONE
-----			