

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number  
WO 2005/087100 A1

- (51) International Patent Classification<sup>7</sup>: **A61B 5/024**
- (21) International Application Number:  
PCT/US2005/007293
- (22) International Filing Date: 7 March 2005 (07.03.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
10/796,566 8 March 2004 (08.03.2004) US
- (71) Applicant (for all designated States except US): **NELL-COR PURITAN BENNETT INCORPORATED** [US/US]; 4280 Hacienda Drive, Pleasanton, CA 94588 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **BAKER, Clark, R., Jr.** [US/US]; 18493 Magee Way, Castro Valley, CA 94546 (US).
- (74) Agent: **SLAYDEN, Bruce, W., II**; Baker Botts L.L.P., 98 San Jacinto Blvd., 1500 San Jacinto Center, Austin, TX 78701 (US).


- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to the identity of the inventor (Rule 4.17(i)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM,

[Continued on next page]

(54) Title: PULSE OXIMETER WITH ALTERNATE HEART-RATE DETERMINATION

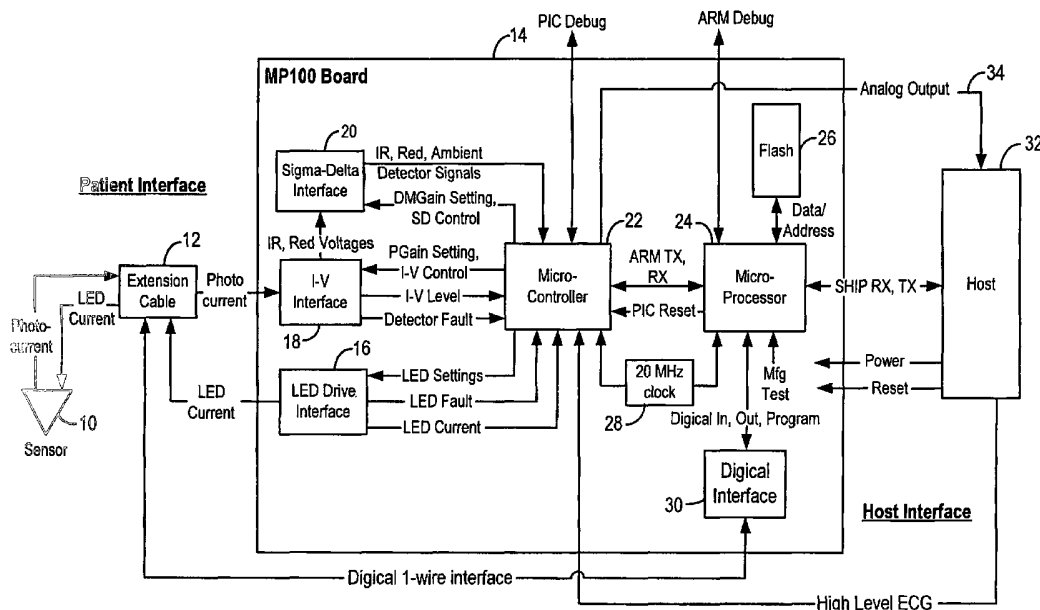

(57) Abstract: A pulse oximeter which determines multiple heart rates, and selects between them based on the metrics of only one of the heart rate calculations. A primary heart rate calculation method is selected, and is used unless its metrics indicate questionable accuracy, in which case an alternative rate calculation is available and is used instead.

WO 2005/087100 A1



- HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- Published:**
- with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## **PULSE OXIMETER WITH ALTERNATE HEART-RATE DETERMINATION**

### **BACKGROUND OF THE INVENTION**

The present invention relates to oximeters, and in particular to determining a pulse rate by multiple mechanisms in a detected waveform from a pulse oximeter.

Pulse oximetry is typically used to measure various blood chemistry characteristics including, but not limited to, the blood-oxygen saturation of hemoglobin in arterial blood, the volume of individual blood pulsations supplying the tissue, and the rate of blood pulsations corresponding to each heartbeat of a patient. Measurement of these characteristics has been accomplished by use of a non-invasive sensor which scatters light through a portion of the patient's tissue where blood perfuses the tissue, and photoelectrically senses the absorption of light in such tissue. The amount of light absorbed at various wavelengths is then used to calculate the amount of blood constituent being measured.

The light scattered through the tissue is selected to be of one or more wavelengths that are absorbed by the blood in an amount representative of the amount of the blood constituent present in the blood. The amount of transmitted light scattered through the tissue will vary in accordance with the changing amount of blood constituent in the tissue and the related light absorption. For measuring blood oxygen level, such sensors have typically been provided with a light source that is adapted to generate light of at least two different wavelengths, and with photodetectors sensitive to both of those wavelengths, in accordance with known techniques for measuring blood oxygen saturation.

Known non-invasive sensors include devices that are secured to a portion of the body, such as a finger, an ear or the scalp. In animals and humans, the tissue of these body portions is perfused with blood and the tissue surface is readily accessible to the sensor.

Patents No. 6,083,172, No. 5,853,364 and No. 6,411,833 show multiple methods of calculating a pulse rate in a pulse oximeter, with a "best rate" module

which arbitrates between the pulse rate calculations to select a best rate based on confidence levels associated with each. The confidence levels are calculated using various metrics to determine the reliability of the different pulse rate calculations. Also, Patent No. 5,524,631 shows a fetal heart rate monitor that uses multiple parallel  
5 filter paths to identify the fetal heart rate, and uses a figure of merit operation to weight the different heart rate estimates.

N-100. The N-100 technology, dating to around 1985, accepted or rejected pulses based on pulse history of the size of pulses, pulse shape, expected time to occur (frequency) and ratio of R/IR.

10 In particular, the N-100 found pulses by looking for a signal maximum, followed by a point of maximum negative slope, then a minimum. The processing was done in a state machine referred to as "munch." Each maximum was not qualified until the signal passed below a noise threshold, referred to as a noise gate. This acted as an adaptive filter since the noise gate level was set by feedback from a  
15 subsequent processing step to adapt to different expected signal amplitudes. The pulses are then accepted or rejected in a "Level3" process which was a filter which adapts to changing signals by comparing the amplitude, period and ratio-of-ratios (ratio of Red to IR, with Red and IR being expressed as a ratio of AC to DC) of a new pulse to the mean of values in a history buffer, then determining if the difference is  
20 within a confidence level. If the new pulse was accepted, the history buffer was updated with the values for the new pulse. The level3 process acted as an adaptive bandpass filter with center-frequency and bandwidth (confidence limits) being adapted by feedback from the output of the filter.

N-200. The N-200 improved on the N-100 since it could be synchronized  
25 with an ECG, and included ECG filtering. The N-200 also added interpolation to compensate for baseline shift between the time of measuring the pulse maximum and minimum. The N-200 included other filtering features as well, such as a "boxcar" filter which computed the mean of a varying number of signal samples.

The N-200, after various filtering and scaling steps, applies the digitized  
30 signals to a "boxcar" filter, which computes the mean of N samples, where N is set by

feedback from a subsequent processing step according to the filtered heart rate. New samples are averaged into the boxcar filter, while the oldest samples are dropped. The boxcar length (N) is used to set three parameters: a pulse threshold, absolute minimum pulse and small pulse. An ensemble-averaging (a.k.a "slider") filter then  
5 produces a weighted average of the new samples and the previous ensemble-averaged sample from one pulse-period earlier. The samples are then passed to a "munch" state machine and a noise gate, like the N-100. An interpolation feature is added to the N-100 process, to compensate for changes in the baseline level. Since the minimum and maximum occur at different times, a changing baseline may increase or decrease the  
10 minimum and not the maximum, or vice-versa.

“Ensemble averaging” is an integral part of C-Lock, which is NELLCOR’s trademark for the process of averaging samples from multiple pulses together to form a composite pulse. This process is also known as “cardiac-gated averaging.” It requires a “trigger” event to mark the start of each pulse.

15

#### BRIEF SUMMARY OF THE INVENTION

The present invention is a pulse oximeter which determines multiple heart rates, and selects between them based on the metrics of only one of the heart rate calculations. A primary heart rate calculation method is selected, and is used unless  
20 its metrics indicate questionable accuracy, in which case an alternative rate calculation is available and is used instead.

In one embodiment, the primary heart rate calculation method does not use an ensemble averaged waveform, while the alternative heart rate calculation does use an ensemble averaged waveform. The alternative heart rate calculation is used if the  
25 primary calculation has disqualified its most recently detected pulse.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of an oximetry system incorporating an embodiment of the invention.

Fig. 2 is a diagram of the software processing blocks of an oximeter including an embodiment of the present invention.

Fig. 3 is a context diagram of the pulse rate calculation subsystem.

5

## DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 illustrates an embodiment of an oximetry system incorporating the present invention. A sensor 10 includes red and infrared LEDs and a photodetector. These are connected by a cable 12 to a board 14. LED drive current is provided by an LED drive interface 16. The received photocurrent from the sensor is provided to an I-V interface 18. The IR and red voltages are then provided to a sigma-delta interface 20 incorporating the present invention. The output of sigma-delta interface 20 is provided to a microcontroller 22 which includes a 10-bit A/D converter. Controller 22 includes flash memory for a program, and EEPROM memory for data. The processor also includes a controller chip 24 connected to a flash memory 26. Finally, a clock 28 is used and an interface 30 to a digital calibration in the sensor 10 is provided. A separate host 32 receives the processed information, as well as receiving an analog signal on a line 34 for providing an analog display.

Design Summary The design of the present invention is intended to deal with unwanted noise. Signal metrics are measured and used to determine filter weighting. Signal metrics are things that indicate if a pulse is likely a plethysmograph or noise, such as frequency (is it in the range of a human heart rate), shape (is it shaped like a heart pulse), rise time, etc. A similar technique was used in the Nellcor N200, described in the background of this application. The new design adds a number of different features and variations, such as the use of two ensemble averagers as claimed in the present invention.

Details of the architecture are shown in the diagram of Fig. 2. This design calculates both the oxygen saturation, and the pulse rate, which are described separately below.

### I. Oxygen Saturation Calculation.

A. Signal Conditioning - The digitized red and IR signals are received and are conditioned in this block by (1) taking the 1st derivative to get rid of baseline shift, (2) low pass filtering with fixed coefficients, and (3) dividing by a DC value to preserve the ratio. The function of the Signal Conditioning subsystem is to emphasize the higher frequencies that occur in the human plethysmograph and to attenuate low frequencies in which motion artifact is usually concentrated. The Signal Conditioning subsystem selects its filter coefficients (wide or narrow band) based on hardware characteristics identified during initialization.

Inputs - digitized red and IR signals

10 Outputs - Pre-processed red and IR signals

B. Pulse Identification and Qualification - The low pass filtered and digitized red and IR signals are provided to this block to identify pulses, and qualify them as likely arterial pulses. This is done using a pre-trained neural net, and is primarily done on the IR signal. The pulse is identified by examining its amplitude, shape and frequency, just as was done in the Nellcor N-100. An input to this block is the average pulse period from block D. This function is similar to the N-100, which changed the upfront qualification using the pulse rate. The output indicates the degree of arrhythmia and individual pulse quality.

Inputs - (1) Pre-processed red and IR signals, (2) Ave. pulse period, (3)  
20 Lowpass Waveforms from the low pass filter.

Outputs - (1) Degree of arrhythmia, (2) pulse amplitude variations, (3) individual pulse quality, (4) Pulse beep notification, (5) qualified pulse periods and age.

C. Compute Signal Quality Metrics - This block determines the pulse shape (derivative skew), period variability, pulse amplitude and variability, Ratio of Ratios variability, and frequency content relative to pulse rate.

Inputs - (1) raw digitized red and IR signals, (2) degree of arrhythmia, individual pulse quality, pulse amplitude variation (3) pre-processed red and IR signals, (4) average pulse period.

Outputs - (1) Lowpass and ensemble averaging filter weights, (2) metrics for sensor off detector, (3) Normalized Pre-processed waveforms, (4) percent modulation.

5 D. Average Pulse Periods. This block calculates the average pulse period from the pulses received.

Inputs - Qualified pulse periods and age.

Outputs - Average pulse period.

10 E1. Lowpass Filter and Ensemble Averaging - Block E1 low pass filters and ensemble averages the signal conditioned by block A, and normalized by block C, for the pulse rate identification. The weights for the low pass filter are determined by the Signal Metrics block C. The signal is also ensemble averaged (this attenuates frequencies other than those of interest near the pulse rate and its harmonics), with the ensemble averaging filter weights also determined by Signal Metrics block C. Less weight is assigned if the signal is flagged as degraded. More weight is assigned if the signal is flagged as arrhythmic because ensemble-averaging is not appropriate during arrhythmia. Red and IR are processed separately, but with the same filtering weights. The filtering is delayed approximately one second to allow the signal metrics to be calculated first.

20 The filters use continuously variable weights. If samples are not to be ensemble-averaged, then the weighting for the previous filtered samples is set to zero in the weighted average, and the new samples are still processed through the code. This block tracks the age of the signal - the accumulated amount of filtering (sum of response times and delays in processing). Too old a result will be flagged (if good pulses haven't been detected for awhile).

25 Inputs - (1) normalized pre-processed red and IR signals, (2) average pulse period, (3) low pass filter weights and ensemble averaging filter weights, (4) ECG triggers, if available, (5) IR fundamental, for zero-crossing triggers.

Outputs - (1) filtered red and IR signals, (2) age.



F. Estimate Filtered Waveform Correlation and Calculate Averaging

Weight - this uses a noise metric similar to that used in the N100 and N200 described above, and doesn't use feedback. The variable weighting for the filter is controlled by the ratio-of-ratios variance. The effect of this variable-weight filtering is that the ratio-of-ratios changes slowly as artifact increases and changes quickly as artifact decreases. The subsystem has two response modes. Filtering in the Fast Mode targets an age metric of 3 seconds. The target age is 5 seconds in Normal Mode. In Fast Mode, the minimum weighting of the current value is clipped at a higher level. In other words, a low weight is assigned to the newest ratio-of-ratios calculation if there is noise present, and a high weight if no noise is present.

Inputs - (1) filtered red and IR signals and age, (2) calibration coefficients, (3) response mode (user speed settings).

Outputs - averaging weight for ratio-of-ratios calculation.

H. Calculate Saturation - Saturation is calculated using an algorithm with the calibration coefficients and averaged ratio of ratios.

Inputs - (1) Averaged Ratio-of-Ratios, (2) calibration coefficients.

Outputs - Saturation.

II. Pulse Rate Calculation.

E2. Lowpass Filter and Ensemble Averaging - Block E2 low pass filters and ensemble averages the signal conditioned by block A, for the pulse rate identification. The weights for the low pass filter are determined by the Signal Metrics block C. The signal is also ensemble averaged (this attenuates frequencies other than those of interest near the pulse rate and its harmonics), with the ensemble averaging filter weights also determined by Signal Metrics block C. Less weight is assigned if the signal is flagged as degraded. More weight is assigned if the signal is flagged as arrhythmic since filtering is not appropriate during arrhythmia. Red and IR are processed separately. The process of this block is delayed approximately one second to allow the signal metrics to be calculated first.

The filters use continuously variable weights. If samples are not to be ensemble-averaged, then the weighting for the previous filtered samples is set to zero in the weighted average, and the new samples are still processed through the code. This block tracks the age of the signal - the accumulated amount of filtering (sum of response times and delays in processing). Too old a result will be flagged (if good pulses haven't been detected for awhile).

Inputs - (1) pre-processed red and IR signals, (2) average pulse period, (3) Lowpass filter weights and ensemble averaging filter weights, (4) ECG triggers, if available, (5) IR fundamental, for zero-crossing triggers.

10                   Outputs - (1) filtered red and IR signals, (2) age.

I. Filtered Pulse Identification and Qualification - This block identifies and qualifies pulse periods from the filtered waveforms, and its results are used only when a pulse is disqualified by block B.

15                   Inputs - (1) filtered red and IR signals and age, (2) average pulse period, (3) hardware ID or noise floor, (4) kind of sensor.

                    Outputs - qualified pulse periods and age.

J. Average Pulse Periods and Calculate Pulse Rate - This block calculates the pulse rate and average pulse period.

                    Inputs - Qualified pulse periods and age

20                   Outputs - (1) average pulse period, (2) pulse rate.

### III. Venous Pulsation

K. Detect Venous Pulsation - Block K receives as inputs the pre-processed red and IR signal and age from Block A, and pulse rate and provides an indication of venous pulsation as an output. This subsystem produces an IR fundamental waveform in the time domain using a single-tooth comb filter which is output to the Ensemble Averaging filters.

                    Inputs - (1) filtered red and IR signals and age, (2) pulse rate.

Outputs - Venous Pulsation Indication, IR fundamental

#### IV. Sensor Off

L. Detect Sensor-Off and Loss of Pulse Amplitude - The Pulse Lost and Sensor Off Detection subsystem uses a pre-trained neural net to determine whether  
5 the sensor is off the patient. The inputs to the neural net are metrics that quantify several aspects of the behavior of the IR and Red values over the last several seconds. Samples are ignored by many of the oximetry algorithm's subsystems while the Signal State is not either Pulse Present or Sensor Maybe Off. The values of the Signal State variable are: "Pulse Present, Disconnect, Pulse Lost, Sensor Maybe Off, and  
10 Sensor Off."

Inputs - (1) metrics, (2) front-end servo settings and ID

Outputs - Signal state including sensor-off indication

#### Pulse Rate Calculation subsystem

The subsystem averages qualified pulse periods from the Pulse Identification  
15 and Qualification subsystem. It outputs the average period and the corresponding pulse rate.

The oximetry algorithm contains two instances of this subsystem. The first instance receives input from the Pulse Identification and Qualification instance whose input waveform have been processed by the Signal Conditioning subsystem, then  
20 lowpass filtered, but not ensemble averaged, by the Ensemble Averaging subsystem. The second instance of the Pulse Rate Calculation subsystem receives input from two instances of the Pulse Identification and Qualification subsystem, the one described above and a second instance that receives input that has been ensemble averaged.

#### Selection of Pulse Period Source

25 One instance of the subsystem receives qualified pulse periods from two sources. The subsystem selects which of these two sources to use for its pulse rate calculation based solely on analysis of only one source, the "primary" source. The oximetry algorithm designates the Pulse Identification and Qualification instance that

does NOT receive ensemble-averaged waveforms as the primary source, and designates the other Pulse Identification and Qualification instance as the “alternate” source of qualified pulse periods. Qualified pulse periods from the alternate source are only used if the most recent pulse from the primary source was rejected. When a  
 5 qualified pulse period is received from the primary source, it is always used to update the pulse-rate calculation, and will prevent qualified pulse periods from the alternate source from being used until the primary source once again rejects a pulse period.

### Calculation of Average Pulse Period and Pulse-Rate Estimate

When the subsystem uses a *Qualified\_Pulse\_Period*, it updates its average  
 10 pulse period, *Avg\_Period*, using a pulse-based, variable-weight IIR filter, then computes its *Rate* output from *Avg\_Period*. The steps for this filtering operation are:

1.  $r_t = (60 / \Delta t) / \text{Qualified\_Pulse\_Period}$
2.  $k = \text{Consecutive\_Qualified} / \max(|r_t - r_{t-1}|, |r_{t-1} - r_{t-2}|, |r_{t-2} - r_{t-3}|, 1.0)$
3.  $x = \text{bound}(\min(\text{Avg\_Period}_{t-1}, \text{Qualified\_Pulse\_Period}), \frac{3}{4} \text{ seconds}, 2 \text{ seconds})$   
 15 seconds
4. If  $\text{Rate\_Age} > 10 \text{ seconds}$ ,  $x = \min(x * \text{Rate\_Age} / 10 \text{ seconds}, 0.3)$
5.  $k = \max(1 / \text{Total\_Qualified}, \min(k, x))$
6. If  $\text{Avg\_Period}_{t-1} \diamond 0$   $\text{Avg\_Period}_t = \text{Avg\_Period}_{t-1} * (\text{Qualified\_Pulse\_Period} / \text{Avg\_Period}_{t-1})^k$   
 20
7. If  $\text{Avg\_Period}_{t-1} = 0$   $\text{Avg\_Period}_t = \text{Qualified\_Pulse\_Period}$
8.  $\text{Rate} = (60 / \Delta t) / \text{Avg\_Period}_t$
9.  $\text{Rate\_Age} = \text{Rate\_Age} + k * (\text{Qualified\_Period\_Age} - \text{Rate\_Age})$

where:

$r_t$  is the pulse rate corresponding to *Qualified\_Pulse\_Period*, in BPM  
 25 the  $_{t-1}$  subscript denotes the previous qualified pulse.

$\Delta t$  is the oximetry algorithm’s sample interval in seconds

$60 / \Delta t$  is the number of samples per minute

$x$  is a filter weight that targets a 7-second response time for typical adult pulse rates.

$k$  is the final filter weight, based on both  $x$  and the differences between consecutive values of  $r_i$ . During the first few pulses,  $k$  is increased to at least  $1 / Total\_Qualified$  so that the initial qualified pulses will be weighted equally.

*Consecutive\_Qualified* is the number of consecutive qualified pulses, and  
5 *Total\_Qualified* is the total number of pulses qualified since the subsystem was reinitialized. Both *Consecutive\_Qualified* and *Total\_Qualified* are incremented each time a *Qualified\_Pulse\_Period* is used, before  $k$  is calculated. *Consecutive\_Qualified* is set to zero when a pulse is rejected by the pulse-period source currently in use.

The update formula for *Avg\_Period<sub>i</sub>*, in step 6 above, is a geometric average  
10 of *Avg\_Period<sub>i</sub>* and *Qualified\_Pulse\_Period*. Geometric averaging helps to keep the subsystem responsive to large pulses-to-pulse period variations, and large, sustained changes in pulse rate.

Once *Rate* is initialized to a non-zero value, *Rate\_Age* is incremented every sample, whether or not *Rate* is updated.

## 15 Context Diagram

Fig. 3 is a context diagram of the pulse rate calculation subsystem. The subsystem updates its *Avg\_Period* and *Rate* outputs from *Qualified\_Pulse\_Periods*. It uses *Qualified\_Pulse\_Periods* from the *Alternative\_Period\_Source* only if it last received a *Notify\_Pulse\_Rejected* from the primary source. It updates its *Rate\_Age*  
20 output based on *Qualified\_Period\_Age*. When *Rate* is updated, the subsystem sets its *Pulse\_Rate\_Updated* flag. The *Reinitialize* input tells the subsystem to reinitialize itself. *Increment\_Rate\_Age* notifies the subsystem to increment its *Rate\_Age* every sample once *Rate* is initialized.

WHAT IS CLAIMED IS:

1. A method for determining a heart rate in a pulse oximeter comprising:  
determining a first heart rate from a pulse oximetry signal using a first  
method;  
determining a second heart rate from a pulse oximetry signal using a second  
5 method;  
evaluating a reliability of said first heart rate using metrics applied to said first  
method;  
using said first heart rate when said metrics indicate said first method is  
reliable; and  
10 using said second heart rate when said metrics indicate that said first heart rate  
is unreliable.
2. The method of claim 1 further comprising  
determining that said first heart rate is unreliable when said metrics indicate  
15 that a most recent pulse is rejected.
3. The method of claim 1 wherein said first method does not use an  
ensemble averaged waveform, and said second method does use an ensemble  
averaged waveform.  
20
4. The method of claim 1 wherein determining a first and second heart  
rate each comprise determining a pulse period, and further comprising:  
converting a pulse period used into a rate.
- 25 5. A pulse oximeter which determines a heart rate, comprising:  
a first heart rate calculator for determining a first heart rate from a pulse  
oximetry signal using a first method;  
a second heart rate calculator for determining a second heart rate from a pulse  
oximetry signal using a second method;

an evaluator configured to determine the reliability of said first heart rate using metrics applied to said first method; and

a selector configured to use said first heart rate when said metrics indicate said first method is reliable, and to use said second heart rate when said metrics indicate that said first heart rate is unreliable.

6. The pulse oximeter of claim 5 wherein said selector determines that said first heart rate is unreliable when said metrics indicate that a most recent pulse is rejected.

10

7. The pulse oximeter of claim 5 wherein said first heart rate calculator does not use an ensemble averaged waveform, and said second heart rate calculator does use an ensemble averaged waveform.

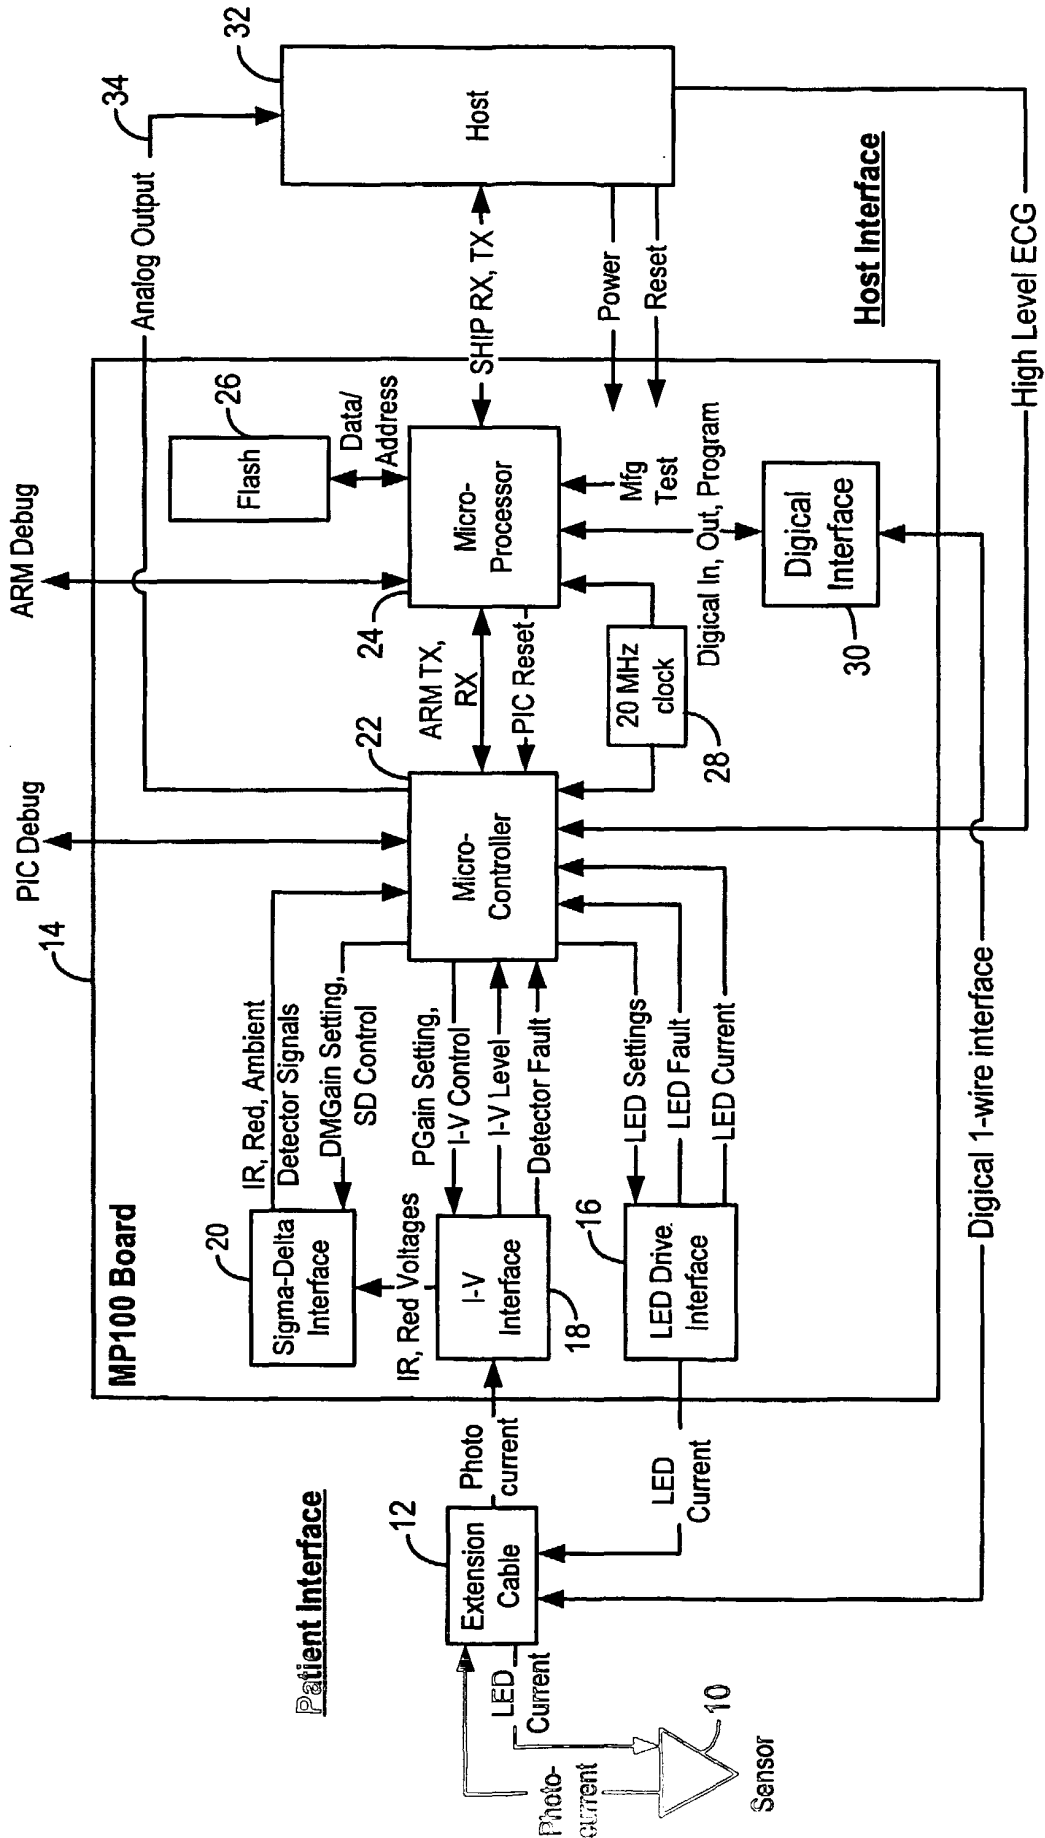


FIG. 1



06 Algorithm Architecture:

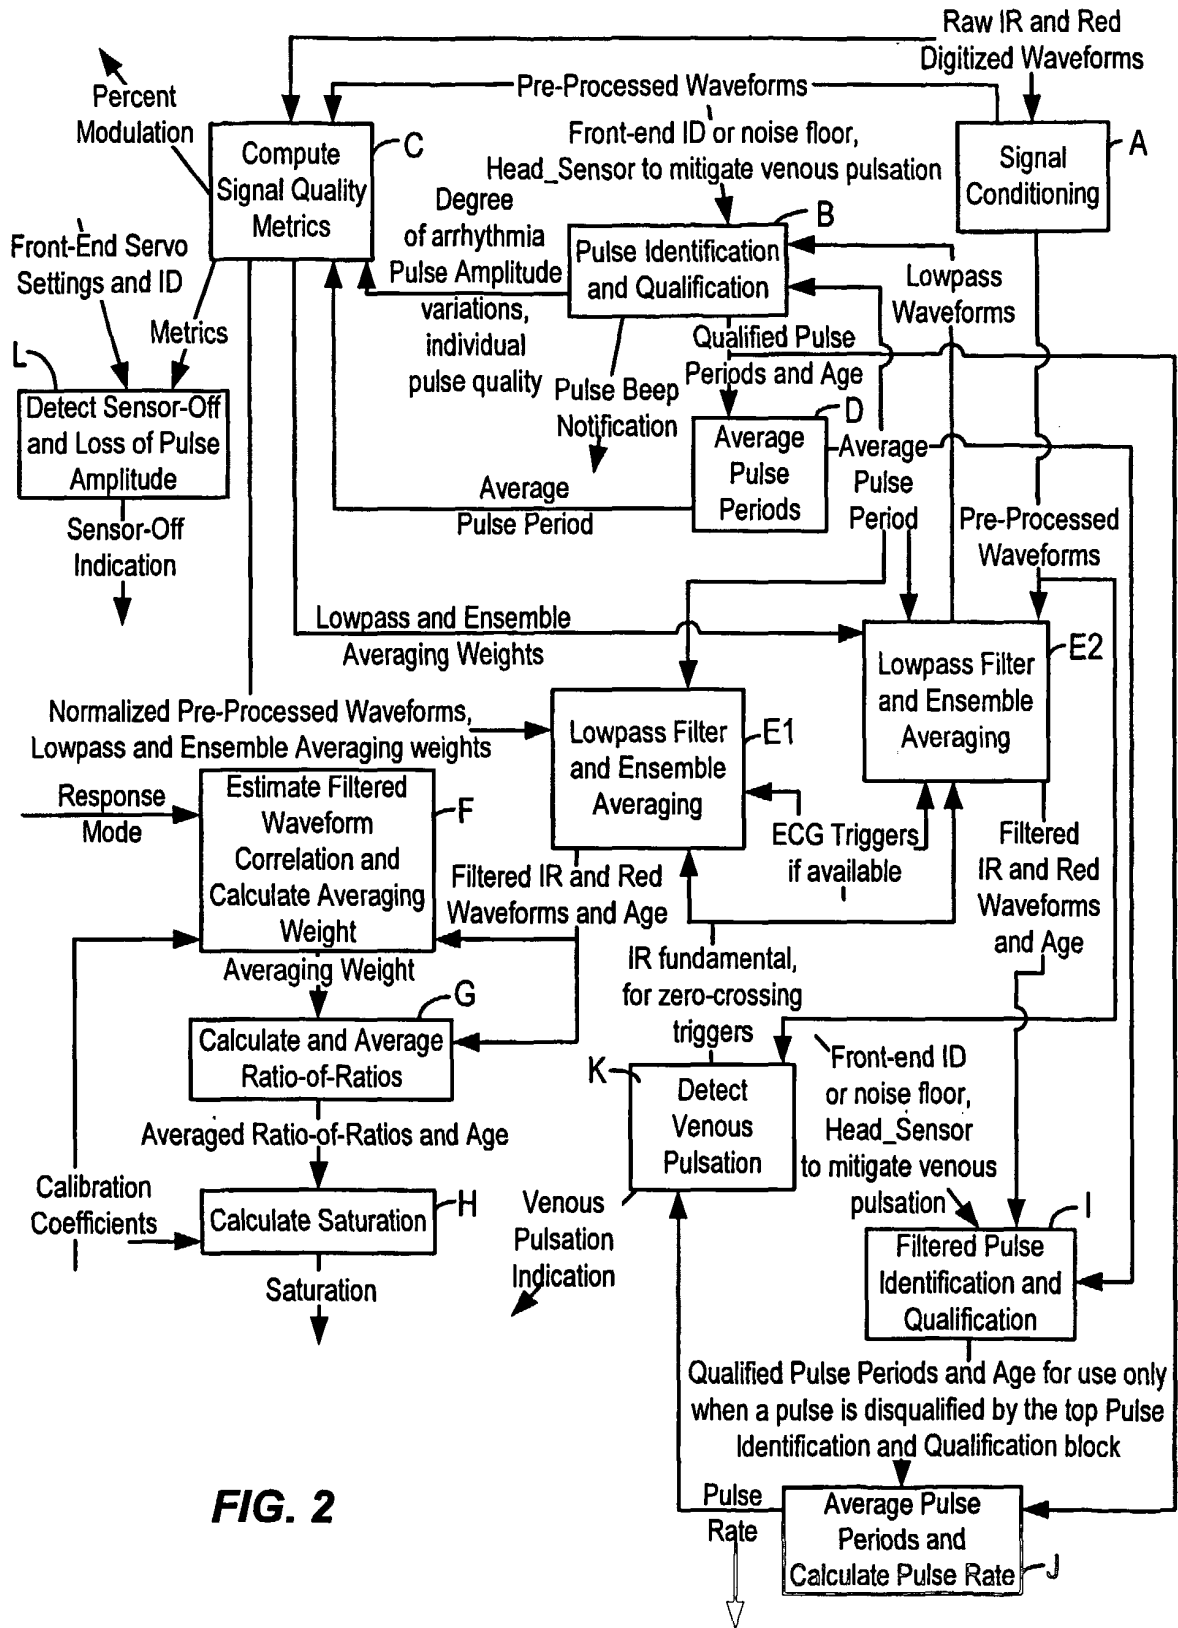
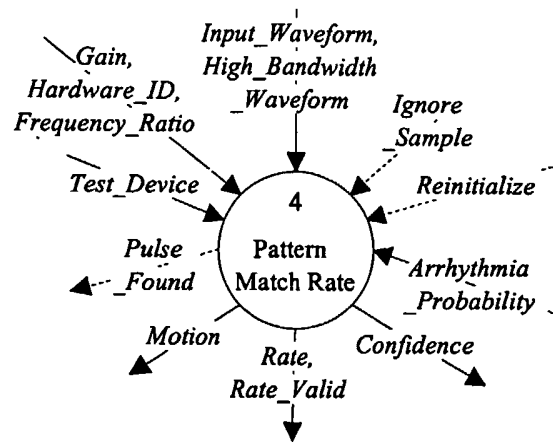


FIG. 2



**FIG. 3** Context Diagram for Pulse Rate Calculation Subsystem

# INTERNATIONAL SEARCH REPORT

Intern. Application No  
PCT/US2005/007293

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 A61B5/024		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) IPC 7 A61B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, INSPEC		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 411 833 B1 (BAKER, JR. CLARK R ET AL) 25 June 2002 (2002-06-25) cited in the application column 6, line 58 - column 7, line 23 column 18, line 37 - line 40 ----- -/--	1,4,5
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.		
<input checked="" type="checkbox"/> Patent family members are listed in annex.		
° Special categories of cited documents :		
*A* document defining the general state of the art which is not considered to be of particular relevance	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	
*E* earlier document but published on or after the international filing date	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.	
*O* document referring to an oral disclosure, use, exhibition or other means	*&* document member of the same patent family	
*P* document published prior to the international filing date but later than the priority date claimed		
Date of the actual completion of the international search  <p style="text-align: center;">28 June 2005</p>	Date of mailing of the international search report  <p style="text-align: center;">05/07/2005</p>	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer  <p style="text-align: center;">Knüpling, M</p>	

INTERNATIONAL SEARCH REPORT

Intern Application No  
 PCi/US2005/007293

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>REUSS J L ET AL: "Period domain analysis in fetal pulse oximetry"                      SECOND JOINT EMBS-BMES CONFERENCE 2002. CONFERENCE PROCEEDINGS. 24TH. ANNUAL INTERNATIONAL CONFERENCE OF THE ENGINEERING IN MEDICINE AND BIOLOGY SOCIETY. ANNUAL FALL MEETING OF THE BIOMEDICAL ENGINEERING SOCIETY. HOUSTON, TX,,                      vol. VOL. 1 OF 3. CONF. 24, 23 October 2002 (2002-10-23), pages 1742-1743, XP010620304                      ISBN: 0-7803-7612-9                      section IV "Results", first paragraph                      section V "Discussion", first paragraph                      -----</p>	1,3,5,7
A	<p>US 2002/072660 A1 (DIAB MOHAMED K ET AL)                      13 June 2002 (2002-06-13)                      abstract                      -----</p>	1,2,5,6

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/us2005/007293

Patent document cited in search report	Publication date	Patent family member(s)	Publication date	
US 6411833	B1	25-06-2002	US 6083172 A	04-07-2000
			US 5853364 A	29-12-1998
			US 2005124871 A1	09-06-2005
			US 2002137994 A1	26-09-2002
			US 2004181134 A1	16-09-2004
			US 2004158135 A1	12-08-2004
			US 2002045806 A1	18-04-2002
			US 2005085735 A1	21-04-2005
-----				
US 2002072660	A1	13-06-2002	US 6360114 B1	19-03-2002
			US 2004158134 A1	12-08-2004
			AU 3773300 A	09-10-2000
			BR 0009290 A	26-12-2001
			CA 2368613 A1	28-09-2000
			EP 1171025 A1	16-01-2002
			JP 2002538920 T	19-11-2002
			WO 0056209 A1	28-09-2000
-----				