

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199888163 B2
(10) Patent No. 737420

(54) Title
Improvements relating to injection devices

(51)⁷ International Patent Classification(s)
A61M 005/20

(21) Application No: **199888163**

(22) Application Date: **1998.08.20**

(87) WIPO No: **WO99/10030**

(30) Priority Data

(31) Number	(32) Date	(33) Country
9717578	1997.08.21	GB
9718221	1997.08.29	GB

(43) Publication Date : **1999.03.16**

(43) Publication Journal Date : **1999.05.13**

(44) Accepted Journal Date : **2001.08.16**

(71) Applicant(s)
Ares-Trading S.A.

(72) Inventor(s)
Jeremy Marshall; Stuart Weekes

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001



(51) International Patent Classification ⁶ : A61M 5/20	A2	(11) International Publication Number: WO 99/10030
		(43) International Publication Date: 4 March 1999 (04.03.99)

(21) International Application Number: PCT/GB98/02495
(22) International Filing Date: 20 August 1998 (20.08.98)
(30) Priority Data:
9717578.0 21 August 1997 (21.08.97) GB
9718221.6 29 August 1997 (29.08.97) GB

(71) Applicant (for all designated States except US): OWEN MUMFORD LIMITED [GB/GB]; Brook Hill, Woodstock, Oxford OX20 1TU (GB).

(72) Inventors; and
(75) Inventors/Applicants (for US only): MARSHALL, Jeremy [GB/GB]; 16 Cranham Street, Jericho, Oxford OX2 6DD (GB). WEEKES, Stuart [GB/GB]; 39 Lakefield Road, Littlemore, Oxford OX4 4LZ (GB).

(74) Agents: LAINE, Simon, James et al.; Wynne-Jones, Laine & James, 22 Rodney Road, Cheltenham, Gloucestershire, GL50 1JJ (GB).


(71) Anes-Trading S.A.
Chateau de Jarmarcus
2028 Jarmarcus, Switzerland

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
Without international search report and to be republished upon receipt of that report.



(54) Title: IMPROVEMENTS RELATING TO INJECTION DEVICES

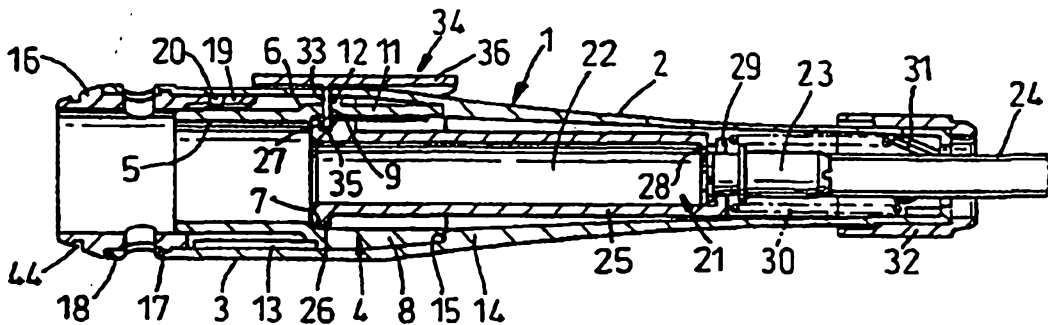

(57) Abstract

An injection device is disposable, and is designed to have a re-usable firing mechanism (37) fitted to its rear end. A syringe carrier (25) within the barrel (1) of the device is initially locked in a position with the needle (23A) of the syringe (21) retracted by a locking element (34) inserted laterally through the barrel (1). This element (34) also holds an axially movable connector (4) to which the firing mechanism connects. The device is made operable by removal of the locking element (34), and after use a return spring (30) ensures that neither the syringe carrier (25) nor the connector (4) assume positions where the locking element (34) can be re-inserted. An adaptor (40) may be provided to facilitate preparing a syringe (22) with a two component dose, and for disposal after use the adaptor with an empty vial (41) still attached can be fitted to the rear end of the injection device in place of the firing mechanism (37).

Improvements relating to Injection Devices

This invention relates to injection devices.

After any injection, the syringe with its needle is thrown away into a guarded enclosure, for obvious safety reasons. But removing it from a re-usable device that first
5 fires the syringe forwards to make the needle penetrate, then pushes the syringe piston forwards to eject the dose, and which finally withdraws the syringe and needle, can itself be hazardous and time-consuming.

One answer is to discard everything, but such injection
10 devices are complex and expensive. That is not therefore a realistic option.

However, by making the device in two parts, one being a re-usable firing mechanism with a plunger that can be released to spring forwards, and the other being a housing
15 and guide for the syringe to which the firing mechanism can be temporarily attached, it becomes possible to contemplate throwing away this other part (still containing a syringe).

According to the present invention there is provided an injection device comprising a barrel, a syringe carrier
20 within the barrel axially movable between a rearward position, in which the needle of a syringe carried thereby is retracted within the forward end of the barrel, and a forward position, in which the needle projects from the forward end of the barrel, spring means urging the syringe
25 carrier to revert to a rearward position after removal of the injection device from the skin, and a removable locking element inserted laterally into the device to prevent



premature operation, characterised in that a connector with limited freedom of axial movement is provided at the rear end of the barrel for attachment and detachment of a firing device whose firing member, when released, acts on the piston in the syringe to urge the syringe forwards and then to eject a dose, and in that, on removal of the locking element to release at least one of the connector and the syringe carrier being held rigid with the barrel, the connector and the syringe carrier assume positions, when the barrel is held against the skin by the firing device being pressed forwards, for the carrier and its syringe to be propelled forwards on actuation of the firing device.

Thus the device is manifestly in a non-usable condition as long as the locking element is in place. If it has been removed, it signifies that the device has been used and should be discarded. It is of course not just a visual signal; it is primarily a physical barrier to operation.

In order to ensure that the locking element cannot be replaced after use, and thus give the impression of a fresh injection device, it will preferably be arranged that either or both the connector and the syringe carrier finish at respective positions where their detents that were originally engaged by the locking element are no longer in registry with the aperture in the barrel through which the locking element was entered. The connector may have a snap engagement with a detent internal of the barrel to capture it in its after use position, while the spring means can urge the carrier to the rear of its locked position.



Preferably the spring means will be partially energised in the initial locked position, so that when the locking element is removed, the spring means will urge the syringe carrier rearwardly, bringing the tip of the needle further
5 back into the barrel from a nearly projecting position which enables the cap to be removed. At the same time, the carrier may act on the connector to push that rearwardly, although not so far that it is captured in its ultimate after use position. Conveniently, a snap engagement element
10 on the connector is rendered inoperative before firing of the device by interengagement of the syringe carrier and the connector, said element in that inoperative state forming a stop that limits rearward movement of the connector.

After injection, the spring means will act through the
15 carrier, the syringe and the firing member to cause the reversion of the connector to its rearward, captive position, the axial relationship between the syringe carrier and the connector having changed and removed the interengagement that rendered the snap engagement element inoperative and
20 limited the rearward movement before firing.

Conveniently, the attachment of the firing device to the connector is by mating screw threads, the connector being restrained against rotation with respect to the barrel.

25 The connector may be a stepped tube, the smaller diameter portion at the rear end providing a socket to receive the firing device, the internal forward facing shoulder formed by the step providing an abutment for the



rear end of the syringe carrier, and the external, rearward facing shoulder formed by the step providing an abutment for engagement with a locking ring, fitted to the rear end of the barrel, when the connector is at its after use position.

5 The syringe carrier may have its limit of forward movement defined by an abutment internal of the barrel. This can be provided by the rear end of guide means for keeping the syringe carrier co-axial with the barrel, and against which a flange at the rear end of the syringe carrier will
10 abut. The flange may also provide the detent in which the locking element engages.

 The spring means is conveniently a helical spring surrounding a needle unit to engage the forward end of the syringe carrier and reacting against an abutment within the
15 forward end of the barrel.

 Preferably, the forward end of the barrel is equipped internally with barbs which point towards the mouth. They will allow projection of the needle and removal of the needle cap, but make it virtually impossible to poke a
20 finger in and contact the retracted needle.



 The roots of the barbs conveniently provide the abutment for the spring.

 Such an injection device is primarily intended for use with a syringe containing a two component dose, these
25 components having to be mixed immediately before injection. One component is a liquid (which may simply be water) already within the syringe, while the other component is a powder, to be dispersed in or made into a solution with the



liquid.

Advantageously, the injection device may be provided in combination with an adaptor for use in preparation of a syringe dose, the syringe initially containing a liquid, being without its needle assembly, and having a piston to which a rod can be temporarily attached, the dose to be administered being a mixture of the liquid and a substance loosely contained in a sealed vial with a membrane over its neck, the adaptor comprising a cup member with a centrally apertured base, the cup being adapted to fit closely over the neck of the vial and having a central hollow spigot upstanding from the base that will pierce the membrane of the vial when the cap is fitted to the vial, and a formation on the outside of the base adapted to attach to the rear end of the injection device instead of the firing device, the formation having a recess communicating with the central aperture and shaped closely to receive the neck of a syringe, wherein the adaptor



enables (when the vial and syringe are fitted to said cup and said recess respectively) injection of the liquid through the aperture and said spigot into the vial, to mix with said substance, and subsequently the withdrawal of the mixture back into the syringe, which is then transferable to the injection device to co-operate with its needle assembly, and wherein, after use of the injection device, the firing device is replaceable by the adaptor with the vial still attached.

10 Said formation may be a second cup, back-to-back and having a common base with the first cup, and a central spigot formed with said recess, the second cup fitting over the rear end of the injection device. Alternatively, the formation may include an externally screw threaded plug that
15 screws into a connector socket to which the firing device can fit.

While the injection is performed the adaptor and empty vial combination is laid aside, but after the injection the combination is fitted to the injector device and, when that
20 is disposed of, so is the adaptor and vial.

For a better understanding of the invention one embodiment will now be described, by way of example, with reference to the accompanying drawings, in which

Figure 1 is an axial section of an injection device as
25 supplied, without any firing mechanism.

Figure 2 is a detail, in perspective, of part of the device,

Figure 3 is an axial section of the device with the

firing mechanism fitted and ready for use,

Figure 4 is an axial section of the device with its firing mechanism during injection,

Figure 5 is an axial section of the device after
5 injection,

Figure 6 is an axial section of the device with the firing mechanism removed and an adaptor fitted, ready for disposal, and

Figure 7 is an axial section of a vial adaptor, which
10 forms an accessory to the device, and a vial.

The device has a barrel 1 with a tapered forward part 2 and a generally cylindrical rear part 3. Telescoped into this rear part 3 there is a stepped connector tube 4 whose reduced diameter rear end portion 5 forms a screw-threaded
15 socket. At the mid-length there is an external, rearwardly facing shoulder 6 and an internal, forwardly facing shoulder 7. Just forward of these shoulders, the forward end portion 8 has an aperture 9 whose purpose is described later. Actually, as best seen in Figure 2, this aperture 9 is the
20 base of a narrow U-shaped slot 10 which forms a finger 11 effectively hinged to the portion 8 at its forward end by the resilient flexibility of the plastics material of which it is formed. At the rear end, the finger 11 has an outwardly projecting lug 12. The tube 4 is prevented from
25 rotating with respect to the barrel 1 by a spline 13 on the interior of the barrel engaged in a groove in the portion 8.

The barrel is formed with internal guide ribs 14 over most of the tapered forward part 2, these terminating in

rearwardly facing shoulders 15. The barrel is also extended rearwardly a short distance by a ring 16 which sleeves between the part 3 and the reduced diameter portion 5 of the tube 4, being retained by a snap fit rib and groove arrangement 17 and having a shoulder 18 abutting against the rear end of the barrel. The ring 16 has a forwardly projecting tongue 19 with an aperture 20 and a bevelled end.

Within the barrel 1 there is a syringe 21 comprising a capsule 22 with a needle unit 23 at its forward end, the actual needle 23A initially being encased by a cap 24. The capsule 22 is enclosed and carried by a sleeve 25 which has an outwardly projecting rim 26 at its rear end, locally thickened to accommodate a notch 27 which registers with the aperture 9 when the rear end of the sleeve 25 is up against the shoulder 7. At the forward end, the sleeve 25 has inturned flanges 28 and 29, the rear one 28 providing an abutment for the base of the needle unit 23 and the forward one 29 being U-shaped so that the base of the needle assembly can be entered laterally. That is done during manufacture, and the user never has access to the needle 23A except when it is actually performing the injection. The rear end of a helical spring 30 abuts the flange 29 and its forward end engages a guide formation 31 comprising several fingers, symmetrically arranged around the axis of the barrel to form barbs pointing inwards and forwards to terminate in the mouth of the barrel 1. These barbs can flex as necessary to allow the cap 24 to be extracted, and they do not impede the projection of the needle 23A. But

they do provide an effective barrier to finger penetration. The mouth of the barrel is surrounded by a nose piece 32, which may be removed to increase the depth of penetration of the needle into the patient.

5 There is an aperture 33 in the cylindrical part 3 of the barrel which initially registers with the aperture 9. A T-shaped locking member 34 has a short stem 35 and a long asymmetrical cross member 36, and the stem 35 is inserted through the apertures 33 and 9 for its tip to engage in the
10 notch 27 while the cross member 36 lies lengthways closely against the barrel, extending over the beginning of the tapered portion 2 and so affording a gap by which it can be prised away. In the assembled and "as supplied" condition of Figure 1, this locking member 34 ensures that the syringe
15 carrier 25 is positively held against any longitudinal movement. It also holds the connector tube 4 with its forward end abutting the shoulders 15.

This device is designed to be fitted to a known firing mechanism 37 which will not be described in detail. But it
20 has a trigger button 38 at its rear end which, when operated, projects a plunger 39 from its forward end, and it screws into the socket 5. Preferably, the button 38 will have a safe position from which it has to be twisted before it can be pressed to release the plunger.

25 This mechanism 37 is fitted immediately before use, and then the cap 24, which projects beyond the barrel 1, is pulled away to expose the needle 23A within the barrel. Finally the locking member 34 is removed, having prevented

the syringe and its carrier being dragged forwards when the cap 24 is being pulled off. The spring 30, which has been under slight compression, can now exert itself and push the barrel 1 forwardly until the forward end of the tongue 19 comes up against the lug 12. In this position the lug 12 cannot deflect under the tongue 19 due to the rim 26 of the sleeve 25. This is the position of Figure 3.

The nose-piece 32 is then applied to the skin and the firing mechanism 37 pressed forwards, telescoping into the barrel until the tube 4 is arrested by coming up against the shoulders 15 again. This brings the tip of the needle 23A back into the mouth of the barrel, but not quite projecting. The button 38 is pressed to fire the plunger 39 forwards. This rapidly pushes the syringe assembly forwards to project the needle 23 and penetrate the skin. The spring 30 is of course compressed, being weaker than that of the firing device. When the syringe assembly reaches its forward limit, which may be defined by the rim 26 meeting the shoulders 15 or by the spring 30 being fully compressed, the plunger 39 carries on to urge the piston (not shown) within the capsule 22 forwards to eject the dose. This is the position of Figure 4.

After that, the device is withdrawn, and the spring 30 exerts itself to push the barrel 1 forwards and thereby move the needle 23A further within the barrel until the lug 12 is engaged in the aperture 20. The lug 12 meets the bevelled end of the tongue 19, and as the rim 26 of the sleeve 25 is no longer under the lug 12, the finger 11 can flex inwardly

before snapping back outwardly at the point where the shoulder 6 meets a step in the locking ring 16. The locking ring and barrel are therefore trapped and cannot shift rearwardly again. This is the position of Figure 5.

5 Finally the firing mechanism 37 is removed, and replaced by a vial adaptor 40 which has been used prior to the injection. The assembly of Figure 6 is then ready for disposal.

10 In this embodiment, the locking element 34 engages both the connector 4 and the syringe carrier 25 to hold them rigid with the barrel. This is preferred, since it makes insertion of the syringe 21 and attachment of the firing mechanism simple and certain. However, the device could be made inoperative by locking either the connector 4 or the
15 syringe carrier 25, particularly the latter.

 Referring to Figure 7, the vial adaptor 40 is provided to simplify the process of preparing the syringe 21. Initially, the capsule 22 contains a liquid, while a vial 41 contains a substance, such as a lyophilised powder occupying
20 only a fraction of the space within the vial. The dose to be administered is a mixture of the liquid and the substance, and so the latter has to be transferred to the syringe.

 The vial 41 has a neck 42 across the end of which is a
25 membrane which initially seals in the powder. The adaptor 40 is, in effect, two cups base-to-base, and one cup 43 is adapted to snap over the ring 16, which is provided with an annular groove 44 to receive a rib 45 on the inside of that

cup. The other cup 46 is adapted to receive and retain, by a tight push fit or a snap-in action for example, the neck 42 of the vial 41. The common base 47 of the cups has a small central aperture 48 with a wide co-axial tubular spigot 49 on the side of the cup 43, and a narrow co-axial tubular spigot 50 on the side of the cup 46. This spigot has a sharp free end, for example by making it oblique to the axis, while the larger spigot 49 has an internal Luer taper to receive the needle-less forward end or neck of the syringe capsule 22. The piston within the capsule has a screw threaded socket on its rear facing side to receive a removable piston rod, which is fitted for the charging process as follows.

The neck 42 of the vial 41 is plugged into the cup 43 and then the neck of the capsule 22 is plugged into the spigot 49, this action causing the spigot 50 to pierce the membrane. The piston within the capsule 22 is then urged forwards by the temporary rod, forcing the liquid through the aperture 48 into the vial 41. It mixes with the substance, and this may be aided by shaking. When all the powder has dispersed, the piston is withdrawn, drawing the mixture back into the capsule 22. The piston rod is removed, and the capsule is unplugged and transferred to the sleeve 25.

The still attached combination of the adaptor 40 and vial 41 is set aside during the injection, but afterwards, when the firing mechanism 37 has been removed from the connector tube 4, the free cup 43 of the adaptor 40 is snap

fitted over the rear end of the locking ring 16. Thus the injection device with the spent syringe, the adaptor 40 and the empty vial 41 can be discarded together as a unit.

5 Instead of the cup 43 fitting to the ring 16, use could be made of the screw threaded socket provided by the rear end portion 5 of the connector 4. The adaptor 40 would have a complementary male plug surrounding the spigot 49 (or that could be thickened and externally screw threaded) to screw into the connector 4.

The claims defining the invention are as follows:

1. An injection device comprising a barrel, a syringe carrier within the barrel axially movable between a rearward position, in which the needle of a syringe carried thereby is retracted within the forward end of the barrel, and a forward position, in which the needle projects from the forward end of the barrel, spring means urging the syringe carrier to revert to a rearward position after removal of the injection device from the skin, and a removable locking element inserted laterally into the device to prevent premature operation, characterised in that a connector with limited freedom of axial movement is provided at the rear end of the barrel for attachment and detachment of a firing device whose firing member, when released, acts on the piston in the syringe to urge the syringe forwards and then to eject a dose, and in that, on removal of the locking element to release at least one of the connector and the syringe carrier being held rigid with the barrel, the connector and the syringe carrier assume positions, when the barrel is held against the skin by the firing device being pressed forwards, for the carrier and its syringe to be propelled forwards on actuation of the firing device.

2. An injection device as claimed in claim 1, characterised in that, after use, the connector finishes at a position where a detent therein that was originally engaged by the locking element is no longer in registry with an aperture in the barrel through which the locking element



was entered.

3. An injection device as claimed in claim 2, characterised in that the connector has a snap engagement with a detent internal of the barrel to capture its after
5 use position.

4. An injection device as claimed in claim 1, 2 or 3, characterised in that the syringe carrier finishes at a position where a detent therein that was originally engaged by the locking element is no longer in registry with an
10 aperture in the barrel through which the locking element was entered.

5. An injection device as claimed in claim 4, characterised in that the spring means urges the syringe carrier to the rear of its locked position.

6. An injection device as claimed in any preceding claim, characterised in that the spring means is partially energised in the initial locked position, so that when the locking element is removed, the spring means urges the syringe carrier rearwardly, bringing the tip of the needle
15 further back into the barrel from a nearly projecting position which enables the cap to be removed.

7. An injection device as claimed in claim 6 as appendant to claim 3, characterised in that the syringe carrier is arranged to act on the connector to push that rearwardly on removal of the locking element, although not
20 so far that it is captured in its ultimate after use position.

8. An injection device as claimed in claim 7,



characterised in that a snap engagement element on the connector is rendered inoperative before firing of the device by interengagement of the syringe carrier and the connector, said element in that inoperative state forming a
5 stop that limits rearward movement of the connector.

9. An injection device as claimed in claim 8, characterised in that, after injection, the spring means acts through the syringe carrier, the syringe and a firing member of the firing device to cause the reversion of the
10 connector to its rearward, captive position, the axial relationship between the syringe carrier and the connector having changed and removed the interengagement that rendered the snap engagement inoperative and limited the rearward movement before firing.

15 10. An injection device as claimed in any preceding claim, characterised in that the attachment of the firing device to the connector is by mating screw threads, the connector being restrained against rotation with respect to the barrel.

20 11. An injection device as claimed in any preceding claim, characterised in that the connector is a stepped tube, the smaller diameter portion at the rear end providing a socket to receive the firing device, the internal forward facing shoulder formed by the step providing an abutment for
25 the rear end of the syringe carrier, and the external, rearward facing shoulder formed by the step providing an abutment for engagement by a locking ring, fitted to the rear end of the barrel, when the connector is at its after



use position.

12. An injection device as claimed in any preceding claim, characterised in that the syringe carrier has its limit of forward movement defined by an abutment internal of
5 the barrel.

13. An injection device as claimed in claim 12, characterised in that the abutment is provided by the rear end of guide means for keeping the syringe carrier co-axial with the barrel, and against which a flange at the rear end
10 of the syringe carrier will abut.

14. An injection device as claimed in claim 13 as appendant to claim 4, characterised in that the flange also provides the detent in which the locking element engages.

15. An injection device as claimed in any preceding claim, characterised in that the spring means is a helical spring surrounding a needle unit to engage the forward end of the syringe carrier and reacting against an abutment within the forward end of the barrel.

16. An injection device as claimed in any preceding
20 claims, characterised in that the forward end of the barrel is equipped internally with barbs which point towards the mouth, these barbs allowing projection of the needle and removal of the needle cap, but preventing insertion of a finger.

25 17. An injection device as claimed in claim 16 as appendant to claim 15, characterised in that the roots of the barbs provide the abutment for the spring.

18. An injection device as claimed in any preceding



claim in combination with an adaptor for use in preparation of a syringe dose, the syringe initially containing a liquid, being without its needle assembly, and having a piston to which a rod can be temporarily attached, the dose


5 to be administered being a mixture of the liquid and a substance loosely contained in a sealed vial with a membrane over its neck, the adaptor comprising a cup member with a centrally apertured base, the cup being adapted to fit closely over the neck of the vial and having a central

10 hollow spigot upstanding from the base that will pierce the membrane of the vial when the cap is fitted to the vial, and a formation on the outside of the base adapted to attach to the rear end of the injection device instead of the firing device, the formation having a recess communicating with the

15 central aperture and shaped closely to receive the neck of a syringe, wherein the adaptor enables (when the vial and syringe are fitted to said cup and said recess respectively) injection of the liquid through the aperture and said spigot into the vial, to mix with said substance, and subsequently

20 the withdrawal of the mixture back into the syringe, which is then transferable to the injection device to co-operate with its needle assembly, and wherein, after use of the injection device, the firing device is replaceable by the adaptor with the vial still attached.

25 19. A combination as claimed in claim 18, characterised in that said formation is a second cup, back-to-back and having a common base with the first cup, and a central spigot formed with said recess, the second cup




fitting over the rear end of the injection device.

20. An adaptor as claimed in claim 18, characterised in that said formation includes an externally screw threaded plug that screws into a connector socket to which the firing
5 device can fit.

21. An injection device substantially as hereinbefore described with reference to Figures 1 to 5 of the accompanying drawings.

22. An injection device as claimed in Claim 21, in
10 combination with an adaptor substantially as hereinbefore described with reference to Figures 6 and 7 of the accompanying drawings.

Dated 6 June, 2001
Owen Mumford Limited
Patent Attorneys for the Applicant/Nominated Person
SPRUSON & FERGUSON



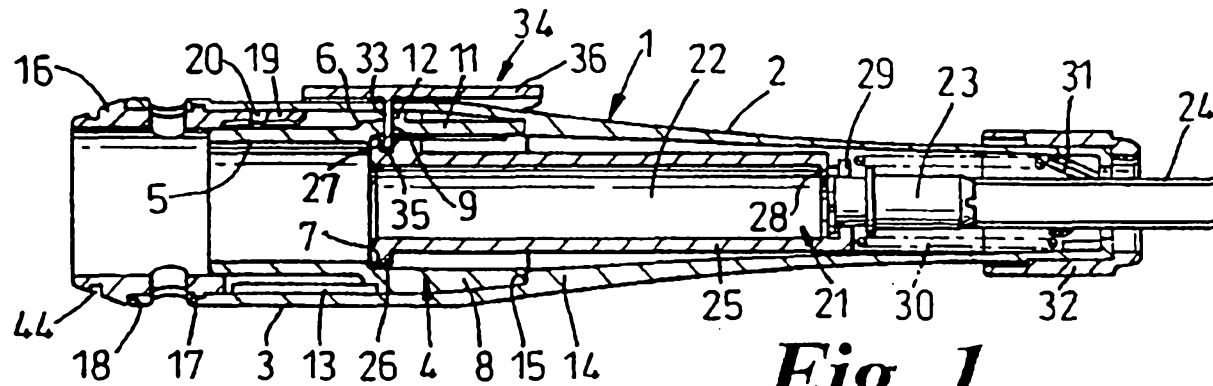


Fig. 1

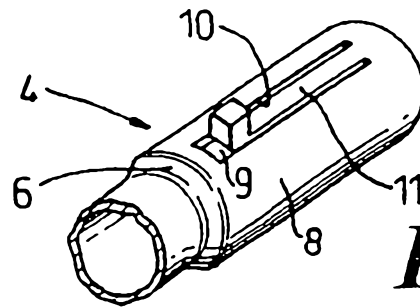


Fig. 2

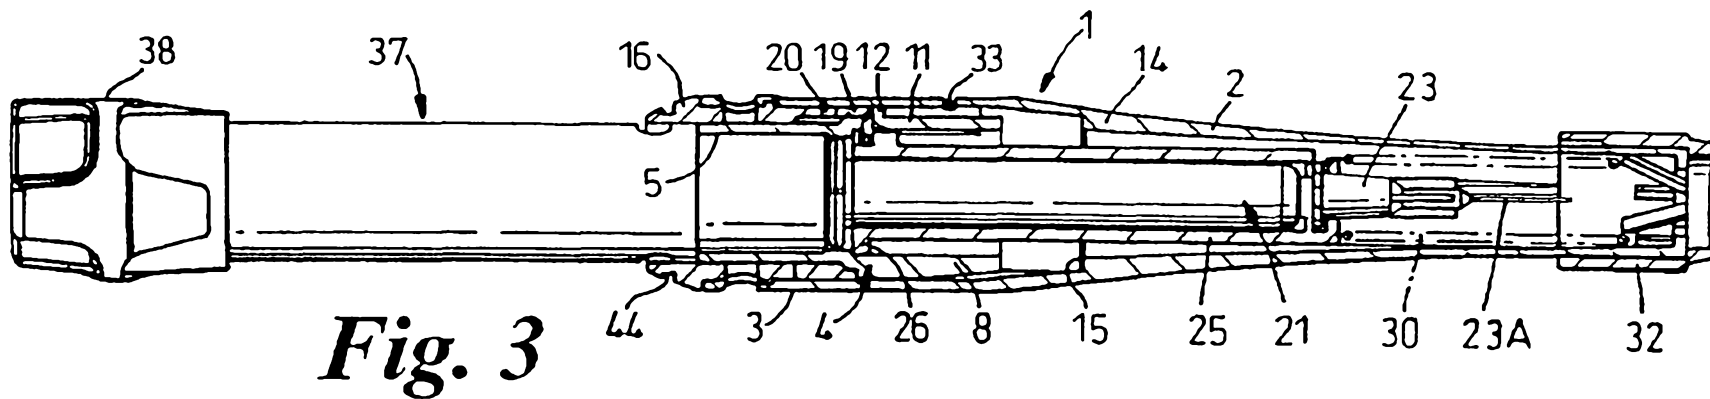


Fig. 3

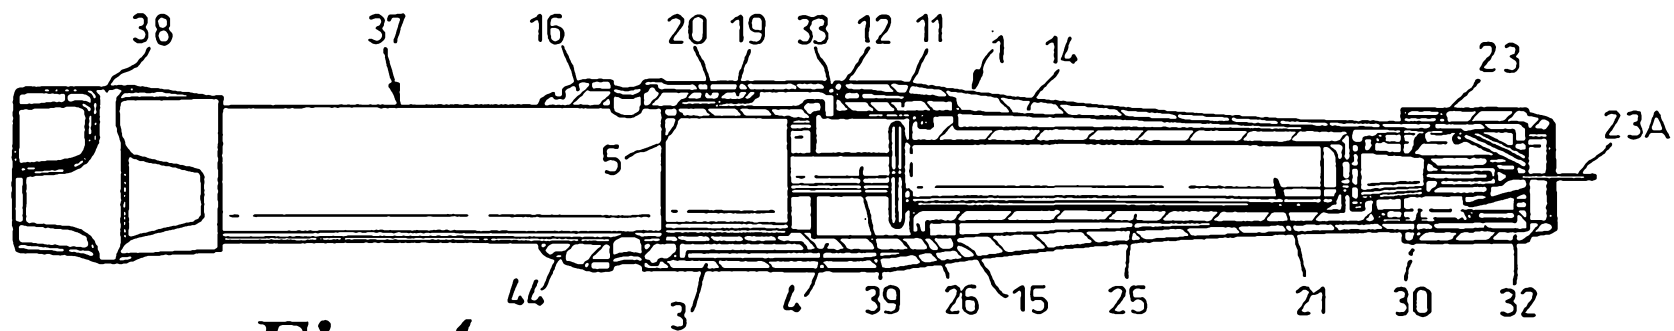


Fig. 4

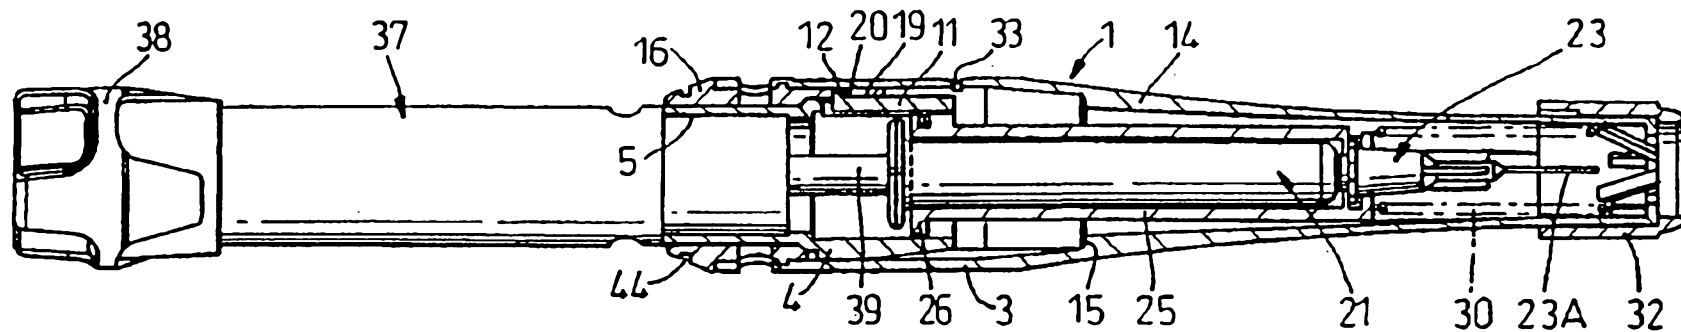


Fig. 5

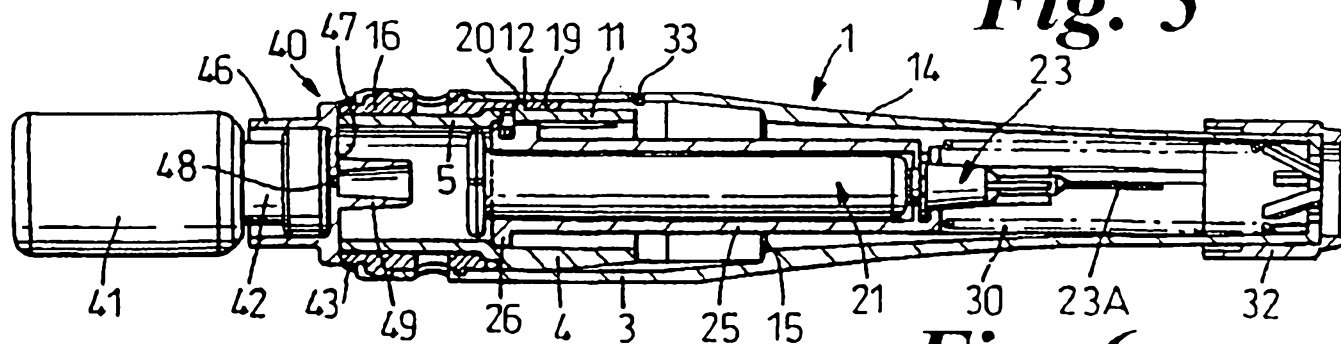


Fig. 6

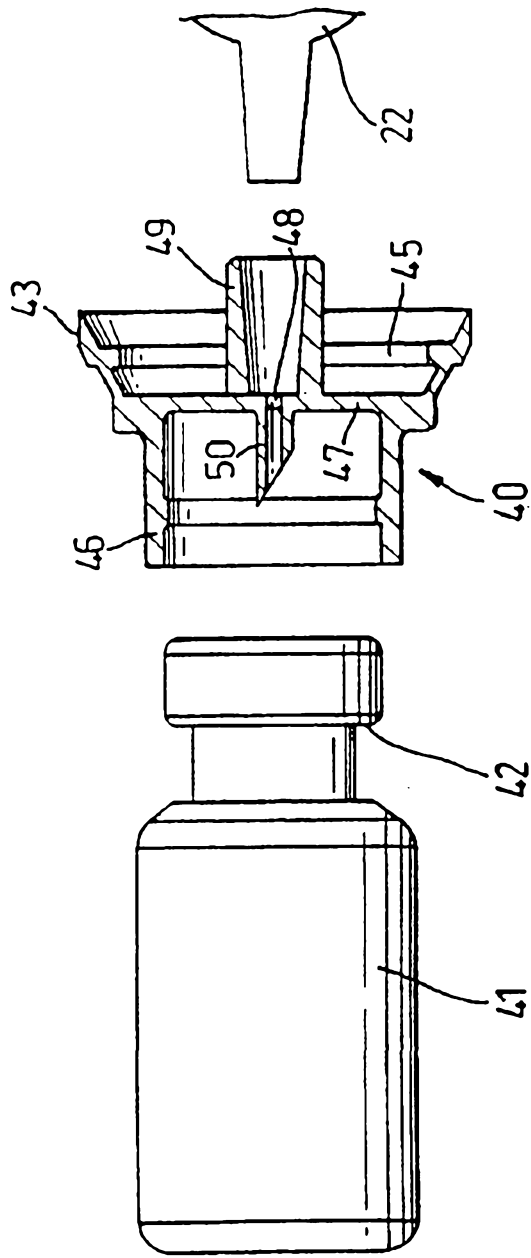


Fig. 7