



(86) Date de dépôt PCT/PCT Filing Date: 2016/01/13

(87) Date publication PCT/PCT Publication Date: 2016/07/21

(85) Entrée phase nationale/National Entry: 2017/07/11

(86) N° demande PCT/PCT Application No.: EP 2016/050575

(87) N° publication PCT/PCT Publication No.: 2016/113310

(30) Priorité/Priority: 2015/01/16 (EP15151532.7)

(51) Cl.Int./Int.Cl. *B65D 21/02* (2006.01),
B65D 23/10 (2006.01), *B65D 75/58* (2006.01),
B65D 77/06 (2006.01), *B65D 83/00* (2006.01),
G01F 19/00 (2006.01)

(71) Demandeur/Applicant:
UNILEVER PLC, GB


(72) Inventeurs/Inventors:
BENSON, PAUL, GB;
GATELY, JOHN DECLAN, GB;
PRYOR, JAMES GARFIELD, GB;
SMITH, ELIZABETH JANE, GB

(74) Agent: BERESKIN & PARR LLP/S.E.N.C.R.L.,S.R.L.

(54) Titre : SYSTÈME DE DISTRIBUTION DE LIQUIDE DE LAVAGE

(54) Title: CLEANING LIQUID DISPENSING SYSTEM

Fig. 7

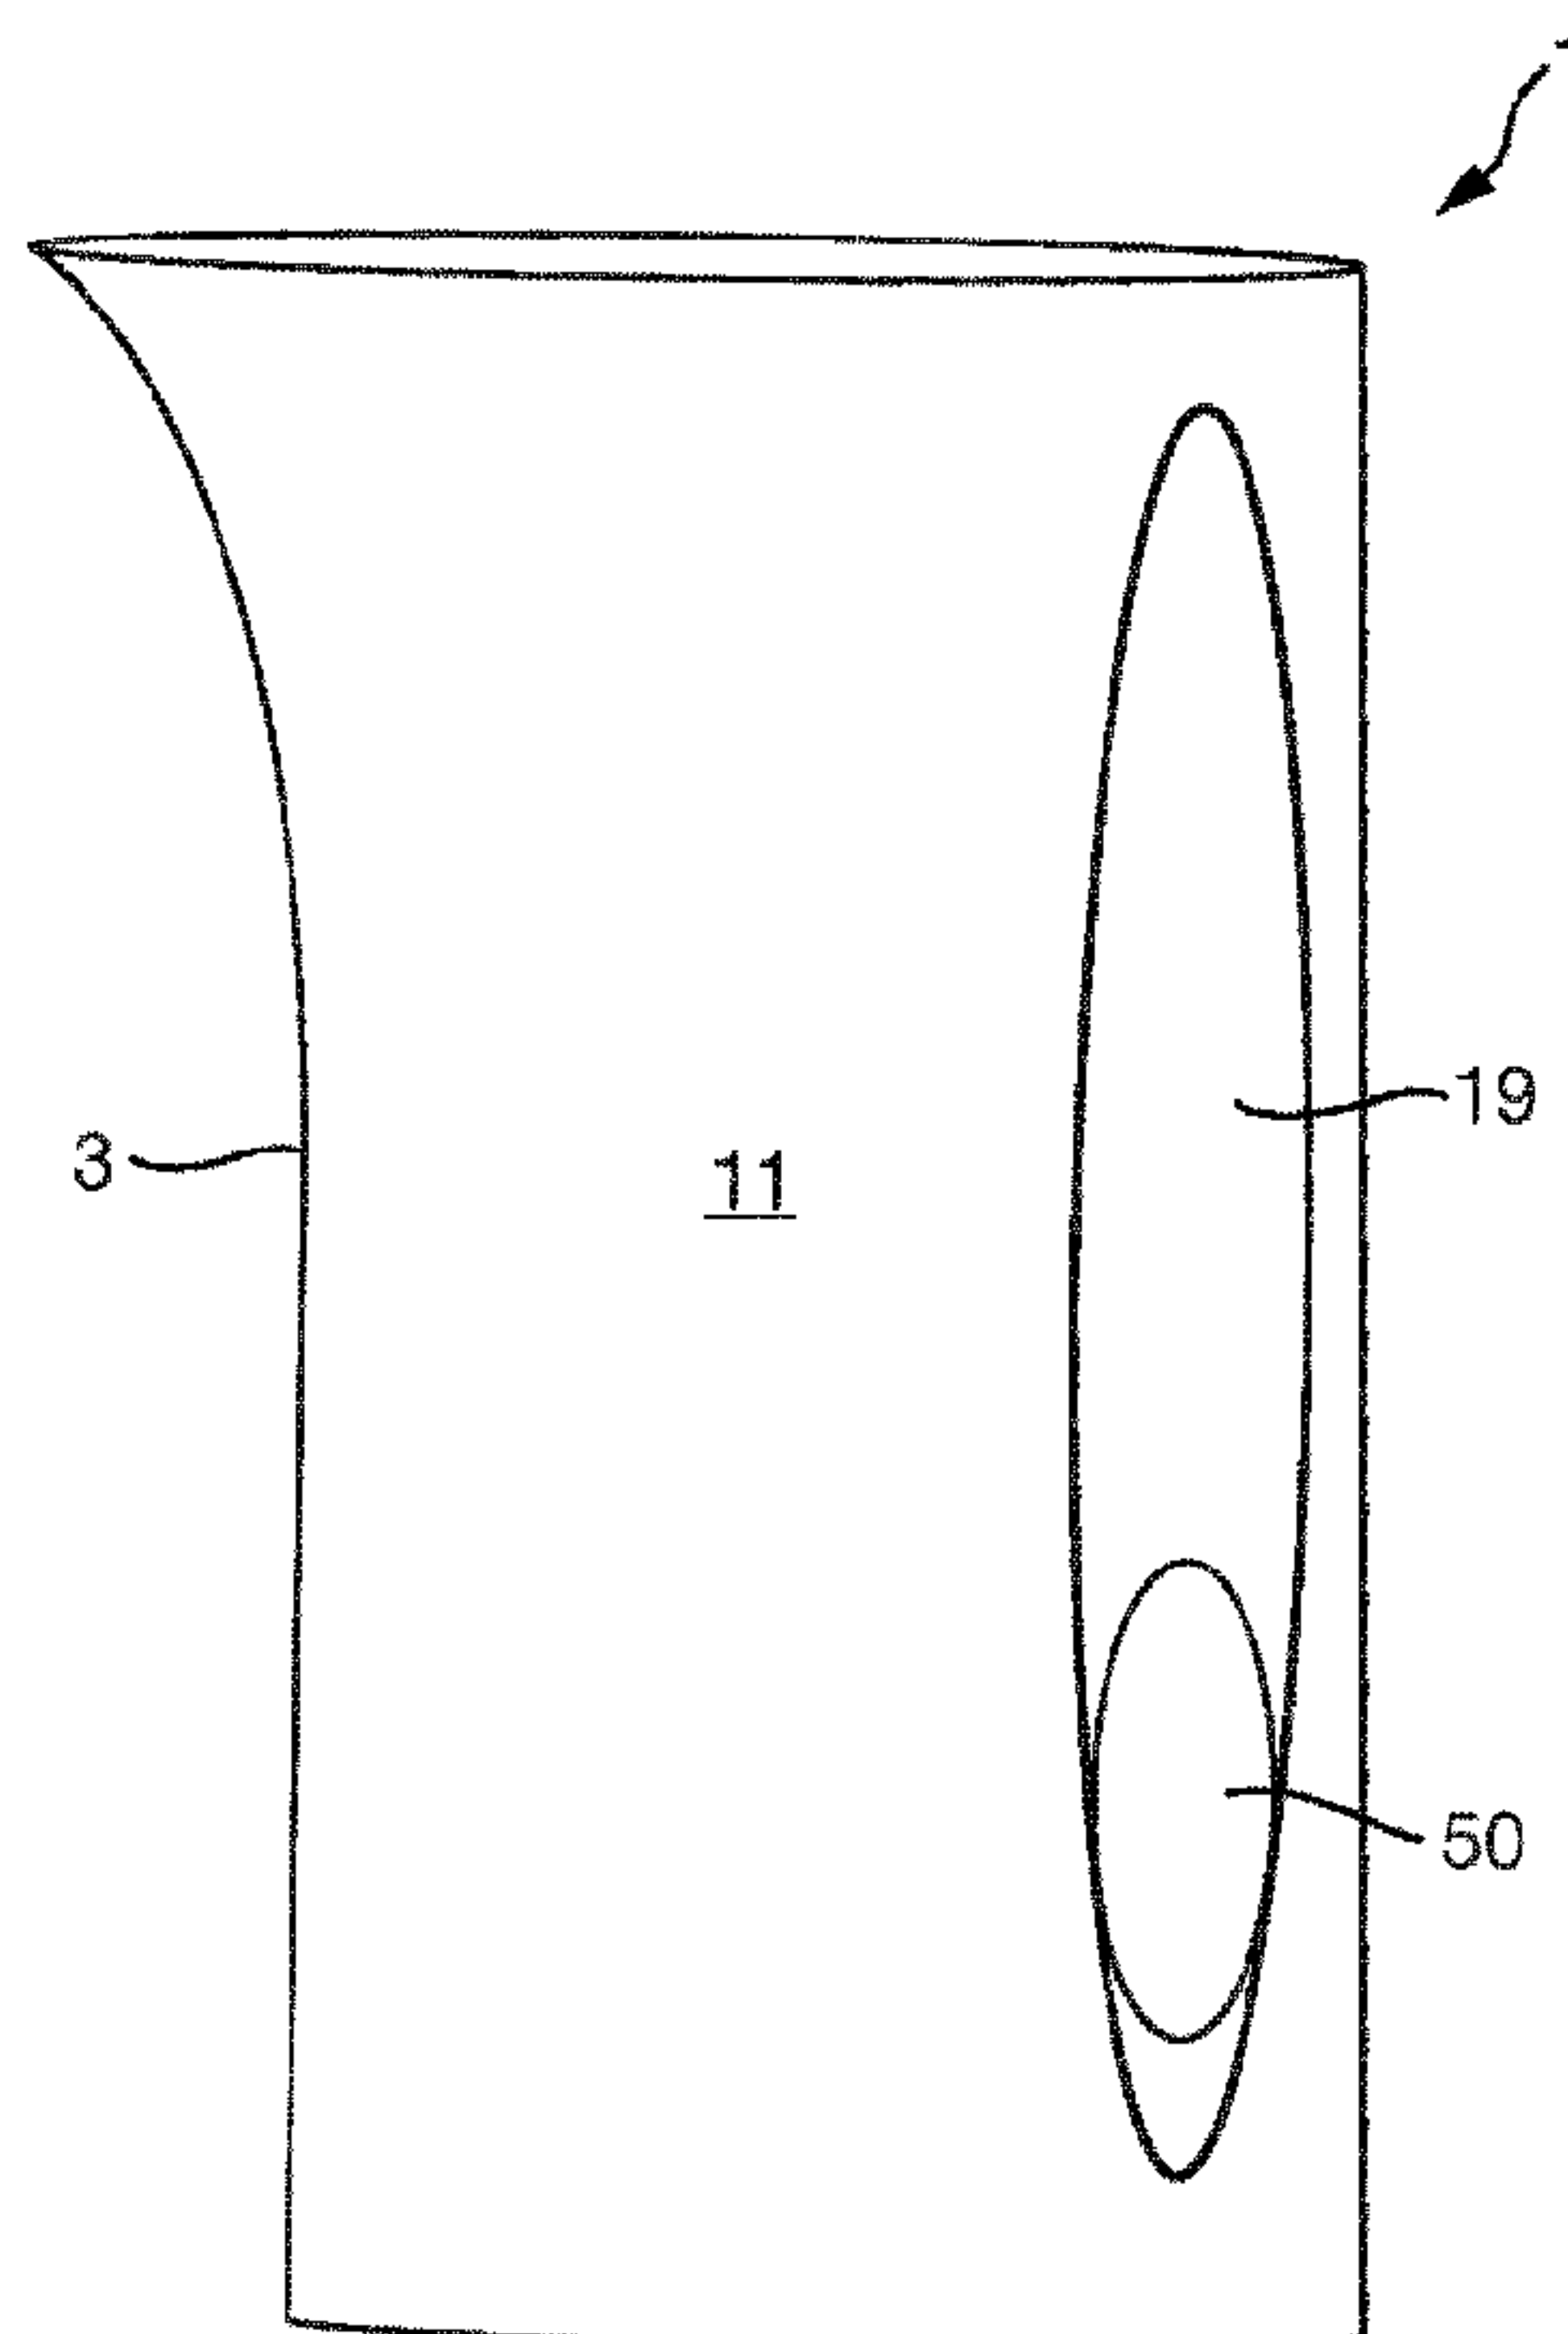

(57) Abrégé/Abstract:

A cleaning liquid dispensing system comprising the combination of a re-usable container (3) and a replaceable spouted pouch (5) wherein (i) the spouted pouch (5) comprises a flexible pouch body (7) containing a cleaning liquid which dispenses from a rigid pouch spout (9), (ii) the container (3) is rigid and comprises a pouch chamber (11) for holding said spouted pouch, and a pour spout (17) in fluid communication with said rigid pouch spout (9), (iii) the container comprises a handle aperture (19), and (iv) a dosing device (50) is nested in the handle aperture (19).

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2016/113310 A1(43) International Publication Date
21 July 2016 (21.07.2016)

(51) International Patent Classification:

B65D 21/02 (2006.01) *B65D 77/06* (2006.01)
B65D 23/10 (2006.01) *B65D 83/00* (2006.01)
B65D 75/58 (2006.01) *G01F 19/00* (2006.01)

(21) International Application Number:

PCT/EP2016/050575

(22) International Filing Date:

13 January 2016 (13.01.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15151532.7 16 January 2015 (16.01.2015) EP

(71) **Applicant** (for AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SA, SC, SD, SG, SL, SZ, TT, TZ, UG, VC, ZA, ZM, ZW only): **UNILEVER PLC** [GB/GB]; a company registered in England and Wales under company no. 41424 of Unilever House, 100 Victoria Embankment, London Greater London EC4Y 0DY (GB).

(71) **Applicant** (for all designated States except AE, AG, AU, BB, BH, BN, BW, BZ, CA, CY, EG, GB, GD, GH, GM, IE, IL, IN, KE, KN, LC, LK, LS, MT, MW, MY, NA, NG, NZ, OM, PG, QA, RW, SA, SC, SD, SG, SL, SZ, TT, TZ, UG, US, VC, ZA, ZM, ZW): **UNILEVER N.V.** [NL/NL]; Weena 455, 3013 AL Rotterdam (NL).

(71) **Applicant** (for US only): **CONOPCO, INC., D/B/A UNILEVER** [US/US]; 800 Sylvan Avenue AG West, S. Wing, Englewood Cliffs, New Jersey 07632 (US).


(72) **Inventors**: **BENSON, Paul**; Unilever R&D Port Sunlight Quarry Road East, Bebington, Wirral Merseyside CH63 3JW (GB). **GATELY, John, Declan**; Unilever R&D Port Sunlight Quarry Road East, Bebington, Wirral Merseyside CH63 3JW (GB). **PRYOR, James, Garfield**; Touch Design Ltd The Quad, Stubbings Estate, Henley Road, Maidenhead Berkshire SL6 6LQ (GB). **SMITH, Elizabeth, Jane**; Unilever R&D Port Sunlight Quarry Road East, Bebington, Wirral Merseyside CH63 3JW (GB).

(74) **Agent**: **HARDY, Susan, Margaret**; Unilever R&D Colworth Colworth House, Sharnbrook, Bedford Bedfordshire MK44 1LQ (GB).

[Continued on next page]

(54) Title: CLEANING LIQUID DISPENSING SYSTEM

Fig. 7

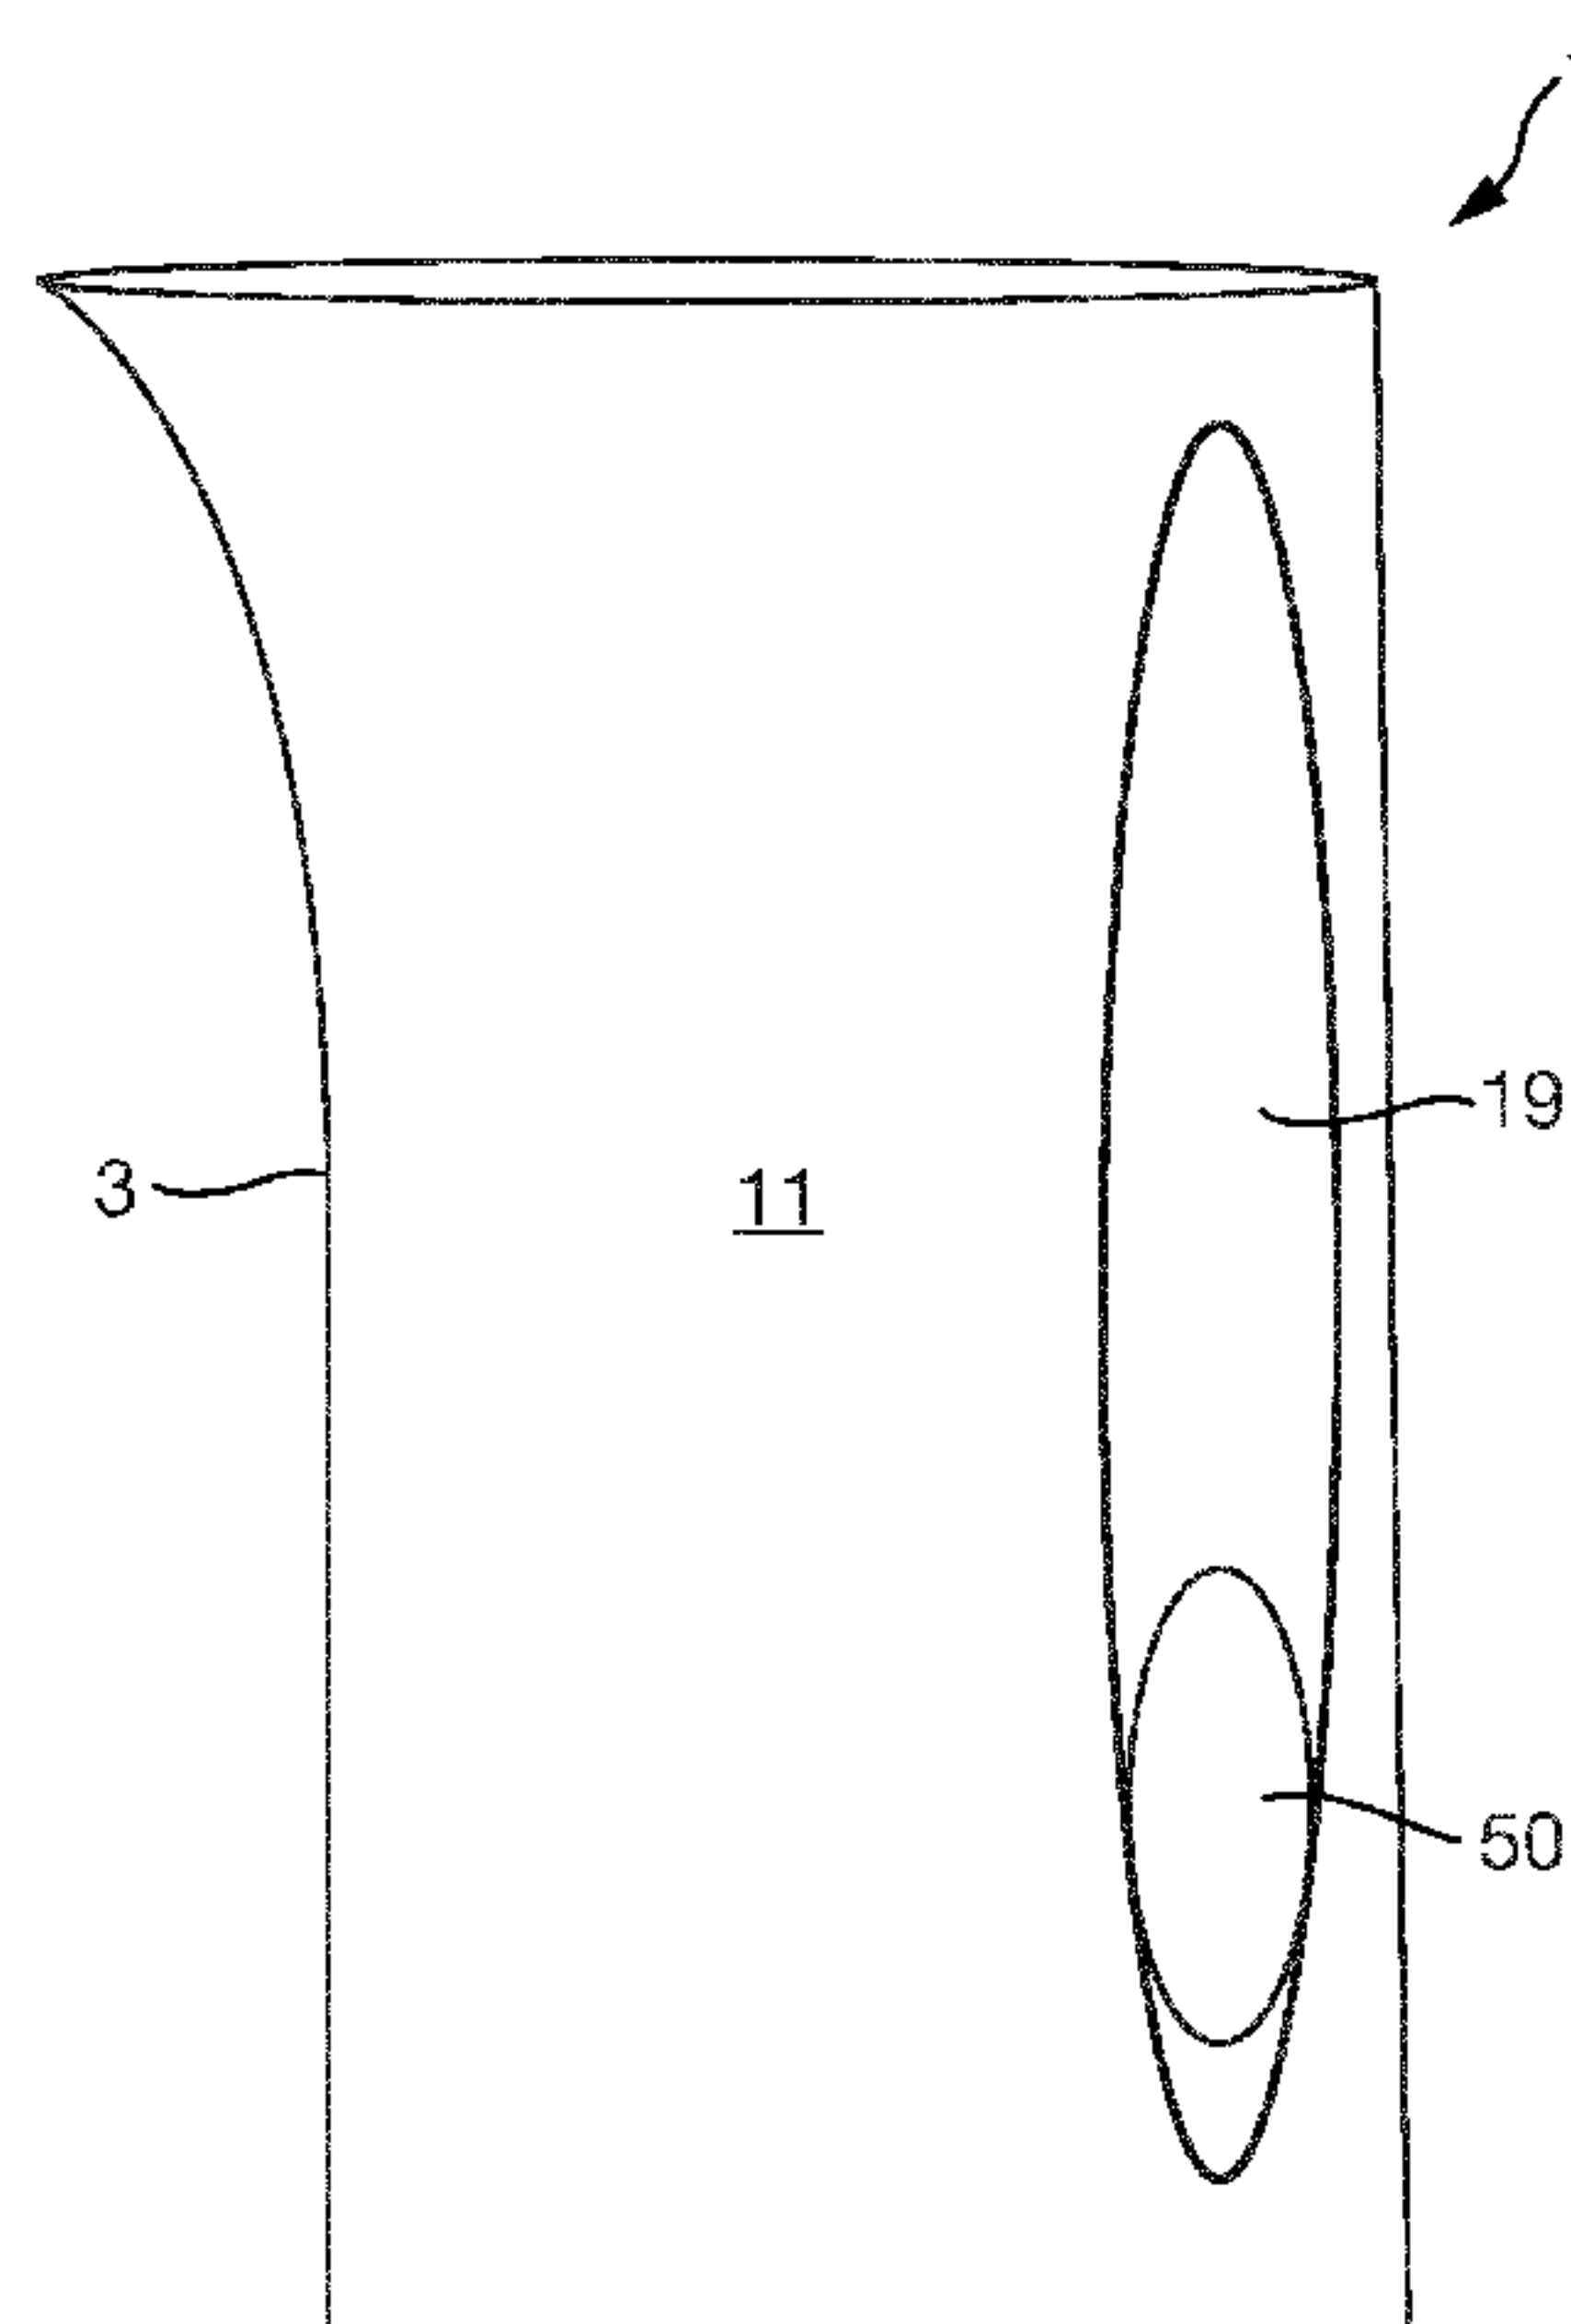

(57) **Abstract**: A cleaning liquid dispensing system comprising the combination of a re-usable container (3) and a replaceable spouted pouch (5) wherein (i) the spouted pouch (5) comprises a flexible pouch body (7) containing a cleaning liquid which dispenses from a rigid pouch spout (9), (ii) the container (3) is rigid and comprises a pouch chamber (11) for holding said spouted pouch, and a pour spout (17) in fluid communication with said rigid pouch spout (9), (iii) the container comprises a handle aperture (19), and (iv) a dosing device (50) is nested in the handle aperture (19).

WO 2016/113310 A1

(81) Designated States *(unless otherwise indicated, for every kind of national protection available):* AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available):* ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report (Art. 21(3))*

- 1 -

CLEANING LIQUID DISPENSING SYSTEM

The present invention relates to re-usable dispensing devices for pouched liquid cleaning products, in particular but not exclusively for spouted pouches containing laundry liquid cleaning compositions which require measured dispensing.

The objective of the present invention is to provide improved packaging which incorporates spouted pouches to be dispense cleaning liquids in accurate, measured doses.

Accordingly, in a first aspect of the present invention there is provided a cleaning liquid dispensing system comprising the combination of a re-usable container and a replaceable spouted pouch wherein

- (i) the spouted pouch comprises a flexible pouch body containing a cleaning liquid which dispenses from a rigid pouch spout; and
- (ii) the container is rigid and comprises a pouch chamber for holding said spouted pouch, and a pour spout in fluid communication with said rigid pouch spout.
- (iii) the container comprises a handle aperture
- (iv) a dosing device nested in the handle aperture.

In a second aspect of the present invention there is provided a re-usable, rigid container for dispensing a cleaning liquid from a spouted pouch, the container comprising a pouch chamber and a pour spout and a handle characterized in the provision of a handle aperture in which is nested a dosing device.

With this arrangement, a cleaning liquid can be dispensed easily and accurately into a dosing device from a flexible, thin-walled (and therefore more environment friendly) pouch by locating the pouch in a re-usable rigid container. Less material can be used in packaging manufactured in large numbers and purchased regularly by the consumer but without the disadvantages of such packaging for

- 2 -

the consumer who does not want to simply empty its contents but needs to dispense small amounts accurately into a dosing device, repeatedly on different occasions (days) over a period of time. This can be difficult to achieve because controlled pouring is difficult from an unwieldy pouch due to the fluidity of the body especially as it becomes more empty. When pouches are used within the system of the invention it is possible to achieve controlled pouring from the pour spout into the dosing device.

Preferably the handle aperture is elongate and extends longitudinally of the container. This allows for the user to hold the container at any point along the height of the container for improved control whilst pouring.

Preferably the handle aperture extends for at least 80% of the height of the container (when container is located upright on level surface).

The handle aperture is preferably a through-hole for greater gripping.

Preferably the dosing device comprises (a) a storage chamber for storing the cleaning liquid, and (b) a filling and dispensing aperture defined by one or more upper edge portions of the storage chamber, said edge portion/s comprising a pour spout.

Preferably the device is oval in circular or oval in cross section. Preferably the device is flexible so as to enable squeezing into the handle aperture. Preferably the device comprises a waist portion to allow the device to stay in position once it is located in the handle aperture.

The dosing device may also provide a fabric stain treatment or pre-treatment function. Accordingly the device may comprise a portion with at least one scrubbing portion. Advantageously this may be on a base/ base edge portion.

- 3 -

Preferably the rigid pouch spout and the container comprise respective engagement members by which engagement the pouch spout is in fluid communication with the container pour spout to allow dispensing of the cleaning
5 liquid stored in the flexible pouch body.

The container preferably comprises one or more walls, and may comprise multiple side walls. The container may be a jug or pitcher type construction. The container is preferably generally ellipsoid in cross section. This advantageously provides a
10 less bulky container.

The handle aperture is preferably located on another e.g. opposing or adjacent (top) side to a pour spout. Generally the container is an upright body with upright longitudinal axis with a lid which may be in a generally transverse section/plane
15 (but which need not be planar or indeed flat).

Preferably the container and pouch spout comprise respective pairs of rigid engagement members, and more preferably these engage along substantially orthogonal and intersecting axis.
20

Preferably the rigid engagement members comprise a respective pair of locating members, which locate the spout in a position whereby a second pair: the fluid communication members can be engaged for fluid intercommunication therebetween. Preferably the locating pair engage in a transverse direction
25 relative to the container's longitudinal axis

Preferably the container comprises a lid which is operable to overlie an aperture in the spout chamber and also includes the container pour spout.

- 4 -

Preferably the lid is hinged relative to the spout chamber such that it is pivoted between a first 'closed' position in which it overlies the aperture in the pouch chamber and a second 'open' position in which it lies in an upright plane. However the lid may also be a separate component. Preferably the respective engagement members of the container and the pouch spout engage via snap-fit engagement. More preferably the container engagement member comprises a recess in an upper part e.g. on or adjacent a perimeter or upper section of one side of the pouch chamber, said recess being configured to receive the rigid pouch spout in snap-fit engagement.

10

The recess is preferably shaped to correspond with the circumferential shape of the pouch spout engagement member. Preferably the recess is generally C-shaped (in plan view with the container resting upright on a level surface) and comprise an annular opening or gap to allow respective pouch spout engagement member to be pushed (by sliding transformation movement) into the recess.

15

Preferably the lid is lockable in the closed and/or open positions. This may be effected by locking members on the lid and pouch chamber.

20

The container preferably comprises a lid engagement member, on the lid. The lid engagement member is preferably configured for snap fit engagement with the pouch spout in a direction orthogonal to the direction of forces driving engagement of the pouch spout and container engagement member. Preferably the lid engagement member engages with the pouch spout for fluid communication therebetween. Preferably the lid engagement member and the lid engagement member may, during engagement actuate an opening mechanism of the pouch spout.

25

- 5 -

Preferably the container engagement members and/or the engagement member of the pouch spout comprise a resilient material, e.g. plastic.

5 Preferably the lid engagement member engages when the lid overlies the aperture. More preferably the engagement is actuated by the locating e.g. pivoting of the lid to overlie the aperture.

10 The pouch spout engagement member is preferably a collar which engages with the recess in the container, these two components forming a pair of locating engagement members. Preferably the pouch spout collar is on a upper part of the pouch spout, adjacent any pouch opening. Preferably the collar is above any pouch spout weld fins/ribs. In this way the pouch spout can be located deeper into the pouch chamber and the lid can be flatter.

15 Preferably the container/lid and pouch engagement members comprise corresponding visual and/or tactile indicia e.g. colouring, texturing etc. to confirm correct engagement with the container/lid engagement member.

20 The adaption of the pouch for such a container is very elegant and simple and so impact on pouch manufacture/material usage is minimal.

25 The flexible pouch body is preferably has a generally oval cross (transverse) section, and may be formed by two walls sealed together along wall perimeters or one wall folded and sealed, along remaining wall perimeters and presenting a front face and a rear face bounded by common side edges. The pouch can have a very simple material/construction and so complicated base or gusset features to provide self-standing features are not necessary. The pouch may therefore be manufactured much cost effectively marketed with greater freedom as to orientation. Without the need for a base part, the pouch may provide a more
30 advantageous shape for artwork.

- 6 -

Preferably the pouch spout is located on a side of the pouch. The side may comprise a flat seam.

- 5 The pouch spout may comprise a removable lid. The pouch spout may further comprise a secondary closure such as a flexible seal or tamper-evident locking mechanism.

10 The liquid composition may be any multi-dose fabric/laundry or hard surface washing or treatment composition. As used herein, the term "laundry" is intended to include, without limitation, fabric cleaning, care, and conditioning compositions.

The dispenser can be used to dispense a portion of the composition stored in the pouch chamber into a washing machine or washing receptacle. The collapsed
15 pouch is contained in the rigid container and therefore does not hamper future dispensing operations.

In a further aspect the invention provides a method of dispensing a cleaning liquid using a dispensing system comprising the combination of a re-usable container
20 and a replaceable spouted pouch wherein

(i) the spouted pouch comprises a flexible pouch body containing a cleaning liquid which dispenses via rigid pouch spout; and

(ii) the container is rigid and comprises a pouch chamber for holding said spouted pouch, and a pour spout,

25 characterized in that the rigid pouch spout and the container comprise respective engagement members;

the method comprising the steps of :

i. inserting the spouted pouch into the container pouch chamber

ii. engaging the respective engagement members such that the pouch spout is in

30 fluid communication with the container pour spout

- 7 -

iii. dispensing of the cleaning liquid stored in the flexible pouch body via the container pour spout.

Various non-limiting embodiments of the invention will now be more particularly
5 described with reference to the following figures in which:

Exemplary Formulations

Non-Limiting Examples of Laundry Treatment (washing and conditioning)
Compositions According To Embodiments of the Invention As Described
10 **below.**

Unless stated otherwise, all proportions are given in weight percent by weight of the total composition.

Exemplary Liquid Fabric Treatment (Conditioner) Compositions 1, 2 and 3

Composition	1	2	3
Softener			
Soft TEA Quat*	16.5	10	16.5
Fatty alcohol**	-	0.5	
Other components			
Electrolyte (CaCl ₂)	0.015	0.015	0.015
Perfume	1.00	1.00	1.00
Water	to 100	to 100	to 100

* Soft TEA quat is a cationic softener based on triethanolamine with tallow and 15% IPA as solvent. Compositions 1 and 2: (VT-90 ex Stepan)

5 Composition 3: Soft DEEDMAC (Armosoft DEQ ex Akzo)

** C16C18 fatty alcohol (Hydrenol D ex Cognis)

Exemplary Liquid Fabric Treatment (Washing) Composition

10

Ingredient as 100% active	Wt %
Neodol 25-9*	6-8
Alcohol ethoxy sulfate	12-15
Linear alkylbenzene sulfonate	6-9
Sodium citrate, dihydrate	3-6
Propylene glycol	4-8
Sorbitol	3-6
Sodium tetraborate pentahydrate	2-4
Minor additives and water	to 100%

*C₁₂-C₁₅ alkoxyated (9EO) chain group

- 9 -

Figure 1 is a perspective view of a dispensing system according to one embodiment of the present invention, shown in three stages of operation; and

5 Figures 2-5 show further embodiments in perspective view, shown in similar stages of operation to Figure 1.

Figures 6a, 6b and 6c show enlarged side, front and plan (respectively) views of the pouch spout of the embodiment shown in Figure 1.

10 Figure 7 is a further embodiment in side view showing the container with the handle aperture of the invention.

In the figures, common reference numbers are used to denote corresponding/common features.

15

Referring to Figure 1, a cleaning liquid dispensing system 1 container (jug) 3 and a replaceable spouted pouch 5.

20

The spouted pouch 5 comprises a flexible pouch body 7 containing a cleaning liquid (not shown) which dispenses from a rigid pouch spout 9. The container 3 comprises a pouch chamber 11 for holding said spouted pouch 5, and a pour spout 17. Generally the container 3 is an upright body with upright longitudinal axis with a low profile lid 25.

25

The container comprises an elongate handle aperture 19 (illustrated more clearly in figure 7) within the pouch chamber 11, in which aperture 19 is nested dosing device 50. The handle aperture 17 extends longitudinally and at least 80% of the height of the container 3 (when container is located upright on level surface as shown in Figure 7. The handle 17 is a through-hole to allow the user greater grip.

30

- 10 -

The dosing device 50 comprises a storage chamber for storing the cleaning liquid which is generally oval in cross section, and a filling and dispensing aperture defined by one or more upper edge portions of the storage chamber, said edge portion/s comprising a pour spout.

5

The dosing device 50 is flexible so as to enable squeezing into the handle aperture. The dosing device 50 comprises a waist portion to allow the device to stay in position once it is located in the handle aperture.

10 The dosing device 50 may also provide a fabric stain treatment or pre-treatment function. Accordingly the device comprises scrubbing portions (not shown) on a base edge portion.

The rigid pouch spout 9 and the container 3 comprise respective engagement
15 members 15 and by this engagement the pouch spout 9 is brought into fluid communication with the container pour spout 17 to allow dispensing of the cleaning liquid from the flexible pouch body 7.

20 The container 3 and pouch spout 9 comprise respective pairs of rigid engagement members 15. These operate along substantially orthogonal and intersecting axis.

The rigid engagement members 15 comprise a respective pair of locating
members 21, which engage to locate the pouch spout 9 in a position whereby a
second pair of rigid engagement members: the fluid communication members 23
25 can be engaged for fluid intercommunication therebetween. The locating pair 21 engage in a transverse direction relative to the upright axis of the container 3 and the general direction of the engagement of fluid communication pair 23.

30 The container 3 comprises a lid 25 which is operable to overlie an aperture 27 in the pouch chamber 11 and also includes the container 3 pour spout 17.

- 11 -

Preferably the lid 25 is hinged relative to the pouch chamber 11 such that it is pivoted between a first position in which it overlies the aperture 27 and an open position in which it lies in an upright plane away from the aperture 27.

5

The respective engagement members 15 of the container 3 and the pouch spout 9 engage via snap-fit engagement. The locating pair 21 consists of a container recess 31 in an upper part of the pouch chamber on the aperture perimeter 29 , which is configured to receive the respective rigid pouch spout collar 40 in snap-fit
10 engagement. The recess is shaped to correspond with the circumferential shape of the pouch spout collar 40. The recess 31 is C-shaped (in plan view with the container 3 resting upright on a level surface) and comprises an annular gap which is dimensioned slightly smaller than the diameter of the pouch spout collar to allow the collar 40 to be pushed (by sliding transformation movement) into the
15 recess 31.

The fluid intercommunication pair 23 comprises a lid engagement member 35, on the lid 25 and, configured for axial snap-fit engagement with the pouch spout 9 in a direction orthogonal to the axial direction of forces driving locational
20 engagement. The lid engagement member 35 engages with the pouch spout to provide fluid communication therebetween. This also actuates an opening mechanism of the pouch spout 9. This may be by a cam-operated rotation of a opening mechanism or by breaking a frangible seal on the pouch spout . In other embodiments the user may additionally or alternatively remove a lid or seal to
25 open the pouch.

Preferably the container engagement members and/or the engagement member of the pouch spout 9 comprise a resilient material, i.e. plastic to provide the snap fit engagement.

30

- 12 -

The lid engagement member 35 only engages when the lid 25 overlies the aperture and is in a level position.

5 The pouch spout collar 40 is on an upper part of the pouch spout 9, adjacent the pouch opening 43 and above the pouch spout weld fins/ribs. In this way the pouch spout 9 is located deeper into the pouch chamber 11 and the lid 25 can be flatter.

10 The liquid composition may be a flowable fabric or hard surface washing or treatment composition. The dispenser can be used to dispense the flowable composition into a washing machine or washing receptacle, and re-stored in the reservoir aperture after use. In the case of certain compositions e.g. liquid compositions, the dispenser may advantageously be rinsed e.g. by leaving the dispenser in the wash so that the rinse part of the cycle rinses the dispenser.

15

In use, the spouted pouch 5 is inserted into the container 3 pouch chamber 11 engaging the respective engagement members 15 such that the pouch spout 9 is in fluid communication with the container 3 pour spout 17. The liquid is then dispensed from the pour spout as desired.

20

.
With this arrangement, dispensing is accurate and efficient. A flexible, thin-walled (and therefore more environment friendly) pouch can be used for packaging purchased frequently by the consumer but without the disadvantages of such packaging. Thus, whereas it can be difficult to achieve controlled pouring from an unwieldy pouch due to the fluidity of the body, when this pack is used within the system of the invention it is possible to achieve controlled pouring from the pour spout into a selected, small location such as a measuring cup or 'shuttle' or machine drawer or directly to a fabric stain prior to hand scrubbing/pre-treatment.

25

- 13 -

It is of course to be understood that the invention is not intended to be restricted to the details of the above embodiment which are described by way of example only.

- 14 -

CLAIMS

1. A cleaning liquid dispensing system comprising the combination of a
cleaning liquid dispensing system comprising the combination of a re-usable
5 container and a replaceable spouted pouch wherein

(i) the spouted pouch comprises a flexible pouch body containing a cleaning liquid
which dispenses from a rigid pouch spout; and

(ii) the container is rigid and comprises a pouch chamber for holding said spouted
pouch, and a pour spout in fluid communication with said rigid pouch spout.

10 (iii) the container comprises a handle aperture

(iv) a dosing device nested in the handle aperture.

2. A cleaning liquid dispensing system according to claim 1 wherein the handle
aperture is elongate and extends longitudinally of the container.

15

3. A cleaning liquid dispensing system according to claim 1 or 2, wherein the
handle aperture extends for at least 80% of the height of the container (when
container is located upright on level surface).

20 4. A cleaning liquid dispensing system according to any preceding claim wherein
the handle aperture is through-hole.

5. A cleaning liquid dispensing system according to any preceding claim wherein
the dosing device comprises (a) a storage chamber for storing the cleaning liquid,
25 and

(b) a filling and dispensing aperture defined by one or more upper edge portions
of the storage chamber, said edge portion/s comprising a pour spout.

30

- 15 -

6. A cleaning liquid dispensing system according to any preceding claim wherein is flexible so as to enable squeezing into the handle aperture and comprises a waist portion to allow the device to stay in position once it is located in the handle aperture.

5

7. A cleaning liquid dispensing system according to any preceding claim wherein the dosing device provides a fabric stain treatment or pre-treatment function by means of at least one scrubbing portion.

10 8. A cleaning liquid dispensing system according to any preceding claim wherein the container and pouch spout comprise respective pairs of snap-fit rigid engagement members which engage along substantially orthogonal and intersecting axis.

15 9. A system according to any of claims 2 or 3 wherein the rigid engagement members comprise a respective pair of locating members, which locate the spout in a position whereby a second pair: the fluid communication members can be engaged for fluid intercommunication therebetween.

20 10. A system according to any preceding claim wherein the container comprises a lid which is operable to overlie an aperture in the spout chamber and said lid includes the container pour spout.

25 11. A system according to any preceding claim wherein the liquid composition is a multi-dose laundry liquid.

12. A re-usable, rigid container for dispensing a cleaning liquid from a spouted pouch, the container comprising a pouch chamber and a pour spout and a handle characterized in the provision of a handle aperture in which is nested a dosing
30 device.

- 16 -

13. A method of dispensing a cleaning liquid using a dispensing system comprising the combination of a re-usable container and a replaceable spouted pouch wherein

- 5 (i) the spouted pouch comprises a flexible pouch body containing a cleaning liquid which dispenses via rigid pouch spout; and
- (ii) the container is rigid and comprises a pouch chamber for holding said spouted pouch, and a pour spout, characterized in that
- (iii) the container comprises a handle aperture
- 10 (iv) a dosing device nested in the handle aperture.

the method comprising the steps of :

- i. inserting the spouted pouch into the container pouch chamber
- ii. removing the dosing device from the handle aperture

dispensing of the cleaning liquid stored in the flexible pouch body via the container

- 15 pour spout into the dosing device
- iv. optionally nesting the dosing device into the handle aperture.

14. A system, method or pouch substantially as described herein and/or as illustrated in any of the drawings.

20

1/7

Fig. 1a

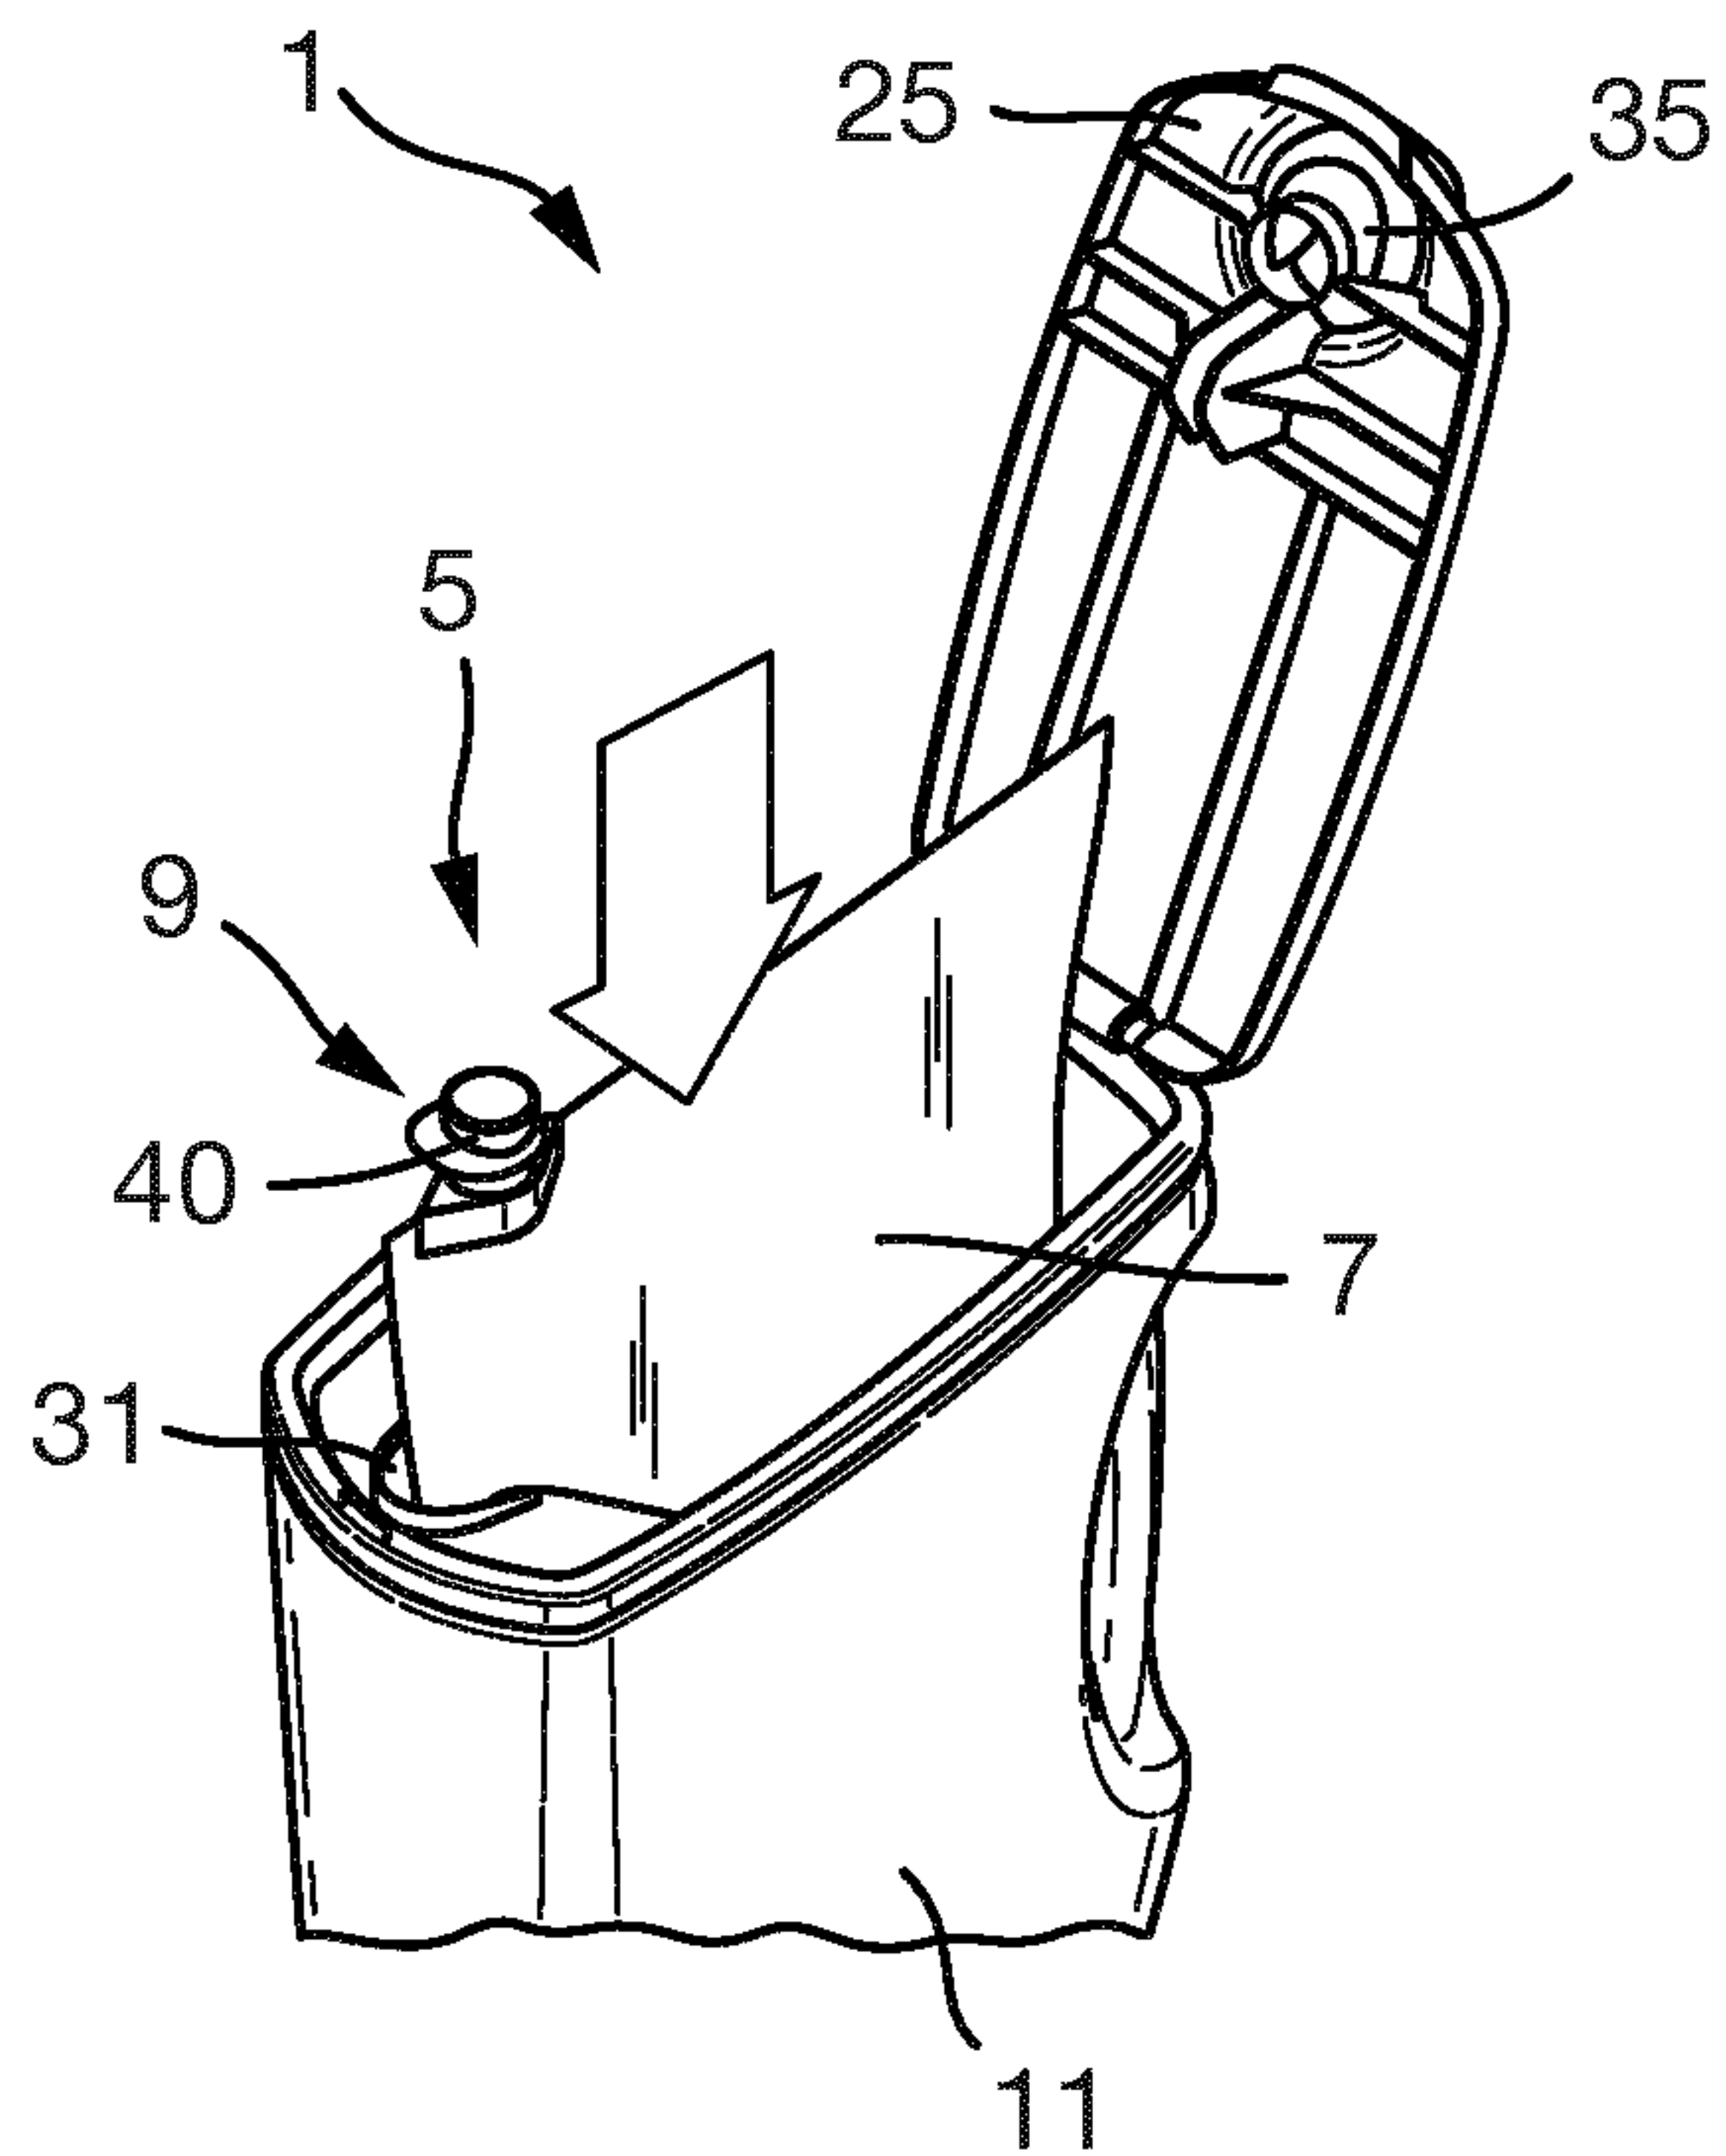


Fig. 1b


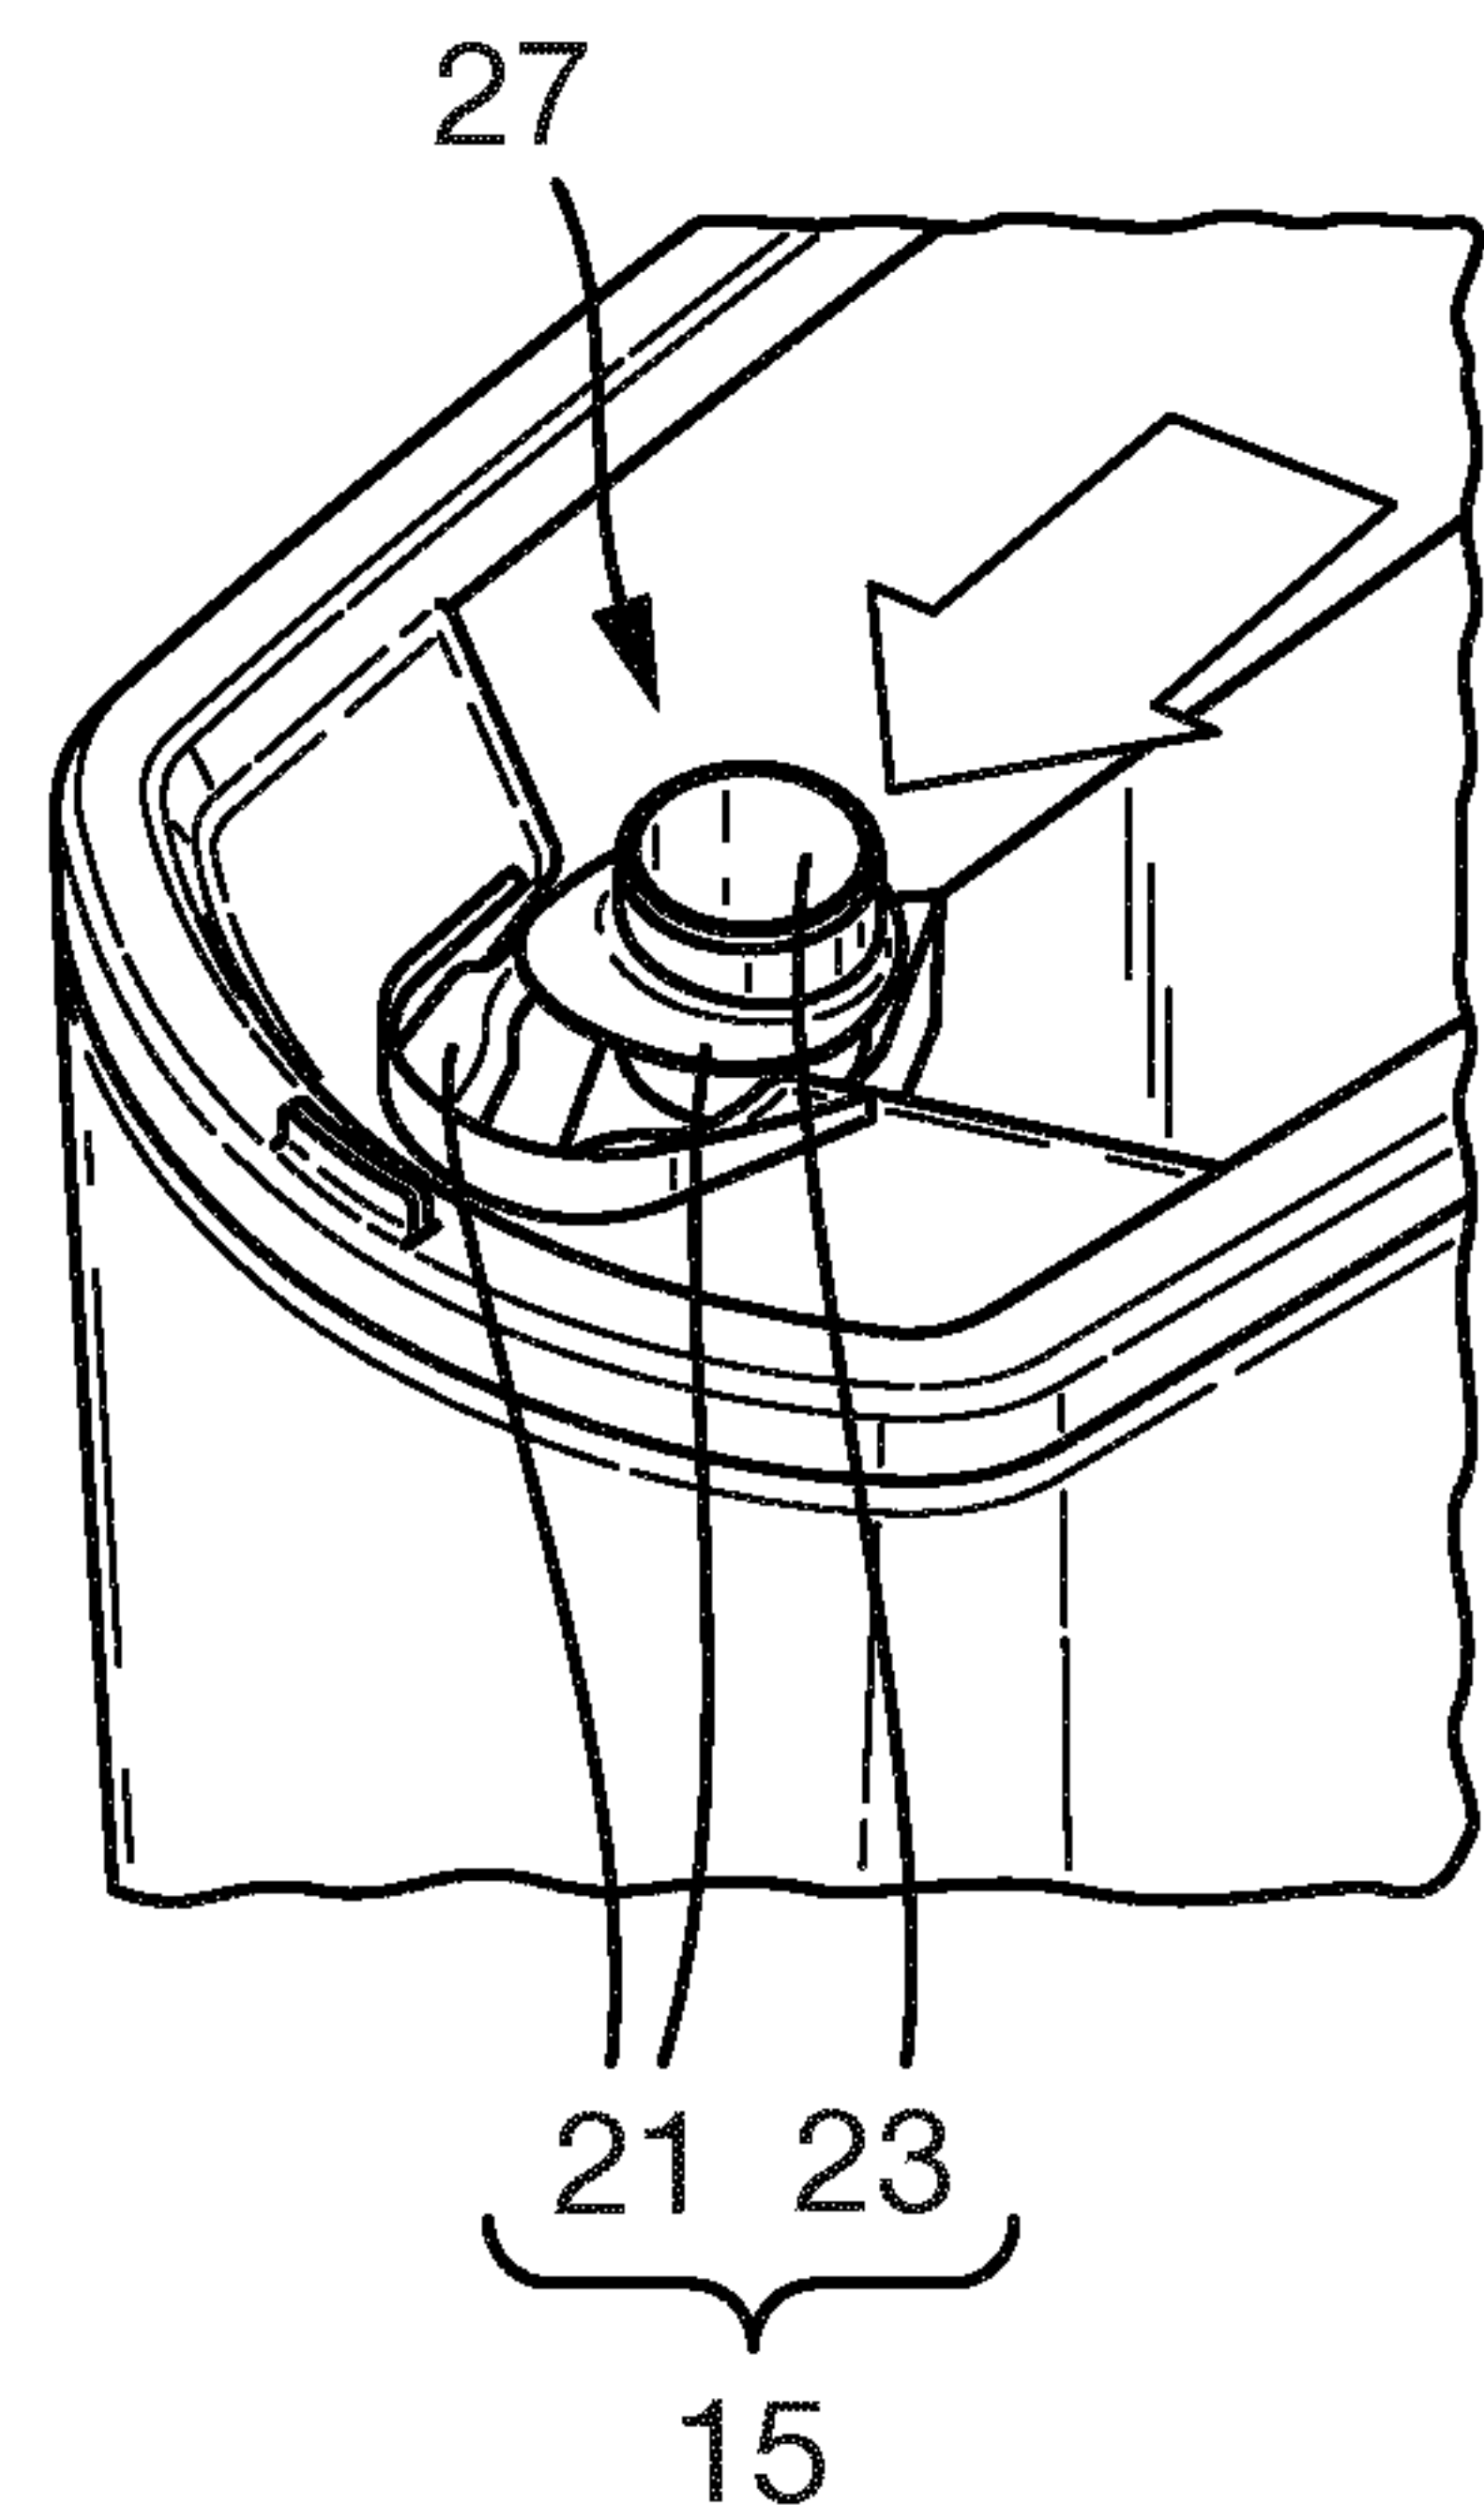


Fig. 1c

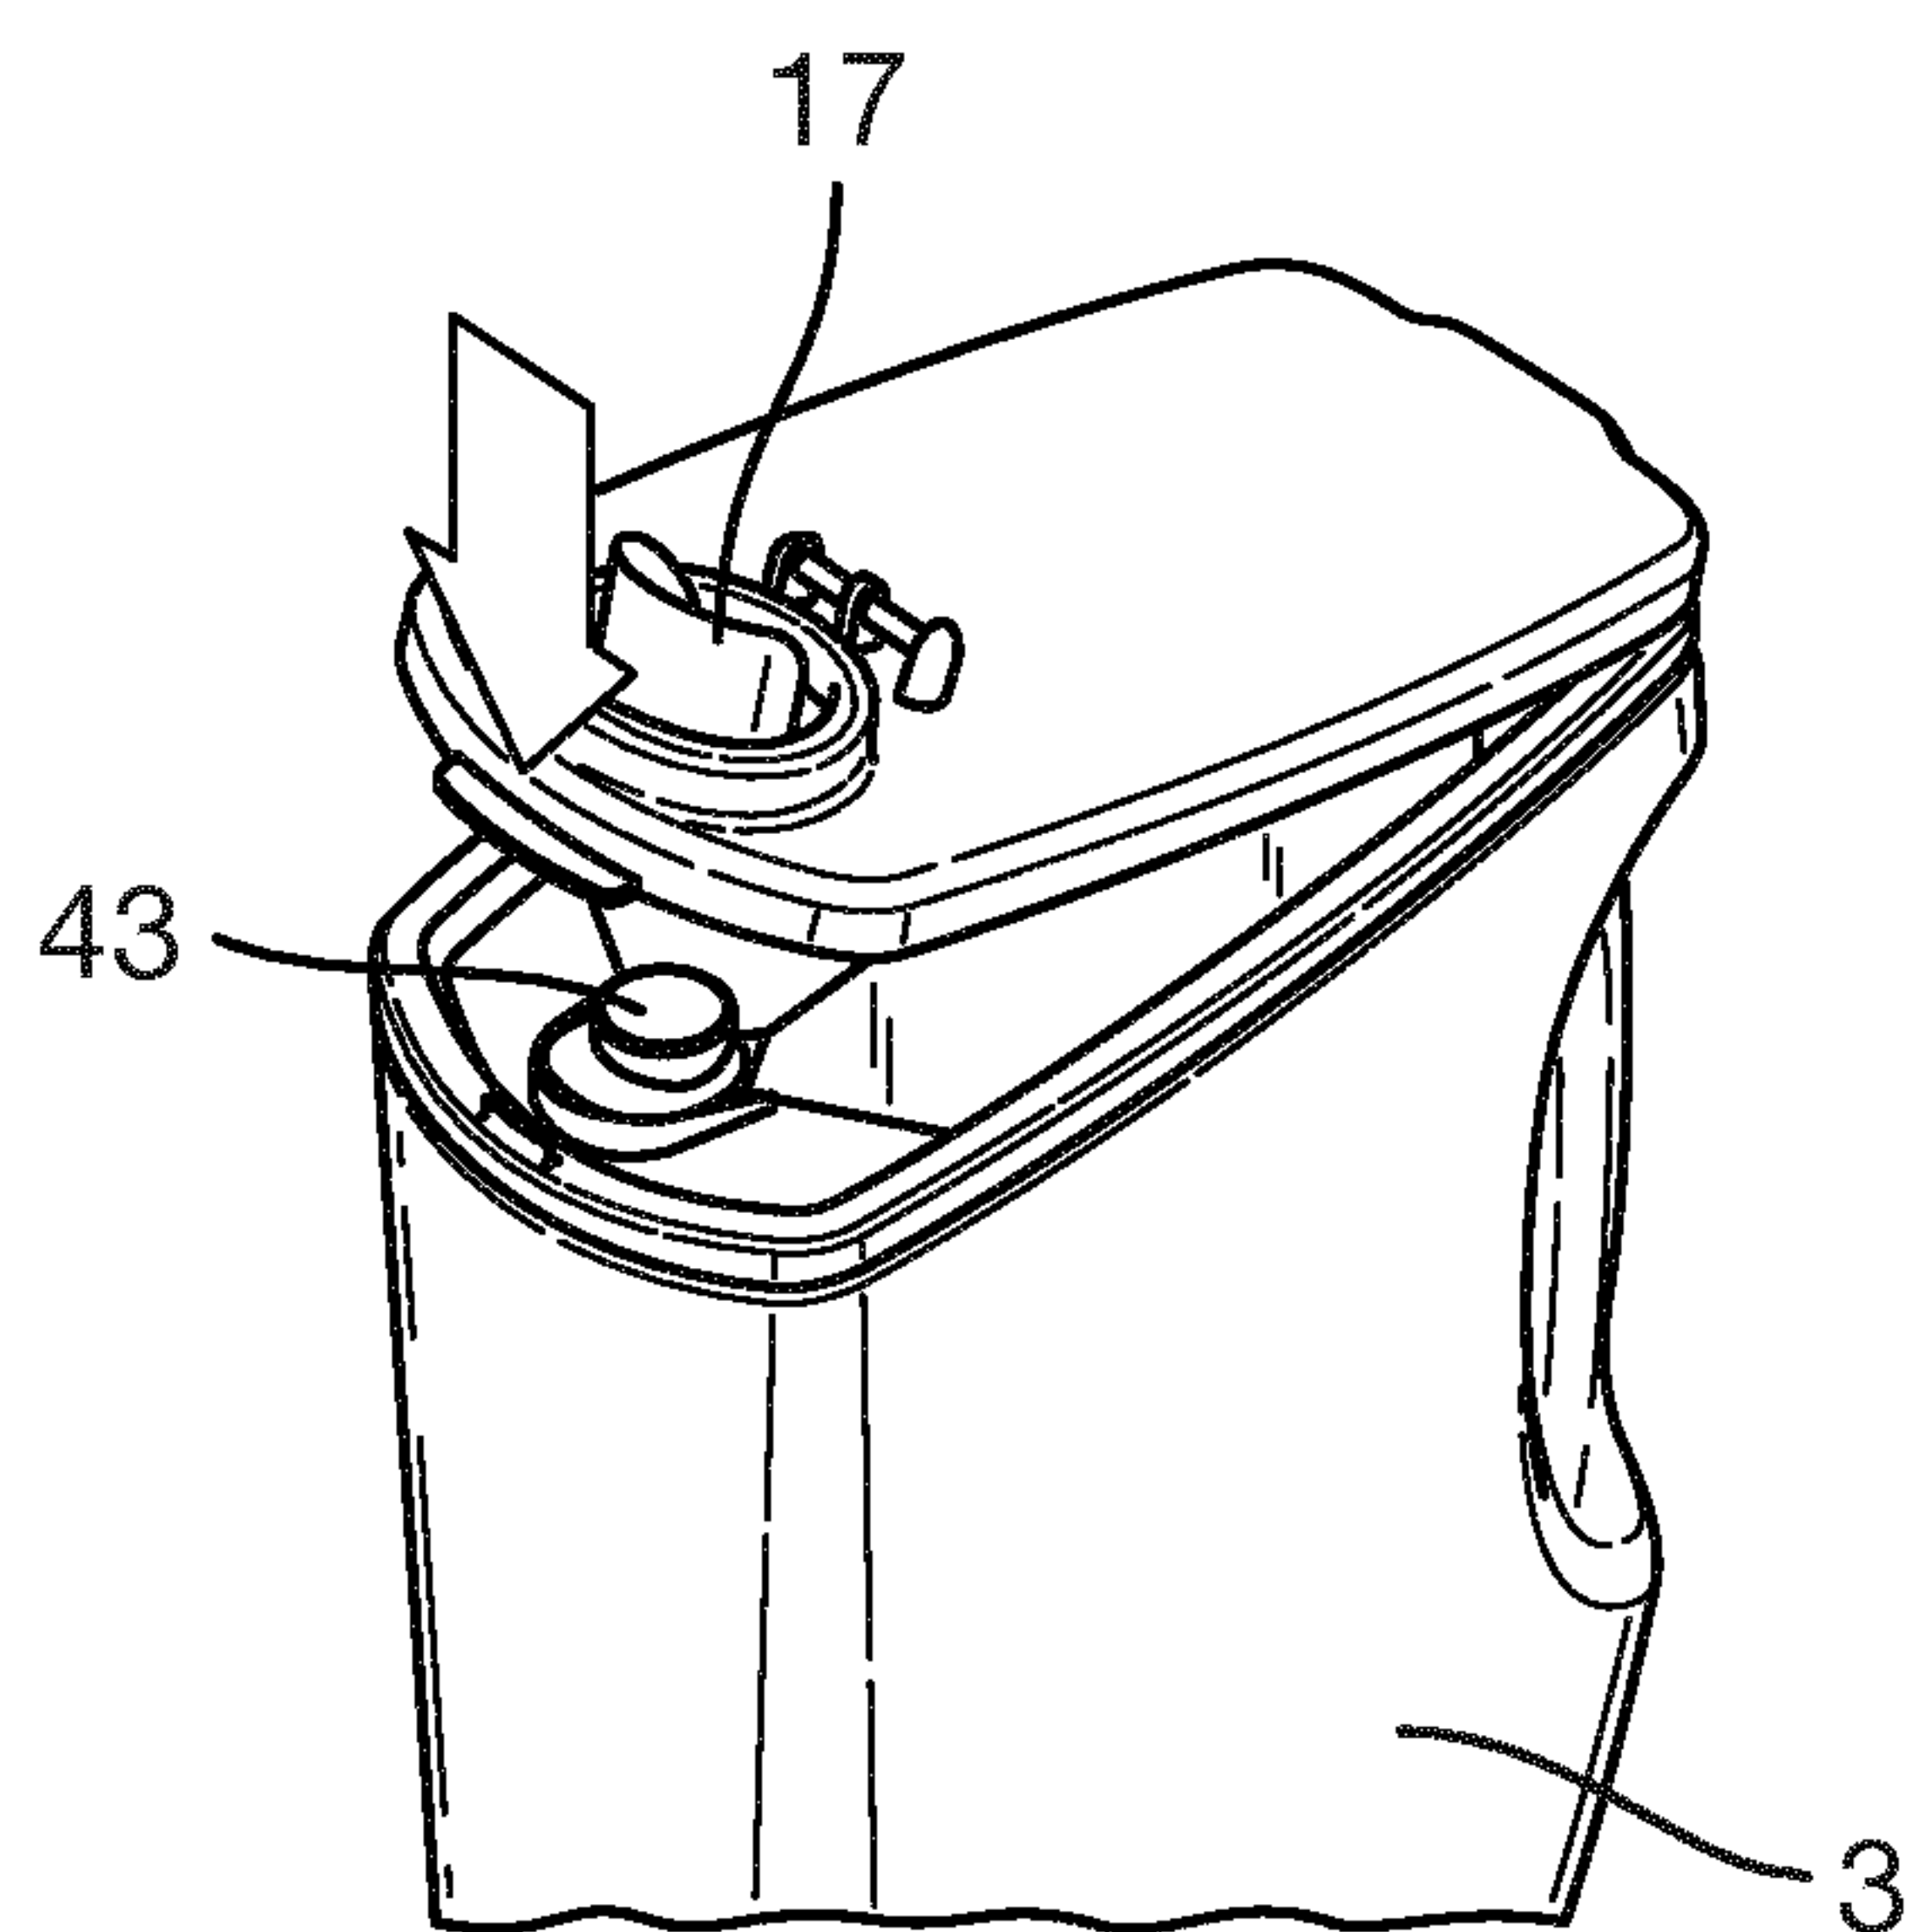

2/7

Fig. 2a

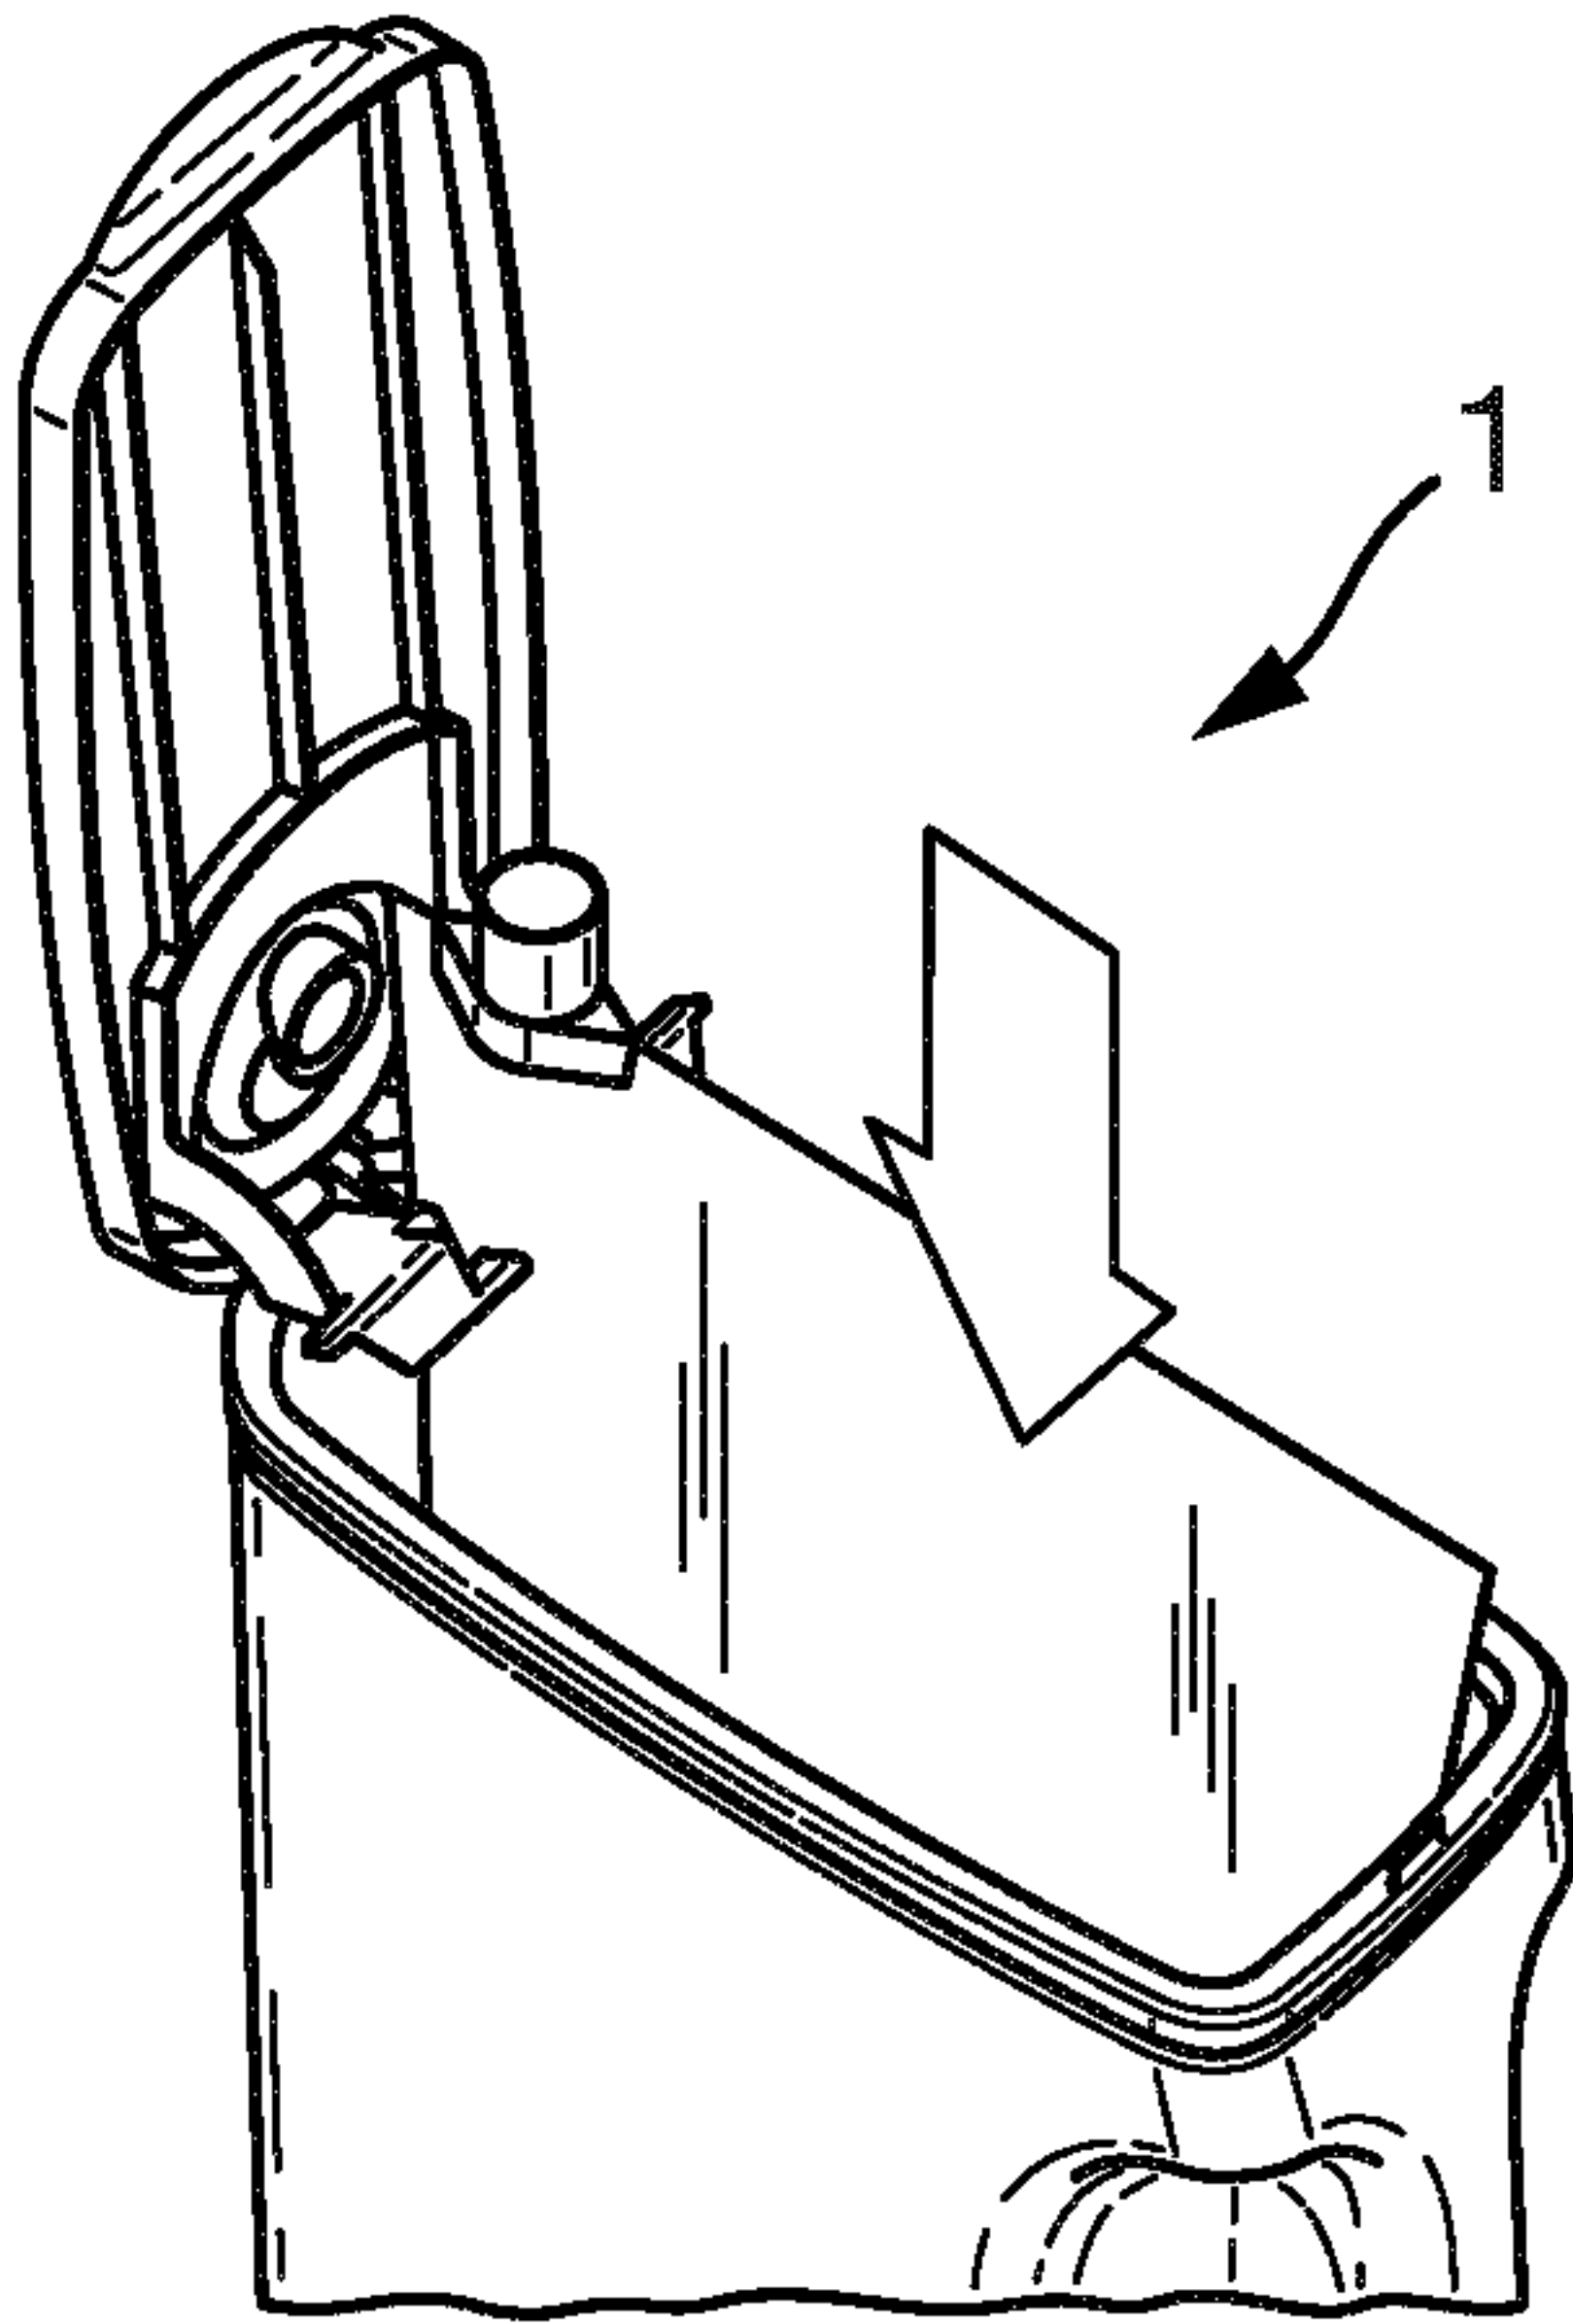


Fig. 2b


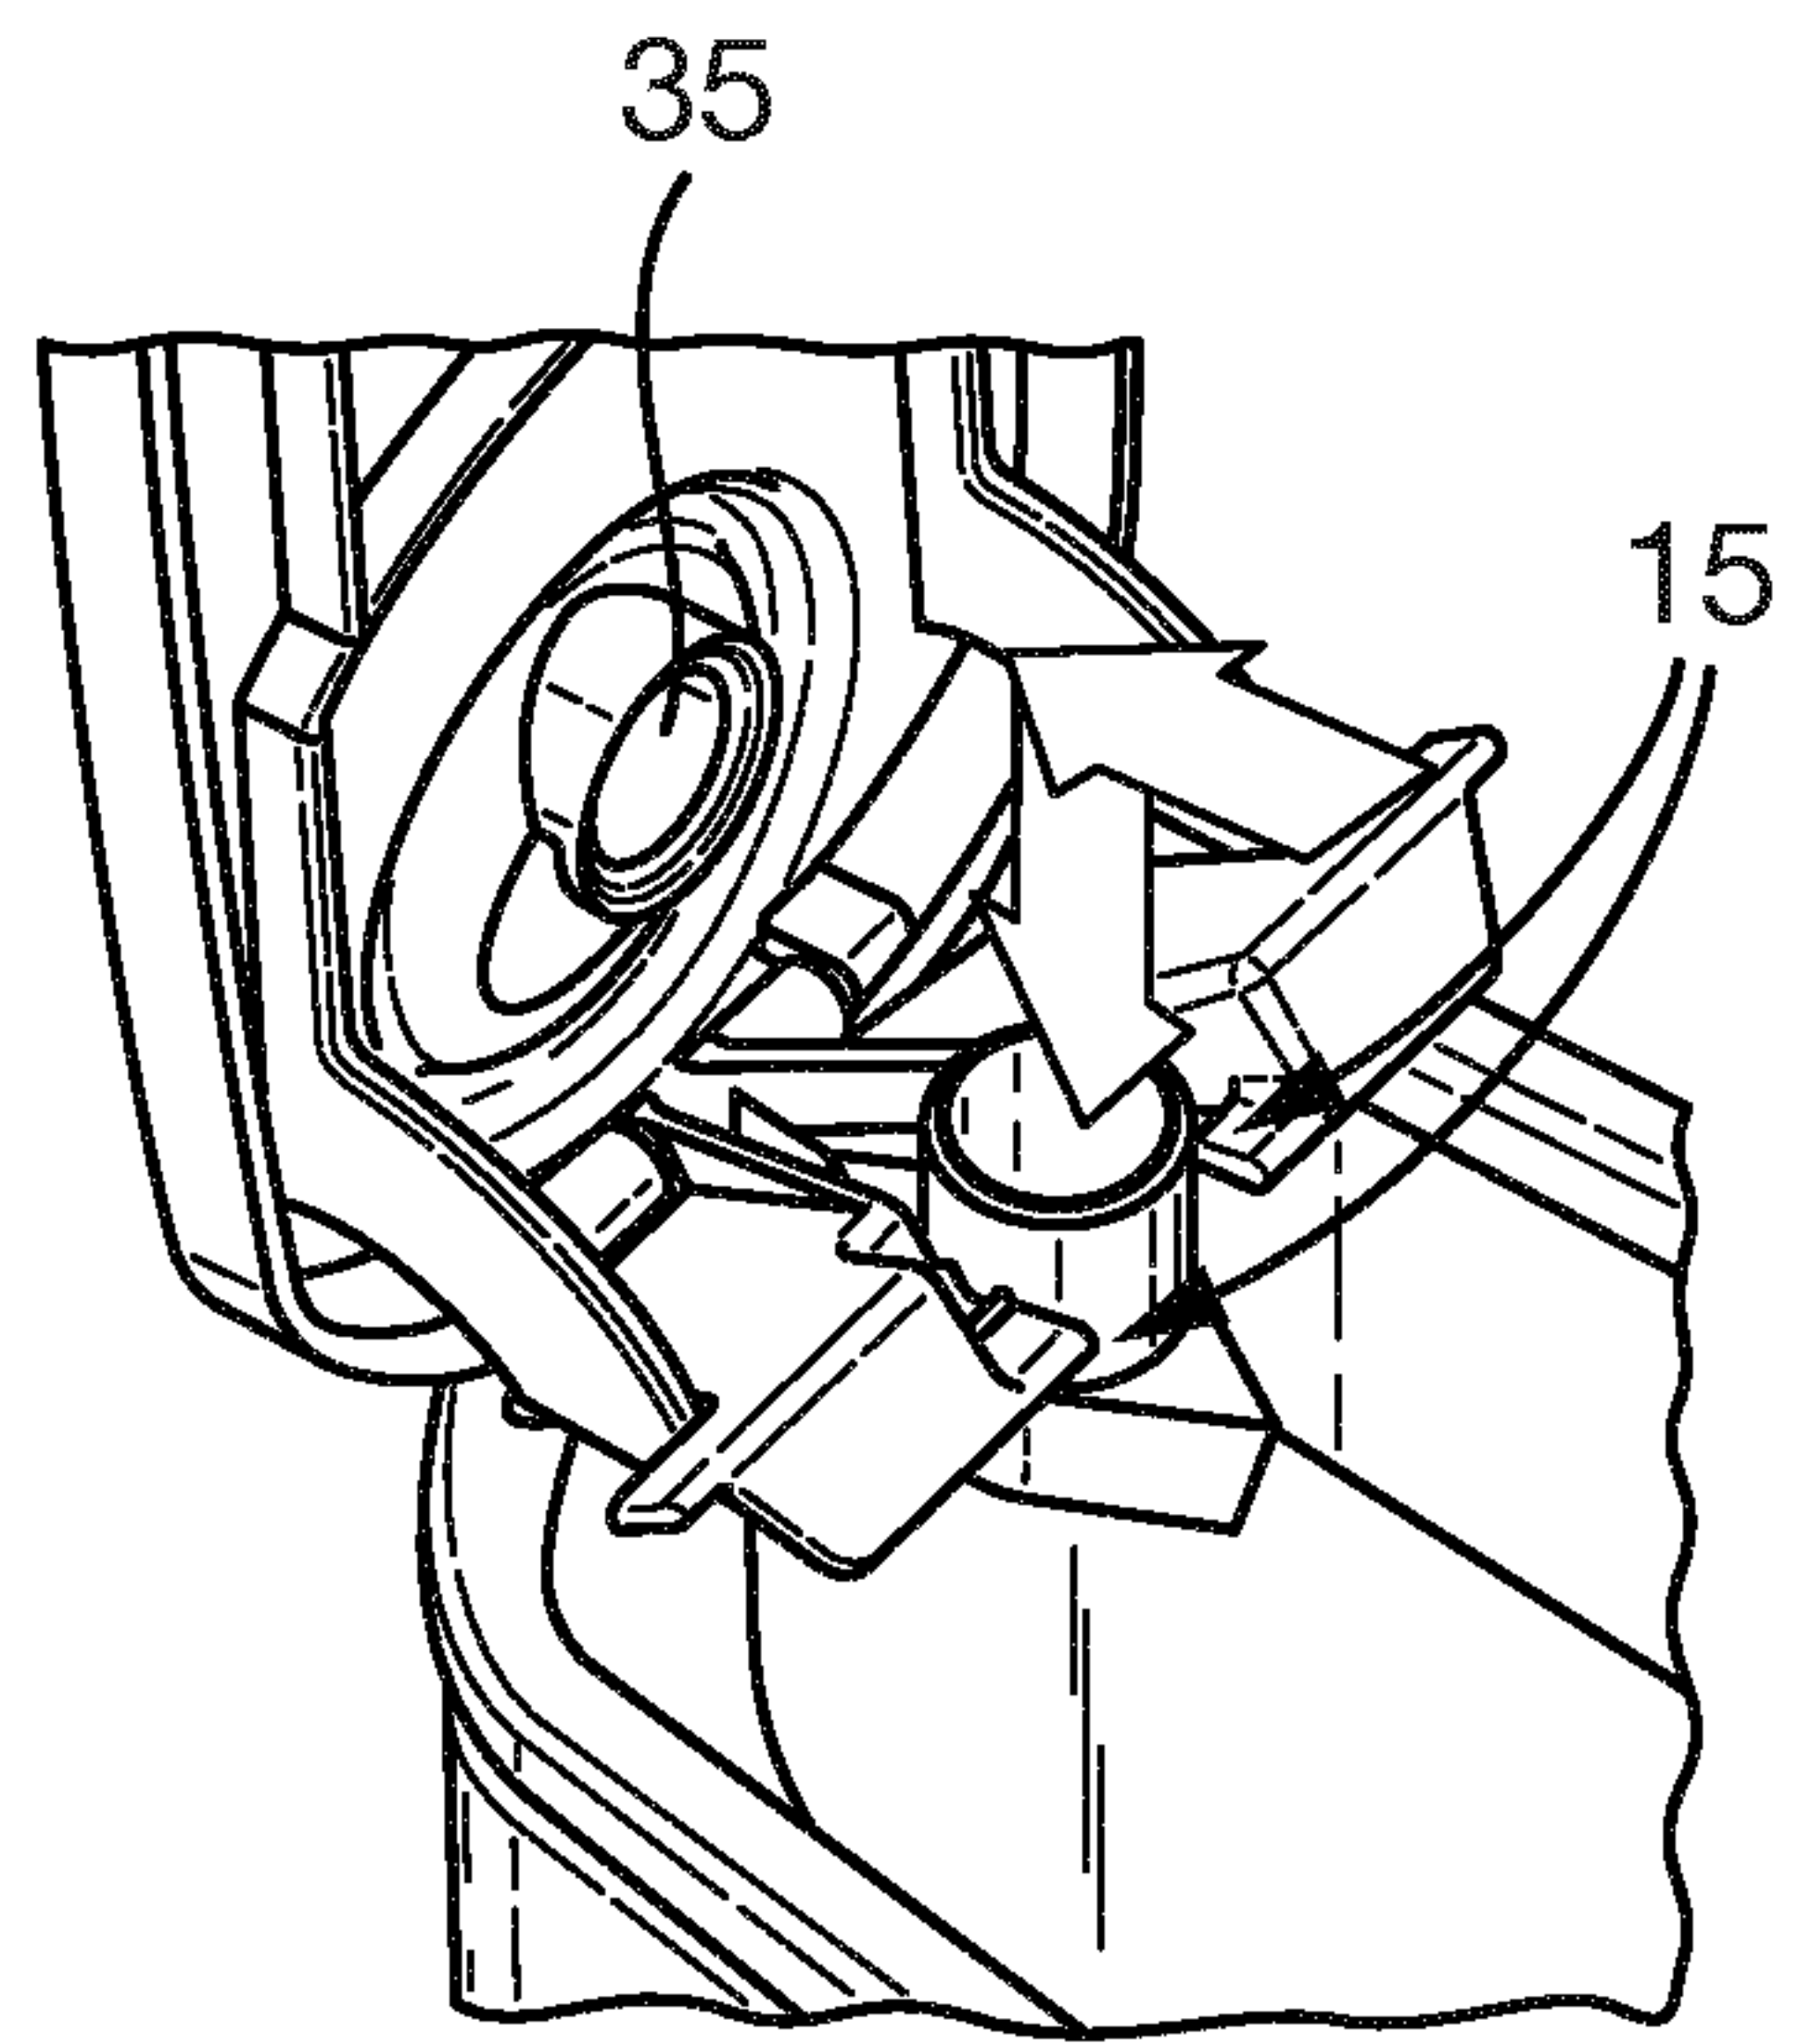


Fig. 2c

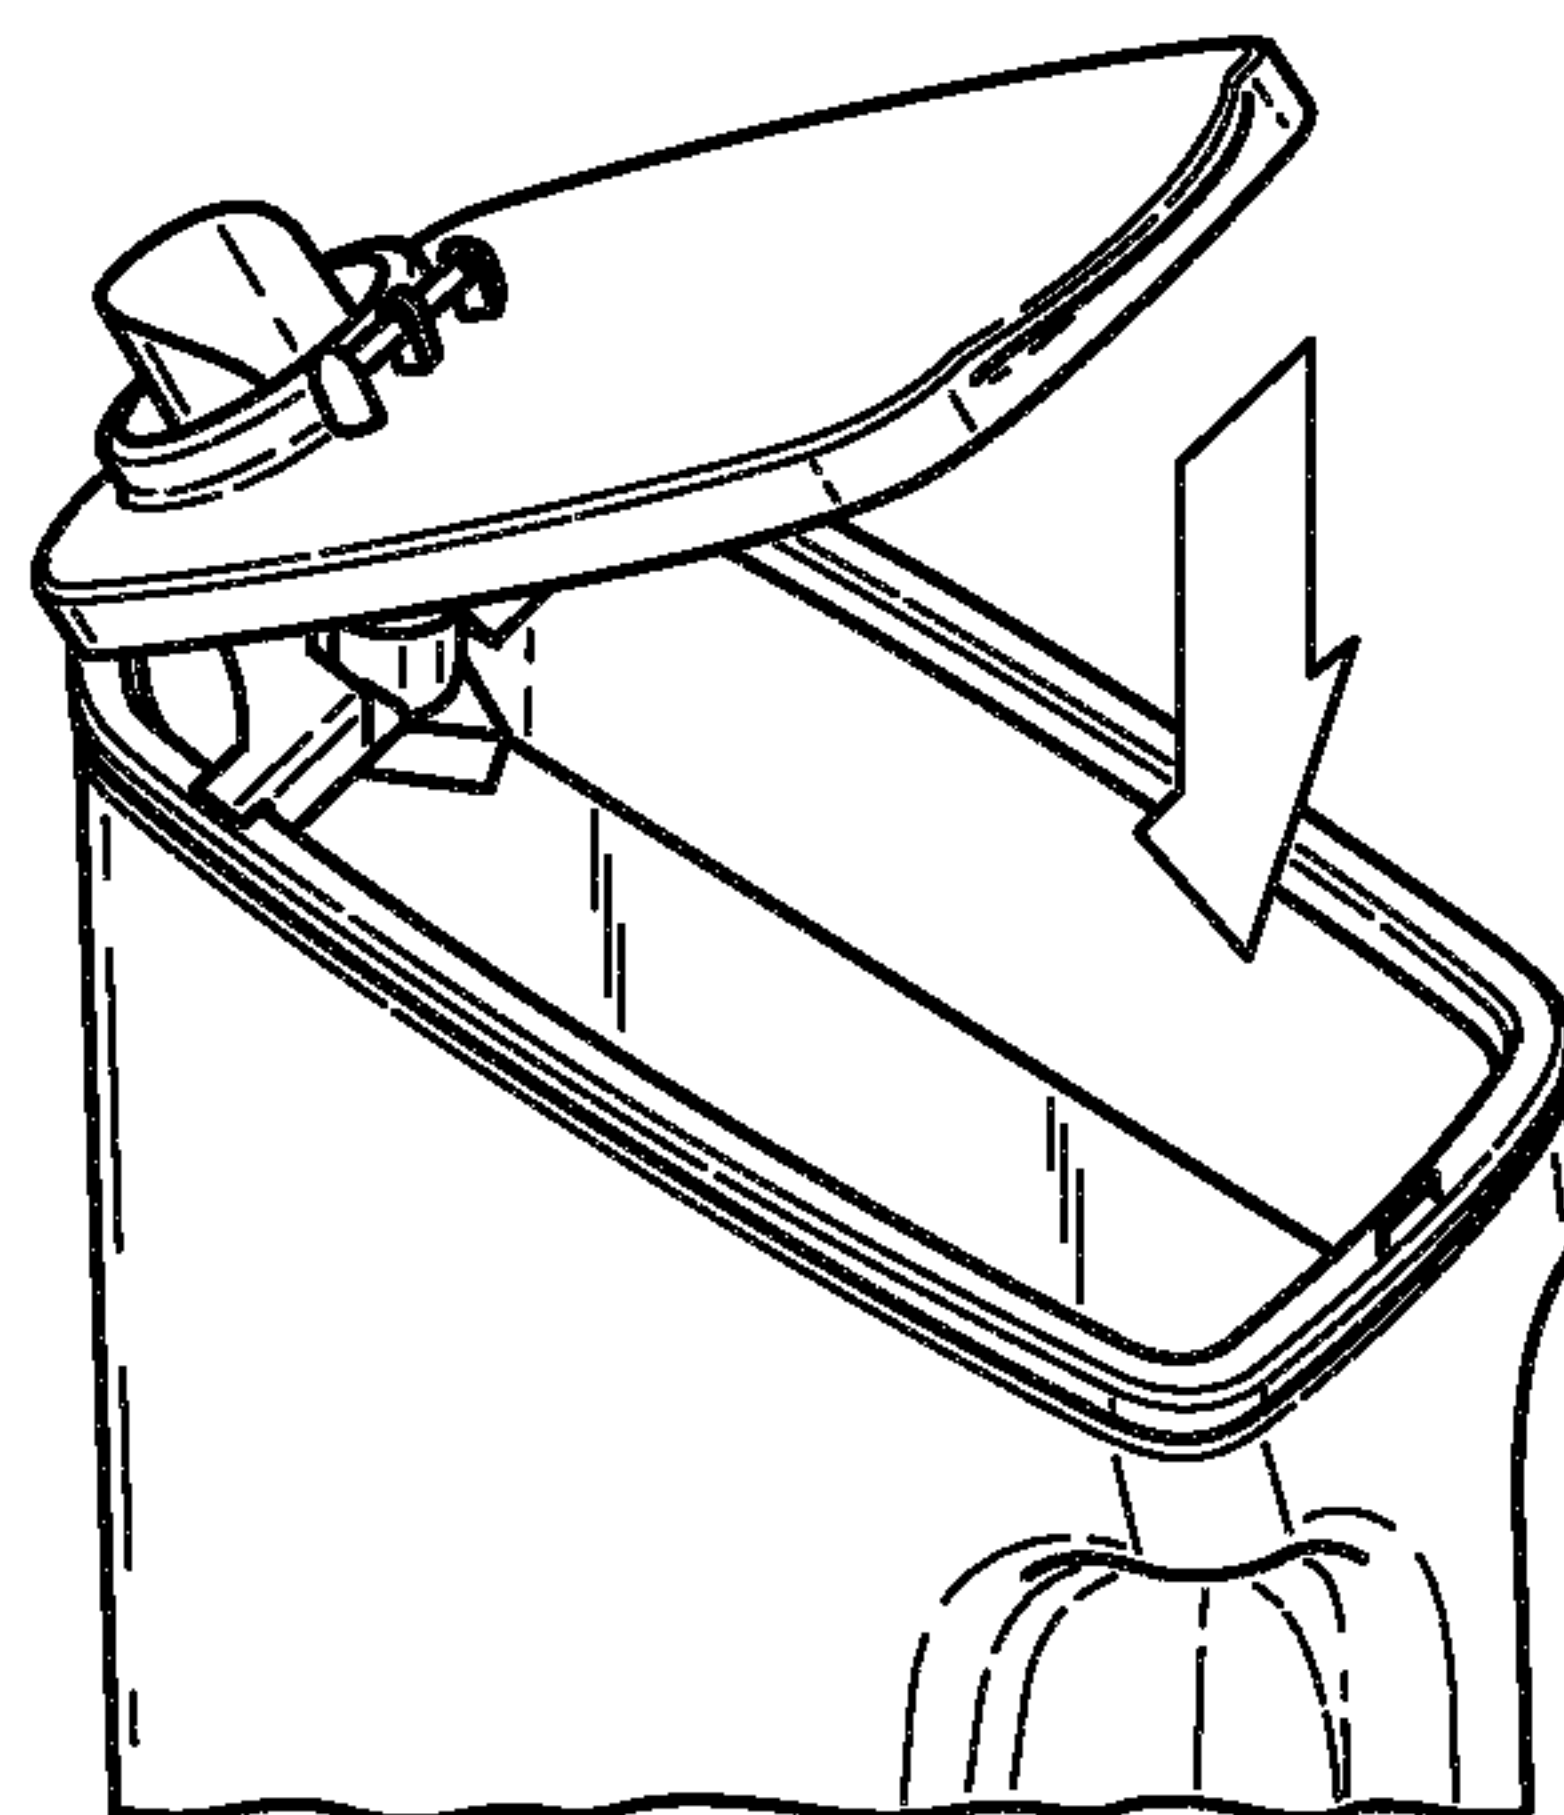

3/7

Fig. 3a

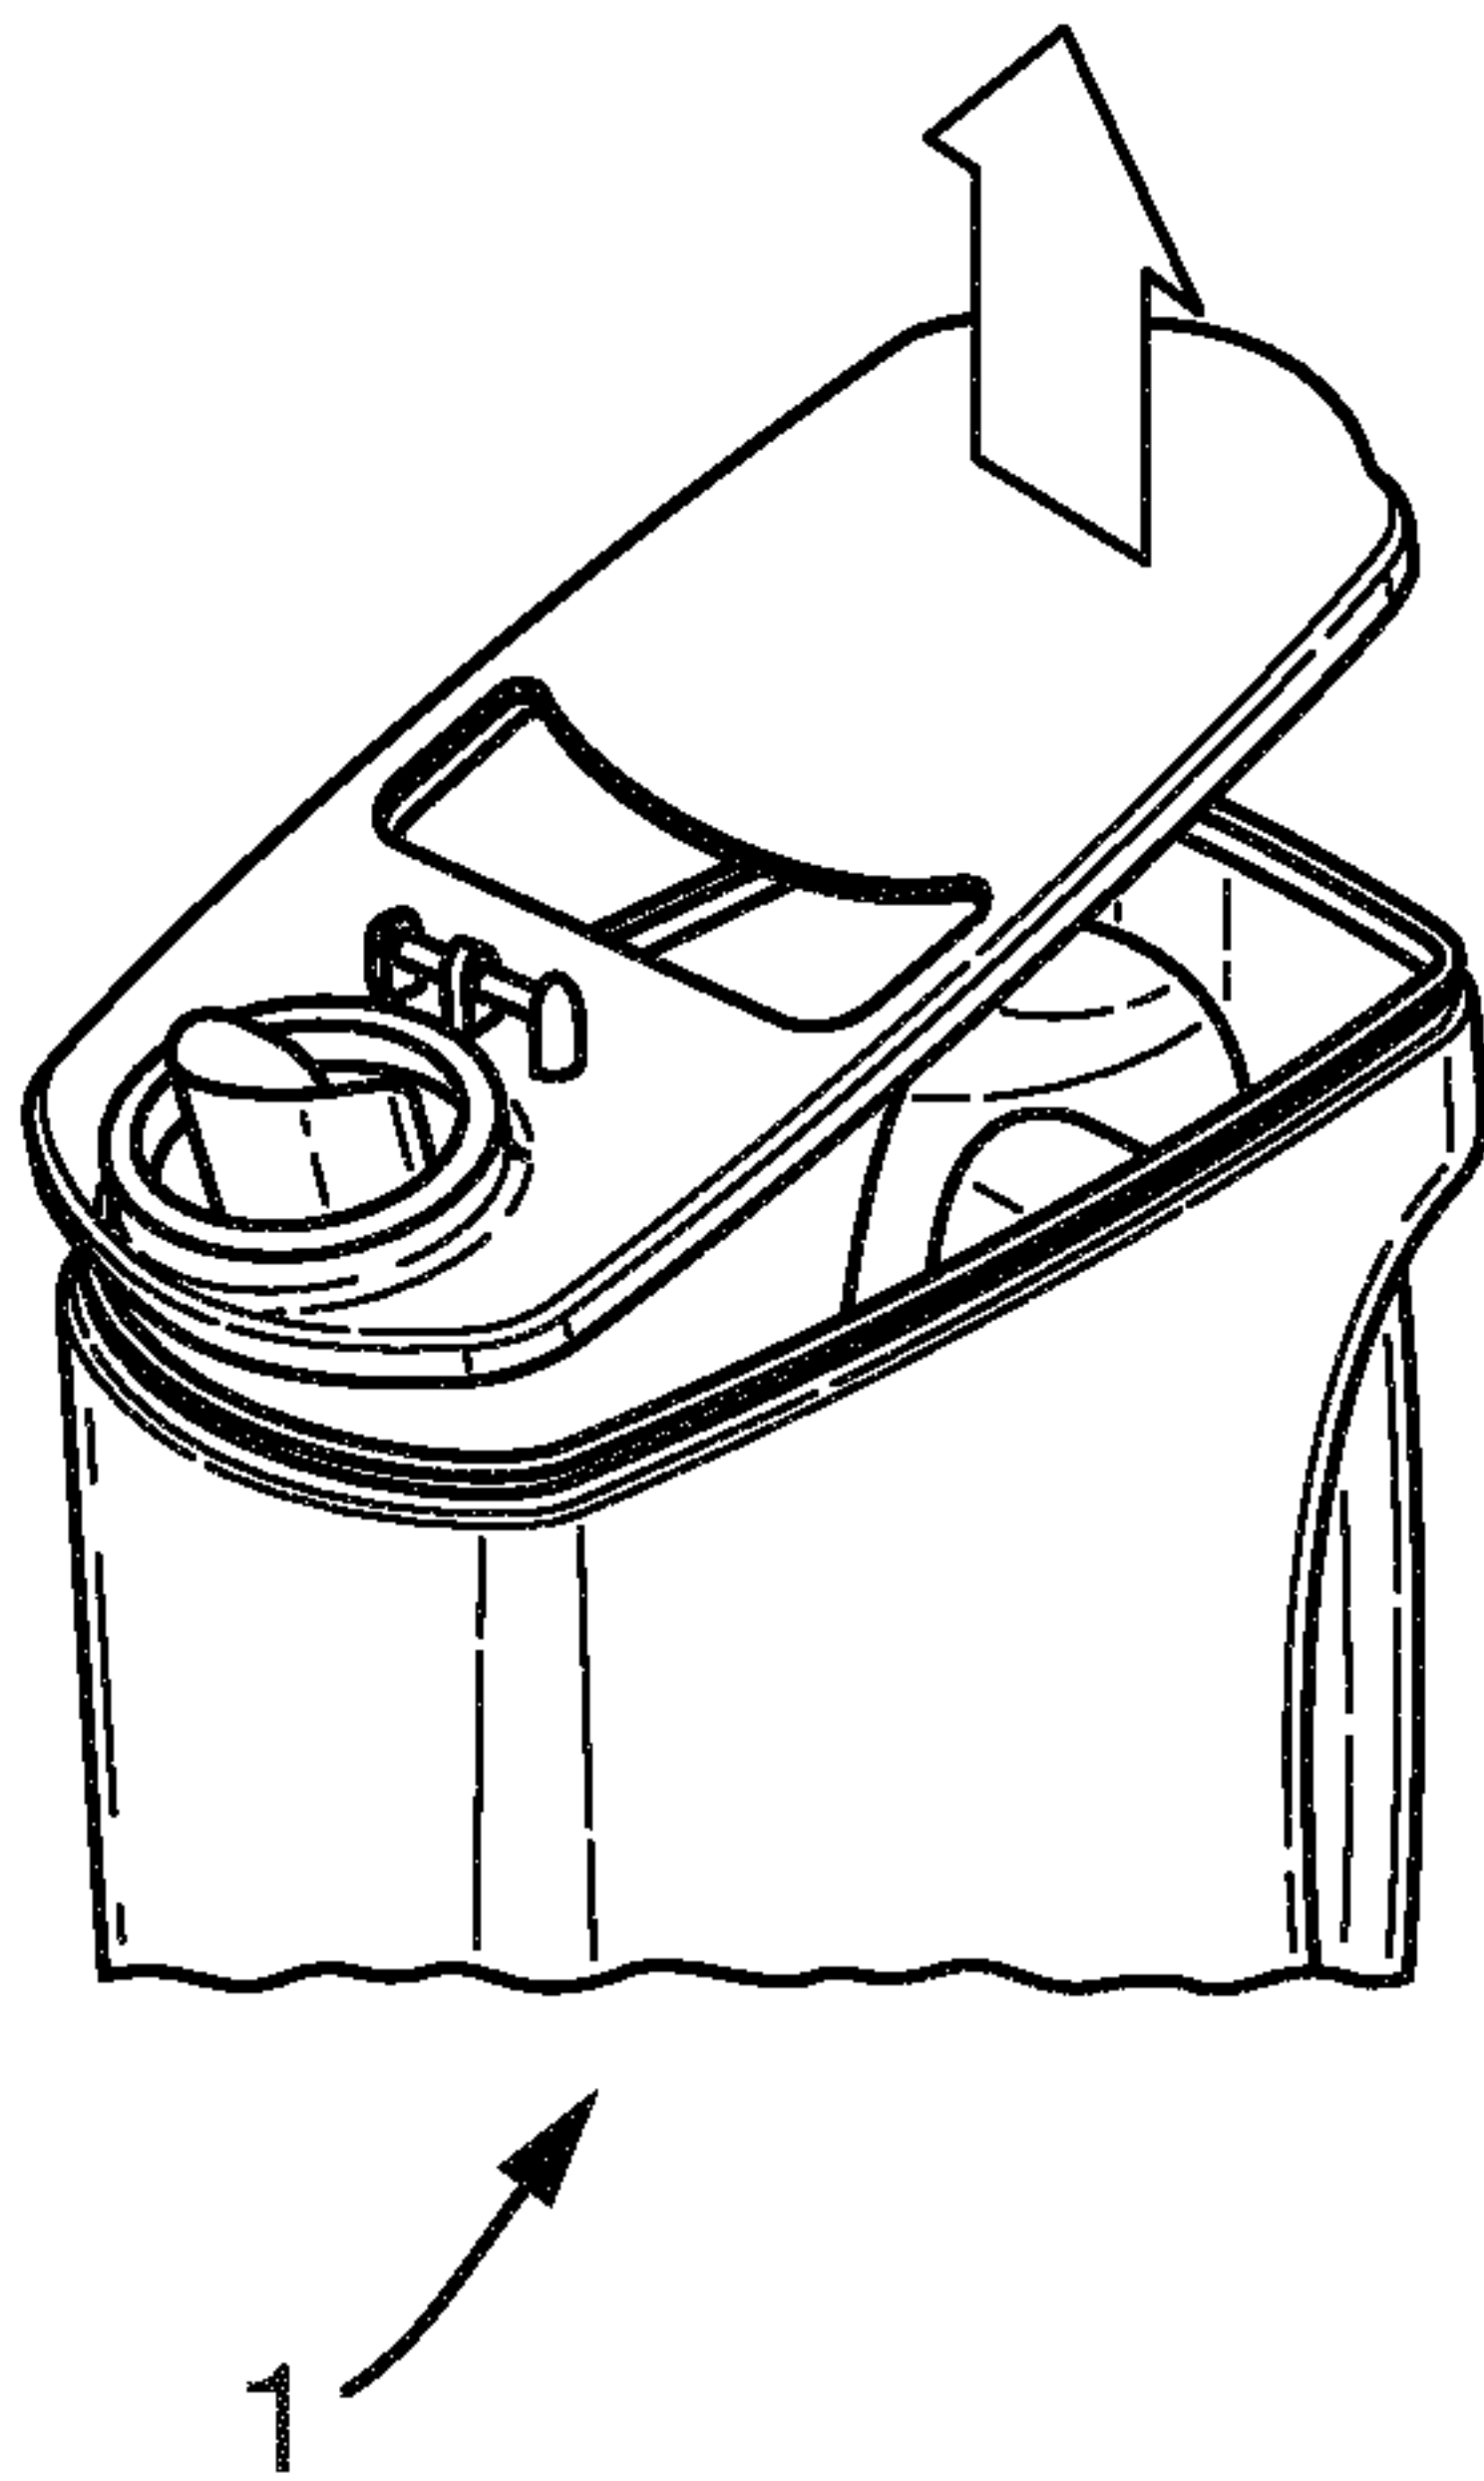


Fig. 3b


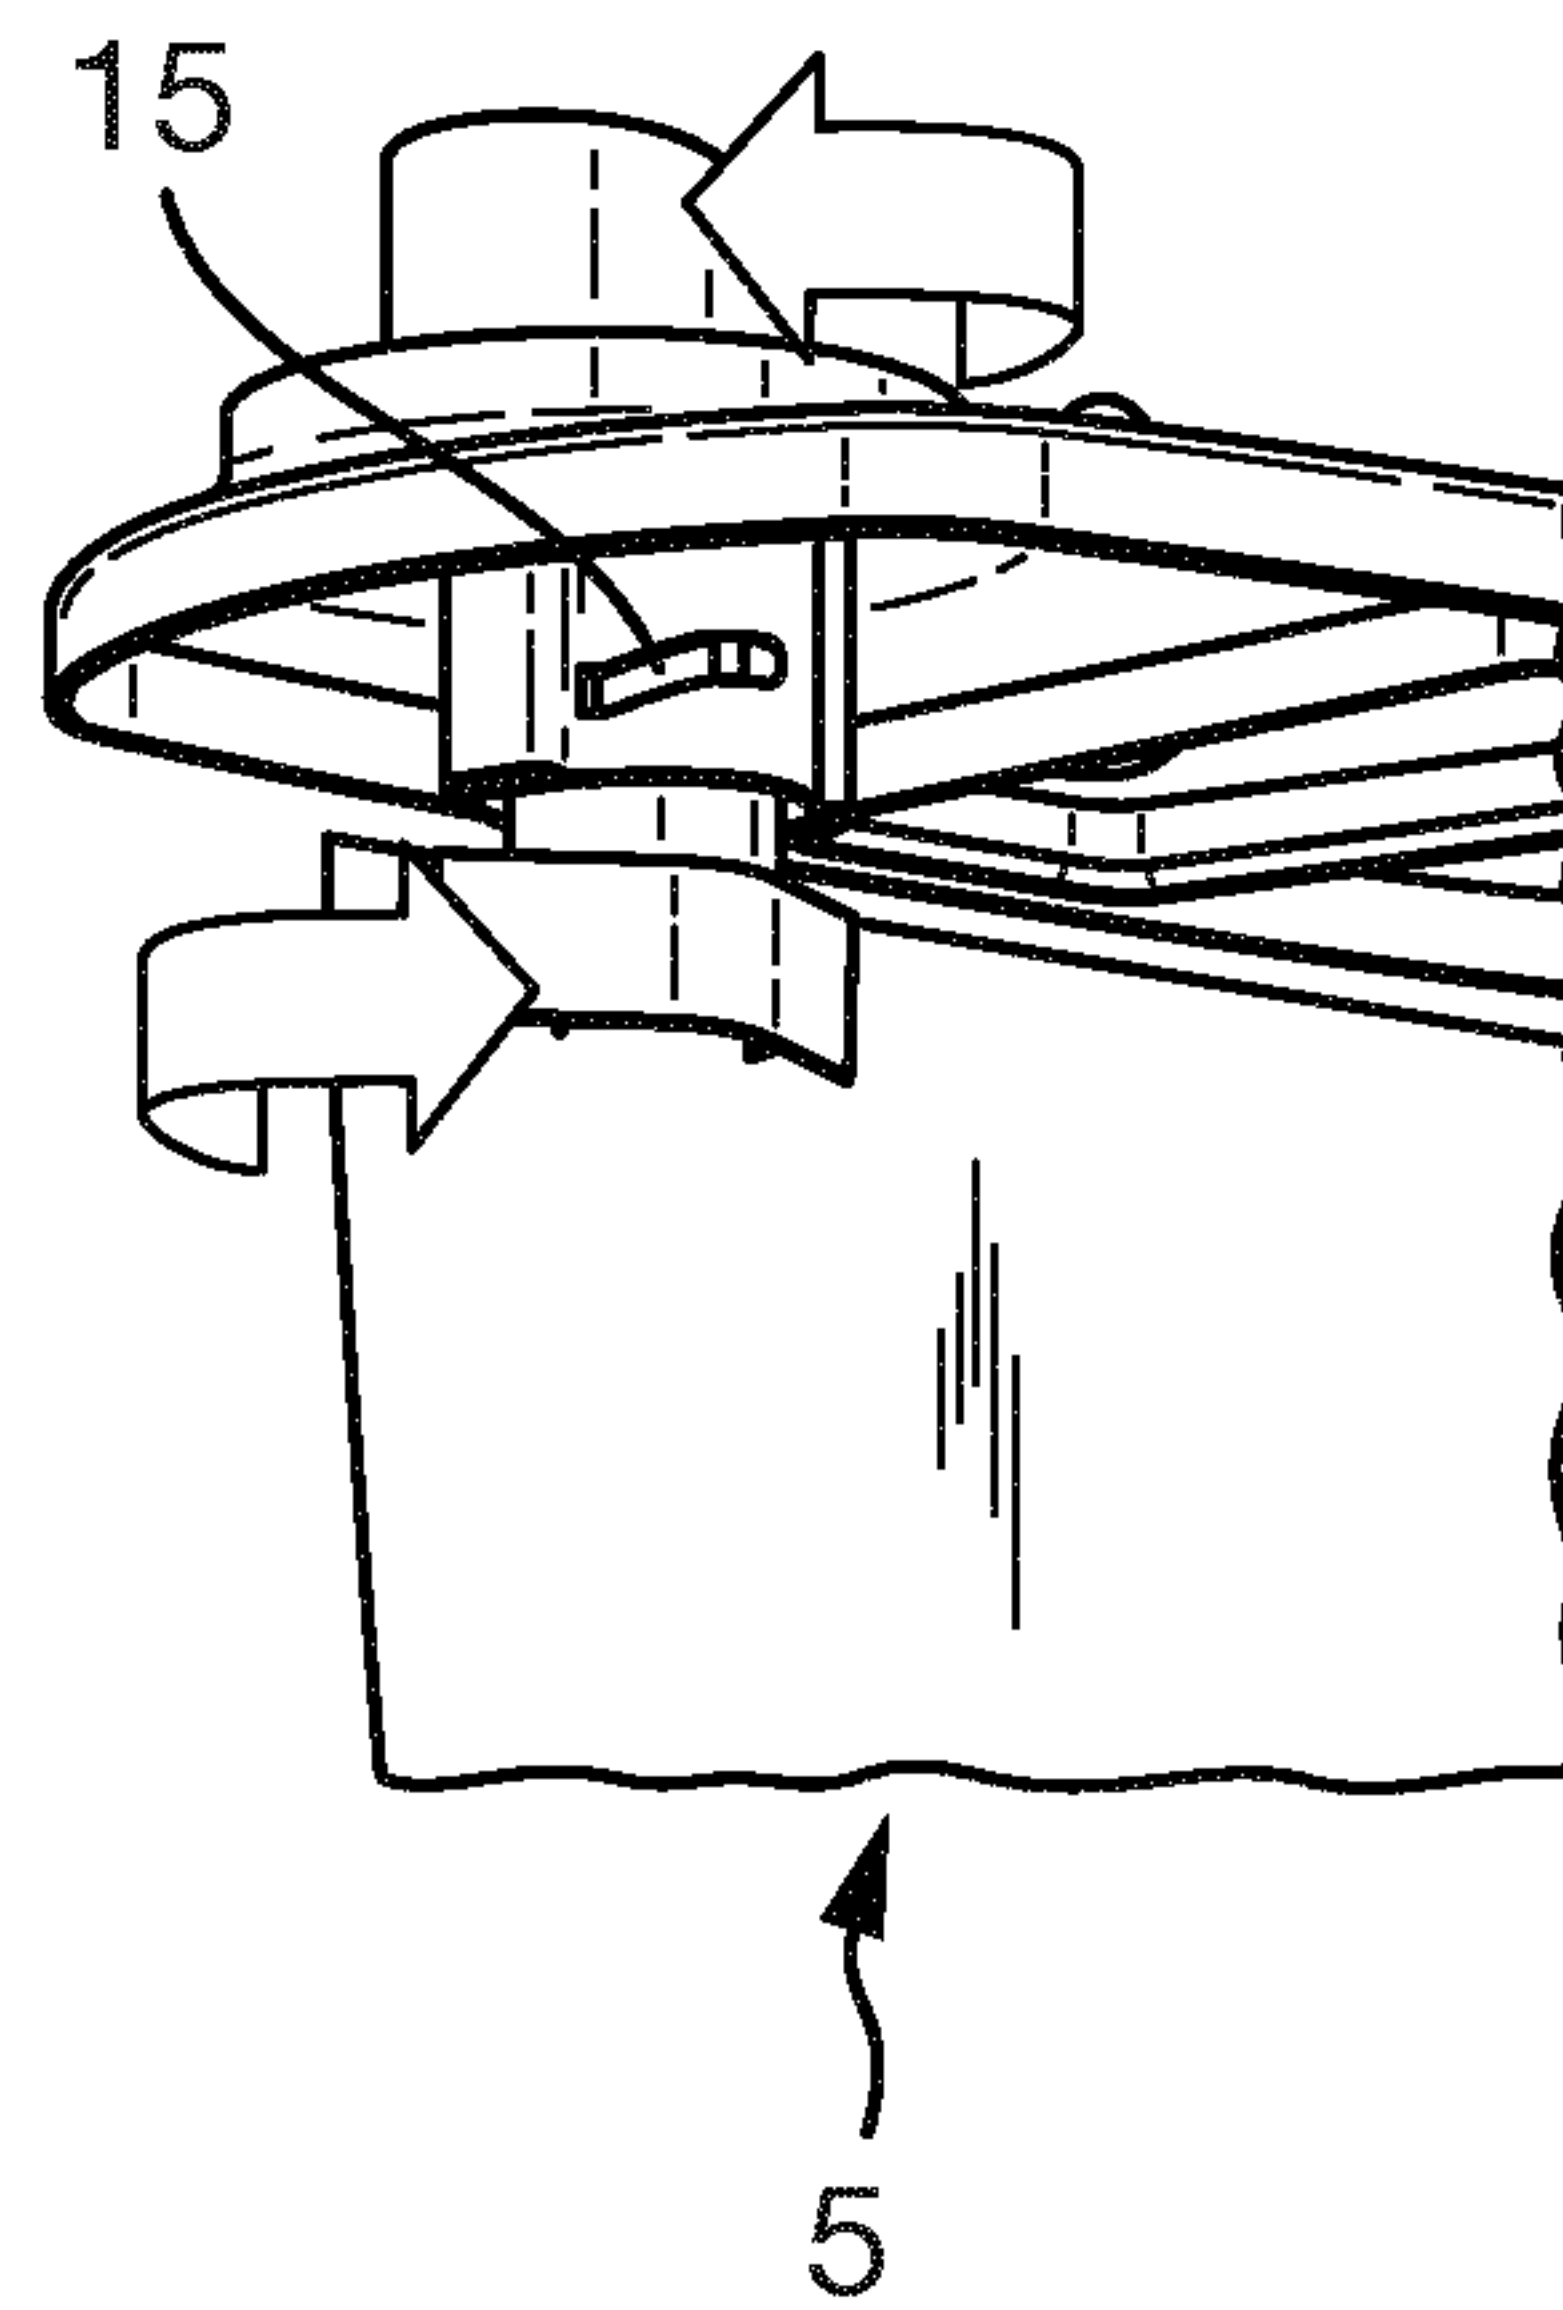


Fig. 3c

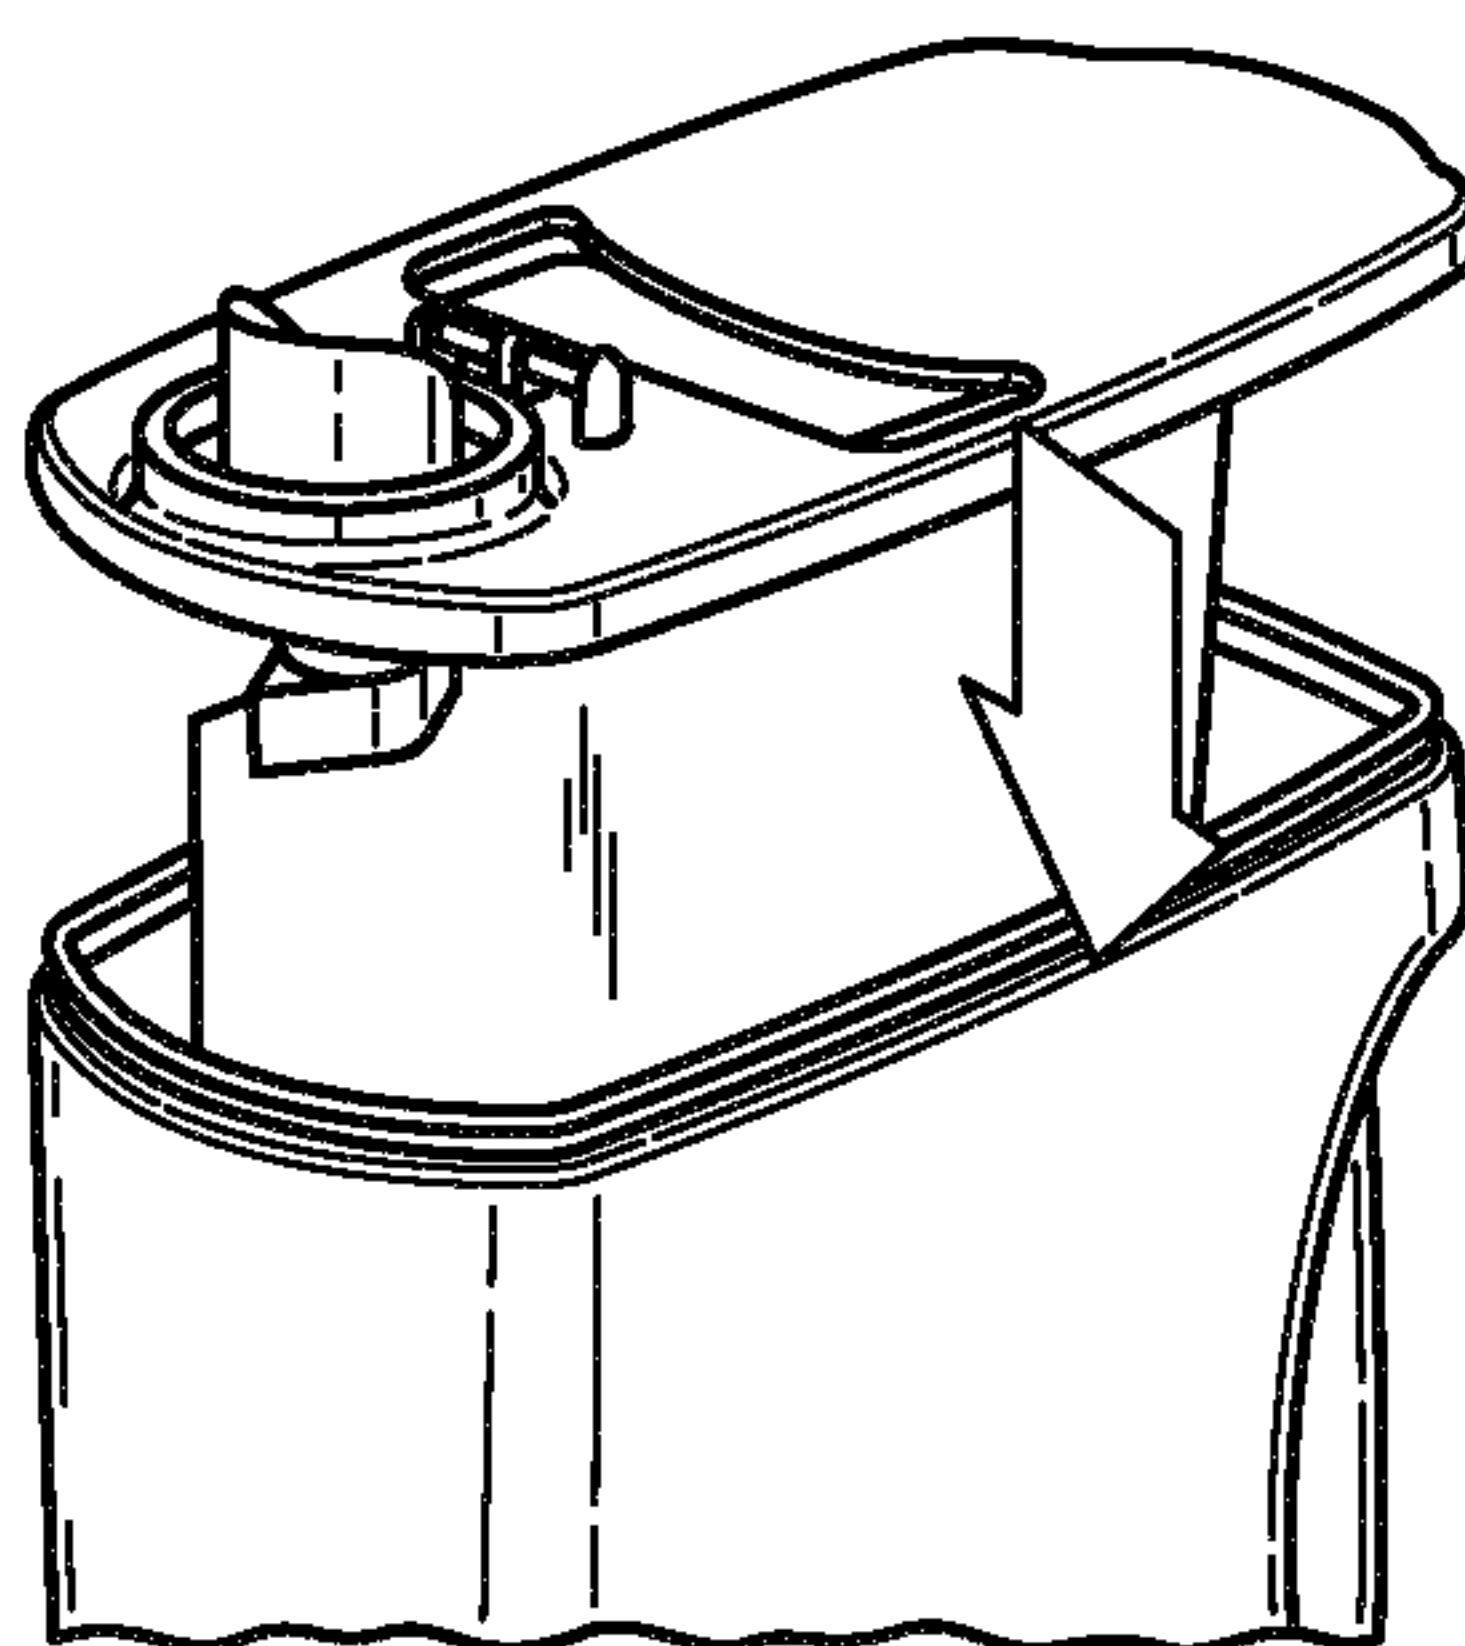

4/7

Fig. 4a

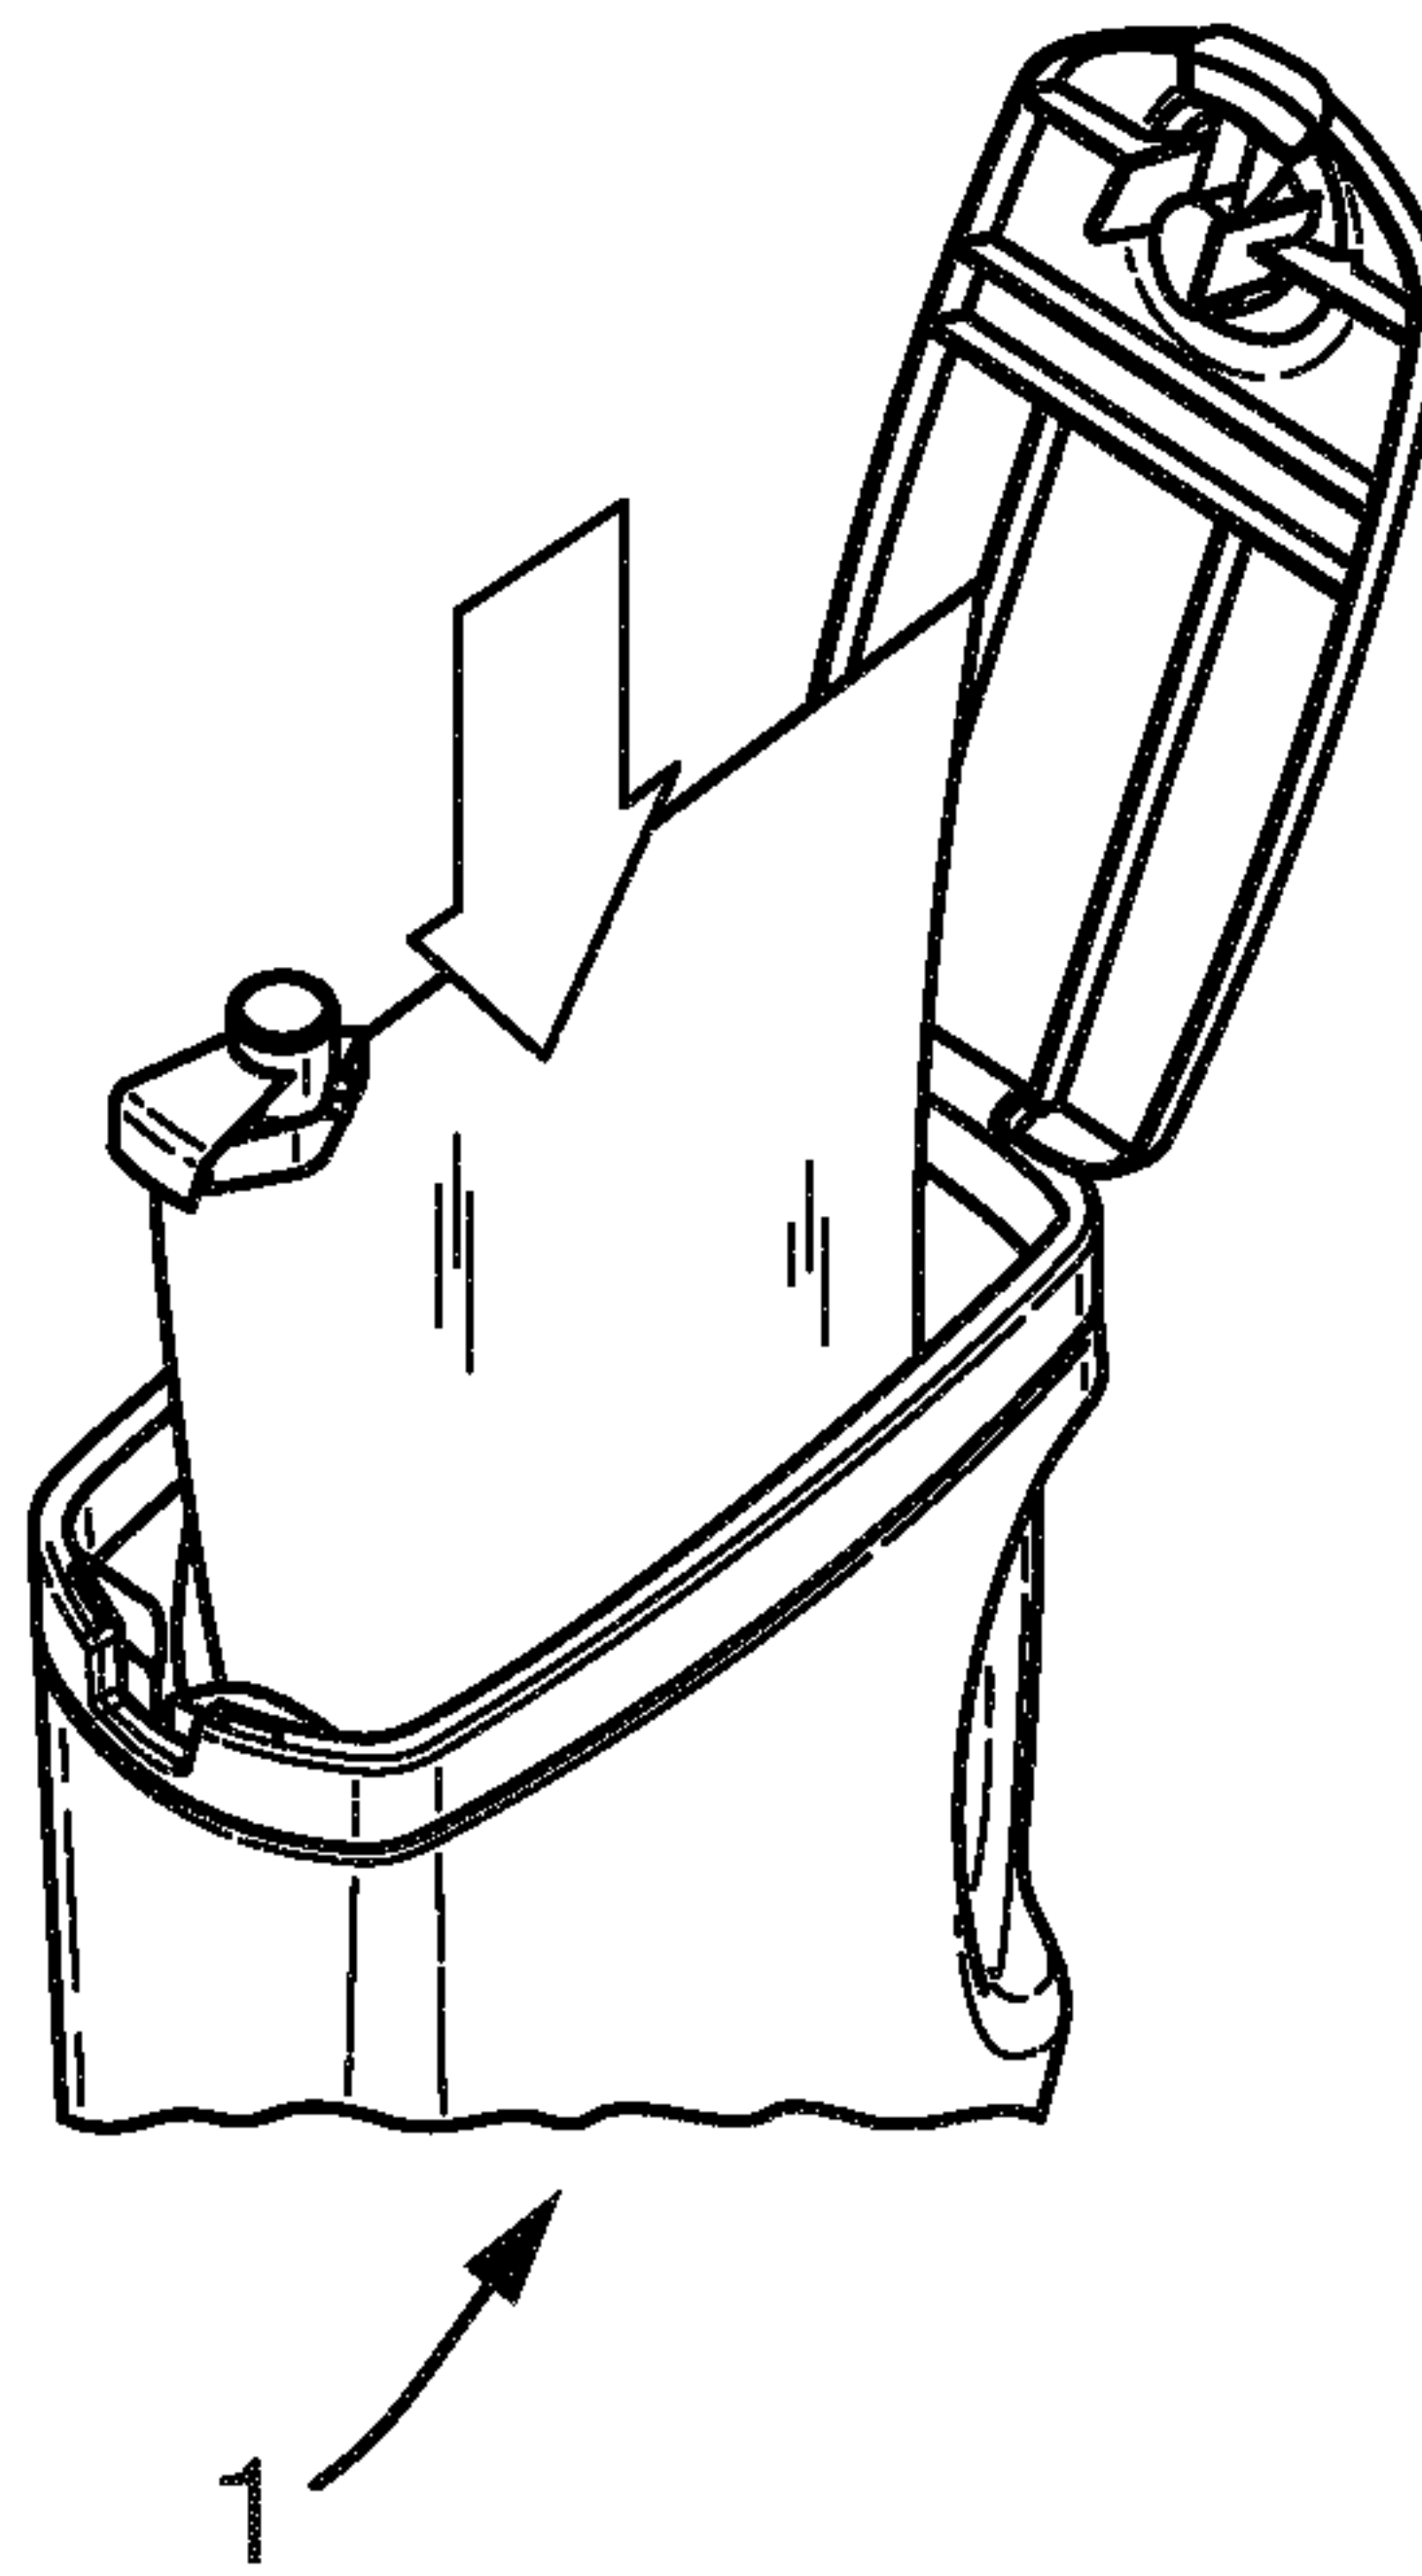


Fig. 4b


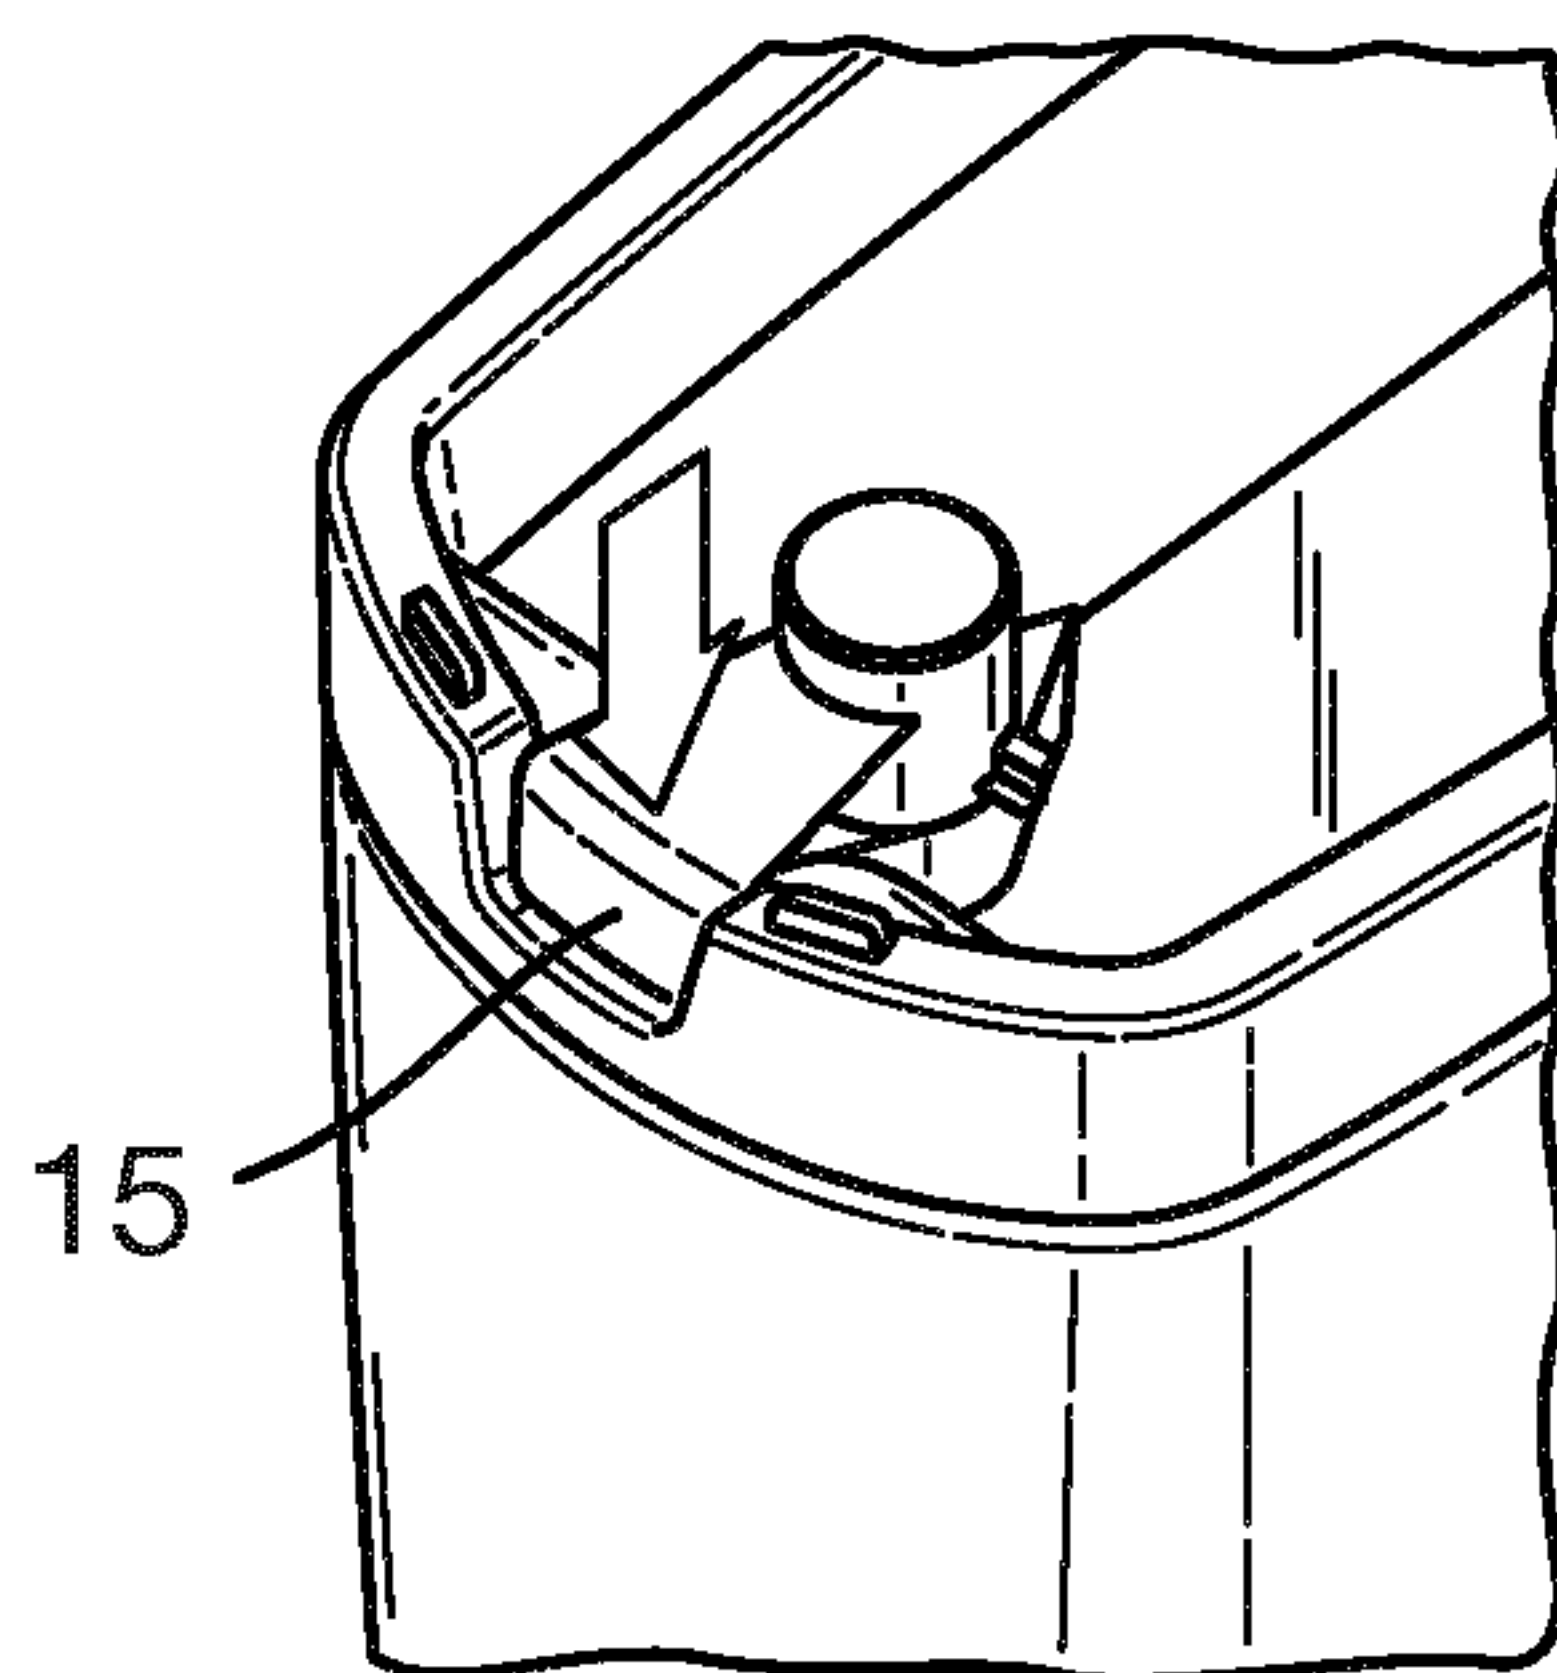


Fig. 4c

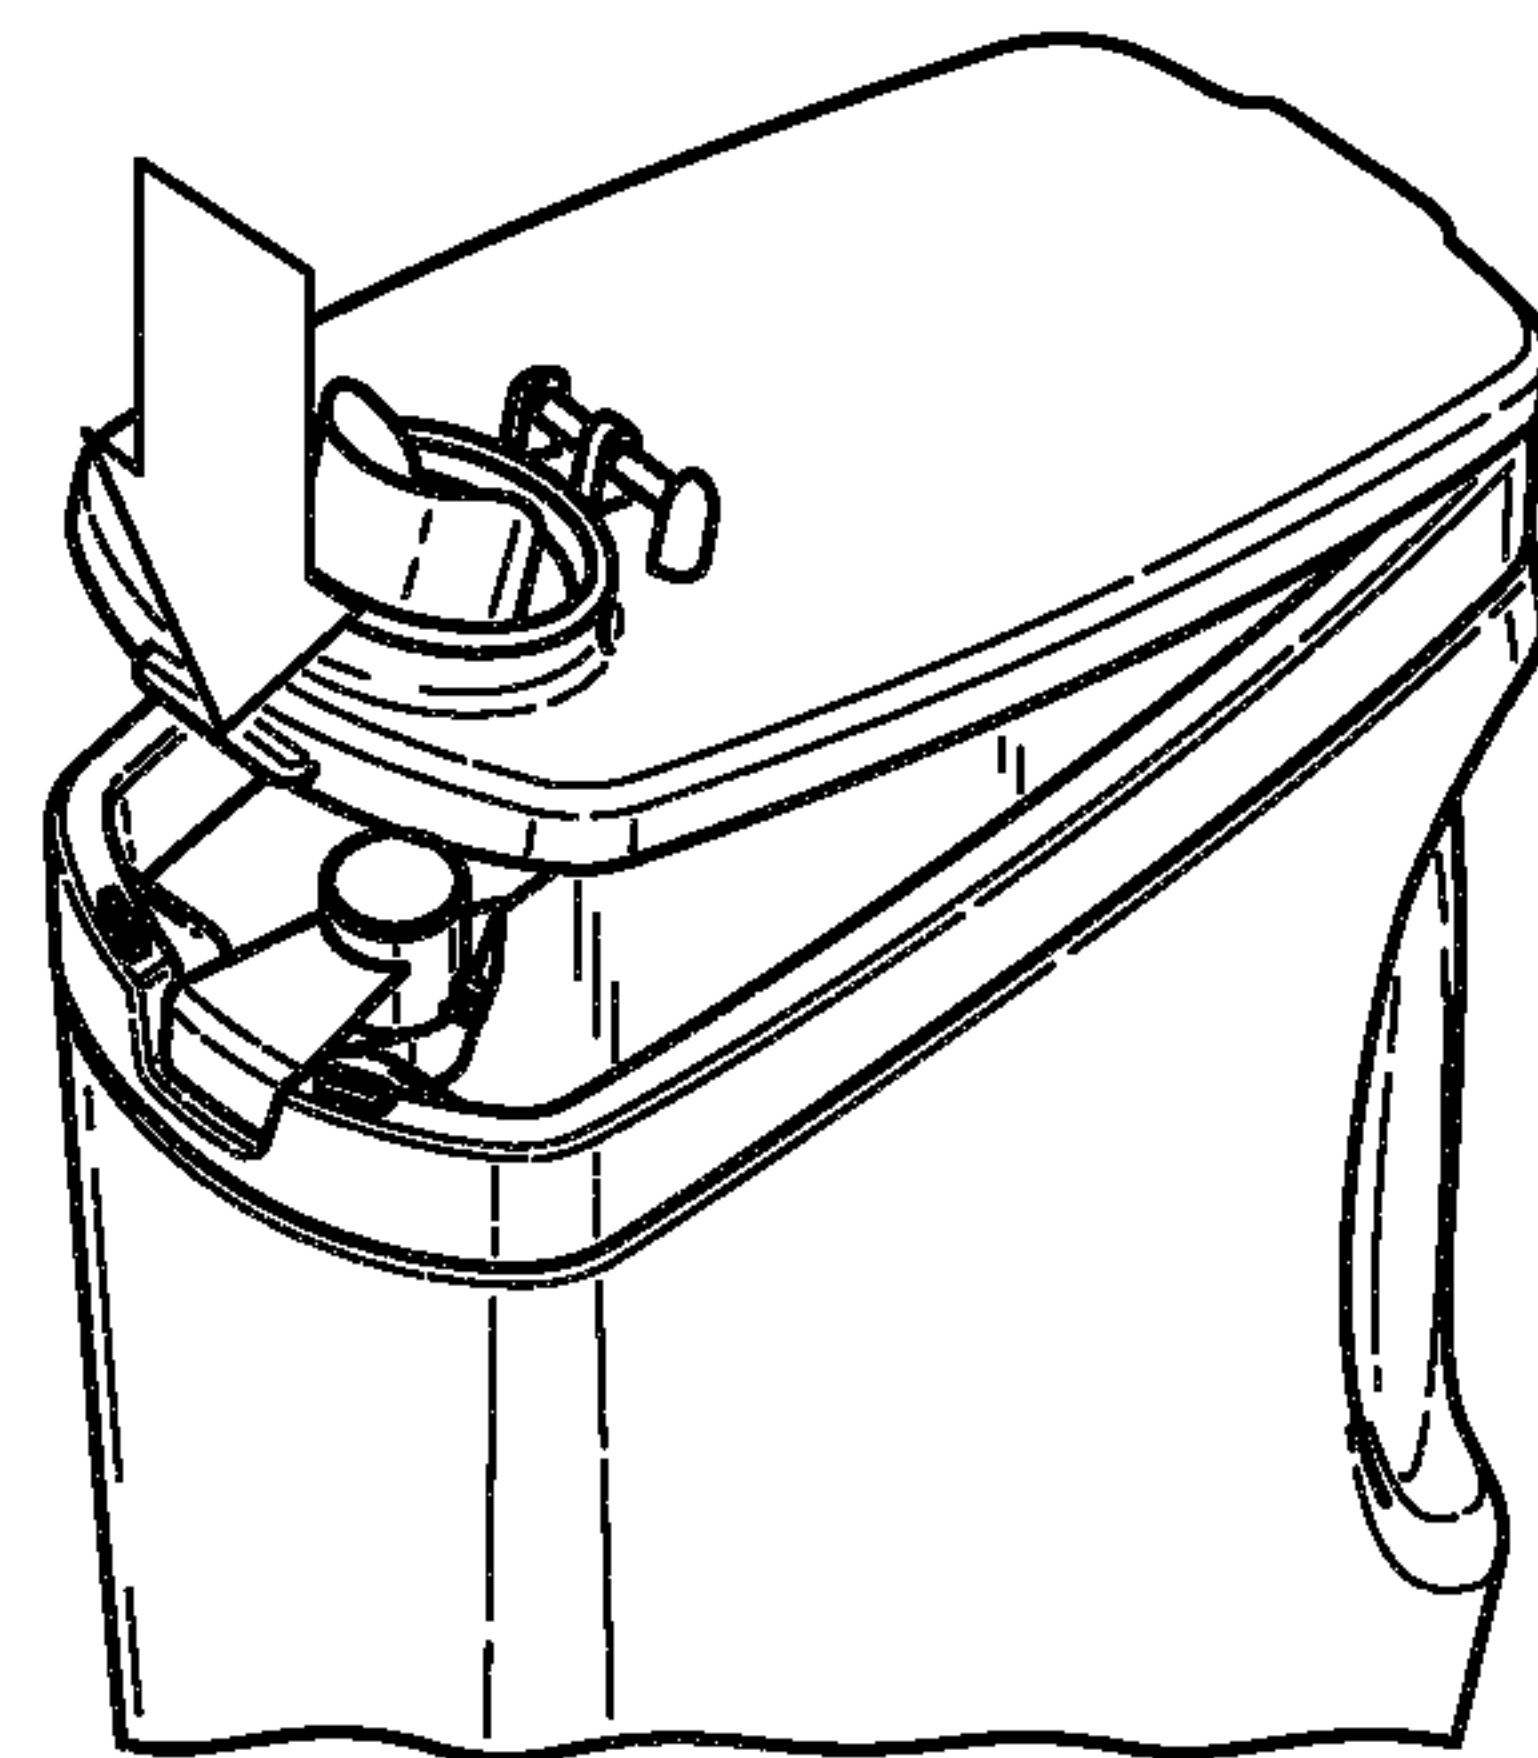

5/7

Fig. 5a

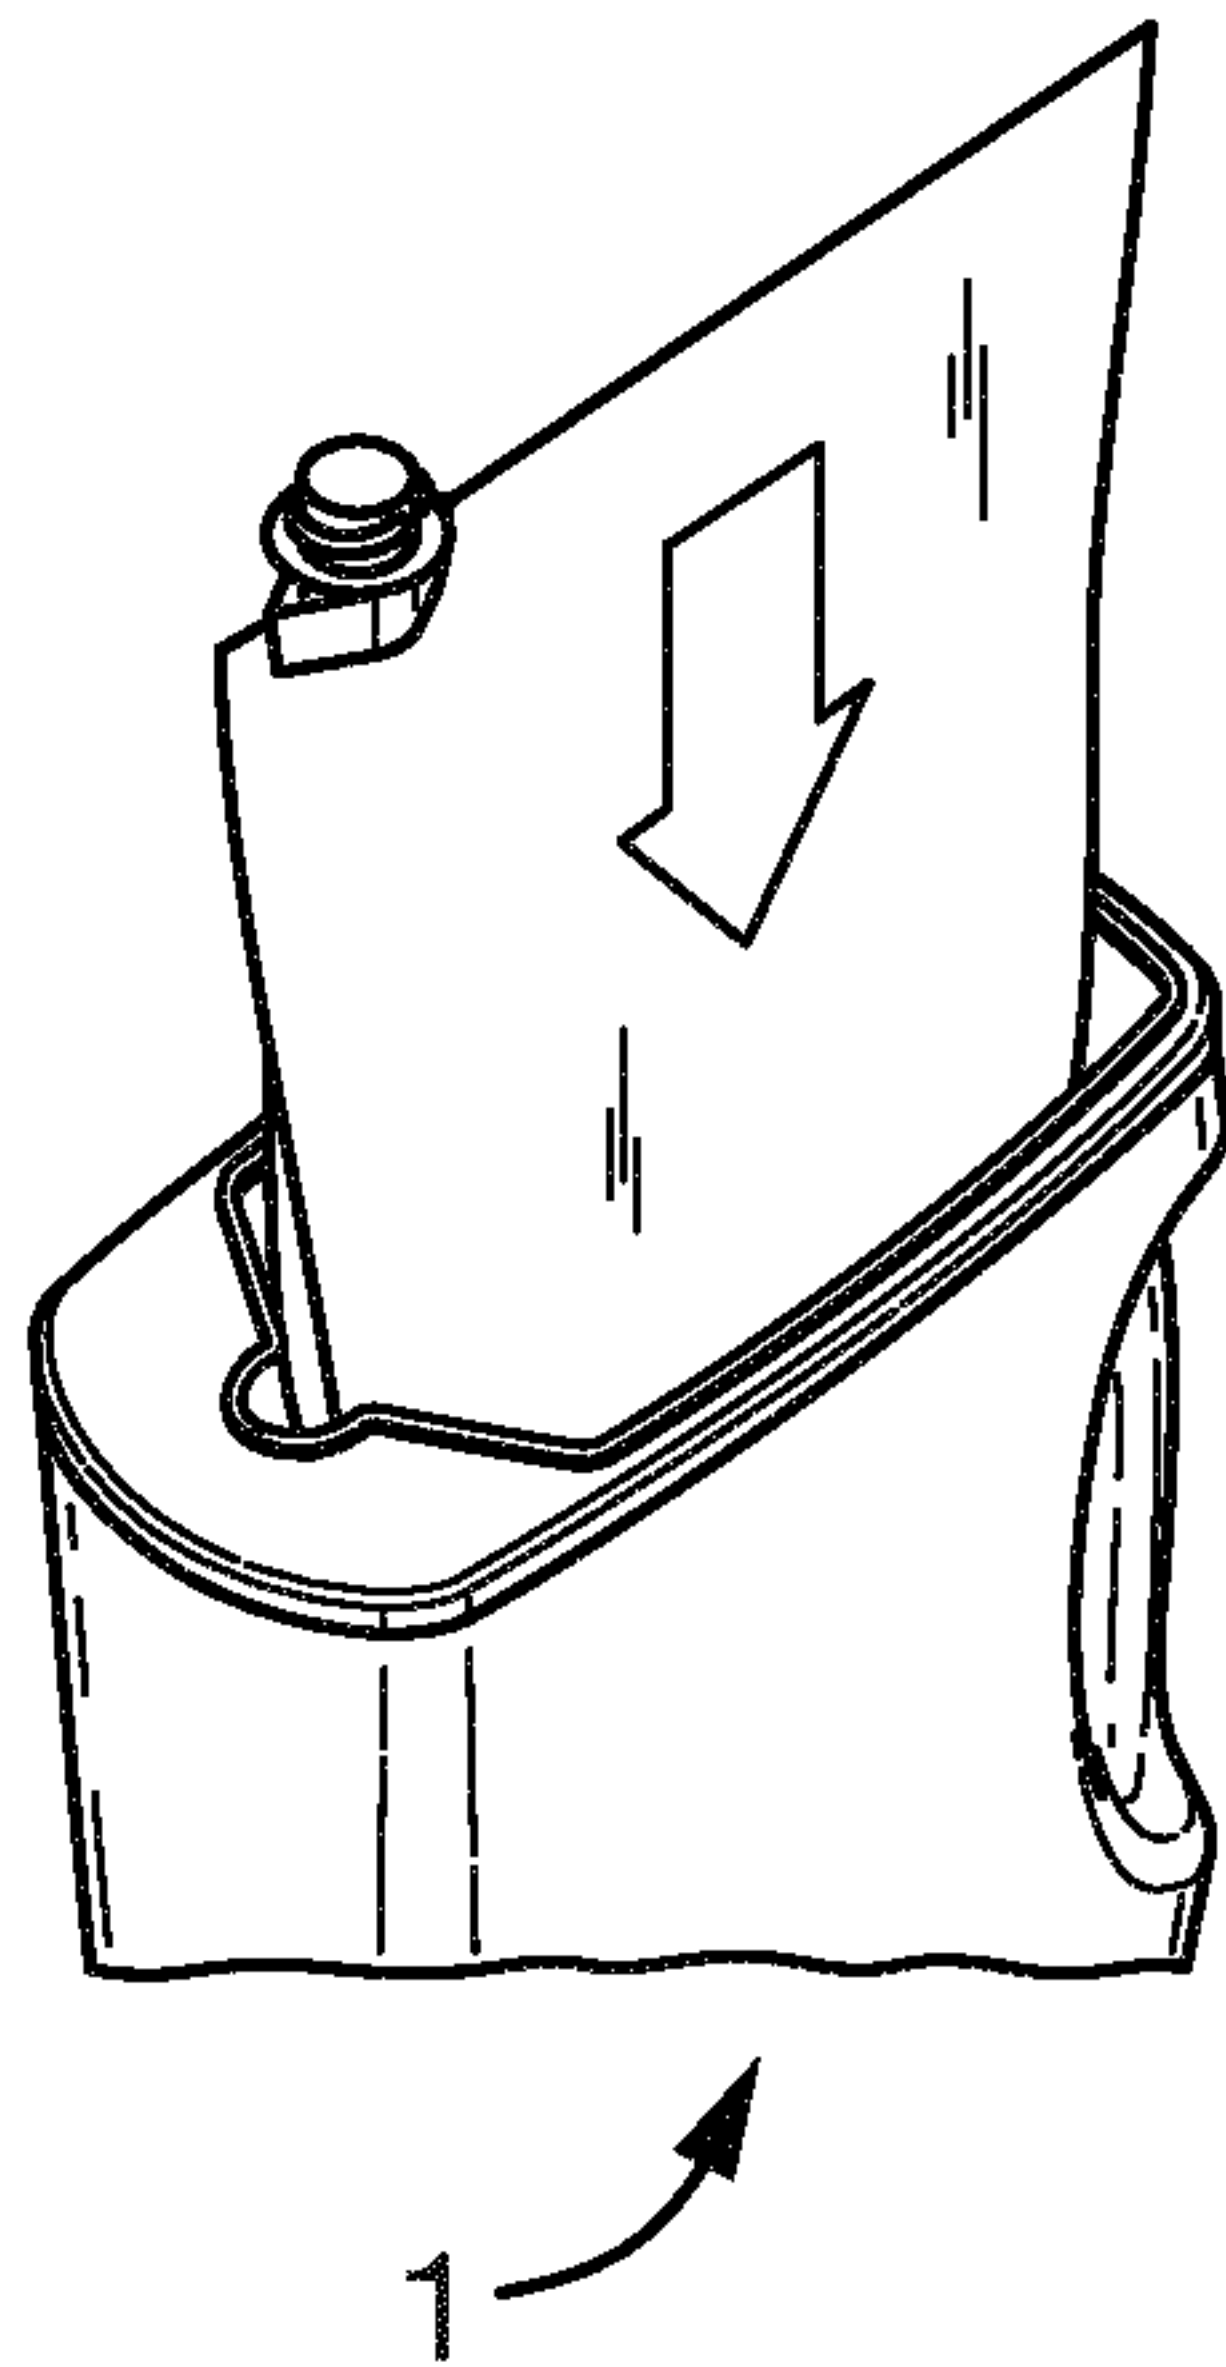


Fig. 5b

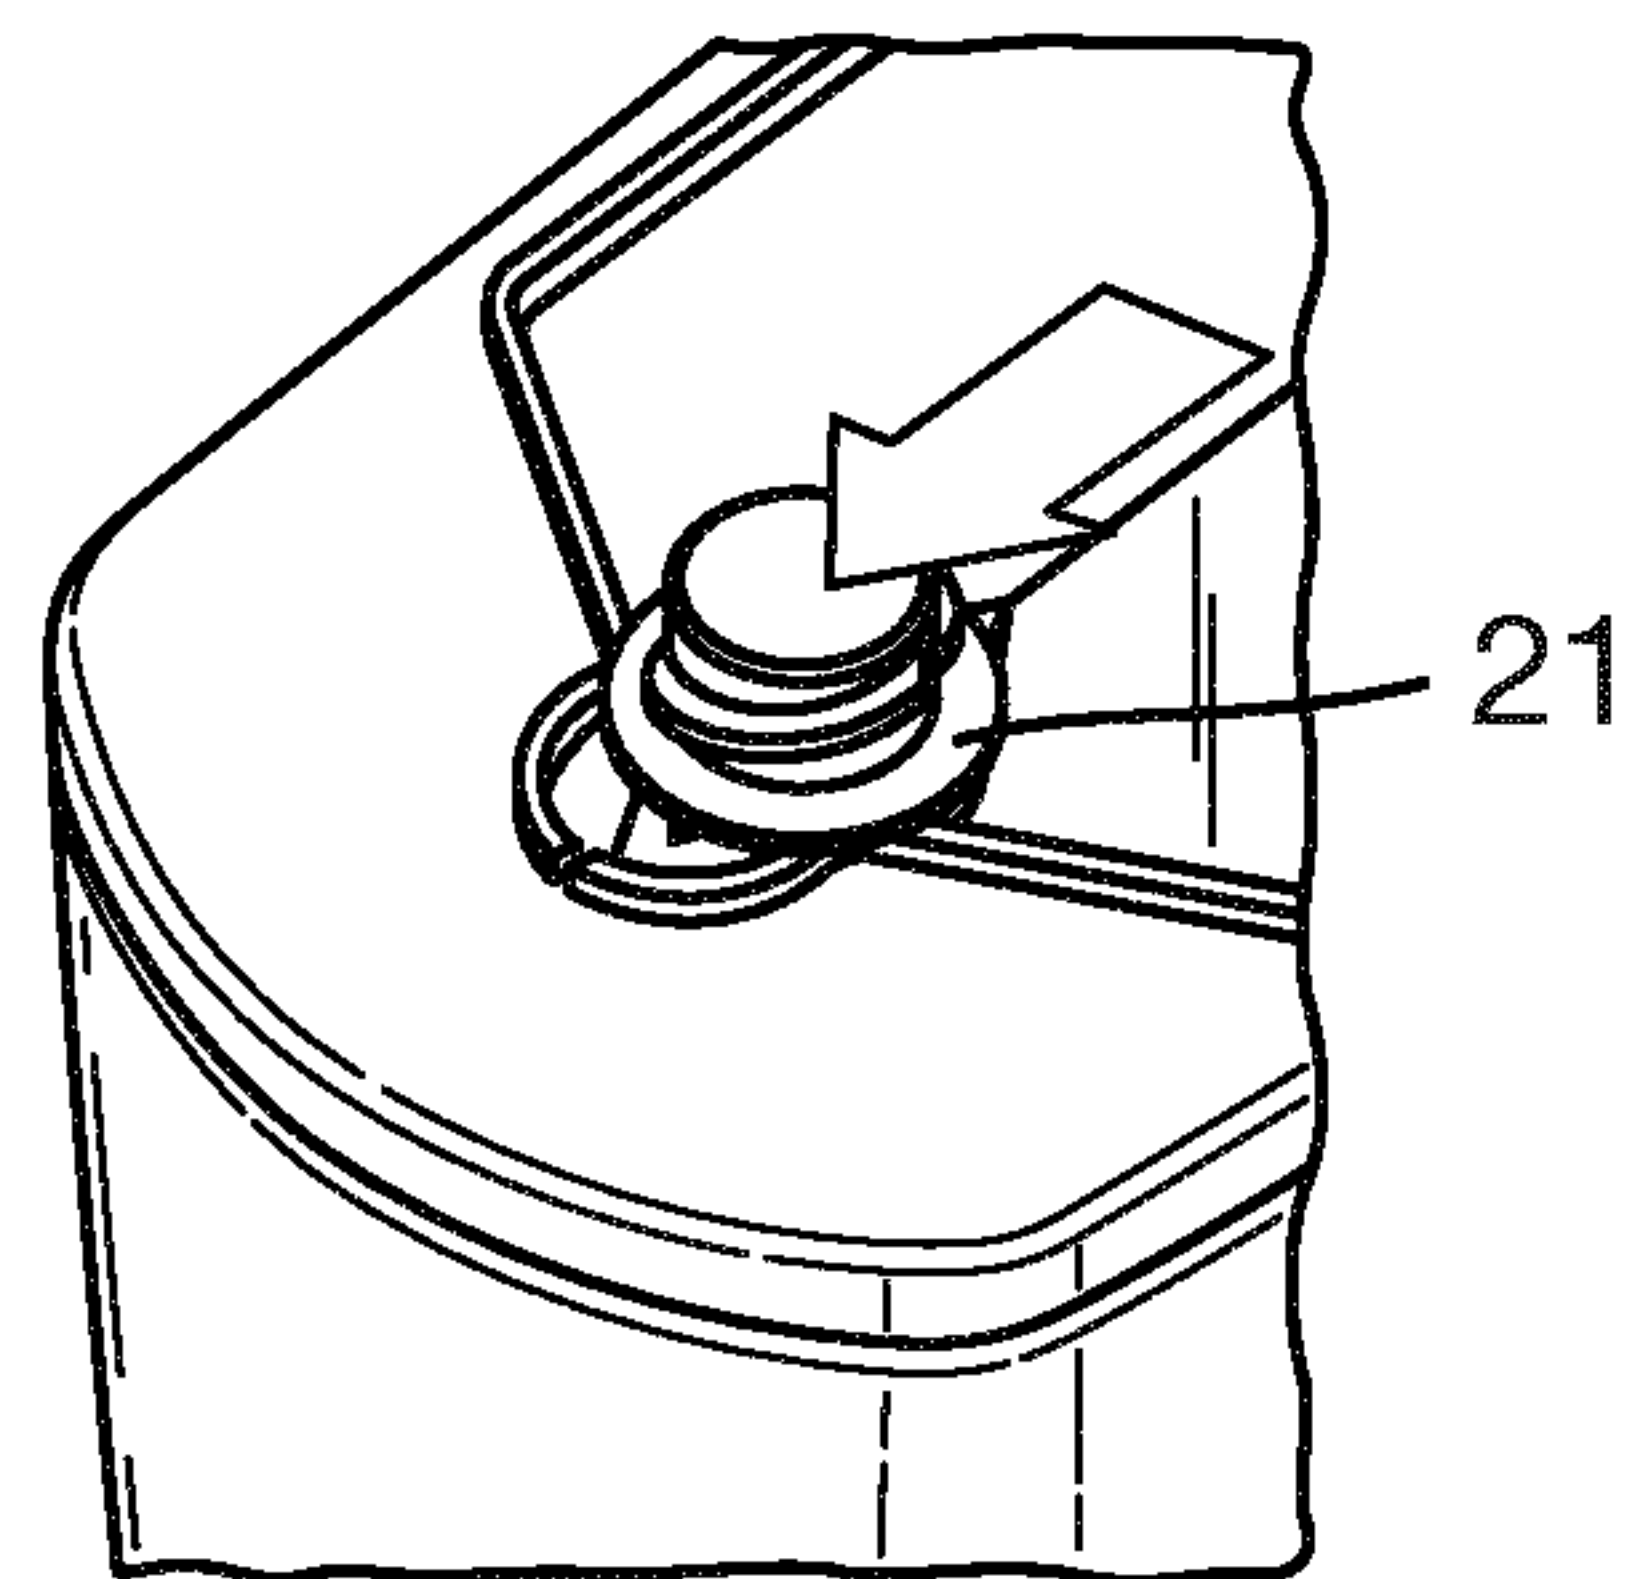


Fig. 5c


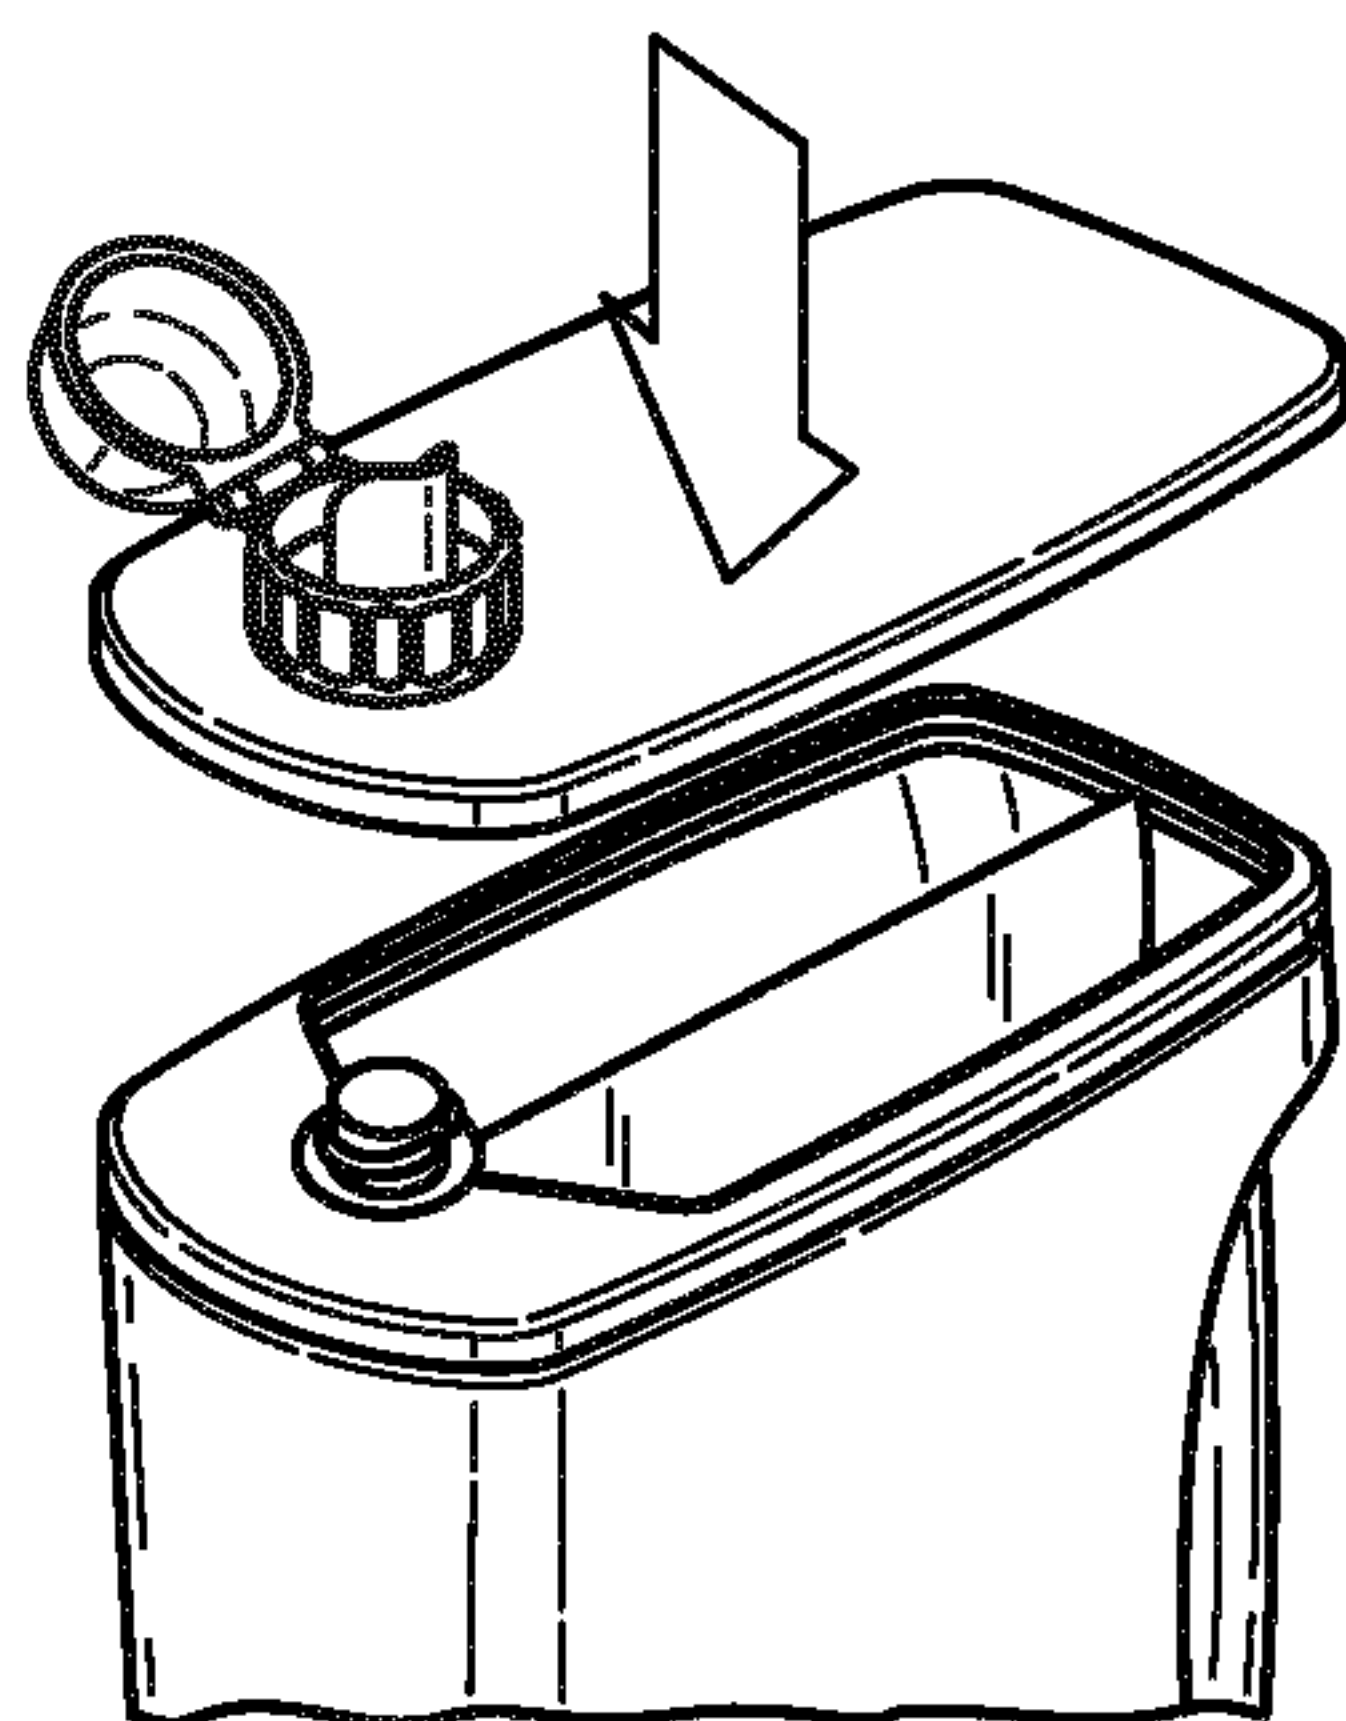


Fig. 5d

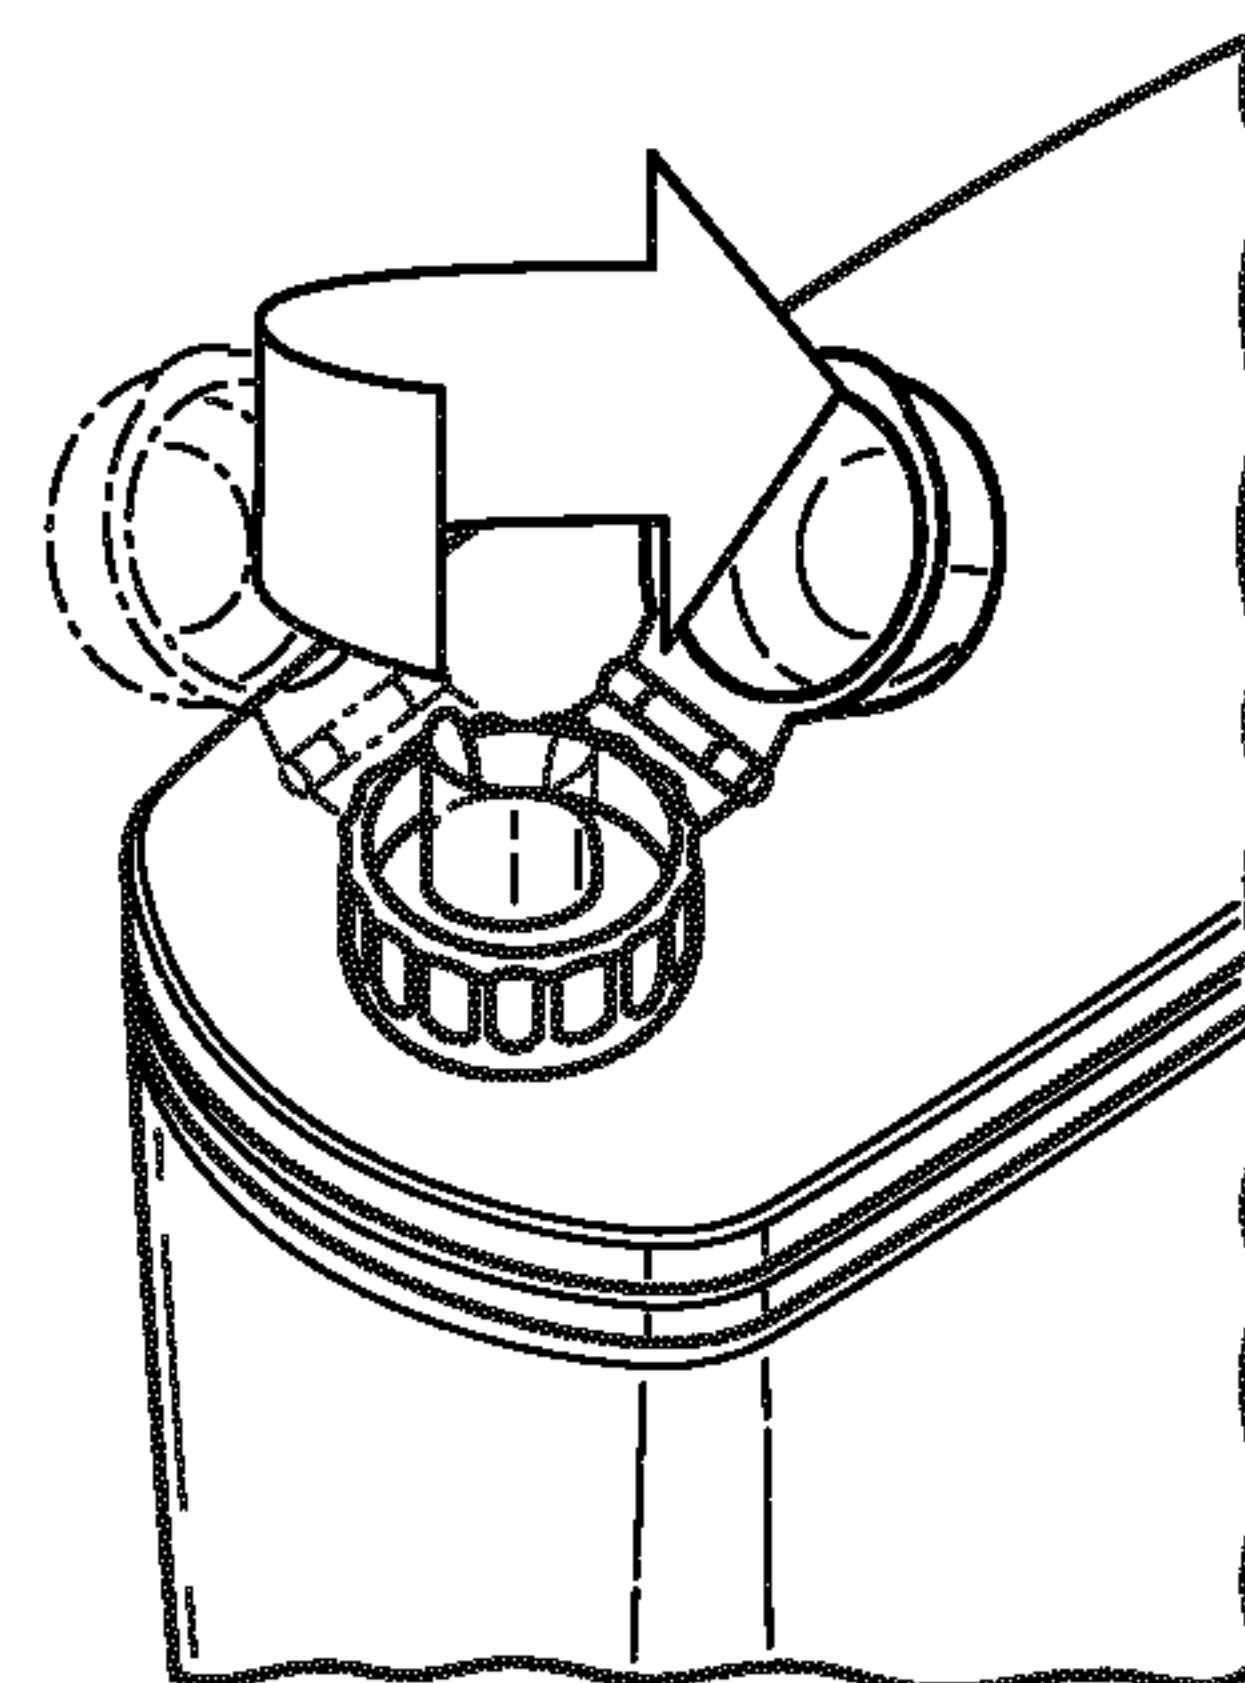

6/7

Fig. 6a

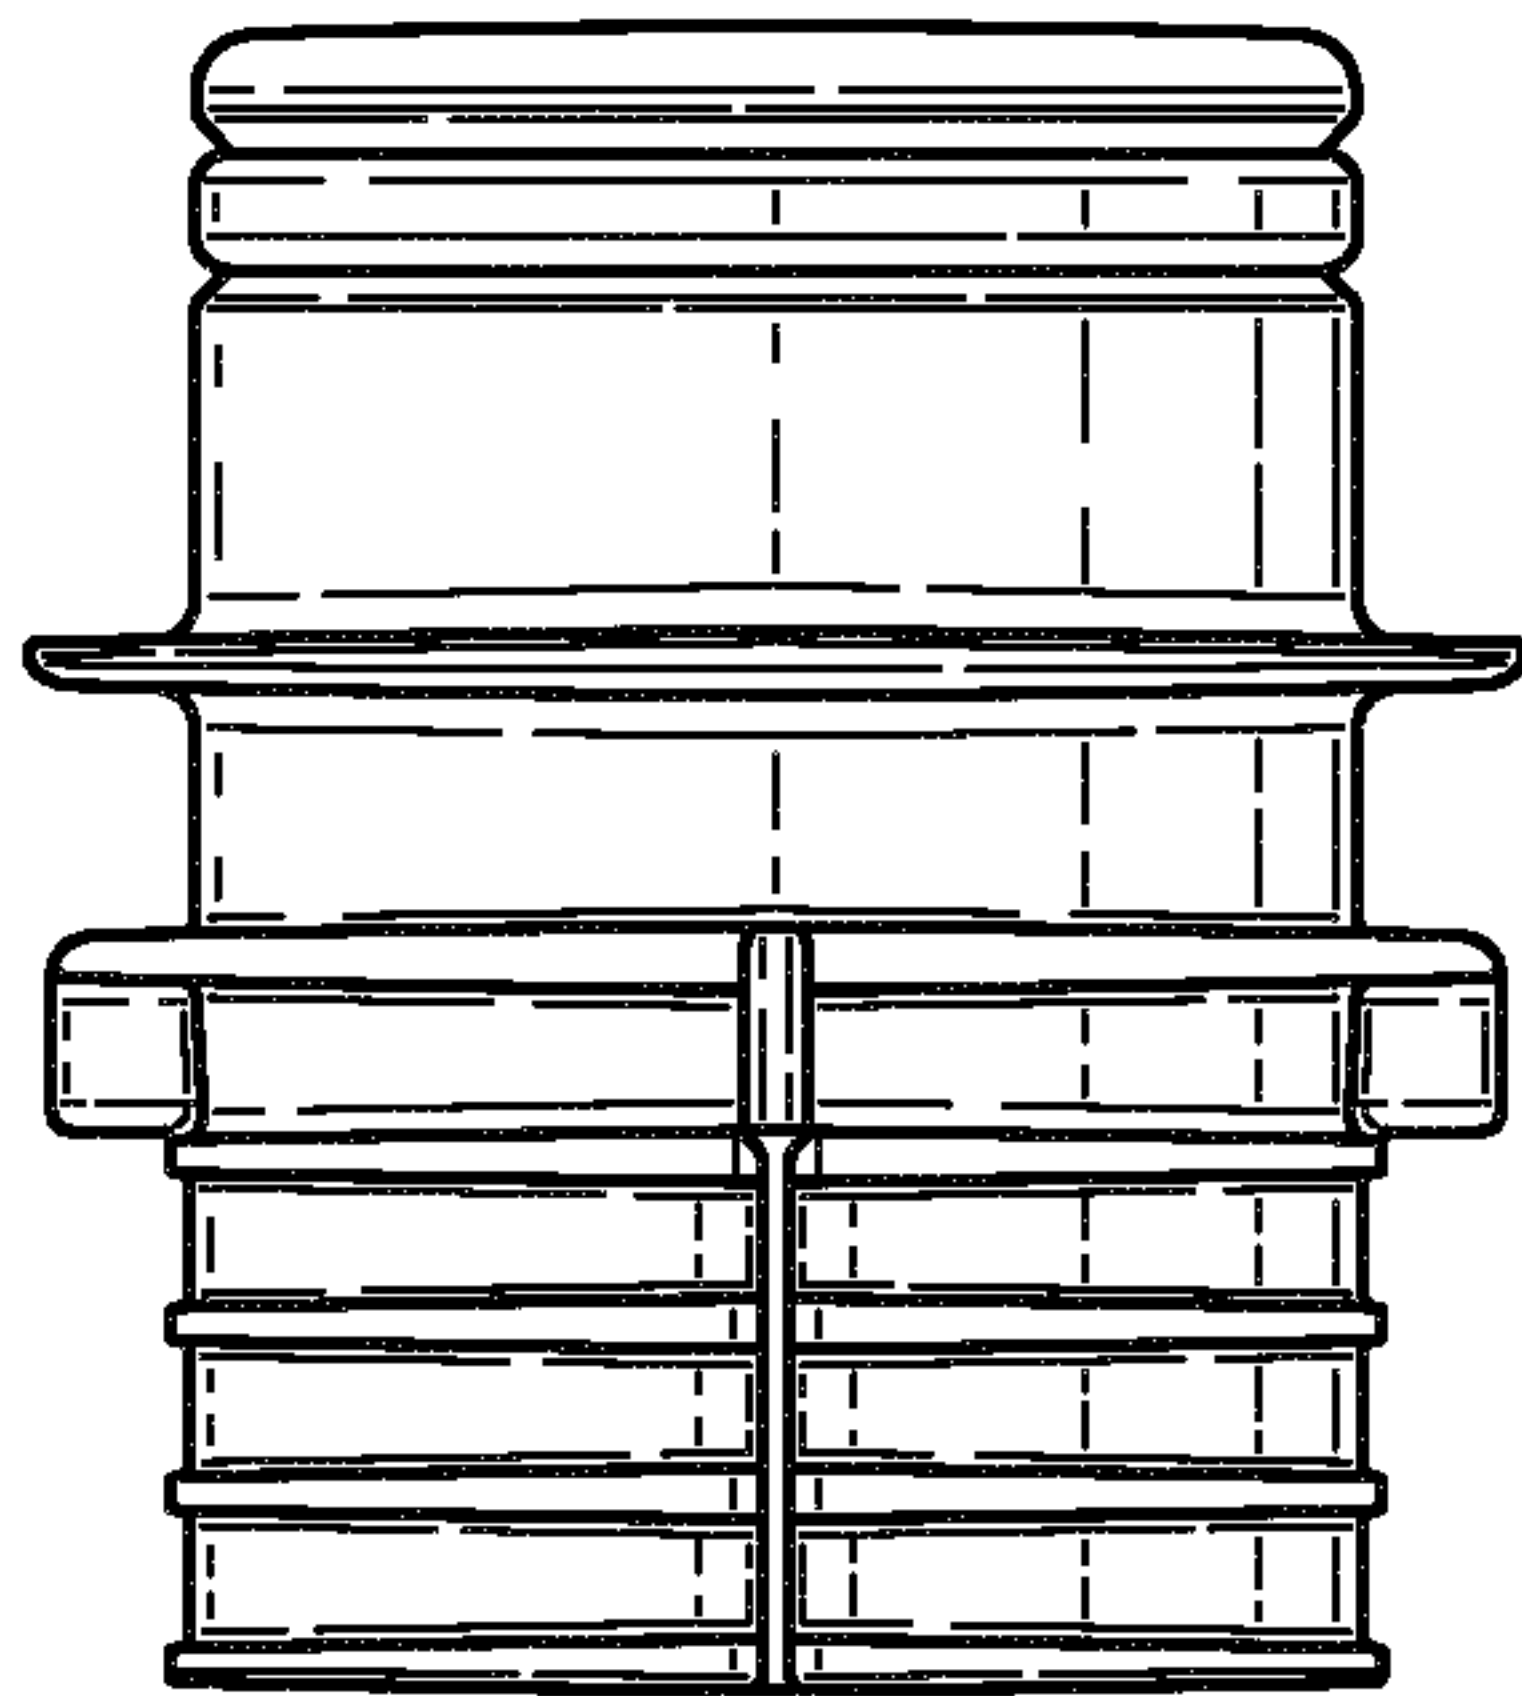


Fig. 6b


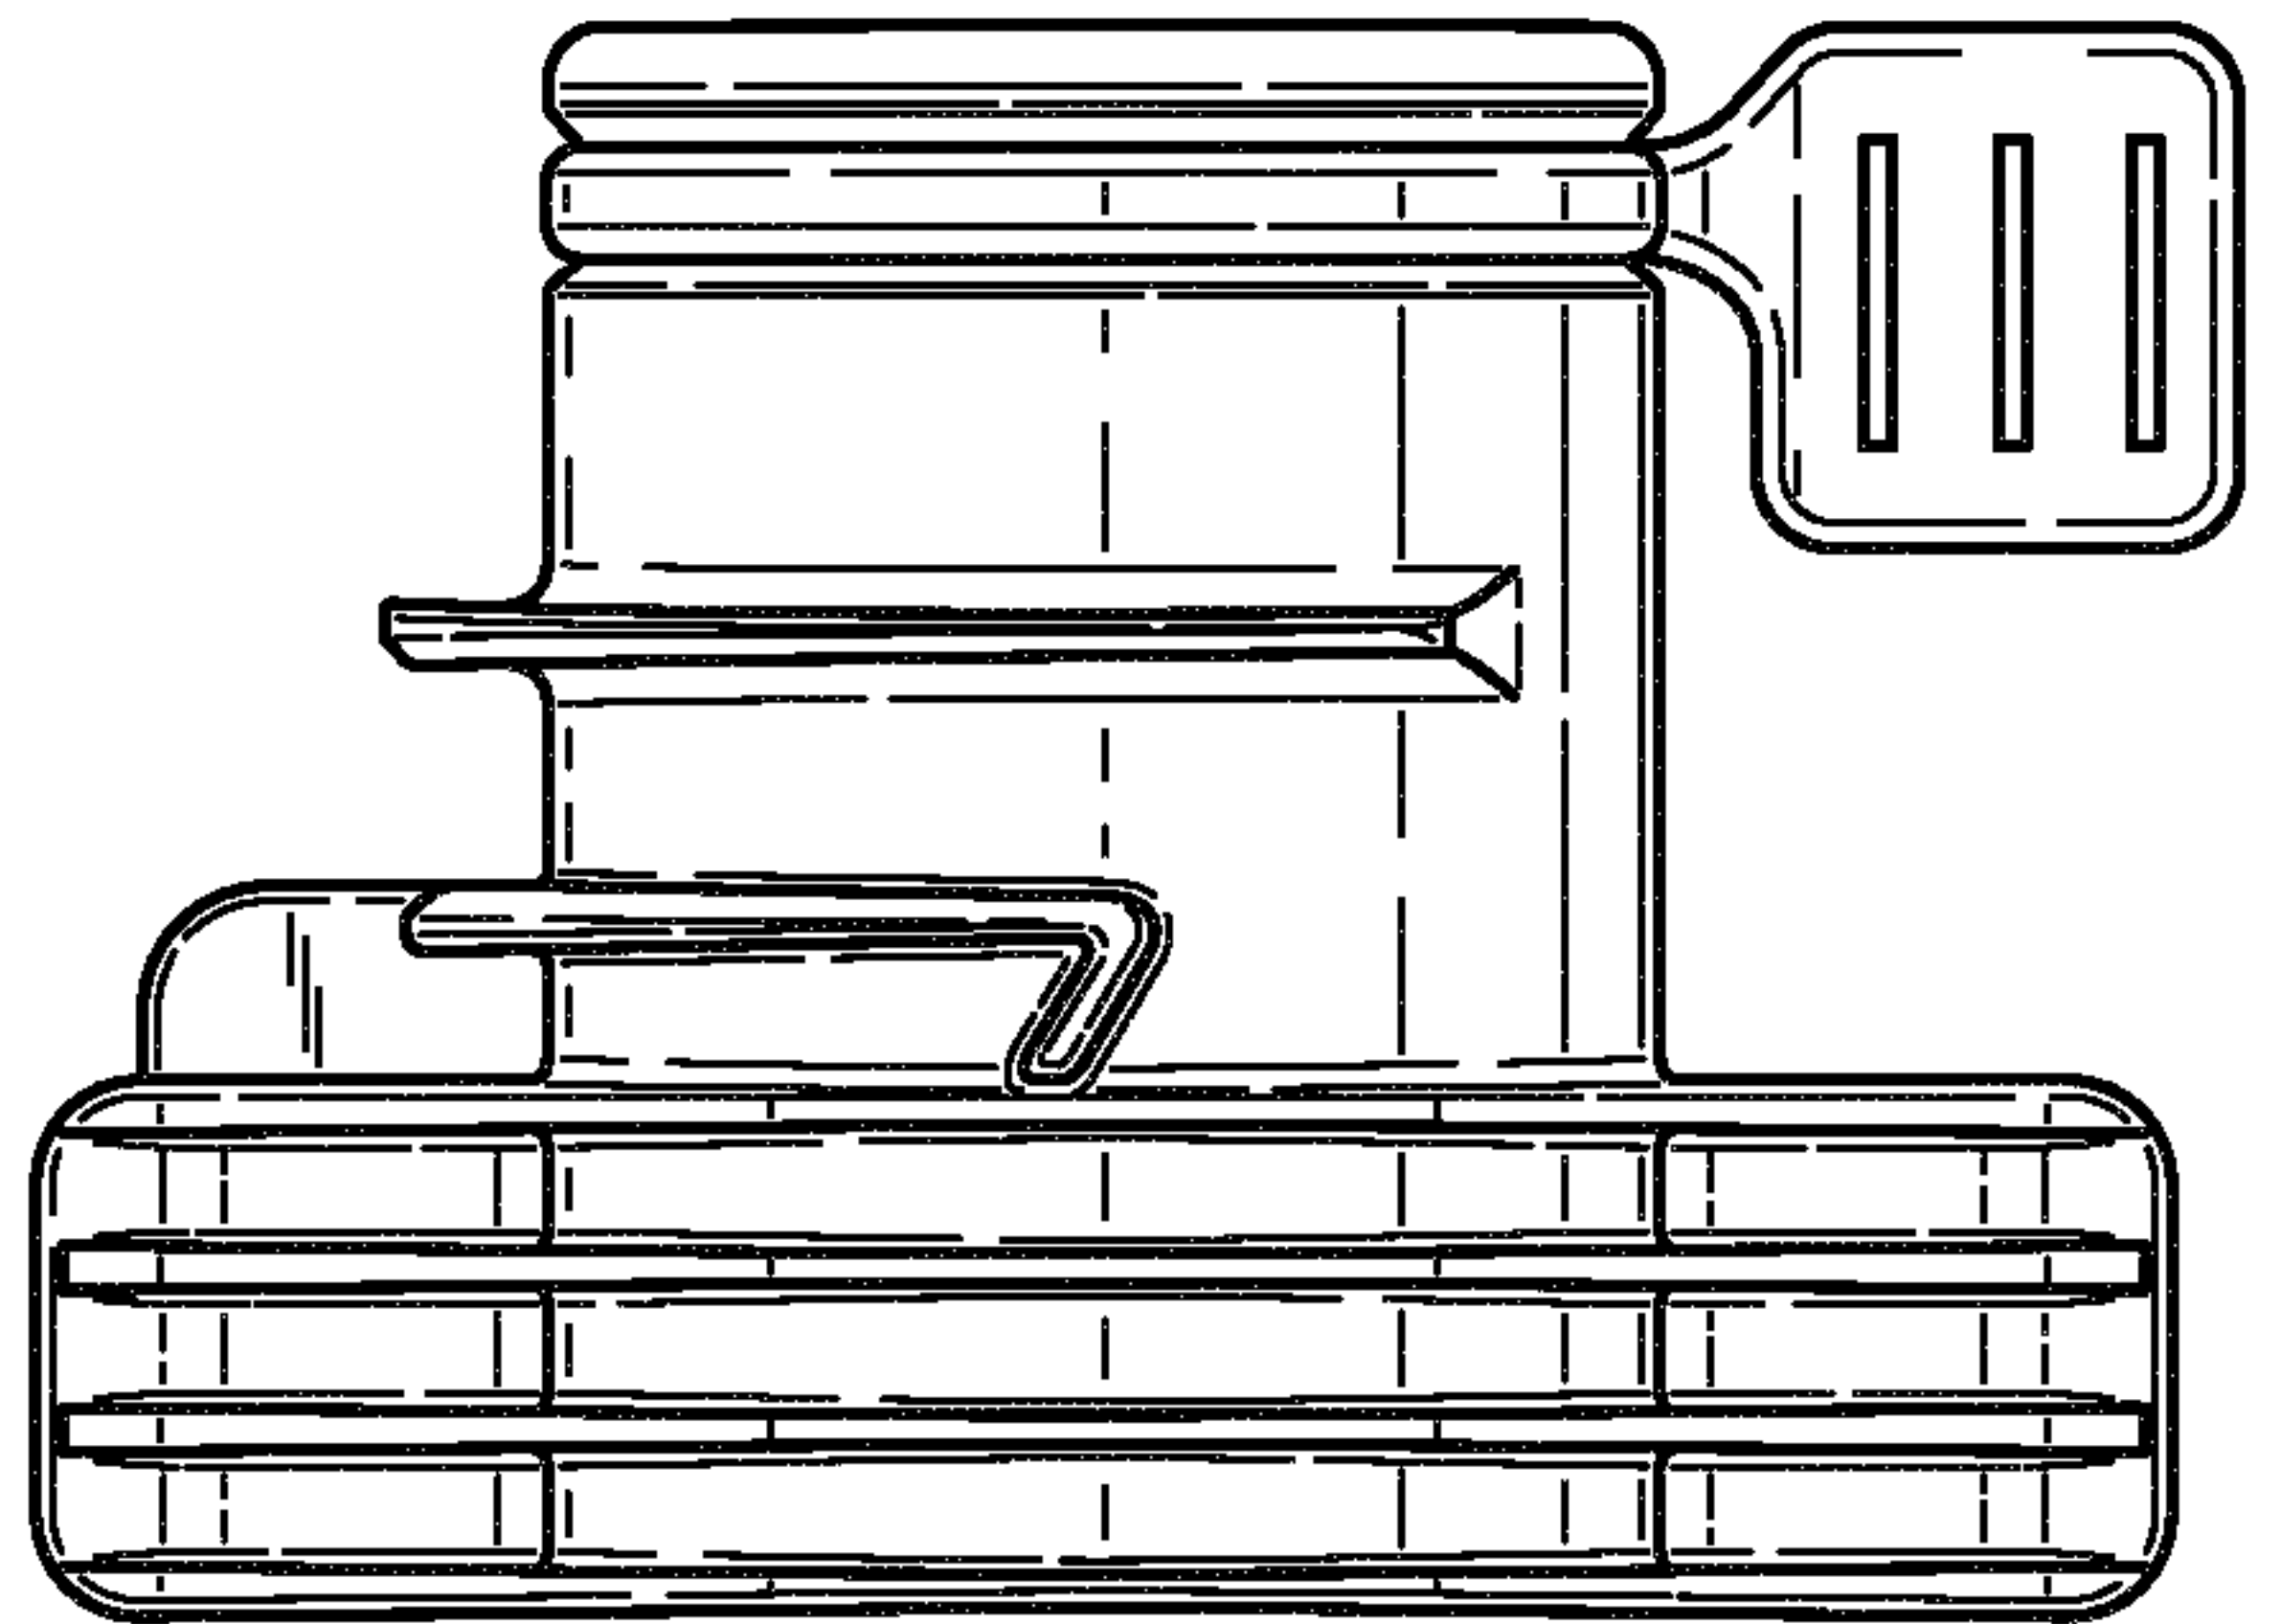


Fig. 6c

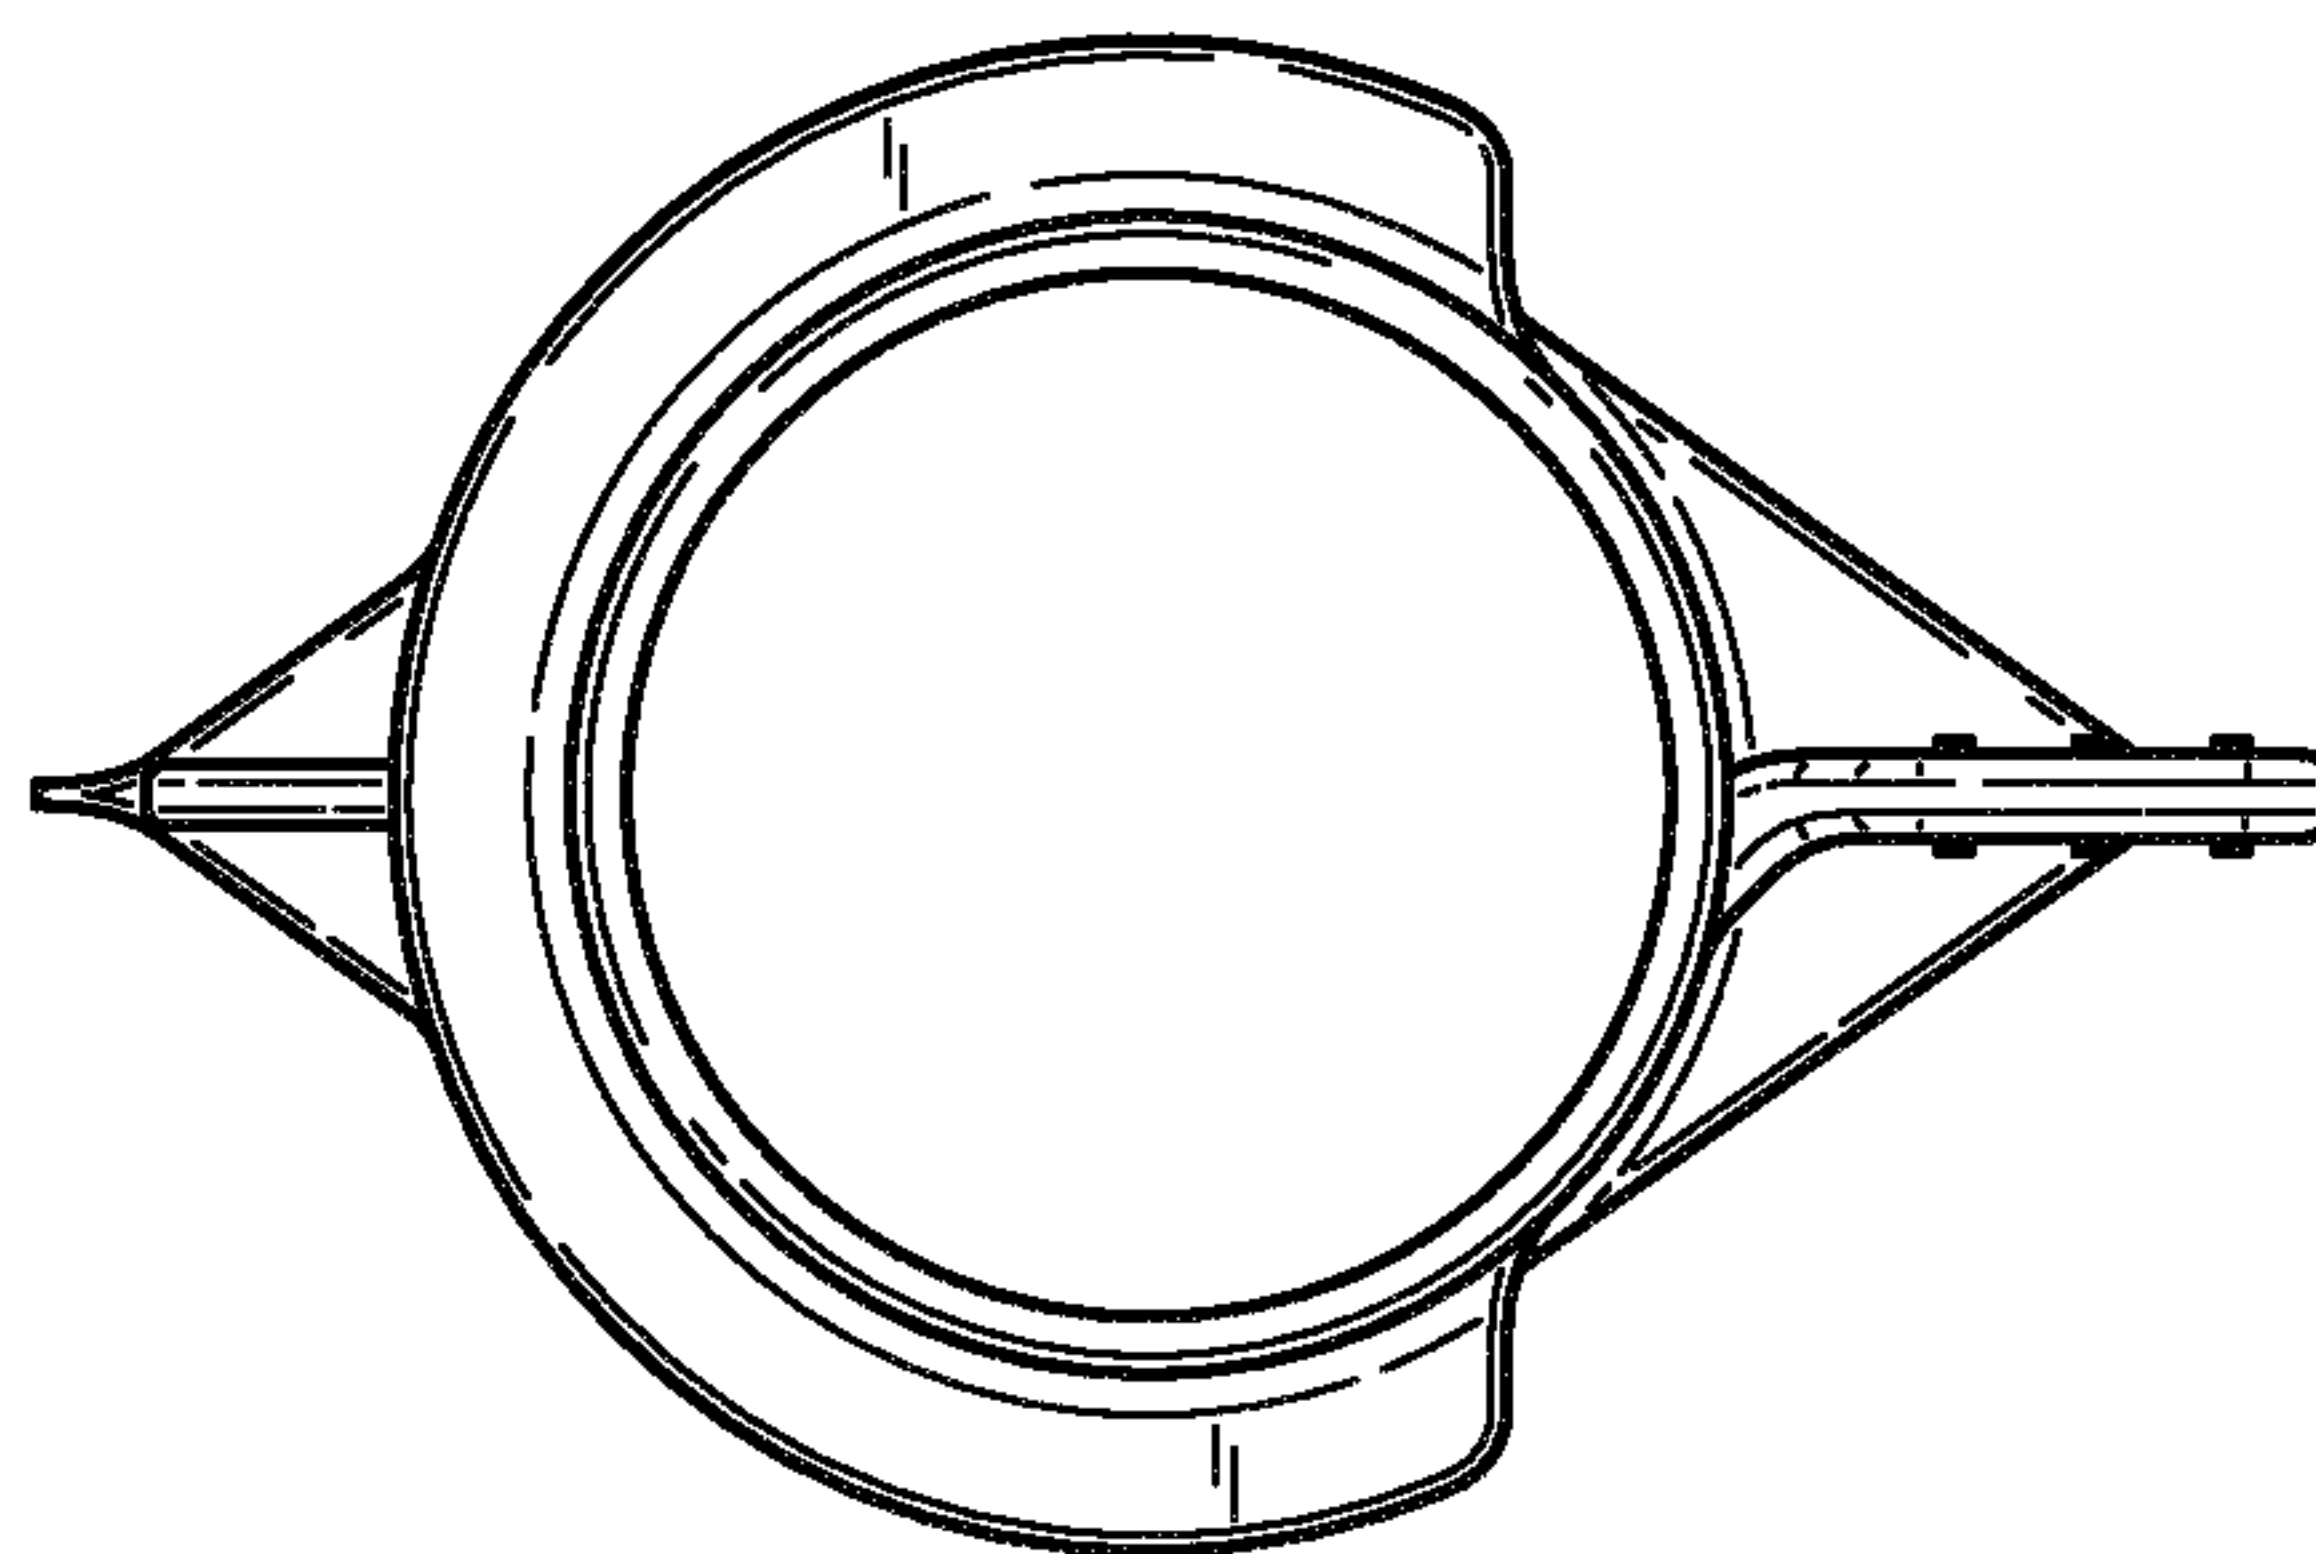

7/7

Fig. 7

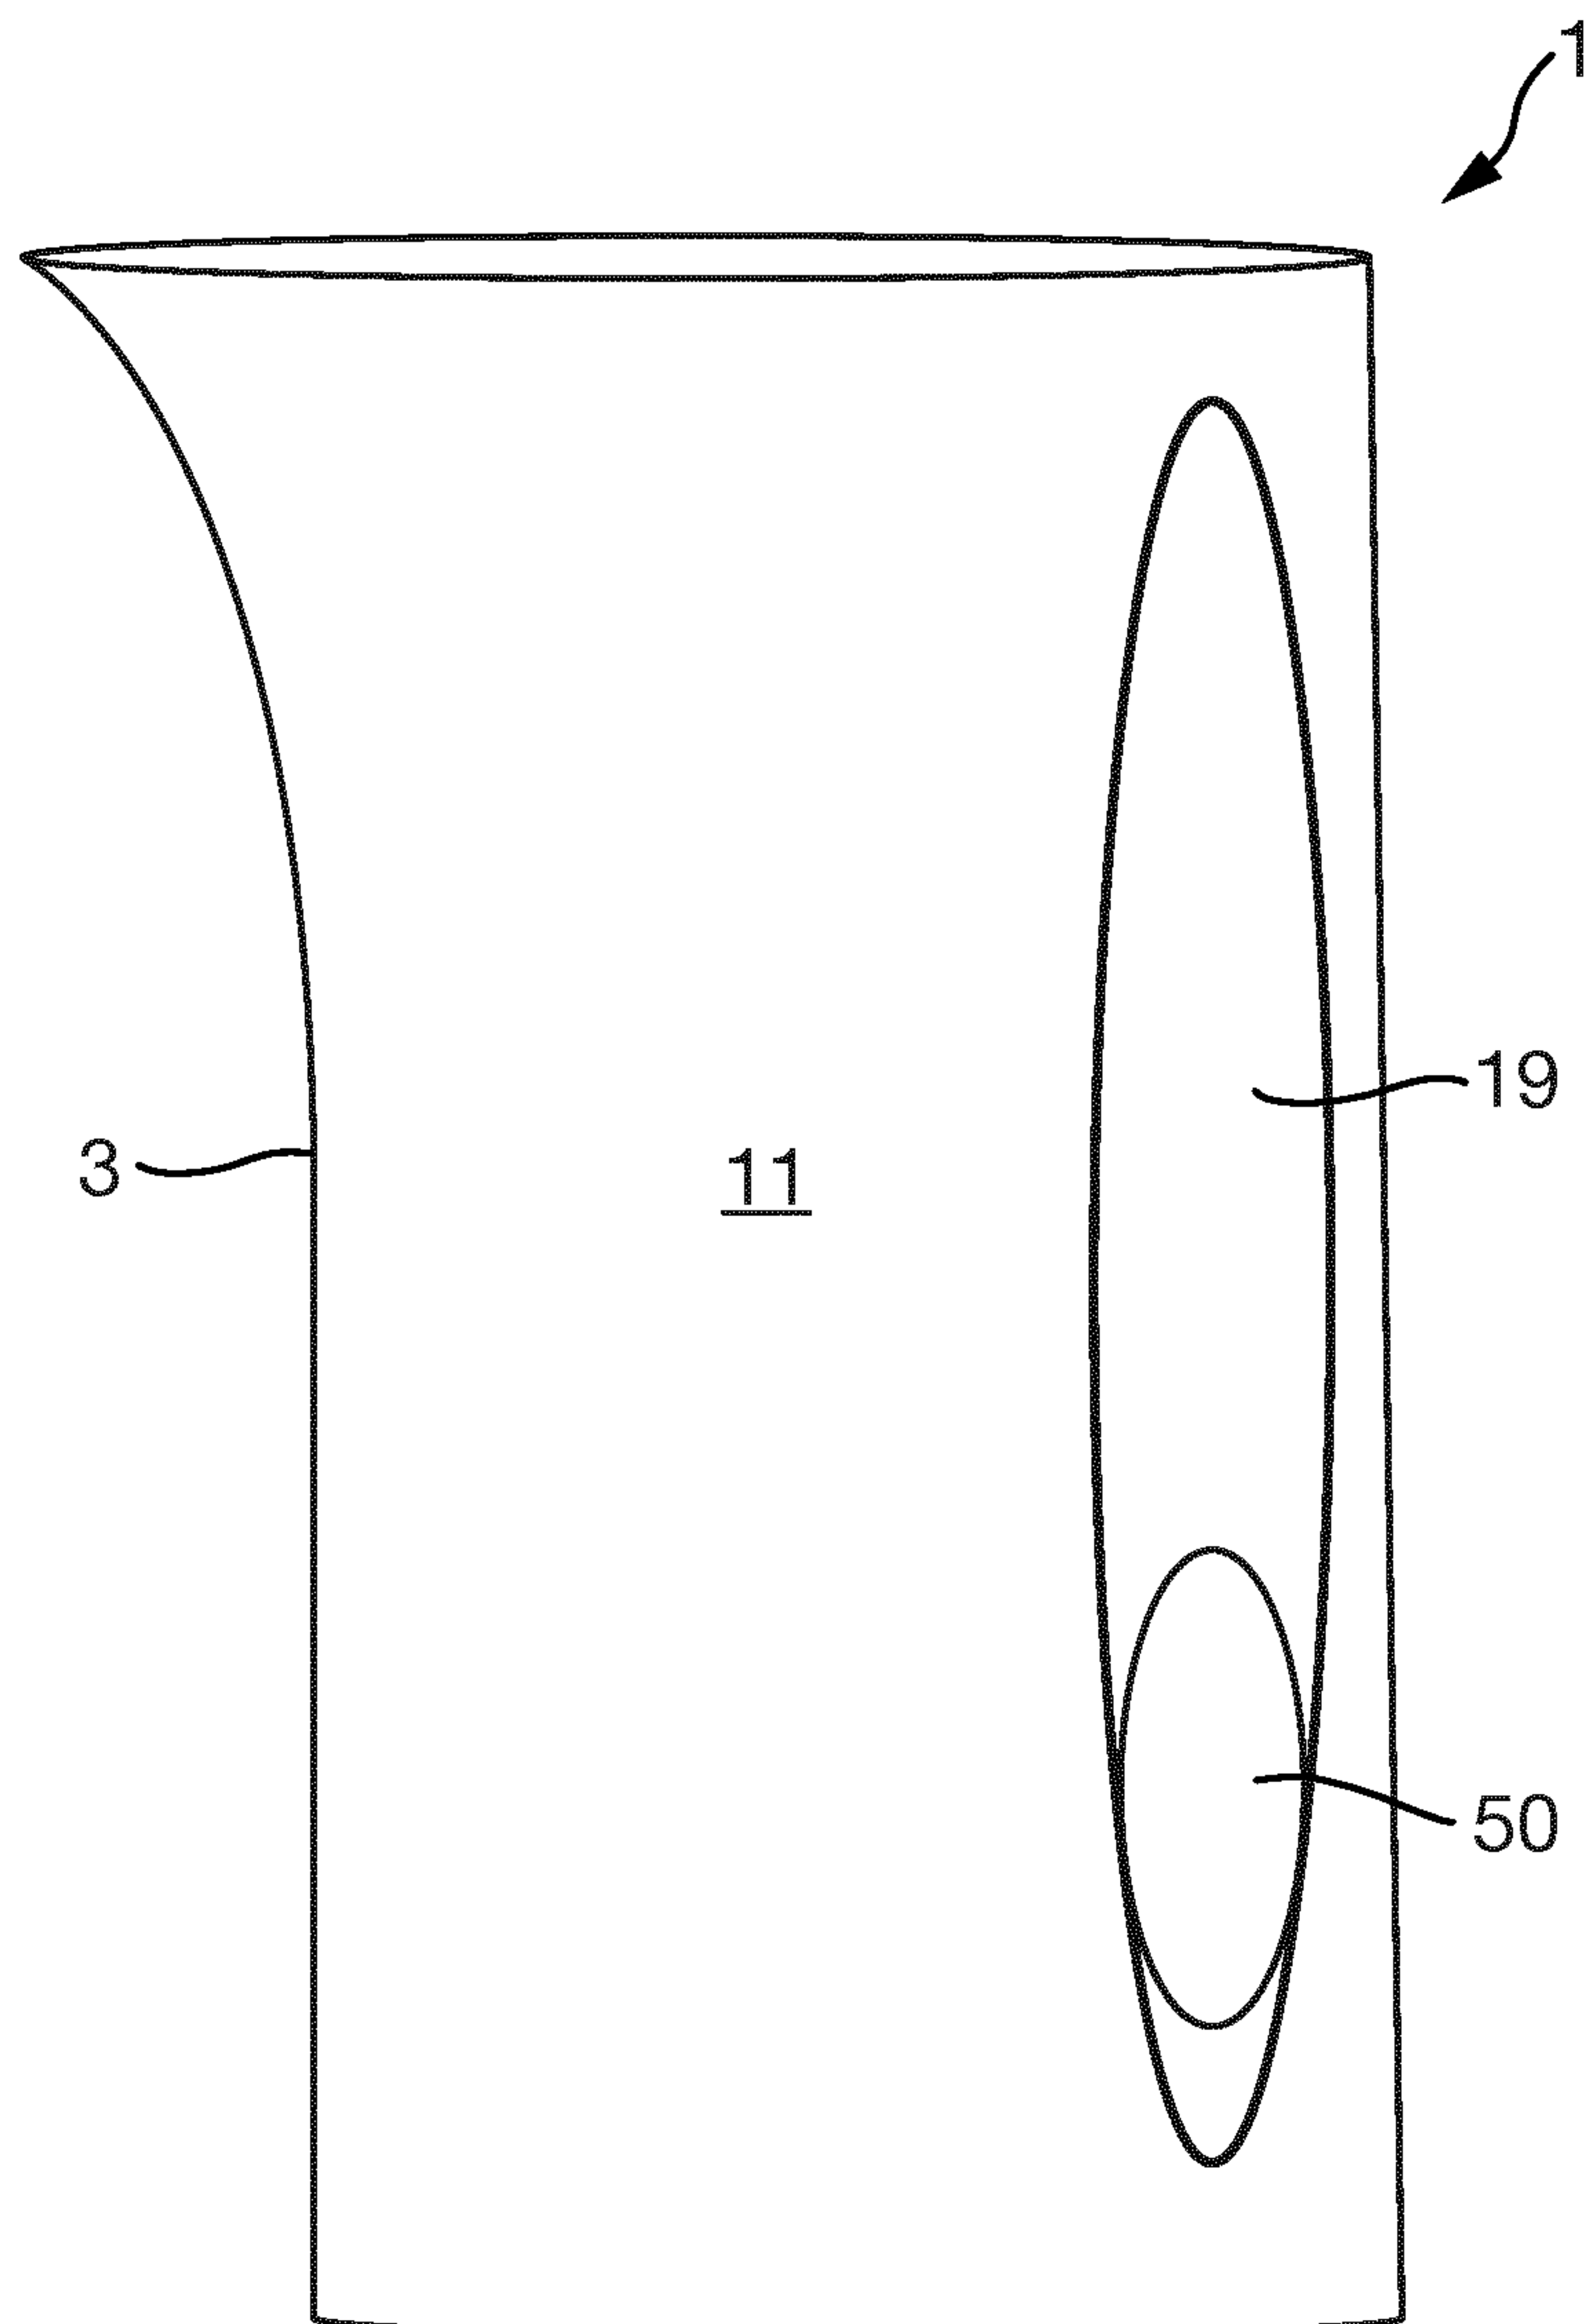


Fig. 7

