



(51) International Patent Classification:

B29B 11/14 (2006.01) **B65D 1/02** (2006.01)
B29C 49/54 (2006.01) **B65D 79/00** (2006.01)

(21) International Application Number:

PCT/EP2014/051202

(22) International Filing Date:

22 January 2014 (22.01.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13305143.3 6 February 2013 (06.02.2013) EP

(71) **Applicant:** **SIDEL PARTICIPATIONS** [FR/FR]; Avenue de la Patrouille de France, F-76930 Octeville sur Mer (FR).

(72) **Inventors:** **BUNEL, Christophe**; c/o Sidel Participations, Avenue de la Patrouille de France, F-76930 Octeville sur Mer (FR). **GODET, Florian**; c/o Sidel Participations, Avenue de la Patrouille de France, F-76930 Octeville sur Mer (FR).

(74) **Agent:** **LOUISET, Raphaël**; Dejade & Biset, 35, rue de Châteaudun, F-75009 Paris (FR).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** MOLD FOR BLOW MOLDING A HOT-FILL CONTAINER WITH INCREASED STRETCH RATIOS

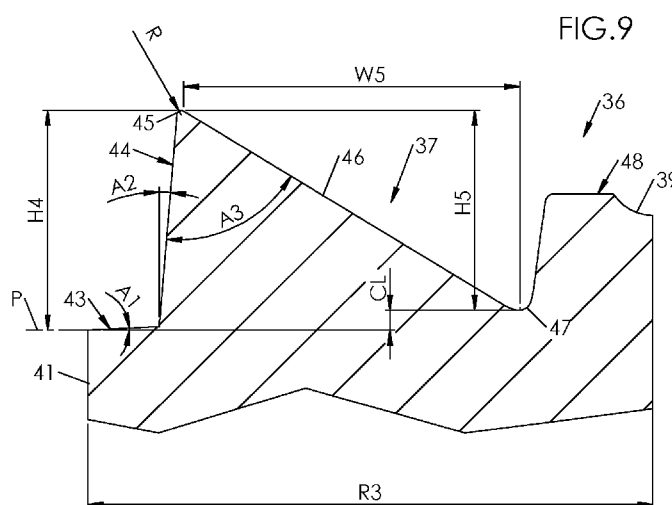

(57) **Abstract:** A mold for blow molding a container from a preform, said container comprising a wall portion and a base including a high standing ring and a central outwardly-inclined invertible diaphragm, said mold comprising sidewalls forming a counter print of the wall portion of the container (1) and a mold base (36) having an upper surface (37) defining a counter print of the container base, characterized in that the upper surface (37) includes: an annular peripheral face (43) corresponding to an annular support flange of the container base, a frusto-conical outer face (44) corresponding to an inner portion (11) of the high standing ring, said outer face (44) protruding upwardly with a draft angle (A2) from an inner edge of the peripheral annular face (43) up to a sharp apex (45), a frusto-conical downwardly inclined inner face (46) corresponding to the invertible diaphragm.

Mold for blow molding a hot-fill container with increased stretch ratios

FIELD OF THE INVENTION

5 The invention generally relates to the manufacturing of containers, such as bottles, which are produced by blow molding or stretch-blow molding from preforms made of plastic (mostly thermoplastic, e.g. PET) material. More specifically, the invention relates to a mold for the manufacturing of containers, in particular hot-fill containers, which are
10 ready to be filled by liquids at a high temperature (generally higher than the glass transition temperature of the material in which the container is made).

BACKGROUND OF THE INVENTION

15

It is known that the blow molding of a container generates both an axial (or length) stretch and a radial (or hoop) stretch which provides molecular bi-orientation – and hence a good structural rigidity – to the material of the container.

20

Although the structural rigidity of an ordinary container is generally sufficient in common applications (such as still water) to resist low mechanical constraints due to the hydrostatic pressure of the liquid therein, it is insufficient to withstand high mechanical constraints generated in the material during a hot-filling.

25

Indeed, residual stresses in the material are released during hot-filling (particularly with a liquid having a temperature higher than the glass transition temperature of the material), causing a deformation of the container that could make it unsuitable for use – and hence for sale.

30

To decrease deformation of the container during hot-filling, it is known to run the blow molding within a mold cavity usually provided with sidewalls heated at a predetermined temperature and with a mold base, and to complete the blowing through a thermal treatment called heat set, by which the container is held in contact with the sidewalls at a predetermined temperature between 80°C and 180°C for a predetermined
35 time (generally several seconds).

Generally, two sidewalls are present. They are usually named "half-molds". They can be moved away the one from the other and from the mold base for allowing either the introduction of a preform or the removal of a finished container and placed in close contact together and with the mold
5 base during the stretch blow molding step.

However, heat setting solves only part of the problems of deformation of a hot-fill container. Indeed, while cooling, the liquid and the air above the liquid in the capped container undergo a decrease in volume that tends to make the container retract.

10 Several solutions have been considered for decreasing the visible effects of such retraction. These solutions generally concern the shape of the container.

For example, it has been proposed to equip the body of the container with deformable side panels that bend inwards under the effect of the retraction and bend back outwards when the container is opened. Such
15 containers must be handled with care by the user because of the flexibility of the body, which may result in accidental spraying.

It has also been proposed to provide the container with a base portion capable of withstanding the various stresses and strains applied to the
20 container, see e.g. U.S. Pat. No. 6,896,147 (assigned to Graham).

More recently, it has been proposed to give the bottom of the container a special shape capable of absorbing at least part of the deformation due to retraction whereas the body of the container is provided with a rigid (i.e. resistant to hot-fill deformation) structure, see
25 e.g. U.S. Pat. No. 7,451,886 (assigned to Amcor).

Deformable bottoms take advantage over deformable side panels in that from the user's point of view the container has a more attractive shape. However, the amount of vacuum absorbed by deformation of the deformable bottom may be insufficient and result in a deformation of the
30 body which may take an oval shape (such a well-known deformation is called "ovalization" by the skilled technicians).

U.S. Pat. Appl. No. 2008/0047964 (Denner et al, assigned to CO2PAC) discloses a container comprising a pressure panel located in the bottom portion of the container. The pressure panel is movable between an
35 outwardly-inclined position and an inwardly-inclined position to compensate for a change of pressure inside the container. In order to

alleviate all or a portion of the vacuum forces within the container, the pressure panel is moved from the outwardly-inclined position by a mechanical pusher in order to force the pressure panel into the inwardly-inclined position. The inversion of the pressure panel from the outwardly-inclined position to the inwardly-inclined position reduces the internal volume of the container.

Denner also provides an exemplary method of blow molding such a plastic container, which includes enclosing a softened polymer material such as PET within a blow mold having side wall portions and a mold base portion movable with respect of the side mold portions in the vertical direction between a retracted position and an extended position. The mold base portion is displaced upwardly into the mold cavity to form a transverse pressure panel deeply set within the base portion of the container.

Although Denner provides a solution which in theory alleviates the drawbacks of previous solutions with deformable bottoms in that it maximizes the amount of vacuum compensation, Denner fails to disclose the details of the movable mold base portion, the use of which, as may be noted, is already known through U.S. Pat. No. 4,035,455 (Rosenkranz et al). More specifically, Denner fails to point out specific structural features of the mold base which would allow the target container to be correctly formed. In addition, blow molding trials showed that a container according to Denner is not suitably designed for blow molding or for a proper inversion of the pressure panel after filling and capping.

SUMMARY OF THE INVENTION

It is a main purpose of the present invention to alleviate the hereabove mentioned drawbacks of the prior art.

It is one object of the invention to propose a blow mold permitting the manufacturing of containers showing good hot-fill performances.

It is yet another object of the invention to propose a blow mold capable of facilitating the blow molding of containers provided with a high standing ring and an invertible diaphragm.

It is therefore proposed a mold for blow molding a container from a preform, said container comprising a wall portion and a base including a

high standing ring and a central outwardly-inclined invertible diaphragm, said mold comprising sidewalls forming a counter print of the wall portion of the container and a mold base having an upper surface defining a counter print of the container base, wherein the upper surface includes:

- 5 – an annular peripheral face corresponding to an annular support flange of the container base,
- a frusto-conical outer face corresponding to an inner portion of the high standing ring, said outer face protruding upwardly with a draft angle from an inner edge of the peripheral annular face up to a sharp
10 apex,
- a frusto-conical downwardly inclined inner face corresponding to the invertible diaphragm.

According to various embodiments, taken either separately or in combination:

- 15 – the annular peripheral face is in the shape of a frustum of a cone and shows an inward inclination in a transversal section;
- the peripheral face defines, with respect of a plane perpendicular to a mold base axis, an angle comprised between 1° and 10°, preferably between 2° and 5°, and for example of about 3°;
- 20 – the draft angle is comprised between 1° and 10°, preferably between 3° and 6°, and for example of about 4.5°;
- the outer face and the inner face of the upper surface of the mold base together define at the apex an angle comprised between 50° and 70°, preferably between 60° and 65°, and for example of about 63°;
- 25 – the apex has a radius of curvature of less than or equal to 1.5 mm, preferably less than or equal to 0.25 mm;
- the inner face of the upper surface extends from the apex down to an annular inner edge where the inner face connects to a central uprising push-up corresponding to a central recess in the container base;
- 30 – the inner edge of the inner face defines with a peripheral plane defined by an outer edge of the peripheral face a clearance comprised between 1 mm and 5 mm, and preferably of about 2 mm;
- the mold base is movable with respect of the sidewall, between a retracted position in which the upper surface extends below the
35 container base to be formed, and a raised position in which the upper

surface closes the cavity;

The above and other objects and advantages of the invention will become apparent from the detailed description of preferred embodiments, considered in conjunction with the accompanying drawings.

5

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

FIG.1 is a realistic sectional view showing both a preform and a
10 resulting hot-fill container formed therefrom;

FIG.2 is a realistic bottom perspective view showing the container of FIG.1;

FIG.3 is a realistic enlarged fragmentary sectional view showing a detail of the container of FIG.1 through the base of the container;

15 FIG.4 is a realistic enlarged sectional view showing the preform of FIG.1;

FIG.5 is a realistic enlarged fragmentary sectional view showing a detail of the preform of FIG.4, in the vicinity of a bottom of the preform;

20 FIG.6 is a realistic sectional view of a stretch blow molding unit including a mold with a movable base mold for manufacturing a hot-fill container, showing a preform from which the container is to be formed;

FIG.7 is a realistic sectional view of the stretch-blow molding unit of FIG.6, further showing the container formed therein from the preform (also shown in dotted line);

25 FIG.8 is a realistic perspective view of a base mold for a molding unit of FIG.6;

FIG.9 is a realistic enlarged fragmentary sectional view showing a detail of the base mold of FIG.8.

30

DETAILED DESCRIPTION

FIG.1 illustrates a hot-fill container **1** suitable for being filled with a hot product (such as tea, fruit juice, or a sports drink).

35 The container **1** includes an upper open cylindrical threaded upper portion or neck **2**, which terminates, at a lower end thereof, in a support collar **3** of greater diameter. Below the collar **3**, the container **1** includes a

shoulder **4** which is connected to the collar **3** through a cylindrical upper end portion of short length.

Below the shoulder **4**, the container **1** has a wall portion **5** which is substantially cylindrical around a container main axis **X**. The wall portion **5** may, as depicted on FIG.1 and 2, include annular stiffening ribs **6** capable of resisting stresses which would otherwise tend to make the wall portion **5** oval when viewed in a horizontal section (such a deformation is standard and called ovalization).

The neck **2** has an outer diameter (taken between the threads) referenced D1 and the wall portion **5** has an overall diameter referenced D2.

At a lower end of the wall portion **5**, the container **1** has a base **7** which closes the container **1** and allows the container **1** to be put on a planar surface such as a table.

The container base **7** includes a standing ring **8**, which is a high standing ring as it will be explained later, and a central outwardly-inclined invertible diaphragm **9** which is capable of being forcedly (e.g. mechanically) pushed upwards (i.e. inwards with respect of the container **1**) after the container **1** has been filled with a product, capped and cooled down, in order to compensate for the vacuum generated by the cooling of the product.

The standing ring **8** connects to the wall portion **5** of the container at a lower end portion **10** thereof, an inner portion **11** and a support flange **12**. The inner portion **11** connects the support flange **12** to the diaphragm **9**.

In a preferred embodiment, the lower end portion **10** of the wall portion **5** has, when viewed in transversal section as shown on FIG.3, the shape of an arch with a concavity turned inward with respect of the container **1**, whereby the outer diameter, referenced D3, of the support flange **12** is smaller than the overall diameter D2 of the wall portion **5**.

The inner portion **11** has the shape of a frustum of a cone and, when viewed in transversal section as shown on FIG.3, inclines inwardly with respect of the container **1**, with a draft angle.

The cone shape of the inner portion **11** provides a vault stiffening and locking function to the diaphragm **9** in its inverted position (in dotted line on FIG.3), whereby the restriction of diameter of the inner portion **11** at its

junction with the diaphragm **9** prevents the latter to articulate back from its inverted position with respect of the inner portion **11**. As a result, re-inversion of the diaphragm **9** back to its initial position (in continuous line on FIG.3) under the mere hydrostatic pressure of the content of the container is prevented.

The inner portion **11** has an axial extension which is important with respect of the outer diameter D3 of the support flange, hence the expression "high standing ring" to name the standing ring **8**. More specifically, the axial extension (or height) of the inner portion **11**, with reference H4, is greater than 1/10 of the outer diameter D3 of the support flange **12**, and preferably comprised between 1/10 and 1/5 of the outer diameter D3 of the support flange **12**:

$$\frac{D3}{10} \leq H1 \leq \frac{D3}{5}$$

In one preferred embodiment, which corresponds to the illustration of FIG.3, the height H4 of the inner portion **11** is of about 1/6 of the outer diameter D3 of the support flange **12**:

$$H4 \cong \frac{D3}{6}$$

The support flange **12** has a radial extension or width, noted W4, which is small with respect of the outer diameter D3 of the support flange **12**. More specifically, the width W4 of the support flange **12** is comprised between 5% and 10% - and preferably of about 6% - of the outer diameter D3 of the support flange **12**:

$$0.05 \cdot D3 \leq W4 \leq 0.1 \cdot D3$$

and, preferably:

$$W4 \cong 0.06 \cdot D3$$

The width W4 of the support flange **12** is also preferably in a ratio with the height H4 of the inner portion **11** comprised between 1/5 and 1/3, and preferably of about 1/4:

$$\frac{H4}{5} \leq W4 \leq \frac{H4}{3}$$

and preferably:

$$W4 \cong \frac{H4}{4}$$

In addition, in the just-blown non-filled configuration of the container **1** as depicted on FIG.1 and in continuous line on FIG.3, the support flange

12 does not quite extend in a plane perpendicular to the container axis but is in the shape of a frustum of a cone and shows an inward inclination A1 when shown in the transversal section of FIG.1, of a small angle with respect of a plane perpendicular to the container axis **X**. This provides a
 5 spring and absorbing effect under the hydrostatic pressure on the diaphragm **9** in its upwardly inverted position (in dotted lines on FIG.3), whereby pressure on the diaphragm **9** results in the support flange **12** pivoting and coming into abutment with a planar supporting surface instead of inversion of the diaphragm **9** back to its initial position (in continuous
 10 line on FIG.3).

In the just-blown non-filled configuration of the container **1** as depicted on FIG.1 and in continuous line on FIG.3, the invertible diaphragm **9** extends both inwards and downwards, from a outer edge **13** having a sharp apex where the diaphragm **9** connects to an upper end of
 15 the inner portion **11** of the high standing ring **8**, down to a smoother inner edge **14** where the diaphragm **9** connects to a central upwardly protruding recess **15**.

In a preferred embodiment, the radial extension or width, denoted W5, of the diaphragm **9**, is comprised between 50% and 80% - and preferably
 20 of about 60% - of the outer radius, denoted R3, of the support flange **12** (where R3 is half D3):

$$0.5 \cdot R3 \leq W5 \leq 0.8 \cdot R3$$

and, preferably:

$$W5 \cong 0.6 \cdot R3$$

In addition, the axial extension, or height, denoted H5, of the diaphragm, is such that the inner edge of the diaphragm extends slightly
 25 above a standing plane perpendicular to the container axis X and defined by an outer edge of the high standing ring **8**.

In other words, the height H5 of the diaphragm **9** is slightly lower than the height H4 of the high standing ring **8**. In a preferred embodiment, the height H5 of the diaphragm **9** is greater than 85% - and preferably of about
 30 90% - of the height H4 of the standing ring **8**:

$$H5 \geq 0.85 \cdot H4$$

and, preferably:

$$H5 \cong 0.9 \cdot H4$$

On FIG.4 and FIG.5, there is shown in more details a preform **16** from

which the container **1** disclosed hereinbefore is formed. The preform **16** is made by injection or compression molding from a single plastic material, preferably PET.

5 The preform **16** comprises the same neck **2** (which is not subjected to variations during the blowing of the container) as the container **1**, which also terminates, at the lower end thereof, with the support collar **3**.

Below the collar **3**, the preform **16** has a body **17** which includes a wall **18** and, at a lower end of the wall **18**, a closed bottom **19** which terminates the preform **16** at a lower side opposite the neck **2**. The length
10 of the preform body **17** (i.e. below the collar **3**), is denoted L.

In its wall **18** and bottom **19**, the preform **16** has an outer surface **20** and an inner surface **21**.

As depicted on FIG.4, the wall **18** of the preform **16** is comprised of a main segment **22** of substantially cylindrical shape, an upper end segment
15 **23** which terminates the main segment **22** upwardly and connects to the collar **3**, and a lower end segment **24** which terminates the main segment **22** downwardly and connects to the bottom **19**.

During the blow molding of the container **1**, the main segment **22** forms the wall portion **5** of the container **1**; the upper end segment **23**
20 forms the shoulder **4** of the container **1**; the lower end segment **24** forms the high standing ring **8** of the container **1**; and the bottom **19** of the preform **16** forms the invertible diaphragm **9** and central protruding recess **15**, as shown by the arrows on FIG.7.

The overall diameter of the main segment **22**, taken at its junction
25 with the upper end segment **23** is denoted D6.

In the depicted embodiment wherein the preform **16** corresponds to a container **1** of small capacity (i.e. less than 1 l, such as 0.5 or 0.6 l), the overall diameter D6 of the main segment **22** is smaller than the diameter D1 of the neck **2**. In an alternate embodiment in which the preform
30 corresponds to a container of greater capacity (i.e. more than 1 l, such as 1.5 l or 2 l), this relationship may be reversed.

In a preferred embodiment corresponding to the illustrated example, the upper end segment **23** has the shape of a horn and smoothly connects the main segment **22** at diameter D6 to the collar **3** at diameter D1. As may
35 be seen on FIG.4, the wall thickness of the preform **16** in the upper end segment **23**, as measured perpendicularly to the preform axis **X** (which is

identical to the subsequent container axis **X**), increases from a value T_1 immediately below the collar **3**, where it corresponds to the wall thickness of the preform **16** in the neck **2** (excluding the thread), to a value T_2 at the junction with the main segment, where T_1 is lower than T_2 , and preferably lower than half T_2 :

$$T_1 < T_2$$

and preferably:

$$T_1 \leq 0.5 \cdot T_2$$

In the illustrated preferred embodiment, the main segment **22** is in the shape of a frustum of a cone with a small draft angle B_1 on the outer surface **20** and a small draft angle B_2 on the inner surface **21**, both angles B_1 and B_2 being lower than 2° , and preferably:

$$B_1 \leq B_2 \leq 2^\circ$$

In a preferred embodiment, B_1 is smaller than 1° , and preferably of about 0.6° . Also in a preferred embodiment, B_2 is smaller than 1.5° , and preferably of about 1.3° .

In a preferred embodiment, the length, taken axially and denoted L_1 , of the main segment **22**, is comprised between 60% and 70% - and preferably between 65% and 70% - of the length L of the preform **16**:

$$0,6 \cdot L \leq L_1 \leq 0,7 \cdot L$$

and preferably:

$$0,65 \cdot L \leq L_1 \leq 0,7 \cdot L$$

Although the preform wall thickness may be substantially constant along the main segment **22**, in a preferred embodiment, the preform wall thickness, as measured perpendicularly to the preform axis **X**, slightly (and linearly) increases from the value T_2 at the junction of the upper end segment **23** and the main segment **22**, to a value T_3 at the junction of the main segment **22** and the lower end segment **24**:

$$T_2 < T_3$$

The material distribution in the upper end segment **23** and main segment **22** is calculated to provide substantially constant thickness of the container **1** in the shoulder **4** and wall portion **5**.

The thickness increase in the upper end segment **23** allows for a sufficient thickness of the material in the container shoulder **4**, since the material located immediately below the collar **3** is less stretched (mostly in the radial or hoop direction) than the material located at the junction

between the upper end segment **23** and the main segment **22** of the preform **16**. Similarly, the thickness increase in the main segment **22** allows for a sufficient thickness of the material in the wall portion **5** of the container **1**, since the material located at the junction between the main segment **22** and the upper end segment is less stretched (both in the axial or length direction and in the radial or hoop direction).

In the illustrated preferred embodiment, the lower end segment **24** has an upper section **25** of increasing wall thickness, adjacent the main segment **22**, and a lower section **26** of substantially constant wall thickness, adjacent the bottom **19**. In the lower section **26**, the preform **16** has a wall thickness, denoted T_4 , the value of which is therefore greater than the value T_3 of the wall thickness of the preform **16** at the junction of the main segment **22** and lower end segment **24**. In a preferred embodiment, T_4 is 5% to 15% greater than T_3 , and for example of about 10% greater than T_3 :

$$T_4 \geq T_3$$

and, preferably:

$$1.05 \cdot T_3 \leq T_4 \leq 1.15 \cdot T_3$$

and, for example:

$$T_4 \cong 1.1 \cdot T_3$$

The increased wall thickness of the preform **16** in the lower end segment **24** allows for reinforcing the lower end portion **10** and the support flange **12**, more specifically in the vicinity of the junction between the lower end portion **10** and the support flange **12**, where rigidity is required on the one hand to facilitate the inversion process and, on the other hand, to provide good stability of the container **1** both during mass handling or storing operations, and during individual normal use of the container **1** where it is stored vertically standing on a planar surface such as a table or a refrigerator shelf.

In a preferred embodiment, the length, taken axially and denoted L_2 , of the lower end segment **24**, is comprised between 30% and 40% - and preferably between 30% and 35% - of the length L_1 of the main segment **22**. In the preferred depicted example, L_2 is about 33% of L_1 :

$$0,3 \cdot L_1 \leq L_2 \leq 0,4 \cdot L_1$$

and preferably:

$$0,6 \cdot L_1 \leq L_2 \leq 0,35 \cdot L_1$$

and, for example:

$$L2 \cong 0.33 \cdot L1$$

In a preferred embodiment illustrated on FIG.4, the preform **16** is provided with a rounded upstanding centering index **27** protruding inwardly from the inner surface **21** of the preform **16** in the axis **X** thereof.

5 Also in one embodiment illustrated on FIG.4, wherein the preform **16** is injection molded, the preform **16** is provided with a downwardly projecting central protrusion **28** which corresponds to the counter print of an injection gate formed in the mold in which the preform **16** was injection molded.

10 In a preferred embodiment, the bottom of the preform **16** has a central region **29** in the form of a spherical dome, the center C of curvature of which is located on the preform axis **X**.

In the central region **29**, the outer surface **20** and the inner surface **21** of the preform **16** are preferably both spherical with common center of curvature C.

In consequence, in the central region **29** (apart from the centering index and protrusion), the preform **16** has a wall thickness, denoted T5, as taken radially from the center C of curvature, which is substantially constant.

20 In the depicted example, the bottom of the preform **16** is also provided with a peripheral region **30** which is located below the lower end segment **24** and makes junction with the central region **29**. The peripheral region **30** is of decreasing wall thickness as taken radially from the center C of curvature of the central region **29**, such that the wall thickness T5 of the preform **16** in the central region **29** of the bottom **19** is smaller than the wall thickness T4 of the lower end segment **24**.

In a preferred embodiment, the wall thickness T5 of the preform **16** in the central region **29** is comprised between 50% and 80% (and preferably lower than 70%, and for example of about 65%) of the wall thickness T4 of the lower end segment **24**:

$$0.5 \cdot T4 \leq T5 \leq 0.8 \cdot T4$$

preferably:

$$0.5 \cdot T4 \leq T5 \leq 0.7 \cdot T4$$

and, for example:

$$T5 \cong 0.65 \cdot T4$$

The decreased wall thickness of the peripheral region **30**, and the comparatively smaller (and constant) wall thickness in the central region **29** of the preform bottom **19** allows for a better printing of the invertible diaphragm **9**, and a reduced thickness of the material in the invertible diaphragm **9**, thereby facilitating inversion thereof, as will be disclosed hereinafter.

The manufacturing of the hot-fill container **1** from the preform **16** is achieved through a blow molding unit **31** including a blow mold **32** and a stretch rod **33**, as depicted on FIG.6 and FIG.7.

The blow mold **32** has sidewalls **34A**, **34B**, including heating means, not illustrated (such as holes for the circulation of a heating fluid such as hot water or hot oil, or electric radiators received within the sidewalls **34A**, **34B**), for heating the sidewalls **34A**, **34B** at a predetermined temperature much greater than the average environment temperature and which, in a preferred embodiment, is of about 80-180°C.

The sidewalls **34A**, **34B** together define at least part of a molding cavity **35** for receiving the preform **16** and form a counter print of the wall portion **5**, including the lower end portion **10** and shoulder **4** of the container **1**.

The blow mold **32** also has a mold base **36**, which has an upper surface **37** forming a counter print of the container base **7** including the support flange **12**, the inner portion **11**, the diaphragm **9** and the central protruding recess **15**. The sidewalls **34A**, **34B**, together with the mold base **36**, define the whole molding cavity **35** of the container **1**.

The mold base **36** is movable with respect of the sidewalls **34A**, **34B** between a retracted position (FIG.6) in which the upper surface **37** extends below the container base **7** to be blow molded, and a raised position (FIG.7) in which the upper surface **37** closes the cavity **35** and extends at the exact place of the container base **7** to be blow molded.

This provides an over stretching of the material during the blow molding, whereby the material of the preform **16** is first stretched beyond the final position of the container base **7**, in the retracted position of the mold base **36**, and then the mold base **36** is moved to its raised position in order to push the stretched material up to form the final shape of the container base **7**.

Such a process allows for a better printing quality, a better material

thickness, and hence a better stiffness from the lower end portion **10** to the inner portion **11**.

During the stretch blow molding of the container **1**, the centering index **27** is received within a corresponding recess **38** formed axially at a lower end tip of a stretch rod **33**. This ensures a proper centering of the preform **16** until it reaches the mold base **36**.

By the end of the blow molding of the container **1**, the central outward protrusion **28** is received within a central recess **39** formed axially in a mold base **36**. This ensures a proper centering of the container base **7** during the pushing up thereof, through the displacement of the mold base **36** from its retracted position to its raised position.

During the blow molding of the container **1**, the preform **16** is subjected to a length stretch ratio comprised between 3.4 and 3.9, and a hoop stretch ratio comprised between 3.5 and 3.9.

The length stretch ratio is the ratio between the developed length of an average line **40** between the outer surface **20** and the inner surface **21** of the preform **16** taken along the body **17**, i.e. from immediately below the collar **3** to the center of the bottom **19**, in an axial sectional plane as depicted on FIG.1, and the developed length of the container **1** taken from immediately below the collar **3** to the center of the base **7**, in a same axial sectional plane as depicted on FIG.1.

The hoop stretch ratio is the ratio between the average diameter D_7 of the main segment **22** (i.e. at about half of the length thereof), taken at the average line **40**) and the overall diameter **D2** of the wall portion **5** of the container **1**.

In a preferred embodiment, the length stretch ratio is comprised between 3.6 and 3.8. Also in a preferred embodiment, the hoop stretch ratio is comprised between 3.7 and 3.8.

Such stretch ratios, combined with the material distribution disclosed hereinbefore, allows for a better printing of the container wall portion **5** and base during the blow molding. More specifically, this facilitates the printing of stiffening ribs **6** on the wall portion **5** of the container **1**, which provide rigidity of the wall portion **5** against deformations due to a vacuum inside the container **1** and confine most of the container **1** deformation onto the container base **7**.

The mold base **36** is illustrated in further details on FIG.8 and FIG.9.

As depicted on FIG.8, the mold base **36** comprises a cylindrical piston **41** by which the mold base **36** is capable of being axially moved and guided in a corresponding bore **42** in the bottom of the sidewalls **34A**, **34B**. The piston **41** terminates by the upper surface **37** forming a counter print of the container base **7**, including the support flange **12**, the inner portion **11** of the high standing ring **8**, and also the diaphragm **9** and central protruding recess **15**.

The upper surface **37** includes an annular peripheral face **43** corresponding to the annular support flange **12** of the container base **7**. This peripheral face **43** does not quite extend in a plane perpendicular to the base mold axis (which is substantially identical to the preform and container axis **X**) but is in the shape of a frustum of a cone and shows an inward inclination when shown in the transversal section of FIG.9, of a small angle **A1** comprised between 1° and 10° , preferably between 2° and 5° - and for example of about 3° - with respect of a plane perpendicular to the base mold axis.

The upper surface **37** also includes a frusto-conical outer face **44** corresponding to the inner portion **11** of the high standing ring **8**. The outer face **44** protrudes upwardly from an inner edge of the annular peripheral face **43**, up to a sharp apex **45** corresponding to the outer edge **13** at the junction between the inner portion **11** and the diaphragm **9**. The outer face **44** defines a draft angle **A2** with respect of a vertical line parallel to the base mold axis comprised between 1° and 10° , preferably between 3° and 6° , and for example of about 4.5° .

The upper surface **37** of the mold base **36** further includes a frusto-conical downwardly inclined inner face **46** corresponding to the invertible diaphragm **9**. The inner face **46** extends from the apex **45** down to an annular inner edge **47** where it connects to a central uprising push-up **48** corresponding to the central recess **15** in the container base **7**.

The apex **45** is sharp in that it has a radius of curvature, denoted **R**, of less than or equal to 1.5 mm. In a preferred embodiment, the radius **R** of curvature of the apex **45** is less than or equal to 0.25 mm. The apex **45** may also have no measurable radius of curvature, i.e. the radius of curvature is less than or equal to 0.1 mm. This provides a sharp junction between the inner portion **11** and the diaphragm **9** in the container base **7**, allowing for both a better inward inversion of the diaphragm **9** wherein the

sharp apex of the outer edge **13** at the junction between the inner portion **11** and the diaphragm **9** forms a punctual (when view in axial section) hinge therebetween, and a better rigidity of the container base **7** after inversion. Part of the mold base **36** may be lathe worked, in particular to
5 obtain the sharp apex **45**.

The outer face **44** and inner face **46** together define at the apex **45** an angle A3, when shown in an axial sectional plane such as on FIG.9, comprised between 50° and 70°, and preferably comprised between 60° and 65°. In a preferred embodiment, angle A3 is of about 63°.

10 Combination of the draft angle A2, sharp apex **45** and angle A3 provide good combined molding capability and performance to the container base **7**. In particular, as already stated, upward inversion of the diaphragm **9** is facilitated whereas outward (or back) inversion thereof is prevented, whereby the diaphragm **9** is locked in its inverted position.
15 Also, the extraction volume EV (i.e. the volume of liquid displaced during the diaphragm inversion, shown by the hatch lines on FIG.3), is maximized with respect of the whole volume of liquid in the container **1** after filling.

The extraction volume EV is also maximized due to the inner edge **47** located close to a peripheral plane P (corresponding to the standing plane
20 of the container **1**) defined by the outer edge of the peripheral face **43**, whereby the inner edge **47** is spaced from the peripheral plane with a clearance CL comprised between 1 mm and 5 mm, and preferably of about 2 mm. Such clearance CL allows for a small downward piston movement of the central recess **15** of the container base **7** after filling, due to
25 hydrostatic pressure, without affecting stability of the container **1** standing on its support flange **12**.

In a preferred embodiment depicted on FIG.8, the push-up **48** is star-shaped in transversal section and comprises a series of recesses **49** (five in the depicted example) which, by counter printing during the blow
30 molding of the container **1**, form convex reinforcing ribs **50** in the central recess **15** of the container base **7**, thereby stiffening the central recess **15** and preventing inversion thereof under the combined effects of hydrostatic pressure and temperature of the content.

Inversion of the diaphragm **9** is preferably achieved mechanically by
35 means of a mandrel which has a top apex capable of being received into the central recess **15** and which, after filling, capping and cooling down of

the container **1**, is moved upwards whereas the container **1** is held tight. Under pressure of the mandrel, the diaphragm **9** deforms and articulates around the sharp junction with the inner portion **11** which is slightly bent outwards, until the diaphragm **9** upwardly inverts towards its final position depicted in dotted line on FIG.3. The inner portion **11** of the high standing ring **8** then bends back to its initial position where it forms an arch capable of standing buckling and bending constraints applied by the diaphragm **9** under hydrostatic pressure of the content.

CLAIMS

1. A mold (32) for blow molding a container (1) from a preform (16), said container (1) comprising a wall portion (5) and a base (7) including a high standing ring (8) and a central outwardly-inclined invertible diaphragm (9), said mold (32) comprising sidewalls (34A, 34B) forming a counter print of the wall portion (5) of the container (1) and a mold base (36) having an upper surface (37) defining a counter print of the container base (7), characterized in that the upper surface (37) includes:

- an annular peripheral face (43) corresponding to an annular support flange (12) of the container base (7),
- a frusto-conical outer face (44) corresponding to an inner portion (11) of the high standing ring (8), said outer face (44) protruding upwardly with a draft angle (A2) from an inner edge of the peripheral annular face (43) up to a sharp apex (45),
- a frusto-conical downwardly inclined inner face (46) corresponding to the invertible diaphragm (9).

and in that:

- the annular peripheral face (43) is in the shape of a frustum of a cone and shows an inward inclination in a transversal section
- wherein the peripheral face (43) defines, with respect of a plane (P) perpendicular to a mold base axis, an angle (A1) comprised between 1° and 10°
- the outer face (44) and the inner face (46) of the upper surface (37) together define at the apex (45) an angle (A3) comprised between 50° and 70°.

2. A mold (32) according to the preceding claim, wherein said angle (A1) is of about 3°.

3. A mold (32) according to any of the preceding claims, wherein the draft angle (A2) is comprised between 1° and 10°.

4. A mold (32) according to claim 3, wherein the draft angle (A2) is of about 4.5°.

5. A mold (32) according to claim 1, wherein the angle (A3) at the apex (45) is comprised between 60° and 65°.

6. A mold (32) according to claim 5, wherein the angle (A3) at the

apex (45) is of about 63°.

7. A mold (32) according to any of the preceding claims, wherein the apex (45) has a radius (R) of curvature of less than or equal to 1.5 mm.

5 8. A mold (32) according to any of the preceding claims, wherein the inner face (46) of the upper surface (37) extends from the apex (45) down to an annular inner edge (47) where the inner face (46) connects to a central uprising push-up (48) corresponding to a central recess (15) in the container base (7).


10 9. A mold (32) according to claim 8, wherein the inner edge (47) of the inner face (46) defines with a peripheral plane (P) defined by an outer edge of the peripheral face a clearance (CL) comprised between 1 mm and 5 mm.

15 10. A mold (32) according to claim 9, wherein the clearance (CL) is of about 2 mm.

20 11. A mold (32) according to any of the preceding claims, wherein the mold base (36) is movable with respect of the sidewall (34), between a retracted position in which the upper surface (37) extends below the container base (7) to be formed, and a raised position in which the upper surface (37) closes the cavity (35).

1/7

FIG.1

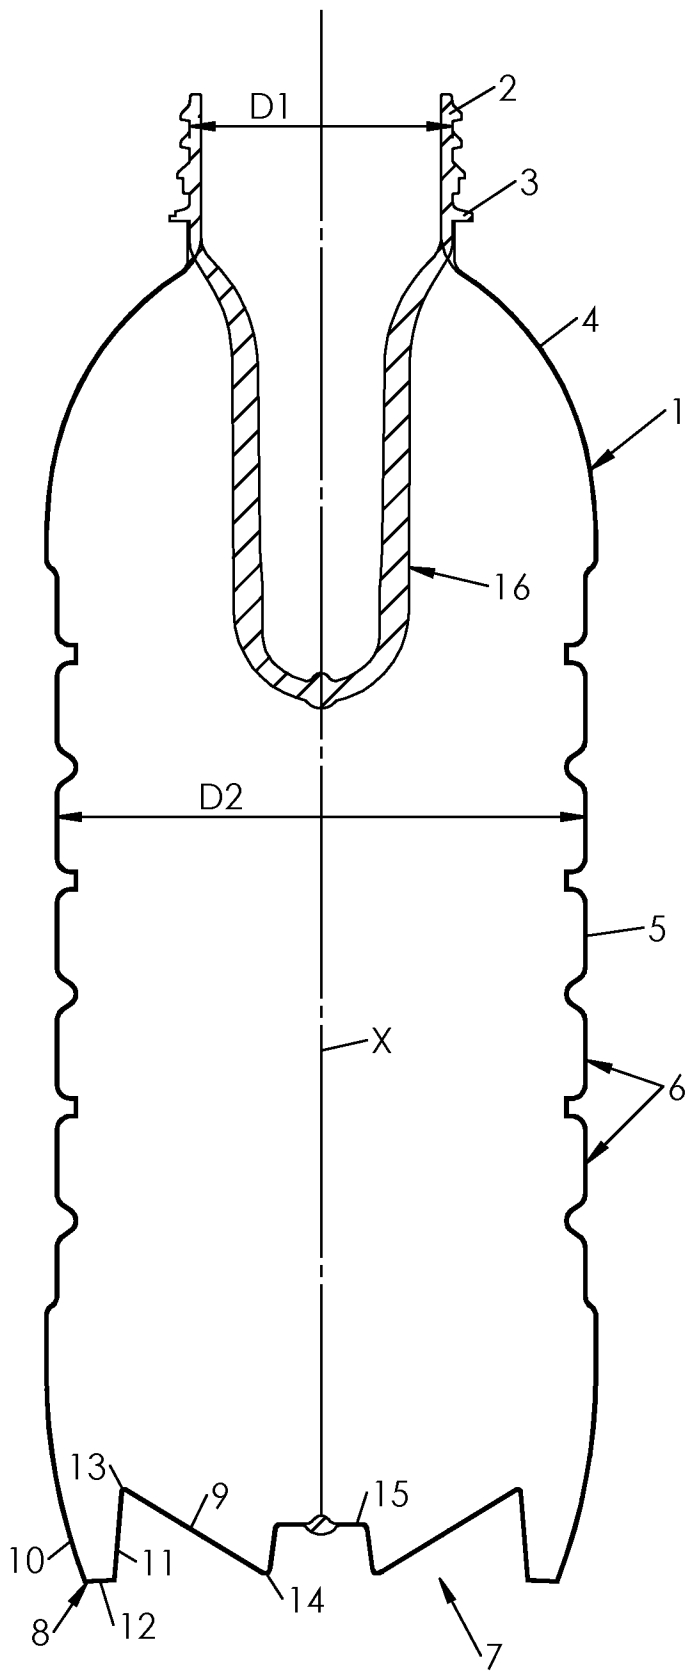

2/7

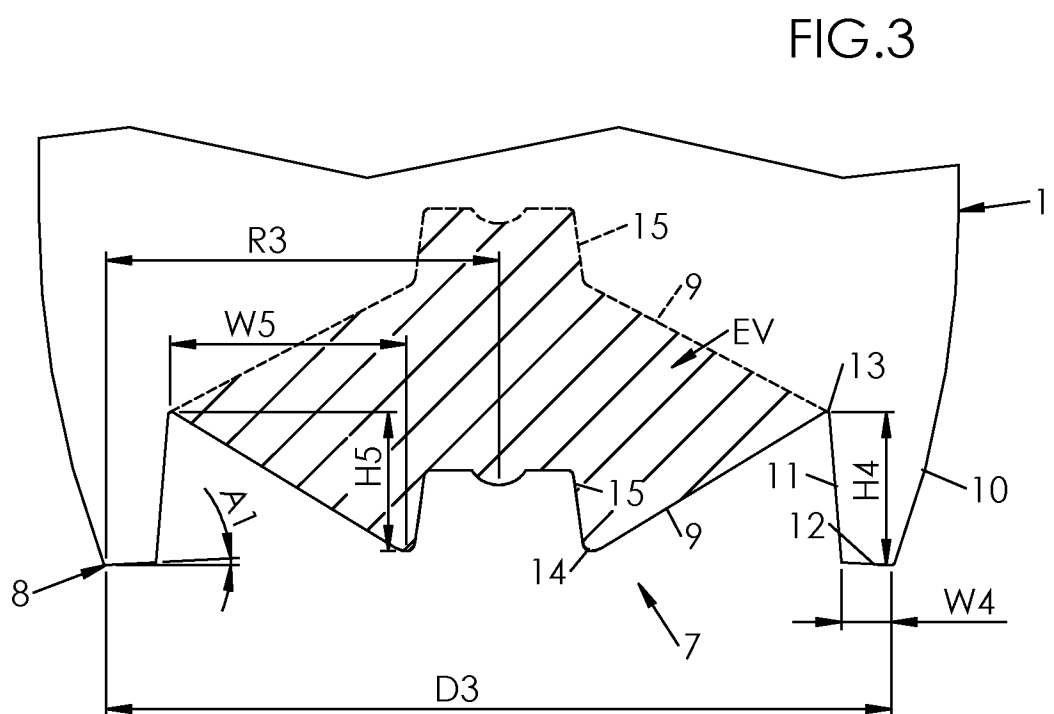
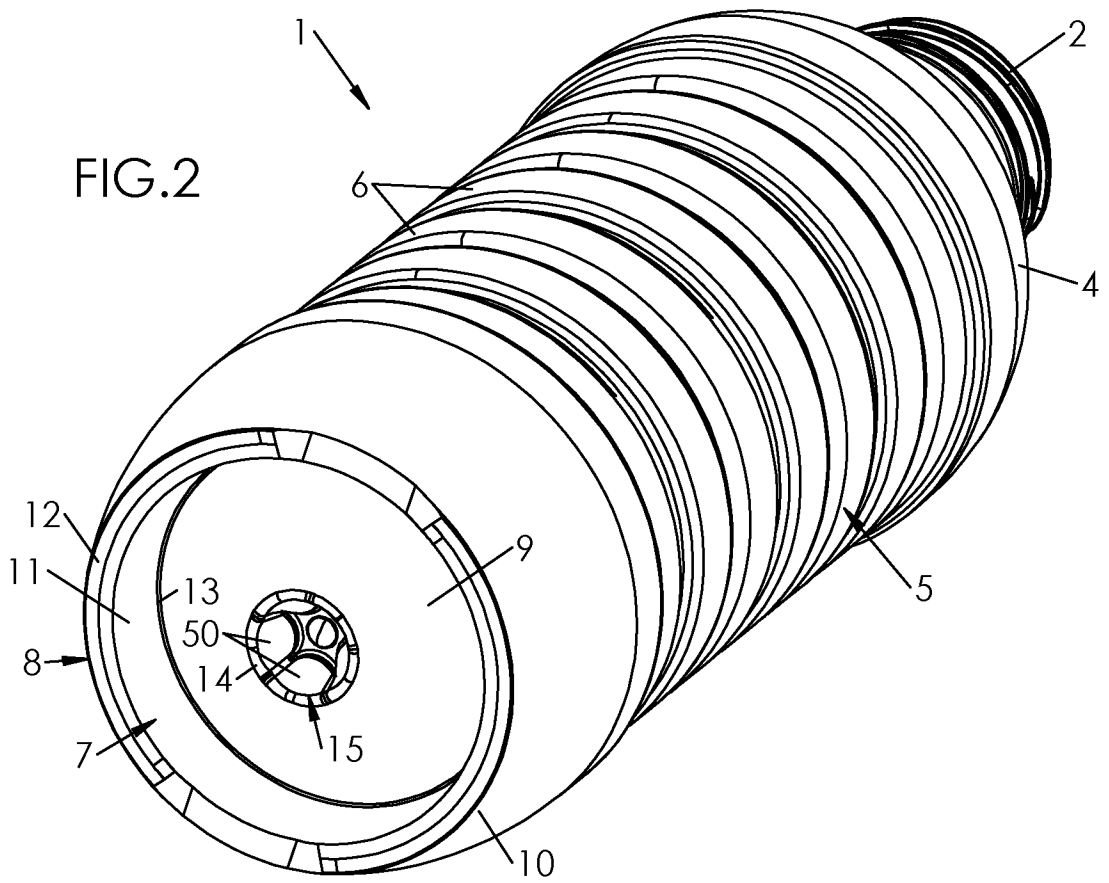


FIG.4



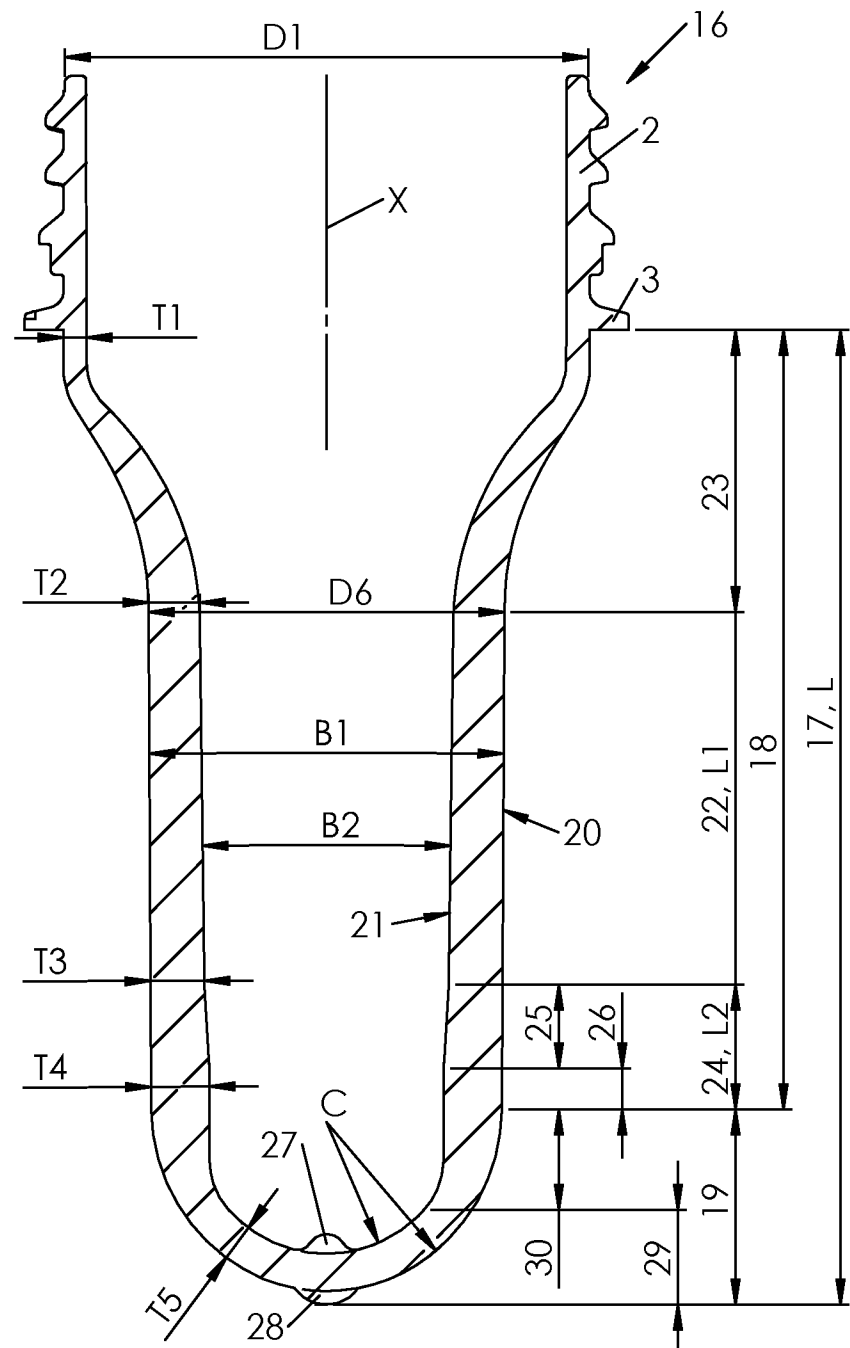



FIG.5

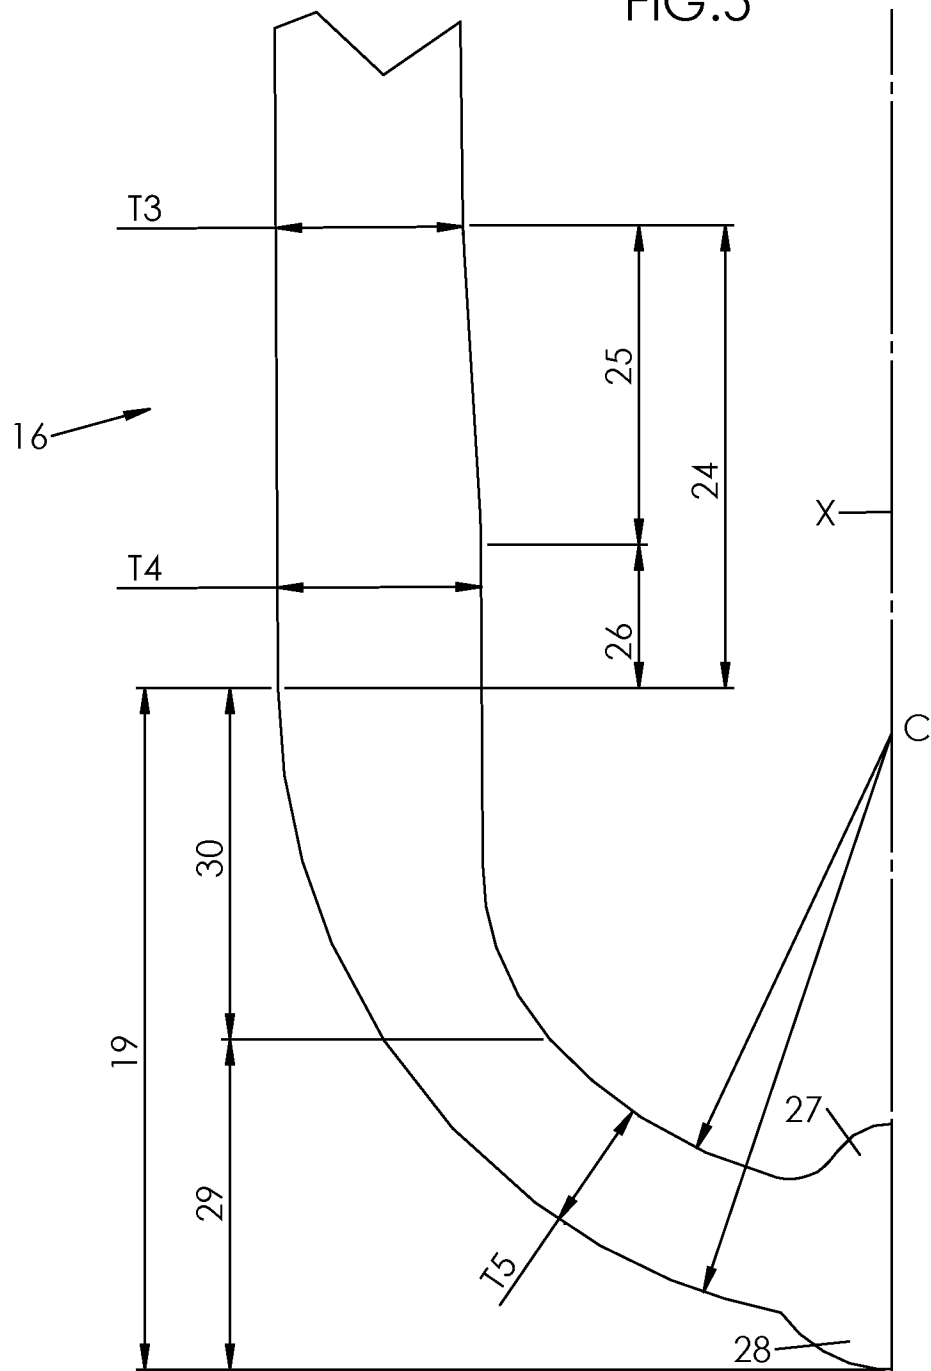

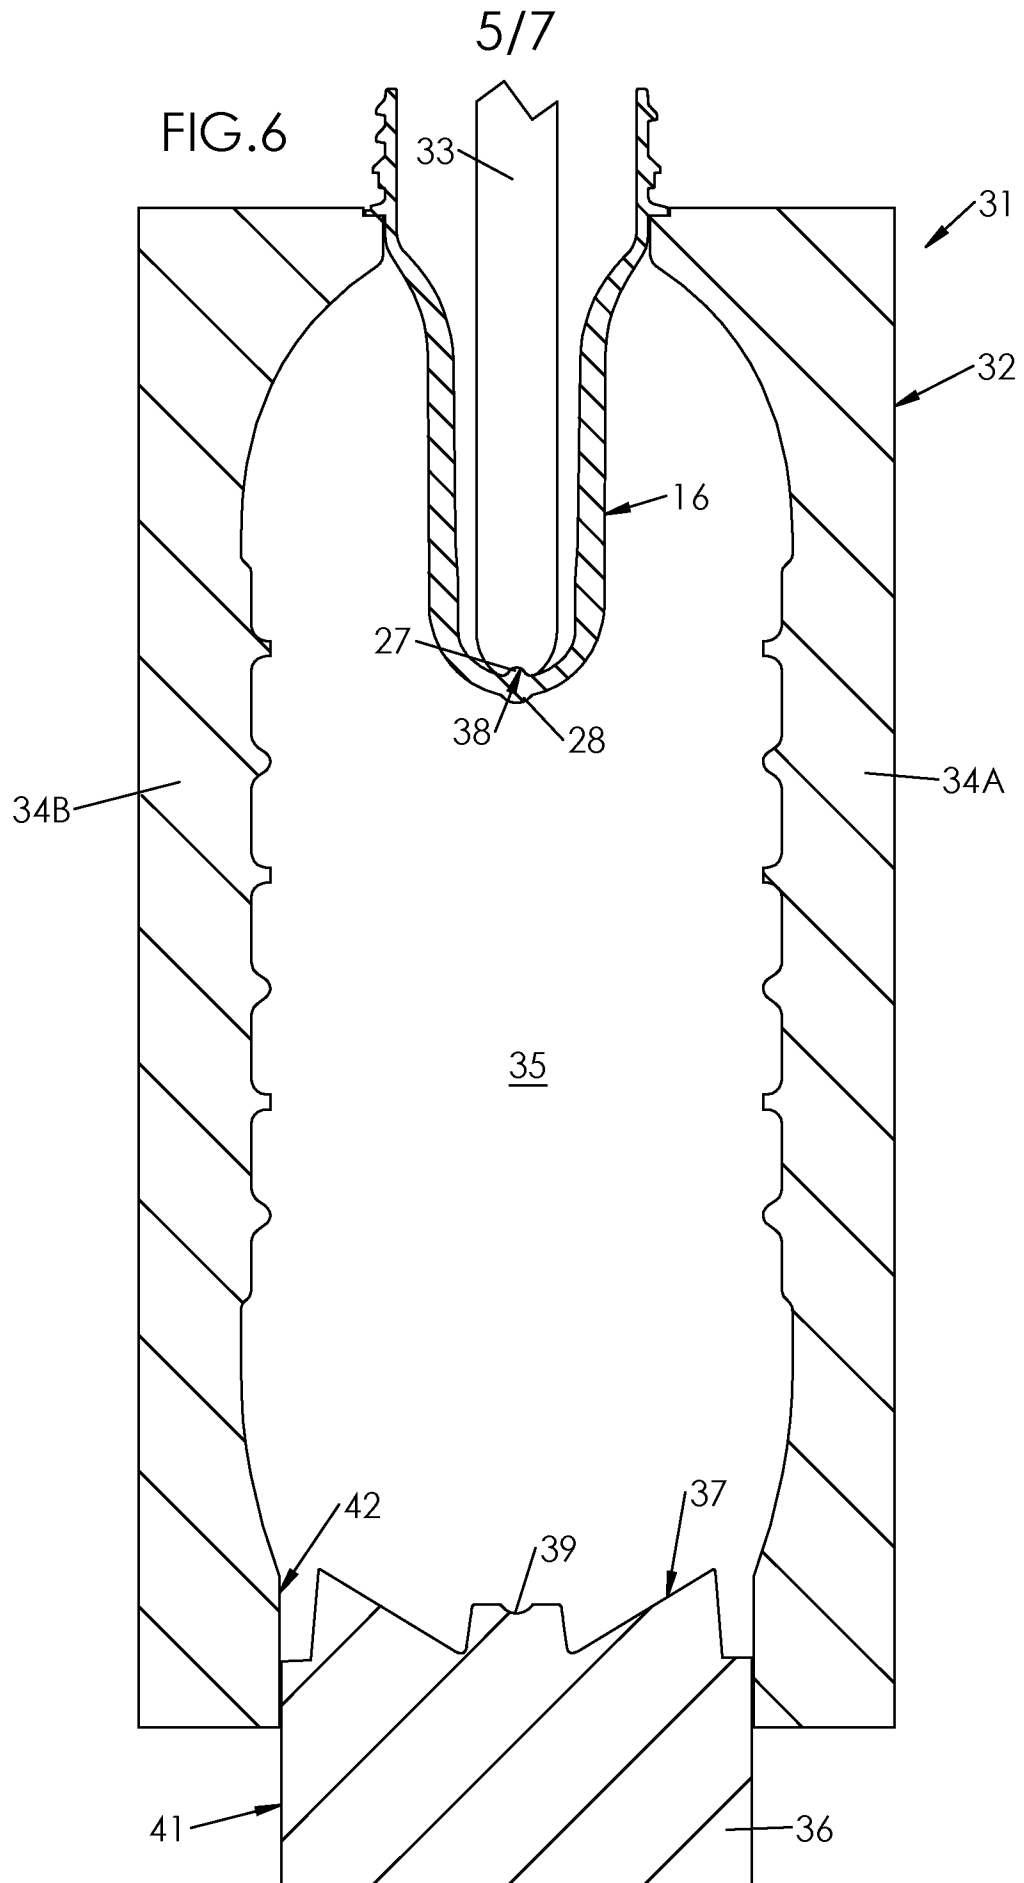

6/7

FIG.7

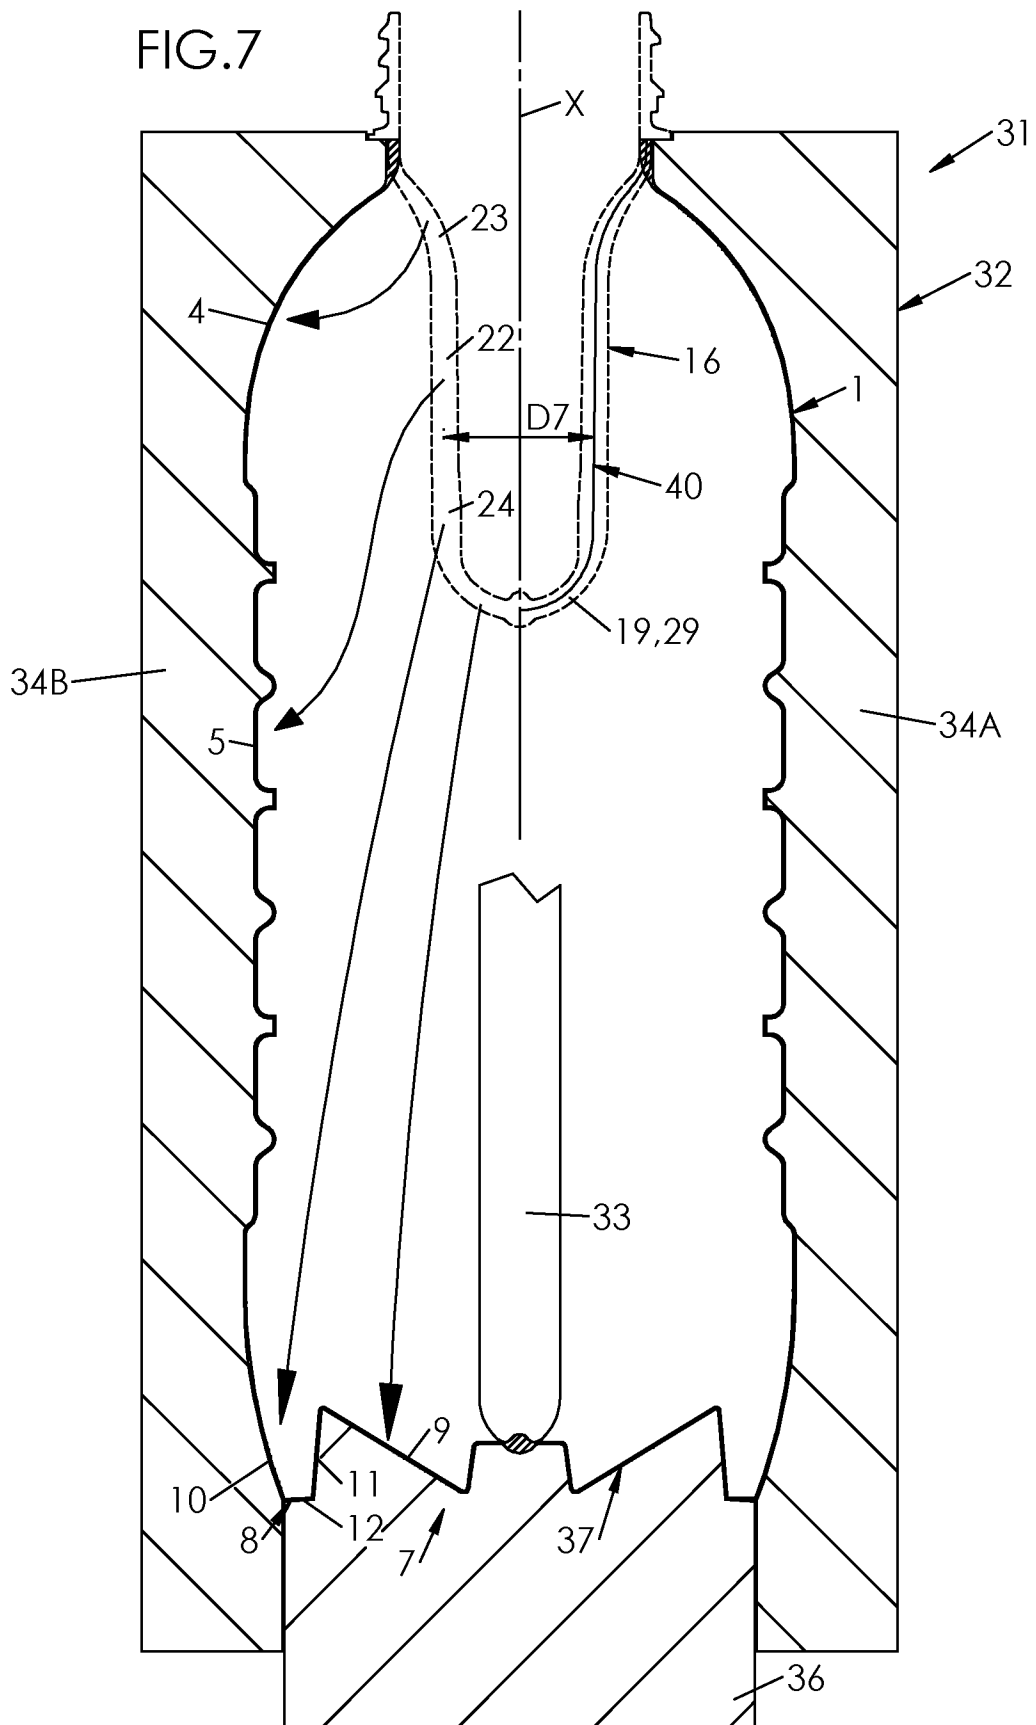

7/7

FIG.8


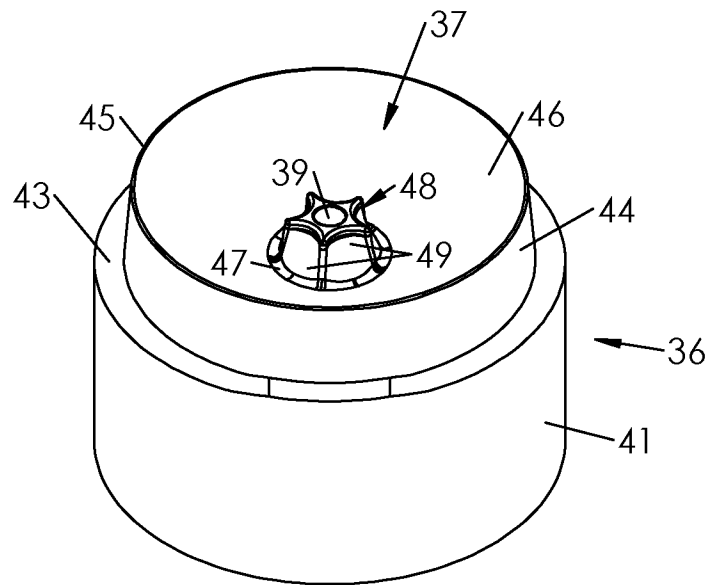


FIG.9

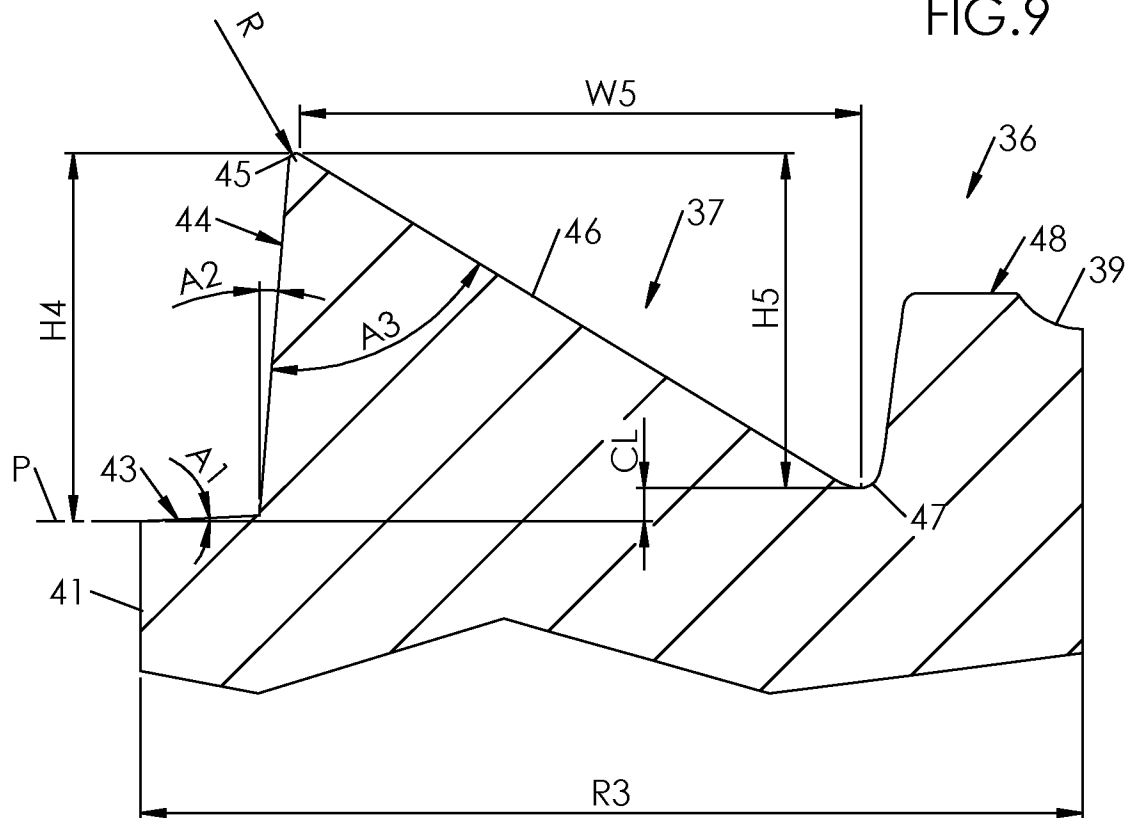

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/051202

A. CLASSIFICATION OF SUBJECT MATTER

INV. B29B11/14 B29C49/54 B65D1/02 B65D79/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B29C B29B B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/047964 A1 (DENNER JOHN [US] ET AL) 28 February 2008 (2008-02-28)	1-4,6, 8-11
Y	figures 2,3,9,10 -----	5
X	WO 2004/028910 A1 (CO2 PAC LTD [NZ]; MELROSE DAVID MURRAY [NZ]) 8 April 2004 (2004-04-08) figures 3,4,11-14 -----	1,7-9,11
X	US 2009/202766 A1 (BEUERLE FREDERICK C [US] ET AL) 13 August 2009 (2009-08-13) figure 10 -----	1,7-9,11
X	WO 2012/002164 A1 (NISSEI ASB MACHINE CO LTD [JP]; TSUCHIYA YOICHI [JP]) 5 January 2012 (2012-01-05) figures 3,4 ----- -/--	1,8-11



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

1 May 2014

Date of mailing of the international search report

09/05/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ingelgård, Tomas

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2014/051202

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 919 579 A1 (SIDEL PARTICIPATIONS [FR]) 6 February 2009 (2009-02-06) figures 2,5 -----	1,8,11
A	US 2010/163513 A1 (PEDMO MARC A [US]) 1 July 2010 (2010-07-01) paragraphs [0030], [0031] -----	1
A	EP 0 572 722 A1 (PROCTER & GAMBLE [US]) 8 December 1993 (1993-12-08) column 1, line 8 - line 25 column 1, line 50 - column 2, line 8 -----	1
A	US 2007/215571 A1 (TRUDE GREGORY [US]) 20 September 2007 (2007-09-20) figures 1,2 -----	1
Y	MX 2012 009 509 A (GRAHAM PACKAGING LC L P [US]) 30 November 2012 (2012-11-30)	5
A	page 18; figures 17,19 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/051202

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008047964	A1	28-02-2008	NONE
WO 2004028910	A1	08-04-2004	AR 041443 A1 18-05-2005
		AU 2003267885 A1 19-04-2004	
		AU 2011200963 A1 07-04-2011	
		BR 0314820 A 02-08-2005	
		CA 2499928 A1 08-04-2004	
		CN 1852837 A 25-10-2006	
		CN 101797991 A 11-08-2010	
		CN 103287647 A 11-09-2013	
		CO 5720986 A2 31-01-2007	
		EC SP055766 A 11-08-2005	
		EP 1565381 A1 24-08-2005	
		EP 2354018 A1 10-08-2011	
		GE P20074059 B 12-03-2007	
		HK 1096927 A1 04-06-2010	
		HK 1145079 A1 14-02-2014	
		HU 0500597 A2 28-09-2005	
		JP 4673060 B2 20-04-2011	
		JP 5409523 B2 05-02-2014	
		JP 2006501109 A 12-01-2006	
		JP 2010202285 A 16-09-2010	
		KR 20050055731 A 13-06-2005	
		MX PA05003291 A 05-07-2005	
		NZ 521694 A 27-05-2005	
		NZ 539146 A 29-06-2007	
		PE 02402004 A1 24-04-2004	
		PL 202811 B1 31-07-2009	
		RO 122720 B1 30-12-2009	
		RU 2342293 C2 27-12-2008	
		SG 147317 A1 28-11-2008	
		SK 50302005 A3 04-08-2005	
		TW 1310751 B 11-06-2009	
		US 2006138074 A1 29-06-2006	
		US 2013068779 A1 21-03-2013	
		WO 2004028910 A1 08-04-2004	
		ZA 200502616 A 26-04-2006	
US 2009202766	A1	13-08-2009	CA 2715245 A1 13-08-2009
		CO 6341588 A2 21-11-2011	
		DO P2010000244 A 15-10-2010	
		EC SP10010443 A 30-11-2010	
		EP 2242635 A2 27-10-2010	
		SV 2010003643 A 08-04-2011	
		US 2009202766 A1 13-08-2009	
		US 2013048650 A1 28-02-2013	
		WO 2009099638 A2 13-08-2009	
WO 2012002164	A1	05-01-2012	CN 102958673 A 06-03-2013
		EP 2586588 A1 01-05-2013	
		US 2013087954 A1 11-04-2013	
		WO 2012002164 A1 05-01-2012	
FR 2919579	A1	06-02-2009	AT 525308 T 15-10-2011
		CN 101801809 A 11-08-2010	
		EP 2173637 A1 14-04-2010	
		ES 2372722 T3 25-01-2012	
		FR 2919579 A1 06-02-2009	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/051202

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		JP 2010535137 A	18-11-2010
		US 2010219152 A1	02-09-2010
		WO 2009050346 A1	23-04-2009

US 2010163513	A1	01-07-2010	
		AU 2009335113 A1	07-07-2011
		CA 2748589 A1	08-07-2010
		CN 102272007 A	07-12-2011
		EP 2379414 A1	26-10-2011
		JP 2012513943 A	21-06-2012
		KR 20110103433 A	20-09-2011
		RU 2011132112 A	10-02-2013
		US 2010163513 A1	01-07-2010
		WO 2010078341 A1	08-07-2010

EP 0572722	A1	08-12-1993	
		AT 148668 T	15-02-1997
		BR 9306481 A	15-09-1998
		CA 2137146 A1	09-12-1993
		DE 69217358 D1	20-03-1997
		DE 69217358 T2	26-06-1997
		DK 0572722 T3	01-04-1997
		EP 0572722 A1	08-12-1993
		ES 2097268 T3	01-04-1997
		GR 3022504 T3	31-05-1997
		IE 930416 A1	15-12-1993
		JP 2980684 B2	22-11-1999
		JP H07507259 A	10-08-1995
		MA 22899 A1	31-12-1993
		TR 27426 A	21-04-1995
		WO 9324377 A1	09-12-1993

US 2007215571	A1	20-09-2007	
		AU 2007227579 A1	27-09-2007
		AU 2010241376 A1	02-12-2010
		CA 2645650 A1	27-09-2007
		CN 101400501 A	01-04-2009
		EP 1996382 A2	03-12-2008
		JP 4743320 B2	10-08-2011
		JP 2009530134 A	27-08-2009
		US 2007215571 A1	20-09-2007
		US 2010133228 A1	03-06-2010
		WO 2007109022 A2	27-09-2007

MX 2012009509	A	30-11-2012	
		AU 2011218086 A1	06-09-2012
		CA 2789210 A1	25-08-2011
		EP 2536644 A2	26-12-2012
		JP 2013520371 A	06-06-2013
		US 2011204067 A1	25-08-2011
		US 2013248539 A1	26-09-2013
		WO 2011103296 A2	25-08-2011
