



- (51) **International Patent Classification:**
H04B 5/06 (2006.01)
- (21) **International Application Number:**
PCT/CN2013/091114
- (22) **International Filing Date:**
31 December 2013 (31.12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant (for all designated States except US):** **HARMAN INTERNATIONAL INDUSTRIES, INCORPORATED** [US/US]; 400 Atlantic Street, Stamford, Connecticut 06901 (US).
- (72) **Inventors; and**
- (71) **Applicants (for US only):** **MA, Jianjun** [CN/CN]; 26-27F, Innov Tower, Block A, No.1801 Hongmei Road, Xuhui District, Shanghai 200233 (CN). **KANG, Zhaolong** [CN/CN]; 26-27F, Innov Tower, Block A, No.1801 Hongmei Road, Xuhui District, Shanghai 200233 (CN). **YANG, Zeng** [CN/CN]; 26-27F, Innov Tower, Block A, No.1801 Hongmei Road, Xuhui District, Shanghai 200233 (CN).
- (74) **Agent:** **UNITALEN ATTORNEYS AT LAW**; 7th Floor, Scitech Place, No.22, Jian Guo Men Wai Ave., Chao Yang District, Beijing 100004 (CN).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

[Continued on next page]

(54) **Title:** WIRELESS CONNECTION PAIRING

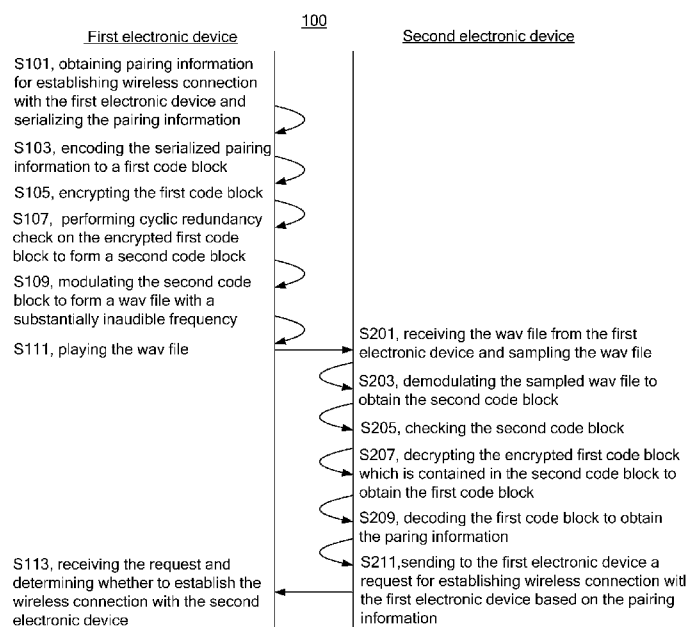


FIG. 1

(57) **Abstract:** A wireless connection pairing method and a first electronic device are provided. The method includes: broadcasting, through an audio system, an acoustic signal which carries pairing information for establishing wireless connection with a first electronic device; the first electronic device receiving from a second electronic device a request for establishing wireless connection with the first electronic device through a wireless network, where the request contains the pairing information extracted from the acoustic signal; and the first electronic device sending a notice of permission to the second electronic device. By employing the method, a mobile device can use connection service conveniently without inputting a password manually.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, **Published:**

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,

LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,

SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,

GW, KM, ML, MR, NE, SN, TD, TG).

— *with international search report (Art. 21(3))*

WIRELESS CONNECTION PAIRING

TECHNICAL FIELD

[0001] The present disclosure generally relates to wireless connection pairing.

BACKGROUND

[0002] Nowadays, wireless connections, such as Wi-Fi and Bluetooth etc., are widely used to connect electronic devices to each other. Normally, to connect a first electronic device to a second electronic device using a wireless connection, a password is required, and it is inconvenient for a user to obtain and input the password manually. Therefore, there is a need for convenient methods for connecting an electronic device to another using a wireless connection.

SUMMARY

[0003] In one embodiment, a wireless connection pairing method is provided. The method may include: broadcasting, through an audio system, an acoustic signal which carries pairing information for establishing wireless connection with a first electronic device; the first electronic device receiving from a second electronic device a request for establishing wireless connection with the first electronic device through a wireless network, where the request contains the pairing information extracted from the acoustic signal; and the first electronic device sending a notice of permission to the second electronic device.

[0004] In some embodiments, the wireless connection pairing method may further include: the first electronic device establishing wireless connection with the second electronic device after the notice of permission is sent to the second electronic device.

[0005] In some embodiments, the wireless connection may be a Wi-Fi connection, and the pairing information may include: SSID (Service Set Identifier) of the first electronic device, an authorization type and a password. In some embodiments, the wireless connection may be a BT (Bluetooth) connection, and the pairing information may include: BT address, service class, UUID (Universally Unique Identifier) and device information of the first electronic device. Such that, a request for establishing Wi-Fi connection or BT connection with the first electronic device can be formed if the second electronic device receives the pairing information.

[0006] In some embodiments, the acoustic signal may be substantially inaudible, for example, its frequency may be above 19 KHz.

[0007] In some embodiments, the wireless connection pairing method may further include: the first electronic device encoding the pairing information; and modulating the encoded pairing information to form the acoustic signal.

[0008] In one embodiment, a wireless connection pairing method is provided. The method may include: a first electronic device receiving an acoustic signal which carries pairing information for establishing wireless connection with a second electronic device; extracting the pairing information from the received acoustic signal; sending to the second electronic device a request for establishing wireless connection with the second electronic device through a wireless network, where the request contains the extracted pairing information; and receiving a notice of permission from the second electronic device.

[0009] In some embodiments, the wireless connection pairing method may further include: establishing wireless connection with the second electronic device after the first electronic device receives the notice of permission from the second electronic device.

[0010] In some embodiments, the acoustic signal may be substantially inaudible, for example, its frequency may be above 19 KHz.

[0011] In some embodiments, the wireless connection pairing method may further include: demodulating the acoustic signal; and decoding the demodulated acoustic signal to obtain the pairing information.

[0012] In one embodiment, a method for broadcasting pairing information is provided. The method may include: a first electronic device obtaining pairing information used for establishing wireless connection with a second electronic device; processing the obtained pairing information to form an acoustic signal which carries the pairing information; and broadcasting the acoustic signal through an audio system.

[0013] In some embodiments, processing the obtained pairing information to form an acoustic signal may include: encoding the obtained pairing information; and modulating the encoded pairing information to form the acoustic signal.

[0014] In some embodiments, the wireless connection may be a Wi-Fi connection, and the pairing information may include: SSID of the second electronic device, an authorization type and a password. In some embodiments, the wireless connection may be a BT connection, and the pairing information may include: BT address, service class, UUID and device information of the second electronic device.

[0015] In some embodiments, the pairing information may be pre-stored in the first electronic device. In some embodiments, the pairing information may be input by a user.

[0016] In one embodiment, a first electronic device is provided. The first electronic device may include a speaker system, a wireless communication device and a processing device configured to: control the speaker system to broadcast an acoustic signal which carries pairing information for establishing wireless connection with the wireless communication device; and after the wireless communication device receives from a second electronic device a request for establishing wireless connection with the wireless communication device, control the wireless communication device to send a notice of permission to the second electronic device.

[0017] In some embodiments, the processing device may be further configured to control the wireless communication device to establish wireless connection with the second electronic device after the notice of permission is sent to the second electronic device.

[0018] In some embodiments, the wireless connection may be a Wi-Fi connection, and the pairing information may include: SSID of the wireless connection pairing system, an authorization type and a password. In some embodiments, the wireless connection may be a BT connection, and the pairing information may include: BT address, service class, UUID and device information of the wireless connection pairing system.

[0019] In some embodiments, the acoustic signal may be substantially inaudible, for example, its frequency may be above 19 KHz.

[0020] In some embodiments, the speaker system, the wireless communication device and the processing device may be separate devices/systems.

[0021] In some embodiments, the processing device may be further configured to: encode the pairing information; and modulate the encoded pairing information to form the acoustic signal.

[0022] In one embodiment, a first electronic device is provided. The first electronic device may include an acoustic signal receiving device, a wireless communication device and a processing device configured to: after the acoustic signal receiving device receives an acoustic signal which carries pairing information for establishing wireless connection with a second electronic device, extract the pairing information from the received acoustic signal; generate a request for establishing wireless connection with the second electronic device which request contains the pairing information extracted from the received acoustic signal; and control the wireless communication device to send the request to the second electronic device.

[0023] In some embodiments, the processing device may be further configured to control the wireless communication device to establish wireless connection with the

second electronic device after the wireless communication device receives a notice of permission from the second electronic device.

[0024] In some embodiments, the acoustic signal may be substantially inaudible, for example, its frequency may be above 19 KHz.

[0025] In some embodiments, the processing device may be further configured to: demodulate the acoustic signal; and decode the demodulated acoustic signal to obtain the pairing information.

[0026] In one embodiment, a system for broadcasting pairing information is provided. The system may include an audio device and a processing device configured to: obtain pairing information used for establishing wireless connection with a first electronic device; process the pairing information to form an acoustic signal which carries the pairing information; and control the audio device to broadcast the acoustic signal.

[0027] In some embodiments, the processing device may be configured to: encode the pairing information; and modulate the encoded pairing information to form the acoustic signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The foregoing and other features of the present disclosure will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only several embodiments in accordance with the disclosure and are, therefore, not to be considered limiting of its scope, the disclosure will be described with additional specificity and detail through use of the accompanying drawings.

[0029] FIG. 1 schematically illustrates a flow chart of a wireless connection pairing method 100 according to one embodiment;

[0030] FIG. 2 schematically illustrates a diagram of a wireless network environment;

[0031] FIG. 3 illustrates a schematic block diagram of a first electronic device 300 according to one embodiment; and

[0032] FIG. 4 illustrates a schematic block diagram of a second electronic device 400 according to one embodiment.

DETAILED DESCRIPTION

[0033] In the following detailed description, reference is made to the accompanying drawings, which form a part hereof. In the drawings, similar symbols typically identify similar components, unless context dictates otherwise. The illustrative embodiments described in the detailed description, drawings, and claims are not meant to be limiting. Other embodiments may be utilized, and other changes may be made, without departing from the spirit or scope of the subject matter presented here. It will be readily understood that the aspects of the present disclosure, as generally described herein, and illustrated in the Figures, can be arranged, substituted, combined, and designed in a wide variety of different configurations, all of which are explicitly contemplated and make part of this disclosure.

[0034] To establish a wireless connection between a server and a client, such as Wi-Fi connection or BT connection, it is necessary for the client to obtain pairing information and a pairing process is required.

[0035] FIG. 1 schematically illustrates a flow chart of a wireless connection pairing method 100 according to one embodiment. In the embodiment, Wi-Fi pairing is described as an example.

[0036] Referring to FIG. 1, in S101, a first electronic device obtaining pairing information for establishing wireless connection with the first electronic device and serializing the pairing information.

[0037] The first electronic device may include a Wi-Fi access point device which allows wireless devices to connect to a wireless network. In some embodiments, serializing

the pairing information may be concatenating the pairing information into a string. In some embodiments, the pairing information may mainly include SSID (Service Set Identifier) of the first electronic device, an authorization type and a password. The authorization type may include WPA_PSK/WPA2_PSK (Wi-Fi Protected Access_Pre-Shared Key), WMM (Wi-Fi Multi Media), WPS (Wi-Fi Protected Setup) or the like.

[0038] In S103, the first electronic device encoding the serialized pairing information to a first code block.

[0039] In some embodiments, the serialized pairing information may be encoded according to ASCII (American Standard Code for Information Interchange) table to form a first code block.

[0040] In S105, the first electronic device encrypting the first code block.

[0041] In some embodiments, the first code block may be encrypted by a reversible encryption algorithm, such as symmetric-key algorithm including DES (Data Encryption Algorithm) algorithm, TDEA (Triple Data Encryption Algorithm) algorithm and RC5 algorithm. Besides, a keyt may be used in the encryption process. In some embodiments, S105 may not be performed.

[0042] In S107, the first electronic device performing CRC (Cyclic Redundancy Check) on the encrypted first code block to form a second code block.

[0043] In some embodiments, an error correcting code, which is calculated based on the encrypted first code block in a certain mathematical relation, may be added to the end of the encrypted first code block to form the second code block.

[0044] In S109, the first electronic device modulating the second code block to form a wav file with a substantially inaudible frequency.

[0045] In some embodiments, the second code block may be encoded by a certain encoding method, such as a repeated encoding method, to form an encoded block. Then, a first modulation process, such as a PSK (Phase-Shift-Keying) modulation

method, may be applied to the encoded block to form a set of symbols. A second modulation process, such as TDM (Time Division Multiplexing), FDM (Frequency Division Multiplexing) and CDM (Code Division Multiplexing), may be applied to the set of symbols to form a base band signal. Afterward, a carrier wave may be used to carry the base band signal to form a wave signal. In some embodiments, the carrier wave may have a substantially inaudible frequency, for example, above 19 KHz. Finally, a wav file with the substantially inaudible frequency, which can be played by a speaker, may be constructed based on the wave signal.

[0046] In S111, the first electronic device playing the wav file.

[0047] To play the wav file, the first electronic device may have a speaker. In some embodiments, the wav file may be played all the time. In some embodiments, the wav file may be played under control. For example, if it is in a cafe, the first electronic device may play the wav file all the time, such that customers' mobile devices can receive the wav file any time. If it is at home, the first electronic device may be triggered to play the wav file when a user wants to connect a mobile device to Wi-Fi.

[0048] In some embodiments, the wav file may be played by a separate device, such as a separate audio system.

[0049] FIG. 2 schematically illustrates a diagram of a wireless network environment. As shown in FIG. 2, the first electronic device broadcasts an acoustic signal which has a substantially inaudible frequency, other devices with a microphone around may receive the acoustic signal.

[0050] In S201, a second electronic device receiving the wav file from the first electronic device and sampling the wav file.

[0051] In some embodiments, the second electronic device may be a mobile device which expects to connect to the first electronic device, such as a mobile phone. The second electronic device may have a microphone to receive the wav file.

[0052] In some embodiments, the wav file may be sampled by an A/D

(Analog-to-Digital) converter with a sampling frequency of 48 KHz.

[0053] In S203, the second electronic device demodulating the sampled wav file to obtain the second code block.

[0054] Since noise exists during the reception of the wav file, in some embodiments, the wav file may be put into a high pass filter in the second electronic device so that only a high frequency portion thereof remains.

[0055] Afterwards, a first and second demodulation processes, which respectively correspond to the second and first modulation processes in S109, may be employed to demodulate the wav file to obtain the encoded block. And the encoded block may be decoded by a decoding method corresponding to the certain encoding method in S109 to obtain the second code block.

[0056] In S205, the second electronic device checking the second code block.

[0057] Specifically, since the second code block contains the encrypted first code block and the error correcting code, the second electronic device may determine whether the encrypted first code block is a correct code block. Specifically, the second electronic device may check whether the error correcting code and the encrypted first code block satisfy the certain mathematical relation described in S107. If yes, the encrypted first code block is determined to be a correct code block; vice versa. If the encrypted first code block is a correct code block, S207 may be performed; else, the second electronic device may wait for receiving a wav file from the first electronic device again.

[0058] In S207, the second electronic device decrypting the encrypted first code block which is contained in the second code block to obtain the first code block.

[0059] In some embodiments, the second electronic device may employ the key which is used in the encryption process in S105 to decrypt the encrypted first code block.

[0060] In S209, the second electronic device decoding the first code block to obtain the pairing information.

[0061] In some embodiments, the first code block may be decoded according to ASCII table. After the decoding process, the second electronic device may obtain the pairing information, i.e., the SSID of the first electronic device, the authorization type and the password.

[0062] In S211, the second electronic device sending to the first electronic device a request for establishing wireless connection with the first electronic device based on the pairing information.

[0063] The process may be performed as a standard Wi-Fi pairing process. In the embodiment, a connection process with an authorization type of WPA_PSK is described. After obtaining the pairing information, the second electronic device may generate a first set of information based on the pairing information and send the first set of information to the first electronic device. The first set of information may include PSK (Pre-Shared Key), a first random number and a MAC (Message Authentication Code). The first electronic device may generate a second random number and send it to the second electronic device. The second electronic device generates a first MIC (Message Integrity Check) based on the second random number and the first set of information, and sends the first MIC to the first electronic device.

[0064] In S113, the first electronic device receiving the request and determining whether to establish wireless connection with the second electronic device.

[0065] In some embodiments, the first electronic device may calculate a second MIC. And after receiving the first MIC from the second electronic device, the first electronic device may determine whether the first MIC is corresponding to the second MIC. If yes, the first electronic device may send a notice of permission to the second electronic device and connect with the second electronic device; vice versa.

[0066] Hereafter, a BT (Bluetooth) pairing process is described as an example. A first BT device serializes pairing information which includes BT address, service class, UUID (Universally Unique Identifier) and device information of the first BT device. Then, the first BT device may perform encoding, encryption and modulation on the serialized

pairing information in turn to form a wav file with a substantially inaudible frequency. Afterward, the first BT device plays the wav file. A second BT device, once receiving the wav file, may perform demodulation, decryption and decoding on the wav file to obtain the pairing information. Afterward, the second BT device uses the pairing information to connect to the first BT device following SSP (Secure Simple Pairing).

[0067] By employing the above pairing methods, a mobile device may perform Wi-Fi connection or BT connection without searching hotspot and inputting password manually, which is more convenient for users. Further, since the pairing information for establishing wireless connection with a central device is broadcasted by the central device or any other audio system through an acoustic signal, devices around the central device or the any other audio system may receive the pairing information while other devices can not receive the pairing information, which ensures a safe usage of wireless connection. Besides, the acoustic signal is substantially inaudible, which avoids influence to persons.

[0068] FIG. 3 illustrates a schematic block diagram of a first electronic device 300 according to one embodiment and FIG. 4 illustrates a schematic block diagram of a second electronic device 400 according to one embodiment.

[0069] In some embodiments, the first electronic device 300 may be a Wi-Fi access point device or a BT enabled device. The second electronic device 400 may be a mobile device which expects to establish wireless connection with the first electronic device 300.

[0070] Referring to FIGs. 3 and 4, the first electronic device 300 may include a speaker system 301, a wireless communication device 303, a processing device 305 and a memory device 307.

[0071] The processing device 305 may be configured to: obtain pairing information, wherein the pairing information is used to establish wireless connection with the wireless communication device 303 and may include SSID of the wireless communication device 303, an authorization type and a password; serialize the pairing information; encode the

serialized pairing information to a first code block; encrypt the first code block; modulate the encrypted first code block to form a wav file with a substantially inaudible frequency; control the speaker system 301 to play the wav file; and after the wireless communication device 303 receives from the second electronic device 400 a request for establishing wireless connection with the first electronic device 300, determine whether to establish wireless connection with the second electronic device 400, where the request is formed based on the wav file. In some embodiments, the processing device 305 may be a CPU, or a MCU, or a DSP etc., or any combination thereof. The memory device 307 may store an operating system and program instructions. In some embodiments, the speaker system 301, the wireless communication device 303 and the processing device 305 may be separate devices/systems.

[0072] The second electronic device 400 may include an acoustic signal receiving device 401, a wireless communication device 403, a processing device 405 and a memory device 407. In some embodiments, the acoustic signal receiving device 401 may be a microphone.

[0073] The processing device 405 may be configured to: after the acoustic signal receiving device 401 receives the wav file from the first electronic device 300, sample the wav file; demodulate the sampled wav file to obtain the encrypted first code block; decrypt the encrypted first code block to obtain the first code block; decode the first code block to obtain the pairing information; generate the request for establishing wireless connection with the first electronic device 300 based on processing the pairing information; control the wireless communication device 403 to send the request to the first electronic device 300, such that the first electronic device 300 determines whether to establish wireless connection with the second electronic device 400 based on the request.

[0074] In some embodiments, the processing device 405 may be a CPU, or a MCU, or a DSP etc., or any combination thereof. The memory device 407 may store an operating system and program instructions. In some embodiments, the acoustic signal

receiving device 401, the wireless communication device 403 and the processing device 405 may be separate devices/systems.

[0075] According to one embodiment, a non-transitory computer readable medium, which contains a computer program for wireless connection pairing, is provided. When the computer program is executed by a processor, it will instruct the processor to: broadcast, through an audio system, an acoustic signal which carries pairing information for establishing wireless connection with a first electronic device; receive from a second electronic device a request for establishing wireless connection with the first electronic device through a wireless network, where the request contains the pairing information extracted from the acoustic signal; and send a notice of permission to the second electronic device.

[0076] There is little distinction left between hardware and software implementations of aspects of systems; the use of hardware or software is generally a design choice representing cost vs. efficiency tradeoffs. For example, if an implementer determines that speed and accuracy are paramount, the implementer may opt for a mainly hardware and/or firmware vehicle; if flexibility is paramount, the implementer may opt for a mainly software implementation; or, yet again alternatively, the implementer may opt for some combination of hardware, software, and/or firmware.

[0077] While various aspects and embodiments have been disclosed herein, other aspects and embodiments will be apparent to those skilled in the art. The various aspects and embodiments disclosed herein are for purposes of illustration and are not intended to be limiting, with the true scope and spirit being indicated by the following claims.

We Claim:

1. A wireless connection pairing method, comprising:

broadcasting, through an audio system, an acoustic signal which carries pairing information for establishing wireless connection with a first electronic device;

the first electronic device receiving from a second electronic device a request for establishing wireless connection with the first electronic device through a wireless network, where the request contains the pairing information extracted from the acoustic signal; and

the first electronic device sending a notice of permission to the second electronic device.

2. The method according to claim 1, further comprising: the first electronic device establishing wireless connection with the second electronic device after the notice of permission is sent to the second electronic device.
3. The method according to claim 1, wherein the acoustic signal is substantially inaudible.
4. The method according to claim 1, further comprising:

the first electronic device encoding the pairing information; and

modulating the encoded pairing information to form the acoustic signal.

5. A wireless connection pairing method, comprising:

a first electronic device receiving an acoustic signal which carries pairing information for establishing wireless connection with a second electronic device;

extracting the pairing information from the received acoustic signal;

sending to the second electronic device a request for establishing wireless connection with the second electronic device through a wireless network, where the request contains the extracted pairing information; and

receiving a notice of permission from the second electronic device.

6. The method according to claim 5, further comprising: establishing wireless connection with the second electronic device after the first electronic device receives the notice of permission from the second electronic device.
7. The method according to claim 5, wherein the acoustic signal is substantially inaudible.
8. The method according to claim 5, further comprising:
 - demodulating the acoustic signal; and
 - decoding the demodulated acoustic signal to obtain the pairing information.
9. A method for broadcasting pairing information, comprising:
 - a first electronic device obtaining pairing information used for establishing wireless connection with a second electronic device;
 - processing the obtained pairing information to form an acoustic signal which carries the pairing information; and
 - broadcasting the acoustic signal through an audio system.
10. A first electronic device, comprising a speaker system, a wireless communication device and a processing device configured to:
 - control the speaker system to broadcast an acoustic signal which carries pairing information for establishing wireless connection with the wireless communication device; and
 - after the wireless communication device receives from a second electronic device a request for establishing wireless connection with the wireless communication device, control the wireless communication device to send a notice of permission to the second electronic device.

11. The first electronic device according to claim 10, wherein the processing device is further configured to control the wireless communication device to establish wireless connection with the second electronic device after the notice of permission is sent to the second electronic device.
12. The first electronic device according to claim 10, wherein the acoustic signal is substantially inaudible.
13. The first electronic device according to claim 10, wherein the processing device is further configured to:
- encode the pairing information; and
 - modulate the encoded pairing information to form the acoustic signal.
14. A first electronic device, comprising an acoustic signal receiving device, a wireless communication device and a processing device, configured to:
- after the acoustic signal receiving device receives an acoustic signal which carries pairing information for establishing wireless connection with a second electronic device, extract the pairing information from the received acoustic signal;
 - generate a request for establishing wireless connection with the second electronic device which request contains the pairing information extracted from the received acoustic signal; and
 - control the wireless communication device to send the request to the second electronic device.
15. The first electronic device according to claim 14, wherein the processing device is further configured to control the wireless communication device to establish wireless connection with the second electronic device after the wireless communication device receives a notice of permission from the second electronic device.
16. The first electronic device according to claim 14, wherein the acoustic signal is substantially inaudible.

17. The first electronic device according to claim 14, wherein the processing device is further configured to:

demodulate the acoustic signal; and

decode the demodulated acoustic signal to obtain the pairing information.

18. A system for broadcasting pairing information, comprising an audio device and a processing device configured to:

obtain pairing information used for establishing wireless connection with a first electronic device;

process the pairing information to form an acoustic signal which carries the pairing information; and

control the audio device to broadcast the acoustic signal.

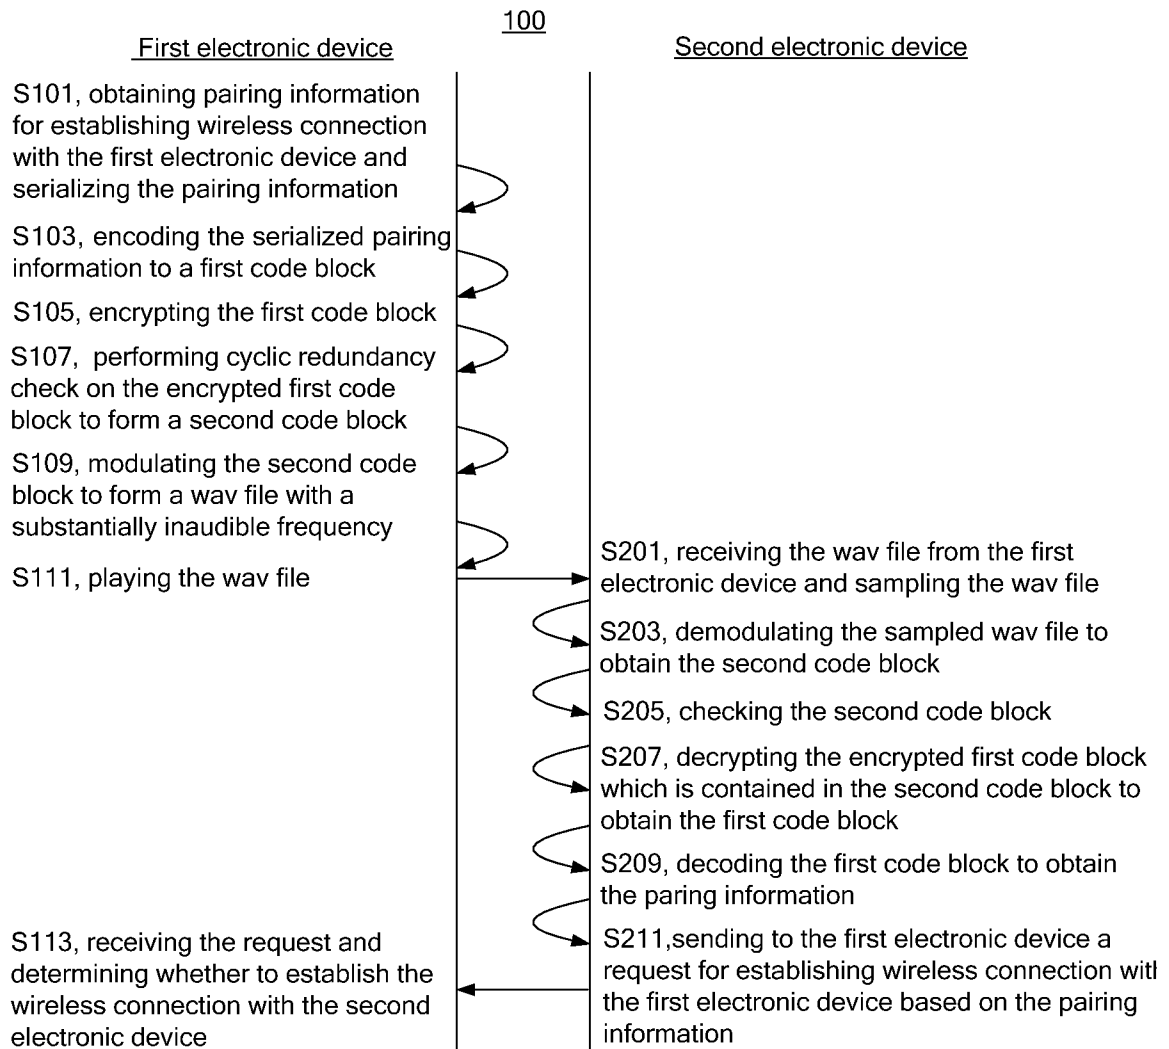


FIG. 1

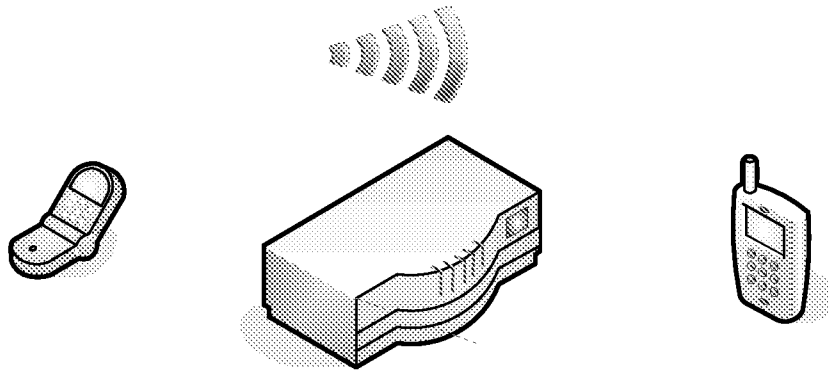


FIG. 2

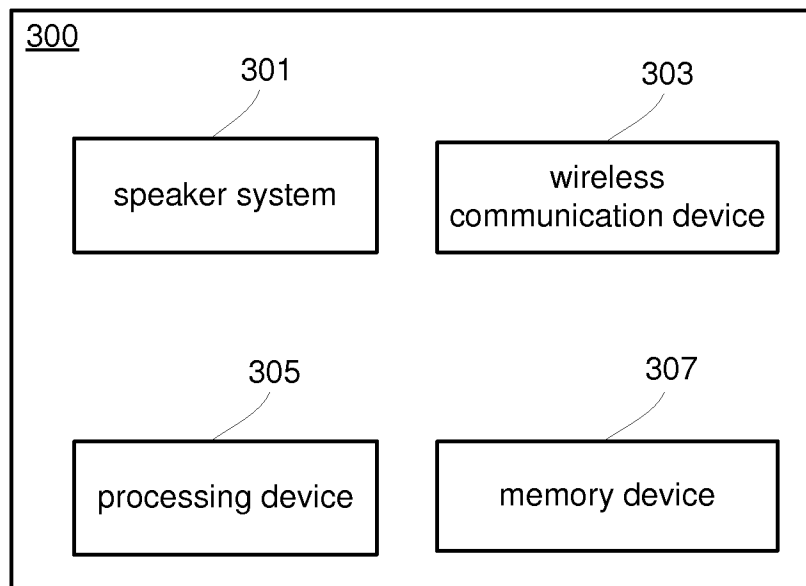


FIG. 3

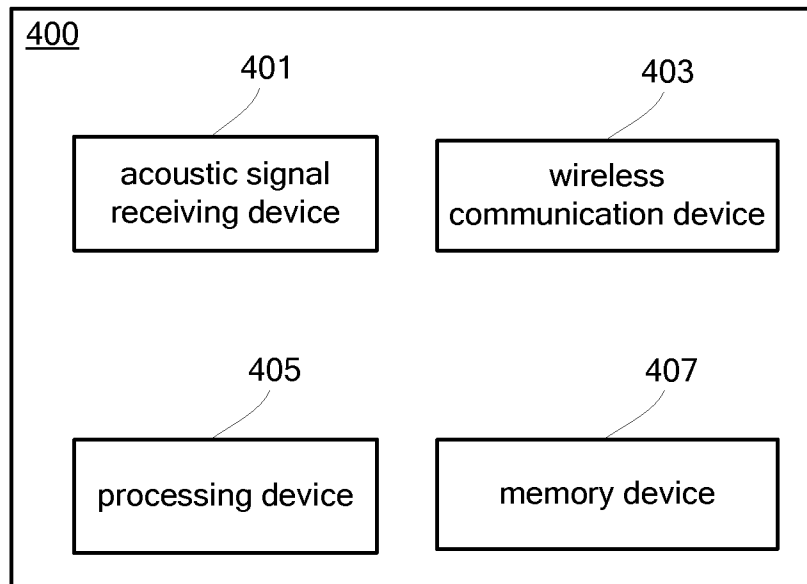


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2013/091114

A. CLASSIFICATION OF SUBJECT MATTER

H04B 5/06(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W; H04Q; H04B; H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CPRSABS, CNABS, CNTXT, CNKI, SIPOABS, DWPI, WOTXT, EPTXT, USTXT: audio, acoustic, voice, sound, wave, wi-fi, bluetooth, wireless, radio, pair, connection

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2010110837 A1 (SAMSUNG ELECTRONICS CO LTD) 06 May 2010 (2010-05-06) description, paragraphs [0047]-[0055], [0062]-[0065] and [0070]-[0072]	1-18
A	CN 202524563 U (NATIONZ TECHNOLOGIES INC) 07 November 2012 (2012-11-07) the whole document	1-18

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A”	document defining the general state of the art which is not considered to be of particular relevance	“T”	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
“E”	earlier application or patent but published on or after the international filing date	“X”	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
“L”	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y”	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
“O”	document referring to an oral disclosure, use, exhibition or other means	“&”	document member of the same patent family
“P”	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

19 September 2014

Date of mailing of the international search report

14 October 2014

Name and mailing address of the ISA/

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA(ISA/CN)
6,Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088 China

Authorized officer

LU,Shan

Facsimile No. (86-10)62019451

Telephone No. (86-10)62089551

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2013/091114

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2010110837	A1	06 May 2010	US	8818273	B2	26 August 2014
				WO	2010050700	A2	06 May 2010
				WO	2010050700	A3	29 July 2010
				KR	20100048885	A	11 May 2010
				RU	2398356	C2	27 August 2010
				JP	5530003	B2	25 June 2014
				EP	2362986	A2	07 September 2011
				JP	2013211925	A	10 October 2013
				CN	102273106	A	07 December 2011
				RU	2008143357	A	10 May 2010
				JP	2014132797	A	17 July 2014
				JP	2012507916	A	29 March 2012
CN	202524563	U	07 November 2012	Non e			