



(51) International Patent Classification:

G01N 21/64 (2006.01) G01N 33/483 (2006.01)

G01N 21/76 (2006.01) B01L 3/00 (2006.01)

(21) International Application Number:

PCT/US2021/033882

(22) International Filing Date:

24 May 2021 (24.05.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/704,963 04 June 2020 (04.06.2020) US

(71) Applicant: **ILLUMINA, INC.** [US/US]; 5200 Illumina Way, San Diego, CA 92122 (US).

(72) Inventors: **COX-MURANAMI, Wesley**; C/o Illumina, Inc., 5200 Illumina Way, San Diego, CA 92122 (US). **PAN-CHAPAKESAN, Rajagopal**; C/o Illumina, Inc., 5200 Illumina Way, San Diego, CA 92122 (US). **RIVAL, Arnaud**; C/o Illumina, Inc., 5200 Illumina Way, San Diego, CA 92122 (US).

(74) Agent: **JORGE, Matthew, M.**; Marshall, Gerstein & Borun LLP, 233 S. Wacker Drive, 6300 Willis Tower, Chicago, IL 60606-6357 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: APPARATUS WITH A SENSOR HAVING AN ACTIVE SURFACE

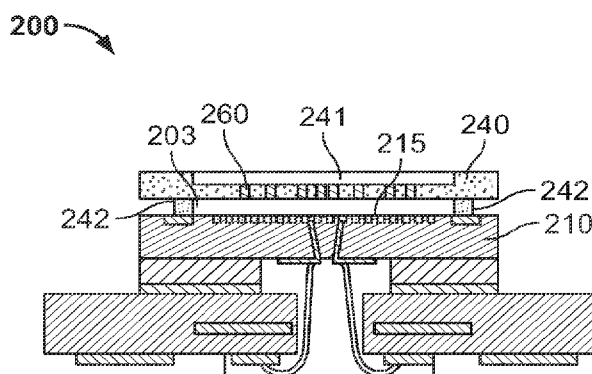


FIG. 7

(57) Abstract: An apparatus and examples of methods for using and manufacturing aspects of an apparatus with a sensor having an active surface. A sensor, a lid, and a flow channel bounded by the lid and a surface of the sensor, and including an illumination source, a heater, and a pump. A method includes fluidically coupling a first flow cell and a second flow cell to a reservoir, moving fluid from the reservoir into a flow channel of the first and second flow cell using respective pumps; and heating fluid in the flow channels of the first and second flow cells using respective heaters. A method includes forming a first sensor and a second sensor on a flexible surface, and folding the flexible surface until the first sensor faces the second sensor.

APPARATUS WITH A SENSOR HAVING AN ACTIVE SURFACE

RELATED APPLICATION SECTION

[0001] This application claims the benefit of and priority to U.S. Provisional Patent Application Number 62/704,963, filed June 4, 2020, the content of which is incorporated by reference herein in its entirety and for all purposes.

BACKGROUND

[0002] Various protocols in biological or chemical research involve performing controlled reactions. The designated reactions can then be observed or detected and subsequent analysis can help identify or reveal properties of chemicals involved in the reaction. In some multiplex assays, an unknown analyte having an identifiable label (*e.g.*, fluorescent label) can be exposed to thousands of known probes under controlled conditions. Each known probe can be deposited into a corresponding well of a microplate. Observing any chemical reactions that occur between the known probes and the unknown analyte within the wells can help identify or reveal properties of the analyte. Other examples of such protocols include known deoxyribonucleic acid (DNA) sequencing processes, such as sequencing-by-synthesis (SBS) or cyclic-array sequencing.

[0003] In some fluorescent-detection protocols, an optical system is used to direct excitation light onto fluorophores, *e.g.*, fluorescently-labeled analytes and to also detect the fluorescent emissions signal light that can emit from the analytes having attached fluorophores. In other proposed detection systems, the controlled reactions in a flow cell are detected by a solid-state light sensor array (*e.g.*, a complementary metal oxide semiconductor (CMOS) detector). These systems do not involve a large optical assembly to detect the fluorescent emissions. For CMOS based flow cells that use external illumination, the lid over the flow channel may be transparent. Furthermore, the external illumination source often is aligned with the sensor, which may have particular challenges for removable flow cells and/or multiple flow cells used in a single instrument. External illumination may also result in shadows caused by inlets in the lid for some flow cells.

[0004] Some sequencing, such as DNA sequencing, may include moving reagents, buffers, and/or other materials through a flow channel over a sensor, such as a CMOS sensor, maintaining and/or modifying the temperature(s) of the materials within the flow channel,

and illuminating fluorescent nucleotides within the flow channel. To use a shared pool of reagent resources for each flow cell may involve a fluidic solution that passes fluids to multiple flow cells on demand.

SUMMARY

[0005] Accordingly, it may be beneficial for individually addressable CMOS flow cells to enable a user to load multiple sequestered samples into a single sequencing run without the need for additional reagent cartridges, using shared reagent volumes and random accessibility. Sequencing instruments may use shared hardware components among several samples on individual addressable flow cells rather than a 1-to-1 regime. Shared hardware components may allow for higher sequencing output without a significant increase in the corresponding cost of an instrument. Individually addressable flow cells may provide ‘random access’ functionality on sequencers as the individually addressable flow cells can be added or subtracted at any point in time during a sequencing run, thereby allowing for multiple sequencing runs to start and stop at the same or different times, and even during the middle of a particular sequencing run without affecting the sequencing runs of other individually addressable flow cells. Users may load smaller sample volumes into flow cells and multiplexing flow cells rather than multiplexing sample input, thereby reducing the need of an excessive amount of sample input on large output flow cells for factory style platforms. Such implementations may be particularly useful and beneficial for assays that produce a much smaller input concentration (PCR-free assays, for example) that still translate to a factory scale need in terms of the sample variety that is sequenced.

[0006] At least some of the examples of the flow cells described herein help enable ‘random access’ sequencing and shared individual control of multiple flow cells on a single instrument. Shared vats or reservoirs of sequencing reagents are accessed on demand by loaded flow cells which can start and stop at any time depending on the type of sequencing run that is programmed for that specific flow cell. The flow cell may include an individual sensor, such as a CMOS type imaging sensor, heating elements, and an electrically controllable pump. Each flow cell may be completely electrically addressable and may individually drive its own imaging, heating, and fluidic pumping.

[0007] Thus, shortcomings of the prior art can be overcome and benefits as described later in this disclosure can be achieved through the provision of an apparatus for use in a sensor

system or instrument. Various examples of the apparatus are described below, and the apparatus, including and excluding the additional examples enumerated below, in any combination (provided these combinations are not inconsistent), may overcome these shortcomings and achieve the benefits described herein. One example apparatus comprises a sensor with an active surface having a plurality of reaction sites, a lid, and a flow channel formed at least partially by the active surface of the sensor and the lid, where the lid comprises an illumination source.

[0008] In some examples of the apparatus, the sensor comprises a Complementary Metal-Oxide Semiconductor (CMOS) detection device.

[0009] In some examples of the apparatus, the CMOS detection device comprises a plurality of detection pixels.

[0010] In some examples of the apparatus, the lid further comprises a non-transparent material.

[0011] In some examples of the apparatus, the lid further comprises an opaque material.

[0012] In some examples of the apparatus, the lid further comprises a fluidic channel therein, where the fluidic channel is in fluidic communication with the flow channel.

[0013] In some examples of the apparatus, the lid further comprises a reservoir.

[0014] In some examples of the apparatus, the reservoir comprises a reagent.

[0015] In some examples of the apparatus, the reservoir comprises a buffer.

[0016] In some examples of the apparatus, the lid further comprises a heater.

[0017] In some examples of the apparatus, the heater is a resistive heater.

[0018] In some examples of the apparatus, the lid is on an opposite side of the flow channel from the active surface of the sensor.

[0019] In some examples of the apparatus, the illumination source comprises a light emitting diode (LED).

[0020] In some examples of the apparatus, the illumination source comprises a plurality of LEDs.

[0021] In some examples of the apparatus, the illumination source is located along a periphery of the lid.

[0022] In some examples of the apparatus, the lid may also comprise a plurality of light guides, whereby the light guides are to guide light from the illumination source toward the active surface of the sensor.

[0023] In some examples of the apparatus, the illumination source comprises a thin film organic LED.

[0024] In some examples of the apparatus, the illumination source comprises a silicon-based LED.

[0025] In some examples of the apparatus, the illumination source is on a bottom surface of the lid, where the bottom surface of the lid faces the active surface of the sensor.

[0026] In some examples of the apparatus, the apparatus further comprises a pump, where the pump is fluidically coupled to the flow channel. The pump may be downstream from the sensor.

[0027] In some examples of the apparatus, the lid further comprises an outlet port, wherein the pump is adjacent to the outlet port of the lid.

[0028] In some examples of the apparatus, there is no removable connection between the flow channel and the pump.

[0029] In some examples of the apparatus, the pump is a piezoelectric pump having a flexible diaphragm element.

[0030] Shortcomings of the prior art can be overcome and benefits as described later in this disclosure can be achieved through the provision of a method of performing a biological or chemical analysis. Various examples of a method are described below, and the method, including and excluding the additional examples enumerated below, in any combination (provided these combinations are not inconsistent), overcome these shortcomings and achieve the benefits described herein. One example method comprises fluidically coupling a first

flow cell and a second flow cell to a reservoir, wherein the first flow cell and second flow cell each comprise a sensor with an active surface having a plurality of reaction sites, a lid, a heater, and a pump, where the lid and the sensor at least partially form a flow channel, where the pump is in fluidic communication with the flow channel; moving fluid from the reservoir into the flow channel of the first flow cell using the pump of the first flow cell and fluid from the reservoir into the flow channel of the second flow cell using the pump of the second flow cell; and heating fluid in the flow channel of the first flow cell using the heater of the first flow cell such that fluid in the flow channel of the first flow cell is at a different temperature than the fluid in the flow channel of the second flow cell.

[0031] In some examples of the method, moving fluid from the reservoir into the flow channel of the first flow cell does not occur while moving fluid from the reservoir into the flow channel of the second flow cell.

[0032] In some examples of the method, the reservoir comprises a reagent.

[0033] In some examples of the method, the reservoir comprises a buffer.

[0034] In some examples of the method, the method further comprises illuminating at least a portion of the reaction sites of the sensor of the first flow cell.

[0035] In some examples of the method, the method further comprises illuminating at least a portion of the reaction sites of the sensor of the second flow cell.

[0036] In some examples of the method, illuminating at least a portion of the reaction sites of the sensor of the second flow cell does not occur while illuminating at least a portion of the reaction sites of the sensor of the first flow cell.

[0037] In some examples of the method, an illumination source in the lid of the first flow cell illuminates at least a portion of the reaction sites of the sensor of the first flow cell.

[0038] In some examples of the method, an illumination source in the lid of the second flow cell illuminates at least a portion of the reaction sites of the sensor of the second flow cell.

[0039] In some examples of the method, a first sequencing run is performed on the first flow cell, and a second sequencing run is performed on the second flow cell, where the first sequencing run and second sequencing run start at different times.

[0040] Shortcomings of the prior art can be overcome and benefits as described later in this disclosure can be achieved through the provision of an apparatus for use in a sensor system or instrument. Various examples of the apparatus are described below, and the apparatus, including and excluding the additional examples enumerated below, in any combination (provided these combinations are not inconsistent), overcome these shortcomings and achieve the benefits described herein. One example apparatus comprises a sensor with an active surface having a plurality of reaction sites, a lid, and a flow channel formed at least partially by the active surface of the sensor and the lid, where the lid comprises a heater.

[0041] In some examples of the apparatus, the heater is a resistive heater.

[0042] In some examples of the apparatus, the sensor comprises a Complementary Metal-Oxide Semiconductor (CMOS) detection device.

[0043] In some examples of the apparatus, the CMOS detection device comprises a plurality of detection pixels.

[0044] In some examples of the apparatus, the apparatus further comprises a pump, where the pump is fluidically coupled to the flow channel.

[0045] In some examples of the apparatus, the pump is downstream from the sensor.

[0046] In some examples of the apparatus, the lid further comprises an outlet port, wherein the pump is adjacent to the outlet port of the lid.

[0047] In some examples of the apparatus, there is no removable connection between the flow channel and the pump.

[0048] In some examples of the apparatus, the pump is a piezoelectric pump having a flexible diaphragm element.

[0049] Shortcomings of the prior art can be overcome and benefits as described later in this disclosure can be achieved through the provision of an apparatus for use in a sensor system or instrument. Various examples of the apparatus are described below, and the apparatus, including and excluding the additional examples enumerated below, in any combination (provided these combinations are not inconsistent), overcome these shortcomings and achieve the benefits described herein. One example apparatus comprises a first sensor and a second

sensor, where each of the first and second sensors comprise an active surface having a plurality of reaction sites, where the active surface comprises a plurality of embedded illumination sources, where a flow channel is formed at least partially by the active surface of the first sensor and the active surface of the second sensor, where the active surface of the first sensor faces the active surface of the second sensor.

[0050] In some examples of the apparatus, the embedded illumination sources are embedded into spaces between the reaction sites of the active surface of each of the first sensor and second sensor.

[0051] In some examples of the apparatus, each of the embedded illumination sources is a light emitting diode (LED).

[0052] In some examples of the apparatus, the apparatus further comprises a pump, where the pump is fluidically coupled to the flow channel.

[0053] In some examples of the apparatus, the pump is downstream from the flow channel.

[0054] In some examples of the apparatus, there is no removable connection between the flow channel and the pump.

[0055] In some examples of the apparatus, the pump is a piezoelectric pump having a flexible diaphragm element.

[0056] Shortcomings of the prior art can be overcome and benefits as described later in this disclosure can be achieved through the provision of a method of making a portion of a flow cell. Various examples of the method are described below, and the method, including and excluding the additional examples enumerated below, in any combination (provided these combinations are not inconsistent), overcome these shortcomings and achieve the benefits described herein. One example method comprises forming a first sensor and a second sensor on a flexible surface, where each of the first and second sensors comprises an active surface having a plurality of reaction sites, where the active surface comprises a plurality of embedded illumination sources; and folding the flexible surface until the first sensor faces the second sensor, whereby a flow channel is formed between the first sensor and second sensor.

[0057] In some examples of the method, the illumination sources are embedded into spaces between the reaction sites of the active surface of each of the first sensor and second sensor.

[0058] In some examples of the method, each of the embedded illumination sources is a light emitting diode (LED).

[0059] In some examples of the method, the method further comprises fluidically coupling a pump to the flow channel.

[0060] In some examples of the method, the pump is downstream from the flow channel.

[0061] In some examples of the method, there is no removable connection between the flow channel and the pump.

[0062] In some examples of the method, the pump is a piezoelectric pump having a flexible diaphragm element.

[0063] Additional features are realized through the techniques described herein. Other examples and aspects are described in detail herein and are considered a part of the claimed aspects. These and other objects, features and advantages of this disclosure will become apparent from the following detailed description of the various aspects of the disclosure taken in conjunction with the accompanying drawings.

[0064] It should be appreciated that all combinations of the foregoing aspects and additional concepts discussed in greater detail below (provided such concepts are not mutually inconsistent) are contemplated as being part of the inventive subject matter and to achieve the benefits advantages disclosed herein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0065] One or more aspects are particularly pointed out and distinctly claimed as examples in the claims at the conclusion of the specification. The foregoing and objects, features, and advantages of one or more aspects are apparent from the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 depicts a side view of an example of a flow cell that includes a heater and a pump;

FIG. 2 depicts a top view of an example of a flow cell shown in FIG. 1;

FIG. 3 depicts a side view of an example of a flow cell shown in FIG. 1 secured within a receptacle;

FIG. 4 depicts an example of a system with multiple flow cells illuminated by a single light source;

FIG. 5 depicts an example of a system with multiple flow cells fluidically coupled to shared fluidic sources;

FIG. 6 depicts an example of a portion of a flow cell with a lid having an embedded light source;

FIG. 7 depicts an example of a portion of a flow cell with a lid having an embedded light source and heater;

FIG. 8 depicts an example of a portion of a flow cell with a lid having a light source on its outer surface;

FIG. 9 depicts an example of a portion of a flow cell with a lid having a light source on its outer surface and embedded heater;

FIG. 10 depicts an example of a portion of a flow cell with a heater and a lid having a light source on its outer surface;

FIG. 11 depicts an example of a portion of a flow cell with a lid having peripheral light sources and a waveguide;

FIG. 12 depicts an example of a portion of a flow cell with a lid having a thin film organic light emitting diode;

FIG. 13 depicts an example of a portion of a flow cell with a silicon based light emitting diode lid;

FIG. 14 depicts an example of a portion of a flow cell with a sensor in a mold having through-mold vias;

FIG. 15 depicts another example of a portion of a flow cell with a sensor in a mold having through-mold vias;

FIG. 16 depicts an example of a portion of a flow cell with a lid having external pins;

FIG. 17 depicts another example of a portion of a flow cell with a lid having external pins;

FIG. 18 depicts a side view of an example of a portion of a flow cell having a lid with embedded fluidic channels;

FIG. 19 depicts a top view of an example of a portion of a flow cell shown in FIG. 18;

FIG. 20 depicts a bottom schematic view of an example of a portion of a flow cell shown in FIG. 18;

FIG. 21 depicts an example of a portion of a flow cell having a lid with embedded fluidic channels and reservoirs;

FIG. 22 depicts an example of a portion of a flow cell with multiple sensors with a shared lid;

FIG. 23 depicts an example of a sensor with embedded light sources on its active surface;

FIG. 24 depicts an example of a portion of a flow cell with opposing sensors with embedded light sources;

FIG. 25 depicts another example of a portion of a flow cell with opposing sensors with embedded light sources;

FIG. 26 depicts an example of sensors on a flexible surface;

FIG. 27 depicts an example of sensors folded together on a flexible surface;

FIG. 28 depicts a flow chart of a method of operating an instrument with multiple individually addressable flow cells; and

FIG. 29 depicts a flow chart of a method of making a flow cell with opposing sensors.

DETAILED DESCRIPTION

[0066] The accompanying figures, in which like reference numerals refer to identical or functionally similar elements throughout the separate views and which are incorporated in and form a part of the specification, further illustrate the present implementation(s) and, together with the detailed description of the implementation(s), serve to explain the principles of the present implementation(s). As understood by one of skill in the art, the accompanying figures are provided for ease of understanding and illustrate aspects of certain examples of the present implementation(s). The implementation(s) is/are not limited to the examples depicted in the figures.

[0067] The terms “connect,” “connected,” “contact” “coupled” and/or the like are broadly defined herein to encompass a variety of divergent arrangements and assembly techniques. These arrangements and techniques include, but are not limited to (1) the direct joining of one component and another component with no intervening components therebetween (*i.e.*, the components are in direct physical contact); and (2) the joining of one component and another component with one or more components therebetween, provided that the one component being “connected to” or “contacting” or “coupled to” the other component is somehow in operative communication (*e.g.*, electrically, fluidly, physically, optically, etc.) with the other component (notwithstanding the presence of one or more additional components therebetween). It is to be understood that some components that are in direct physical contact with one another may or may not be in electrical contact and/or fluid contact with one another. Moreover, two components that are electrically connected, electrically coupled, optically connected, optically coupled, fluidly connected or fluidly coupled may or may not be in direct physical contact, and one or more other components may be positioned therebetween.

[0068] The terms “including” and “comprising”, as used herein, mean the same thing.

[0069] The terms “substantially”, “approximately”, “about”, “relatively”, or other such similar terms that may be used throughout this disclosure, including the claims, are used to describe and account for small fluctuations, such as due to variations in processing, from a reference or parameter. Such small fluctuations include a zero fluctuation from the reference or parameter as well. For example, they can refer to less than or equal to $\pm 10\%$, such as less than or equal to $\pm 5\%$, such as less than or equal to $\pm 2\%$, such as less than or equal to $\pm 1\%$,

such as less than or equal to $\pm 0.5\%$, such as less than or equal to $\pm 0.2\%$, such as less than or equal to $\pm 0.1\%$, such as less than or equal to $\pm 0.05\%$. If used herein, the terms “substantially”, “approximately”, “about”, “relatively,” or other such similar terms may also refer to no fluctuations, that is, $\pm 0\%$.

[0070] As used herein, a “flow cell” can include a device having a lid extending over a reaction structure to form a flow channel therebetween that is in communication with a plurality of reaction sites of the reaction structure, and can include a detection device that detects designated reactions that occur at or proximate to the reaction sites. A flow cell can also or alternatively include two (or more) opposing sensors, without a lid. A flow cell may include a solid-state light detection or “imaging” device, such as a Charge-Coupled Device (CCD) or Complementary Metal-Oxide Semiconductor (CMOS) (light) detection device. The CMOS detection device or sensor, for example, may include a plurality of detection pixels that detects incident emission signals. In some examples, each detection pixel corresponds to a reaction site. In other examples, there may be more or fewer pixels than the number of reaction sites. Likewise, a detection pixel in some examples corresponds to a single sensing element to create an output signal. In other examples, a detection pixel corresponds to multiple sensing elements to create an output signal. As one specific example, a flow cell can fluidically, electrically, or both fluidically and electrically couple to a cartridge, which can fluidically, electrically, or both fluidically and electrically couple to a bioassay system. A cartridge and/or bioassay system may deliver a reaction solution to reaction sites of a flow cell according to a predetermined protocol (*e.g.*, sequencing-by-synthesis), and perform a plurality of imaging events. Alternatively, as described herein, the flow cell may contain some or all of the reaction solution for delivery to the reaction sites. For example, a cartridge and/or bioassay system may direct one or more reaction solutions through the flow channel of the flow cell, and thereby along the reaction sites. At least one of the reaction solutions may include four types of nucleotides having the same or different fluorescent labels. In some examples, the nucleotides bind to the reaction sites of the flow cell, such as to corresponding oligonucleotides at the reaction sites. The cartridge, bioassay system, or the flow cell itself in some examples then illuminates the reaction sites using an excitation light source (*e.g.*, solid-state light sources, such as light-emitting diodes (LEDs)). In some examples, the excitation light has a predetermined wavelength or wavelengths, including a range of wavelengths. The fluorescent labels excited by the incident excitation light may provide emission signals (*e.g.*, light of a wavelength or wavelengths that differ

from the excitation light and, potentially, each other) that may be detected by the light sensors of the flow cell.

[0071] Flow cells described herein perform various biological or chemical processes and/or analysis. More specifically, the flow cells described herein may be used in various processes and systems where it is desired to detect an event, property, quality, or characteristic that is indicative of a designated reaction. For example, flow cells described herein may include or be integrated with light detection devices, sensors, including but not limited to, biosensors, and their components, as well as bioassay systems that operate with sensors, including biosensors.

[0072] The flow cells facilitate a plurality of designated reactions that may be detected individually or collectively. The flow cells perform numerous cycles in which the plurality of designated reactions occurs in parallel. For example, the flow cells may be used to sequence a dense array of DNA features through iterative cycles of enzymatic manipulation and light or image detection/acquisition. As such, the flow cells may be in fluidic communication with one or more microfluidic channels that deliver reagents or other reaction components in a reaction solution to a reaction site of the flow cells. The reaction sites may be provided or spaced apart in a predetermined manner, such as in a uniform or repeating pattern. Alternatively, the reaction sites may be randomly distributed. Each of the reaction sites may be associated with one or more light guides and one or more light sensors that detect light from the associated reaction site. In one example, light guides include one or more filters for filtering certain wavelengths of light. The light guides may be, for example, an absorption filter (*e.g.*, an organic absorption filter) such that the filter material absorbs a certain wavelength (or range of wavelengths) and allows at least one predetermined wavelength (or range of wavelengths) to pass therethrough. In some flow cells, the reaction sites may be located in reaction recesses or chambers, which may at least partially compartmentalize the designated reactions therein. Furthermore, the designation reactions may involve or be more easily detected at temperatures other than at ambient temperatures, for example, at elevated temperatures.

[0073] As used herein, a “designated reaction” includes a change in at least one of a chemical, electrical, physical, or optical property (or quality) of a chemical or biological substance of interest, such as an analyte-of-interest. In particular flow cells, a designated reaction is a positive binding event, such as incorporation of a fluorescently labeled

biomolecule with an analyte-of-interest, for example. More generally, a designated reaction may be a chemical transformation, chemical change, or chemical interaction. A designated reaction may also be a change in electrical properties. In particular flow cells, a designated reaction includes the incorporation of a fluorescently-labeled molecule with an analyte. The analyte may be an oligonucleotide and the fluorescently-labeled molecule may be a nucleotide. A designated reaction may be detected when an excitation light is directed toward the oligonucleotide having the labeled nucleotide, and the fluorophore emits a detectable fluorescent signal. In another example of flow cells, the detected fluorescence is a result of chemiluminescence or bioluminescence. A designated reaction may also increase fluorescence (or Förster) resonance energy transfer (FRET), for example, by bringing a donor fluorophore in proximity to an acceptor fluorophore, decrease FRET by separating donor and acceptor fluorophores, increase fluorescence by separating a quencher from a fluorophore, or decrease fluorescence by co-locating a quencher and fluorophore. A biological or chemical analysis may include detecting a designated reaction.

[0074] As used herein, “downstream” refers to being situated in a direction where a net volume of fluid flows towards. For example, if the net flow of fluid flows from a first source, to a second source, such that after a relevant period of time, for example after a DNA sequencing run, more fluid flows from the first source to a second source, the second source is downstream from the first source.

[0075] As used herein, “electrically coupled” and “optically coupled” refers to a transfer of electrical energy and light waves, respectively, between any combination of a power source, an electrode, a conductive portion of a substrate, a droplet, a conductive trace, wire, waveguide, nanostructures, other circuit segment and the like. The terms electrically coupled and optically coupled may be utilized in connection with direct or indirect connections and may pass through various intermediaries, such as a fluid intermediary, an air gap and the like. Likewise, “fluidically coupled” refers to a transfer of fluid between any combination of sources. The term fluidically coupled may be utilized in connection with direct or indirect connections, and may pass through various intermediaries, such as channels, wells, pools, pumps, and the like.

[0076] As used herein, a “reaction solution,” “reaction component” or “reactant” includes any substance that may be used to obtain at least one designated reaction. For example, potential reaction components include reagents, enzymes, samples, other biomolecules, and

buffer solutions, for example. The reaction components may be delivered to a reaction site in the flow cells disclosed herein in a solution and/or immobilized at a reaction site. The reaction components may interact directly or indirectly with another substance, such as an analyte-of-interest immobilized at a reaction site of the flow cell.

[0077] As used herein, the term “reaction site” is a localized region where at least one designated reaction may occur. A reaction site may include support surfaces of a reaction structure or substrate where a substance may be immobilized thereon. For example, a reaction site may include a surface of a reaction structure (which may be positioned in a channel of a flow cell) that has a reaction component thereon, such as a colony of nucleic acids thereon. In some flow cells, the nucleic acids in the colony have the same sequence, being for example, clonal copies of a single stranded or double stranded template. However, in some flow cells a reaction site may contain only a single nucleic acid molecule, for example, in a single stranded or double stranded form.

[0078] As used herein, the term “transparent” refers to allowing all or substantially all visible and non-visible electromagnetic radiation or light of interest to pass through unobstructed; the term “opaque” refers to reflecting, deflecting, absorbing, or otherwise obstructing all or substantially all visible and non-visible electromagnetic radiation or light of interest from passing through; and the term “non-transparent” refers to allowing some, but not all, visible and non-visible electromagnetic radiation or light of interest to pass through unobstructed.

[0079] As used herein, the term “waveguide” refers to a structure that guides waves, such as electromagnetic waves, with minimal loss of energy by restricting the transmission of energy to a particular direction or range of directions.

[0080] Reference is made below to the drawings, which are not drawn to scale for ease of understanding, wherein the same reference numbers are used throughout different figures to designate the same or similar components.

[0081] FIG. 1 depicts a side view of an example of a flow cell 100 that includes a heater and a pump. The flow cell 100 includes a sensor 110, for example, an imager sensor such as a CMOS sensor. A top surface of the sensor 110 forms an active surface 115, which may have a plurality of reaction sites. Above the active surface 115 of the sensor 110 is a (micro)-fluidic flow channel 103 delineated by a lid 140 of the flow cell 100 on one side, and a contiguous surface including the active surface 115 of the sensor 110, and optionally, fanout

regions extending outward from the active surface 115 of the sensor 110. In other words, the lid 140 bounds at least a portion of the flow channel 103 opposite of the sensor 110. In fabricating a flow cell 100, this fluidic flow channel 103 may be formed over a CMOS or other sensor utilizing one or more of a variety of molding processes, which involve a fabrication technique consisting of multiple processes. If a fluidic flow channel 103 is not formed in a useable shape, reagents may not be exchanged (e.g., single pot reagents) or may not be exchanged in a manner that renders reliable results. Thus, it is desirable that the resultant flow cell 100 include a fluidic flow channel 103 that may be utilized with bio-sensor processes including, but not limited to, SBS or cyclic-array sequencing. Flow channel 103 is fluidically coupled to a fluid inlet 101 and a fluid outlet 102.

[0082] The sensor 110 shown in FIG. 1 may be attached to a substrate 120, for example, a printed circuit board (PCB), a ceramic, or other material. Sensor 110 may be attached to the substrate 120 using, for example, a die-attach adhesive paste or film that may provide, for example, low or ultra-low stress on the sensor and high temperature stability. Examples of die-attach pastes include Supreme 3HTND-2DA and EP3HTSDA-1 by MasterBond (USA), and LOCTITE ABLESTIK ATB-F100E by Henkel Corp. USA. An example of a die attach adhesive film is LOCTITE ABLESTIK CDF100 by Henkel Corp. (USA). In one example, the sensor 110 may be directly attached to the substrate 120, while in other examples a structure, coating or layer may be interposed between the substrate 120 and the sensor 110.

[0083] In the example shown in FIG. 1, lid 140 includes a heater 141. The heater 141, when activated, provides thermal energy to, among others, the flow channel 103. In some examples, the heater 141 is transparent. A transparent heater in the lid 140 may be important when excitation light is emitted through the lid 140 into the flow channel 103 and onto the active surface 115 of the sensor 110 as a part of a biological or chemical analysis. In other examples, the heater 141 is opaque. An opaque heater may be acceptable when no excitation light is used as a part of a biological or chemical analysis, or when the excitation light used as a part of a biological or chemical analysis is provided to the flow channel 103 and onto the active surface 115 of the sensor 110 without having to travel through the lid 140 of the flow cell 100. In some examples, the heater 141 is a resistive heater.

[0084] The flow cell 100 shown in FIG. 1 also includes a pump 130, such as a piezoelectric diaphragm pump. The pump 130 is fluidically coupled to the flow channel 103 via channel 107 as well as fluid outlet 102, and may cause fluid to flow from the fluid inlet 101, through

the flow channel 103, and out through the fluid outlet 102. The pump 130 may draw fluid through the flow channel 103, for example, by generating a net negative pressure downstream from the flow channel 103. In some examples, the pump 130 may also cause fluid to travel through the flow channel 103 in the opposite or upstream direction; that is, from the fluid outlet 102 to the fluid inlet 101. In some examples, substrate 120 comprises circuitry to drive the pump 130. In other examples, pump 130 is an electrically controllable pump driven by a controller located externally from the flow cell 100, either through a connection via the substrate 120 or via a separate connection. While a piezoelectric diaphragm pump is shown in the example of FIG. 1, other types of pumps may also be suitable for certain implementations, including without limitation syringe pumps. In some examples, there may be no removable connection between the flow channel 103 and the pump 130. A mold 180 may encapsulate the pump 130, sensor 110, and substrate 120. As shown in FIG. 1, the mold 180 may also form or encapsulate the fluid inlet 101, fluid outlet 102, and channels 107 connecting to the flow channel 103, as well as support or otherwise attach to the lid 140.

[0085] The flow cell 100 depicted in FIG. 1 may be an individually addressable CMOS flow cell 100. Each flow cell 100 includes a CMOS imaging surface, piezoelectric pump (or other electrically controllable pump), heating element, fluidic inlet and outlet, and printed circuit board (PCB) to communicate with an electrically coupled instrument. In some examples, the individually accessible flow cell 100 includes a CMOS sensor that is directly embedded into an injection molded plastic body. Using direct adhesives or pressure sensitive adhesives are example methods to fluidically interface the two elements. A piezo pump including a flexible diaphragm element and oscillating electromagnet may drive fluidics. Embedded heating elements, whether they are resistive elements on the CMOS surface itself, transparent resistive elements on the lid 140 of the flow cell 100 (for example, using indium tin oxide), or non-transparent heating elements in the lid 140, may perform directed heating on demand. The plastic body of the assembly may interface directly with an instrument using a pogo pin array for electric communication and at a fluidic inlet and outlet. The heater and pump can be individually controlled, allowing individually addressable sequencing in larger systems or instruments.

[0086] FIG. 2 depicts a top view of an example of a flow cell 100 shown in FIG. 1. The flow cell 100 includes a fluid inlet 101 that is fluidically coupled to flow channel 103. A heater 141 is shown over the flow channel 103 as two discrete elements. In other examples, heater

141 may be a single element, or more than two elements. In other examples, heater 141 may be planer, rectangular, oval, linear, circular, or other shape. A channel 107 fluidically couples the flow channel 103 to the pump 130, which in turn is fluidically coupled to the fluid outlet 102.

[0087] FIG. 3 depicts a side view of an example of a flow cell 100 shown in FIG. 1 secured within a receptacle 150. A flow cell 100 is shown secured within a receptacle 150. Clasps 151 may be used to removably physically restrain the flow cell 100 within the receptacle 150. Examples of clasps 151 include spring loaded members that rotate about an axis and flexible members with an overhang. In other examples, where magnetic forces do not affect the designated reaction(s) and/or detection or analysis thereof, permanent magnetic or electromagnetic clasps may be used. Electrical connections 152 contact the underside of substrate 120. A fluid source 153 connects to fluid inlet 101 of the flow cell 100. A fluid waste channel 154 connects to fluid outlet 102 of the flow cell 100. In some examples, a pump 130, when activated, draws a fluid from the fluid source 153, through the fluid inlet 101, into the flow channel 103, and then through channel 107, through pump 130, out through fluid outlet 102, and then into fluid waste channel 154. In other examples, a pump 130 may be run in reverse, in which case fluid is drawn back from the fluid waste channel 154, through the fluid outlet 102, and towards the fluid inlet 101. This may be useful, for example, when cyclically moving fluids through the flow channel 103 in forward and reverse directions, that is, creating a backwash flow profile. While the pump 130, which is downstream from the sensor 110 and flow channel 103, may operate in both a forward and reverse direction, in some examples, the net fluid flow is from the fluid source 153 to the fluid waste channel 154. It should be appreciated that multiple different types of fluids may be supplied through the fluid source 153 while being driven by the pump 130. For example, a plurality of reagent wells may be fluidically coupled to a switchable valve, such as a rotary valve, which selectively fluidically couples the fluid source 153 to a particular reagent well. Such selection of the reagent well may be determined by a logic circuit formed on or in substrate 120 alone. In other examples, the reagent well may be determined by an instrument to which the flow cell 100 is secured to within the receptacle 150.

[0088] FIG. 4 depicts an example of a system with multiple flow cells 100 illuminated by a single light source 160. A light source 160 emits light, such as excitation light, that travels through a splitter 161. The splitter 161 distributes the excitation light to a plurality of flow

cells 100. In this FIG. 4, five receptacles 150 housing four flow cells 100 are shown. It should be appreciated that other examples may include fewer or more than five receptacles, of which some or all of the receptacles may house flow cells, or even no flow cells when not in use. Light gates 162, such as on/off mirrors, corresponding to each receptacle, selectively allow excitation light to travel and illuminate the flow cell 100, specifically, the flow channel 103 and reaction sites of the flow cell 100, as a part of the biological or chemical analysis.

[0089] In some examples, an instrument interfaces with one or more individually addressable flow cells. Each flow cell resides in an individual nest or receptacle with electronic and fluidic contacts. The reaction sites on the active surface of the sensor of each flow cell is illuminated by either a shared or individualized light source 160, such as a light emitting diode (LED) light source. A light pipe, mirror, or splitter element may enable shared LED source utilization. Self-illuminating flow cells may also be used, such as those described herein, to enable even more compact size and specified addressability of each flow cell 180.

[0090] FIG. 5 depicts an example of a system with multiple flow cells 100 fluidically coupled to shared fluidic sources. Similar to FIG. 4, five receptacles 150 housing four flow cells 100 are shown. It should be appreciated that other examples may include fewer or more than five receptacles, of which some or all of the receptacles may house flow cells, or even no flow cells while not in use. In this example, each flow cell 100, when residing within and mated to a receptacle 150, is fluidically coupled to one or more shared fluidic sources, such as sequencing reagents and washes. A valve 163 may select and/or regulate the fluid that is accessible by each flow cell 100. Accordingly, for example, the pump 130 of each flow cell 100 may draw fluid in through the fluid inlet 101, where the specific fluid that is delivered is selected by the valve 163 such as a rotary valve. In other examples, a plurality of valves is utilized to switch between various fluids. Fluid outlet 102 may be fluidically coupled to a waste reservoir. In some examples, the waste reservoir is shared between each of the flow cells 100. In other examples, each flow cell 100 may be fluidically coupled to its own waste reservoir, unshared with others. In yet other examples, each flow cell 100 may be fluidically coupled to its own individual waste reservoir, and each of the individual reservoirs are fluidically coupled to a shared waste reservoir that may be used as an overflow reservoir.

[0091] As the individually addressable flow cells 100 may utilize a shared pool of reagent resources rather than carrying their own individual pools, a fluidic solution that can pass fluids to multiple flow cells 100 on demand may be desirable. Having the pump built into the

flow cell allows each flow cell 100 to dictate the amount of volume passed over its surface which may be dependent on the overall data output of that specific flow cell 100.

[0092] Built in heating of the CMOS flow cell 100 enables each flow cell 100 to be at different points in a sequencing run, even from those adjacent. Sequencing instruments that utilize instrument-based heating usually involve adjacent flow cells 100 addressed at the same temperature and thus each flow cell 100 is aligned on the same sequencing step which is being performed. Built in heating on the flow cell 100 allows for a random access sequencer.

[0093] The built-in heating and pumping of the individually addressable flow cells 100 may enable more flexible upstream workflows that may be performed on the flow cells. If, for instance, library preparation and clustering in one instrument and sequencing in the other is desired, the built in functionality of the individually addressable flow cell will alleviate design requirements on each instrument, thereby lowering the overall instrument costs.

[0094] FIG. 6 depicts an example of a portion of a flow cell 200 with a lid 240 having an embedded light source. The flow cell 200 includes a sensor 210 with an active surface 215. The sensor 210 resides over and is coupled to a substrate 220. A lid 240 resides over the active surface 215 of the sensor 210, separated by pillars 242. In other words, the pillars 242 support the lid 240 over the active surface 215 of the sensor 210. For example, an adhesive is applied to the lid 240 and the upper surface of the pillars 242. The adhesive forms an interface between an upper surface of each pillar 242 and the lid 240. In some examples, the pillars 242 are a single continuous material. In other examples, the pillars 242 include multiple layers of materials. In other examples, the pillars 242 comprise multiple components. A flow channel 203 is formed between and bounded by the lid 240 and active surface 215, among other components such as the pillars 242. Light sources 260 are embedded within the lid 240. In some examples, the light sources 260 are light emitting diodes. As shown in this example, the light sources 260 may be unevenly distributed through the lid 240. In other examples, the light sources 260 are evenly distributed through the lid 240, that is, having equal distance spacing between each of the light sources 260. Moreover, as shown in this example, the light sources 260 are located at or on the bottom surface of the lid 240, where the bottom surface of the lid 240 is the surface that is closest to the active surface 215 of the sensor 210. When the light sources 260 are activated, they emit light, such as excitation light, into the flow channel 203. The fluorescent labels excited by the incident

excitation light may provide emission signals (e.g., light of a wavelength or wavelengths that differ from the excitation light and, potentially, each other) that may be detected by the sensor 210 of the flow cell 200. In some examples, the lid 240 is opaque. In other examples, the lid 240 is transparent. In some examples, the lid 240 may comprise a transparent glass material. In other examples, the lid 240 may comprise a plastic material that may be opaque.

[0095] In some examples, the pillars are a single continuous material. In other examples, the pillars include multiple layers of materials. In other examples, the pillars comprise multiple components. In yet other examples, the pillars are an extension of and continuous with the mold.

[0096] FIG. 7 depicts an example of a portion of a flow cell 200 with a lid 240 having an embedded light source and heater. The flow cell 200 in this example is similar to that of FIG. 6, and also includes a heater 241. The heater 241 is embedded within the lid 240, over the light sources 260. The heater 241 may be opaque or otherwise obstruct incident light from outside the flow cell 200. The heater 241, when activated, may provide thermal energy to the flow channel 203, thereby heating the contents therein. The light sources 260, when activated, emit light, such as excitation light, into the flow channel 203.

[0097] FIG. 8 depicts an example of a portion of a flow cell 200 with a lid 240 having a light source 260 on its outer surface. Light source 260 in this example is located on the outer surface of the lid 240, that is, the surface that is furthest from the active surface 215 of the sensor 210. The light source 260 may be one or more discreet sources of light, such as one or more light emitting diodes, grouped together. The lid 240 may be optically translucent or otherwise diffusive such that light emitted by the light source 240 is distributed over all or substantially all of the active surface 215 of the sensor 210. In other examples, the light source 260 is a plurality of light sources distributed evenly or unevenly over some or all of the top surface of the lid 240.

[0098] FIG. 9 depicts an example of a portion of a flow cell 200 with a lid 240 having a light source on its outer surface and embedded heater 241. The flow cell 200 in this example is similar to that of FIG. 8, and also includes a heater 241 in the lid 240. The heater 241, when activated, may provide thermal energy to the flow channel 203, thereby heating the contents therein. In some examples, the heater 241 is transparent. In other examples, the heater 241 is not transparent, but is of sufficiently small size to not significantly block excitation light from

the light source 260. For example, the heater 241 may be a thin resistive heater that allows for light to pass between the heater elements, through the lid 240 toward the active surface 215 of the sensor 210.

[0099] FIG. 10 depicts an example of a portion of a flow cell 200 with a heater 241 and a lid 240 having a light source on its outer surface. The flow cell 200 in this example is similar to that of FIG. 8, and also includes a heater 241 located below the sensor 210. The heater 241, when activated, may provide thermal energy to the flow channel 203, thereby heating the contents therein. The heater 241 may be non-transparent or opaque since it is not located between the light source 260 and the active surface 215 of the sensor 210. However, thermal energy produced by the heater 241 will pass through the sensor 210 to reach the flow channel 203. Such a configuration may be less desirable where the sensor 210 is sensitive to heat, that is, where the sensor's performance becomes degraded at an elevated temperature due to heat from the heater 241 involved for the biological or chemical analysis.

[0100] FIG. 11 depicts an example of a portion of a flow cell 200 with a lid 240 having peripheral light sources and a waveguide 261. The lid 240 of the flow cell 200 includes light sources 260 along the periphery of the lid 240. Light emanating from the light sources 260 are directed into the flow channel 203 by a waveguide 261. The waveguide 261 may be a plurality of waveguides that distribute the light produced by the light sources 260 into the flow channel 203. In some examples, the light is evenly distributed or substantially evenly distributed over the active surface 215 of the sensor 210. In some examples, the lid 240 may be opaque. In other examples, the lid 240 may be transparent or non-transparent.

[0101] In some examples, the waveguide 261 may comprise more than one layer and one of these additional layers can act as a planarization layer or act as an optical filter. In order to couple light into a waveguide, a grating may be formed that diffracts the light into the propagating direction (modes) of a waveguide. An example of such a waveguide 261 can be a planar waveguide. To achieve high efficiency and high tolerance room (on the angular direction of the light incident on the grating) the size of the coupling structure (e.g., grating) plays a role; it may be designed to be larger.

[0102] FIG. 12 depicts an example of a portion of a flow cell 200 with a lid 240 having a thin film organic light emitting diode. The lid 240 has a thin-film organic LED (OLED) 270. The OLED is a thin layer or film that emits light in response to an electric current. The OLED

270 may be located on the bottom surface of the lid 240; that is, the OLED 270 is located on a surface of the lid 240 that is closest to the active surface 215 of the sensor 210.

Accordingly, the OLED 270 at least partially bounds the flow channel 203. In other examples, the OLED 270 is located within the lid 240 such that at least a portion of the lid 240 resides between the OLED 270 and the flow channel 203. In other examples, the OLED 270 is located on the top surface of the lid 240.

[0103] FIG. 13 depicts an example of a portion of a flow cell 200 with a silicon-based light emitting diode lid. In this example, all or substantially all of the lid 240 of the flow cell 200 comprises a silicon-based LED 271. The silicon-based LED 271 at least partially bounds the flow channel 203 and, when activated, emits light therein toward the active surface 215 of the sensor 210. In other examples, the lid 240 comprises a silicon-based LED 271.

[0104] FIG. 14 depicts an example of a portion of a flow cell 300 with a sensor 310 in a mold 380 having through-mold vias. A sensor 310 has an active surface 315 having a plurality of reaction sites thereon. The sensor 310 resides within a mold 380 and is electrically connected to through-mold vias 284 that extend through the mold 380 to pads 385. A lid 340 resides over the active surface 315 of the sensor 310, separated by pillars 342. In other words, the pillars 342 support the lid 340 over the active surface 315 of the sensor 310. In some examples, the pillars 342 are a single continuous material. In other examples, the pillars 342 include multiple layers of materials. In other examples, the pillars 342 comprise multiple components. In yet other examples, the pillars are an extension of and continuous with the mold 380. A flow channel 303 is formed between and bounded by the lid 340 and active surface 315, among other components such as the pillars 342. Through mold vias (TMV) 381 extend from pads 382 on a bottom surface of the mold 380, through the mold 380, through pillars 342 and to the lid 340. In this example, the lid 340 includes a thin film OLED 370 on its bottom surface. The OLED 370 is electrically connected to the TMV 381. Accordingly, current may be provided to the OLED 370 in the lid 340 through the pads 382.

[0105] FIG. 15 depicts another example of a portion of a flow cell 300 with a sensor in a mold 380 having through-mold vias 381. The flow cell 300 in this example is similar to that of FIG. 14, and also includes a heater 341 located in the lid 340. The heater 341 may be powered through an electrical connection directly or indirectly to a TMV 381. In some examples, the heater 341 is connected to the same TMV 381 as the light source, such as the OLED 370. In these examples, the OLED 370 and heater 341 are activated or powered

together, that is at the same time. In other examples, there are multiple TMVs 381 that extend from separate pads 382 on the bottom of the mold 380 to the lid 340 to selectively provide power to and activate the OLED 370 and heater 341.

[0106] FIG. 16 depicts an example of a portion of a flow cell 300 with a lid 340 having external pins 383. A lid 340 resides over the active surface 315 of the sensor 310, separated by pillars 342. In other words, the pillars 342 support the lid 340 over the active surface 315 of the sensor 310. External pins 383 extend through the lid 340 and are electrically connected to the light source in the lid 340, which in this figure is an OLED 370. Accordingly, current may be provided to the OLED 370 in the lid 340 through the pins 383.

[0107] FIG. 17 depicts another example of a portion of a flow cell 300 with a lid 340 having external pins. The flow cell 300 in this example is similar to that of FIG. 16, and also includes a heater 341 in the lid 340. The heater 341 may be powered through an electrical connection directly or indirectly to an external pin 383. In some examples, the heater 341 is connected to the same pin 383 as the light source, such as the OLED 370. In these examples, the OLED 370 and heater 341 are activated or powered together, that is at the same time. In other examples, there are multiple pins 383 to selectively provide power to and activate the OLED 370 and heater 341.

[0108] FIG. 18 depicts a side view of an example of a portion of a flow cell 400 having a lid 440 with embedded fluidic channels. A flow cell 400 has a sensor 410 with an active surface 415. The sensor 410 resides in a mold 480 with TMVs 484 extending therethrough to electrically connect the sensor 410 to pads 485. A lid 440 resides over the active surface 415 of the sensor 410, separated by pillars 442. In other words, the pillars 442 support the lid 440 over the active surface 415 of the sensor 410. A flow channel 403 is formed between and bounded by the lid 440 and active surface 415, among other components such as the pillars 442. The lid includes a light source 460. The light source 460 may be on or proximate to the bottom surface of the lid 440, that is, the surface of the lid 440 that is closest to the active surface 415 of the sensor 410. The light source may be a single LED, a plurality of LEDs, LEDs along the periphery of the lid 440 utilizing a waveguide to distribute light on the active surface 415 of the sensor, a thin film OLED, a silicon-based LED, or other light source. Multiple fluid source channels 404 feed into and are fluidically coupled to fluid inlet 401. Fluid inlet 401 is fluidically coupled to flow channel 403, which in turn is fluidically coupled to fluid outlet 402. In operation, fluids, such as reagents and washes, flow through fluid

source channels 404, through fluid inlet 401, and into flow channel 403. The fluid then travels out through fluid outlet 402. The fluid may be moved, for example, by a pump, such as those described herein. While the flow of fluid described herein has been described flowing in a downstream direction from fluid inlet 401 to fluid outlet 402, it is nonetheless possible that the flow may travel in an opposite direction. While five fluid source channels are shown in this figure, it should be appreciated that there may be fewer or more than five fluid source channels depending upon the particular implementation.

[0109] FIG. 19 depicts a top view of an example of a portion of a flow cell 400 shown in FIG. 18. Flow cell 400 includes a lid 440 over a mold 480 housing a sensor (not shown in this figure). Fluid is provided through inlet ports 465 to channels 404 that connect to fluid inlet 401. Fluid then travels through a flow channel (not shown in this figure) over the sensor, and out through fluid outlet 402.

[0110] FIG. 20 depicts a bottom schematic view of an example of a portion of a flow cell 400 shown in FIG. 18. Sensor 410 resides within mold 480. Through mold vias (TMV) 484 connect the sensor 410 to bond pads 485 at the bottom of the mold 480. While eight bond pads are shown in this figure, it should be appreciated that there could be fewer or more than 8 bond pads and connections depending upon the particular implementation.

[0111] FIG. 21 depicts an example of a portion of a flow cell 500 having a lid 540 with embedded fluidic channels and reservoirs. A sensor 510 has an active surface 515 having a plurality of reaction sites thereon. The sensor 510 resides within a mold 580 and is electrically connected to through-mold vias 581 that extend through the mold 580 to pads 582. A lid 540 resides over the active surface 515 of the sensor 510, separated by pillars 542. In other words, the pillars 542 support the lid 540 over the active surface 515 of the sensor 510. A flow channel 503 is formed between and bounded by the lid 540 and active surface 515, among other components such as the pillars 542. Through mold vias (TMV) 581 extend from pads 582 on a bottom surface of the mold 580, through the mold 580, through pillars 542 and to the lid 540. In this example, the lid 540 includes a thin film OLED 570 on its bottom surface. The OLED 570 is electrically connected to the TMV 581. Accordingly, current may be provided to the OLED 570 in the lid 540 through the pads 582.

[0112] In addition to the OLED 570, ing In certain examples, including the one shown in this FIG. 21, each reservoir may be coupled to the inlet port 501 via a channel and a valve

563 to regulate the flow from each reservoir 567 into the fluid inlet 501. Fluid entering from inlet port 501 travels through flow channel 503 as a part of a biological or chemical analysis. After travelling through the flow channel 503, the fluid exits through the fluid outlet 502. As described in other examples herein, fluid may be drawn through the channels, including the fluid inlet 501, flow channel 503, and out through the fluid outlet 502, by a pump (not shown in this figure).

[0113] FIG. 22 depicts an example of a portion of a flow cell with multiple sensors 610 with a shared lid 640. A lid 640 is secured to sensors 610, each within a mold 680, via pillars 642. A flow channel 603 is formed between and bounded by the lid 640 and active surface 615 of each sensor 610, among other components such as the pillars 642. Fluid enters the flow channel 603 above each sensor 610 through fluid inlet 601 and exits through fluid outlet 602. Within the lid 640 and above the flow channel 603 resides a bypass channel 608, which provides an alternative route through which fluid may flow through the lid 640, instead of through the flow channel 603 above one of the sensors 610. Fluid flowing through the lid 640, may either travel through the bypass channel 608 or into the fluid inlet 601 and into the corresponding flow channel 603. Fluid flowing through the flow channel 603 exits through fluid outlet 602 and joins fluid flowing through bypass channel 608 and into transfer channel 609 towards the next fluid inlet 601 and bypass channel 608 of the next sensor 610. After fluid exits the fluid outlet 602 and bypass channel 608 of the last sensor 601, the fluid exits lid 640.

[0114] The fluidic paths depicted in FIG. 22 show each flow channel 603 in series with another flow channel 603. In other examples, the flow channels 603 may be arranged in parallel, that is, where fluid travelling through a flow channel 603 or bypass channel 608 of one sensor 610 does not flow through a flow channel 603 or bypass channel 608 of another sensor 610. In some examples, some but not all sensors have a bypass channel 608 over the flow channel 603. In some examples, the lid 640 includes bypass channels that travel around, to the side, or otherwise not above the flow channel. Further, some examples include additional channels to deliver fluids to particular sensors directly or indirectly.

[0115] FIG. 23 depicts an example of a sensor 710 with embedded light sources on its active surface 715. A cross sectional view of a sensor 710 having an active surface 715 is shown. The active surface 715 includes a plurality of reaction sites 790. Between the reaction sites 790 are interstitial regions that include light sources 760. In some examples, there is a one-

to-one ratio between reaction sites and light sources. In other examples, there is less than a one-to-one ratio between reaction sites and light sources. In other examples, there is more than a one to one ratio between reaction sites and light sources. The active surface 715 of each sensor 710 may detect designated reactions simultaneously and/or in parallel.

[0116] FIG. 24 depicts an example of a portion of a flow cell with opposing sensors 710 with embedded light sources. Two sensors 710 are orientated facing each other, such that the active surface 715 of one sensor 710 faces the active surface 715 of the other sensor 710. A flow channel 703 is formed in the region between the active surfaces 715 of the sensors 710. Each active surface 715 of the sensor 710 includes both reaction sites 790 and light sources 760. The light sources 760 of the active surface 715 of one sensor 710, when activated, illuminate the reaction sites 790 of the active surface 715 of the other sensor 710. Likewise, the light sources 760 of the active surface of the other sensor 710, when activated, illuminate the reaction sites 790 of the active surface 715 of the one sensor 710. In some examples, the light sources 760 of each active surface 715 may be activated at the same time (simultaneously) thereby illuminating both active surfaces 715 of the opposing sensors 710 at the same time (simultaneously). In other examples, the light sources 760 of each active surface 715 may be activated at different times thereby illuminating the active surface 715 of one of the sensors 710 but not the other.

[0117] In some examples, all the light sources 760 of an active surface 715 of a sensor 710 may emit the same wavelength or wavelengths of light. In other examples, a subset of light sources 760 of an active surface 715 of a sensor 710 emit a subset of wavelengths of light, while a different subset of light sources 760 of an active surface 715 of a sensor 710 emit a different subset of wavelengths of light. By way of further example, a first sensor 710 may have an active surface 715 that includes a first set of light sources 760 that emit blue light, and a second set of light sources 760 that emit red light; a second sensor may have light sources that emit the same or different wavelengths than the first sensor.

[0118] FIG. 25 depicts another example of a portion of a flow cell with opposing sensors with embedded light sources. A first sensor 810 having an active surface 815 resides within a mold 880. A second sensor 811 having an active surface 815 resides with a second mold 881. The active surface 815 of the first sensor 810 faces the active surface 815 of the second sensor 811. A flow channel 803 is formed in the region between the active surface 815 of the first sensor 810 and the active surface 815 of the second sensor 811. The mold 880 housing

the first sensor 810 includes a fluid inlet 801 and a fluid outlet 802, each providing fluid access to the flow channel 803. In this example, the fluid inlet 801 and fluid outlet 802 each extend through the mold 880 on opposite sides of the sensor 810. Pillars 842 separate mold 840 and mold 841 which, in this example, corresponds to the distance between the active surface 815 of the first sensor 810 and the active surface 815 of the second sensor 811.

[0119] FIG. 26 depicts an example of sensors on a flexible surface. During the manufacturing process, in this example, a first sensor 810 and second sensor 811 are each coupled to a flexible surface 895. In some examples, the first sensor 810 and second sensor 811 are coupled to the flexible surface 985 using an adhesive. The first sensor 810 and second sensor 811 each have an active surface 815. The second sensor 811 resides in a mold 881. As shown in this figure, mold 881 has pillars 824 coupled thereto. The first sensor 810 resides in a mold 880. As shown in this figure, mold 880 has pillars 842 coupled thereto. The pillars 842 of the mold 880 mate with the pillars 842 of mold 881. In other examples, mold 881 has no pillars coupled thereto, but rather mates with pillars 842 coupled to the mold 880 of the opposing sensor. In other examples, mold 880 has no pillars coupled thereto, but rather mates with pillars 842 coupled to the mold 881 of the opposing sensor. In some examples, a pump (not shown in this figure) is coupled to the flow channel 803.

[0120] With continued reference to FIG. 26, the mold 880 includes a fluid inlet 801 and a fluid outlet 802. In some examples, the flexible surface 895 includes openings or apertures that provide fluid access through the flexible surface 895 to the fluid inlet 801 and fluid outlet 802. In other examples, the fluid inlet 801 and fluid outlet 802 are fluidically coupled to channels directly and not through the flexible surface 895. In other examples, the mold 880 does not include fluid inlet 801 and fluid outlet 802; rather, the fluid inlet 801 and fluid outlet 802 extend through or around pillars 842 that reside between the mold 880 and mold 881.

[0121] In some examples, the flexible surface may include standard flexible circuits made of polyimide films. The thickness of the flexible surface can vary, for example, from 10 μm to 100 μm . The flexible surface may also include copper electrical lines for electrically coupling the components attached thereto, including for example the sensors.

[0122] FIG. 27 depicts an example of sensors folded together on a flexible surface. Sensors placed on a flexible surface, such as that shown in FIG. 26, may be folded together such that the active surfaces of the sensors face each other, as shown in this FIG. 27. A first sensor 810

having an active surface 815 resides with in mold 880. A second sensor 811 having an active surface 815 resides with a second mold 881. The active surface 815 of the first sensor 810 faces the active surface 815 of the second sensor 811. A flow channel 803 is formed in the region between the active surface 815 of the first sensor 810 and the active surface 815 of the second sensor 811. The mold 880 housing the first sensor 810 includes a fluid inlet 801 and a fluid outlet 802, each providing fluid access to the flow channel 803. In this example, the fluid inlet 801 and fluid outlet 802 each extend through the mold 880 on opposite sides of the sensor 810. Pillars 842 separate mold 840 and mold 841 which, in this example, corresponds to the distance between the active surface 815 of the first sensor 810 and the active surface 815 of the second sensor 811. The molds 880 and 881 are each coupled to a flexible surface 895, for example, by an adhesive. The flexible surface 895 that resides between the molds 880 and 881 is able to flex and bend such that the active surface 815 of the first sensor 810 faces the active surface 815 of the second sensor 811. Electrical paths may extend through the flexible surface 895 from pads 882 on the bottom surface of the mold 880 to pads 896 on the opposing side of the flexible surface 895.

[0123] FIG. 28 depicts a flow chart of a method of operating an instrument with multiple individually addressable flow cells. A first flow cell is fluidically coupled to a reservoir 910. A second flow cell is fluidically coupled to a reservoir 912. In some examples, the first flow cell and second flow cell are fluidically coupled to a reservoir at or about the same time. In other examples, the first flow cell and second flow cell are fluidically coupled to a reservoir at different times, such as more than one minute apart. In other examples, only a first flow cell is fluidically coupled to a reservoir. In some examples, the first flow cell and second flow cell are coupled to the same reservoir. In other examples, the first flow cell and second flow cell are coupled to different reservoirs. In other examples, the first flow cell and second flow cell are coupled to multiple reservoirs. The reservoir or reservoirs may contain various reagents or washes.

[0124] After the first flow cell and/or second flow cell are fluidically coupled to a reservoir, fluid is moved from the reservoir into the flow channel of the first flow cell 920 and from the reservoir into the flow channel of the second flow cell 922. In some examples, the fluid from the reservoir is moved into the flow channel of the first flow cell 920 and second flow cell 922 at or about the same time. In other examples, the fluid from the reservoir is moved into the flow channel of the first flow cell 920 and second flow cell 922 at different times, such as

more than one minute apart. The flow channel of the first flow cell is heated 930. The flow channel of the second flow cell is heated 932. In some examples, the flow channel of the first flow cell is heated 930 while the flow channel of the second flow cell is not, such that the fluid in the flow channel of the first flow cell is at a different temperature than the fluid in the flow channel of the second flow cell. In other examples, the flow channel of the first flow cell and the flow channel of the second flow cell are heated at or about the same time.

[0125] The flow channel of the first flow cell is illuminated, and signals detected/acquired 940, for example, by capturing an image of the flow channel or otherwise detecting emitted light from reaction sites on an active surface of a sensor of the flow cell. The flow channel of the second flow cell is illuminated and signals detected/acquired 942, for example, by capturing an image of the flow channel or otherwise detecting emitted light from reaction sites on an active surface of a sensor of the flow cell. In some examples, the flow channel of the first flow cell is illuminated, and signals detected/acquired 940 at or about the same time as the flow channel of the second flow cell is illuminated, and signals detected/acquired 942. In other examples, the flow channel of the first flow cell is illuminated, and signals detected/acquired 940 at a different time as the flow channel of the second flow cell is illuminated, and signals detected/acquired 942.

[0126] The process of moving fluid into the flow channel of a first flow cell and/or second flow cell 920 and 922, heating the flow channel of the first flow cell and/or second flow cell 930 and 932, and illuminating and detecting signals from the flow channel of the first flow cell and/or second flow cell 940 and 942 may form an iterative cycle of enzymatic manipulation and light or signal detection or acquisition. In some examples, the iterative cycle includes moving fluid into the flow channel of a first flow cell and/or second flow cell 920 and 922 and illuminating and detecting signals from the flow channel of the first flow cell and/or second flow cell 940 and 942, but not heating the flow channel of the first flow cell and/or second flow cell 930 and 932. A plurality of these iterative cycles may form a sequencing run, such as a DNA sequencing run. A sequencing run may occur on a single flow cell. Multiple sequencing runs may occur on multiple flow cells. In some examples, a sequencing run on a first flow cell starts at a different time than a sequencing run on a second flow cell. In some examples, each flow cell includes its own pump, whereby fluid may be moved from the reservoir and through the flow cell. In some examples, the flow cell includes logic circuitry and/or electronic memory and a processor to execute instructions stored on the

electronic memory to actuate the pump on the flow cell. In further examples, the flow cell may include logic circuitry and/or electronic memory and a processor to execute instructions stored on the electronic memory to actuate one or more valves on an instrument to which the flow cell is removably coupled.

[0127] FIG. 29 depicts a flow chart of a method of making a flow cell with opposing sensors. In this example, the method includes forming a first sensor and a second sensor on a flexible surface 951, where each of the first and second sensors comprises an active surface having a plurality of reaction sites, where the active surface comprises a plurality of embedded illumination sources; and folding the flexible surface until the first sensor faces the second sensor 952, whereby a flow channel is formed between the first sensor and second sensor. The method may further include fluidically coupling a pump to the flow channel 953.

[0128] In some examples, a flow cell comprises a top layer with optically non-transparent or opaque features, including but not limited to, electrical components (e.g., electrodes) or physical structures (e.g., herringbone trenches). The integration of these performance enhancing features can help achieve faster SBS kinetics and positively impact the performance of the flow cells into which the top layer is integrated.

[0129] In some examples, the pillars are a single continuous material. In other examples, the pillars include multiple layers of materials. In other examples, the pillars comprise multiple components. In yet other examples, the pillars are an extension of and continuous with the mold.

[0130] The flowchart and block diagrams in the Figures illustrate the architecture, functionality, and operation of possible implementations of systems, methods, and computer program products according to various examples of the present implementation. In this regard, each block in the flowchart or block diagrams can represent a module, segment, or portion of instructions, which comprises one or more executable instructions for implementing the specified logical function(s). In some alternative implementations, the functions noted in the blocks can occur out of the order noted in the Figures. For example, two blocks shown in succession can, in fact, be executed substantially concurrently, or the blocks can sometimes be executed in the reverse order, depending upon the functionality involved. It will also be noted that each block of the block diagrams and/or flowchart illustration, and combinations of blocks in the block diagrams and/or flowchart illustration,

can be implemented by special purpose hardware-based systems that perform the specified functions or acts or carry out combinations of special purpose hardware and computer instructions.

[0131] The terminology used herein is for the purpose of describing particular examples only and is not intended to be limiting. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising”, when used in this specification, specify the presence of stated features, integers, steps, processes, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, processes, operations, elements, components and/or groups thereof.

[0132] The corresponding structures, materials, acts, and equivalents of all means or step plus function elements in the claims below, if any, are intended to include any structure, material, or act for performing the function in combination with other claimed elements as specifically claimed. The description of one or more examples has been presented for purposes of illustration and description, but is not intended to be exhaustive or limited to in the form disclosed. Many modifications and variations will be apparent to those of ordinary skill in the art. Any example was chosen and described in order to best explain various aspects and the practical application, and to enable others of ordinary skill in the art to understand various examples with various modifications as are suited to the particular use contemplated.

[0133] It should be appreciated that all combinations of the foregoing concepts and additional concepts discussed in greater detail below (provided such concepts are not mutually inconsistent) are contemplated as being part of the subject matter disclosed herein at least to achieve the benefits as described herein. In particular, all combinations of claims subject matter appearing at the end of this disclosure are contemplated as being part of the subject matter disclosed herein. It should also be appreciated that terminology explicitly employed herein that also may appear in any disclosure incorporated by reference should be accorded a meaning most consistent with the particular concepts disclosed herein.

[0134] This written description uses examples to disclose the subject matter, and also to enable any person skilled in the art to practice the subject matter, including making and using

any devices or systems and performing any incorporated methods. The patentable scope of the subject matter is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal languages of the claims.

[0135] It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described examples (and/or aspects thereof) may be used in combination with each other. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the various examples without departing from their scope. While the dimensions and types of materials described herein are intended to define the parameters of the various examples, they are by no means limiting and are merely provided by way of example. Many other examples will be apparent to those of skill in the art upon reviewing the above description. The scope of the various examples should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms “including” and “in which” are used as the plain-English equivalents of the respective terms “comprising” and “wherein.” Moreover, in the following claims, the terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical requirements on their objects. Forms of term “based on” herein encompass relationships where an element is partially based on as well as relationships where an element is entirely based on. Forms of the term “defined” encompass relationships where an element is partially defined as well as relationships where an element is entirely defined. Further, the limitations of the following claims are not written in means-plus-function format and are not intended to be interpreted based on 35 U.S.C. § 112, sixth paragraph, unless and until such claim limitations expressly use the phrase “means for” followed by a statement of function void of further structure. It is to be understood that not necessarily all such objects or advantages described above may be achieved in accordance with any particular example. Thus, for example, those skilled in the art will recognize that the systems and techniques described herein may be embodied or carried out in a manner that achieves or optimizes one advantage or group of advantages as taught herein without necessarily achieving other objects or advantages as may be taught or suggested herein.

[0136] While the subject matter has been described in detail in connection with only a limited number of examples, it should be readily understood that the subject matter is not limited to such disclosed examples. Rather, the subject matter can be modified to incorporate any number of variations, alterations, substitutions or equivalent arrangements not heretofore described, but which are commensurate with the spirit and scope of the subject matter. Additionally, while various examples of the subject matter have been described, it is to be understood that aspects of the disclosure may include only some of the described examples. Also, while some examples are described as having a certain number of elements it will be understood that the subject matter can be practiced with less than or greater than the certain number of elements. Accordingly, the subject matter is not to be seen as limited by the foregoing description, but is only limited by the scope of the appended claims.

CLAIMS

What is claimed is:

1. An apparatus comprising:
a sensor with an active surface having a plurality of reaction sites, a lid, and a flow channel formed at least partially by the active surface of the sensor and the lid,
where the lid comprises an illumination source and a heater.
2. The apparatus of claim 1, wherein the sensor comprises a Complementary Metal-Oxide Semiconductor (CMOS) detection device.
3. The apparatus of claim 2, wherein the CMOS detection device comprises a plurality of detection pixels.
4. The apparatus of any of claims 1 - 3, wherein the lid further comprises a non-transparent material.
5. The apparatus of any of claims 1 - 3, wherein the lid further comprises an opaque material.
6. The apparatus of any of claims 1 - 5, wherein the lid further comprises a fluidic channel therein, where the fluidic channel is in fluidic communication with the flow channel.
7. The apparatus of any of claims 1 - 6, wherein the lid further comprises a reservoir.
8. The apparatus of claim 7, wherein the reservoir comprises a reagent.
9. The apparatus of claim 7 or 8, wherein the reservoir comprises a buffer.
10. The apparatus of any of claims 1 - 9, wherein the heater is a resistive heater.
11. The apparatus of any of claims 1 - 10, wherein the lid is on an opposite side of the flow channel from the active surface of the sensor.
12. The apparatus of any of claims 1 - 11, wherein the illumination source comprises a light emitting diode (LED).
13. The apparatus of any of claims 1 - 11, wherein the illumination source comprises a plurality of LEDs.

14. The apparatus of any of claims 1 - 12, wherein the illumination source is located along a periphery of the lid.
15. The apparatus of claim 14, wherein the lid comprises a plurality of light guides, whereby the light guides guide light from the illumination source toward the active surface of the sensor.
16. The apparatus of any of claims 1 - 15, wherein the illumination source comprises a thin film organic LED.
17. The apparatus of any of claims 1 - 16, wherein the illumination source comprises a silicon-based LED.
18. The apparatus of any of claims 1 - 17, wherein the illumination source is on a bottom surface of the lid, where the bottom surface of the lid faces the active surface of the sensor.
19. The apparatus of any of claims 1 - 18, further comprising a pump, where the pump is fluidically coupled to the flow channel.
20. The apparatus of claim 19, wherein the pump is downstream from the sensor.
21. The apparatus of claim 19, wherein the lid further comprises an outlet port, wherein the pump is adjacent to the outlet port of the lid.
22. The apparatus of any of claims 19 - 21, wherein there is no removable connection between the flow channel and the pump.
23. The apparatus of any of claims 19 - 22, wherein the pump is a piezoelectric pump having a flexible diaphragm element.
24. A method comprising:
 - fluidically coupling a first flow cell and a second flow cell to a reservoir, wherein the first flow cell and second flow cell each comprise a sensor with an active surface having a plurality of reaction sites, a lid, a heater, and a pump, where the lid and the sensor at least partially form a flow channel, where the pump is in fluidic communication with the flow channel;
 - moving fluid from the reservoir into the flow channel of the first flow cell using the pump of the first flow cell and fluid from the reservoir into the flow channel of the second flow cell using the pump of the second flow cell; and
 - heating fluid in the flow channel of the first flow cell using the heater of the first flow

cell such that fluid in the flow channel of the first flow cell is at a different temperature than the fluid in the flow channel of the second flow cell.

25. The method of claim 24, wherein moving fluid from the reservoir into the flow channel of the first flow cell does not occur while moving fluid from the reservoir into the flow channel of the second flow cell.

26. The method of any of claims 24 - 25, wherein the reservoir comprises a reagent.

27. The method of any of claims 24 - 26, wherein the reservoir comprises a buffer.

28. The method of any of claims 24 - 27, further comprising illuminating at least a portion of the reaction sites of the sensor of the first flow cell.

29. The method of any of claims 24 - 28, further comprising illuminating at least a portion of the reaction sites of the sensor of the second flow cell.

30. The method of claim 29, wherein illuminating at least a portion of the reaction sites of the sensor of the second flow cell does not occur while illuminating at least a portion of the reaction sites of the sensor of the first flow cell.

31. The method of claims 28 - 30, wherein an illumination source in the lid of the first flow cell illuminates at least a portion of the reaction sites of the sensor of the first flow cell.

32. The method of claims 29 - 31, wherein an illumination source in the lid of the second flow cell illuminates at least a portion of the reaction sites of the sensor of the second flow cell.

33. The method of any of claims 24 - 32, wherein a first sequencing run is performed on the first flow cell, and a second sequencing run is performed on the second flow cell, where the first sequencing run and second sequencing run start at different times.

34. A device comprising:



a sensor with an active surface having a plurality of reaction sites, a lid, and a flow channel formed at least partially by the active surface of the sensor and the lid,
where the lid comprises a heater.

35. The apparatus of claim 34, wherein the heater is a resistive heater.

36. The apparatus of any of claims 34 - 35, wherein the sensor comprises a Complementary Metal-Oxide Semiconductor (CMOS) detection device.

37. The apparatus of claim 36, wherein the CMOS detection device comprises a plurality of detection pixels.
38. The apparatus of any of claims 34 - 37, further comprising a pump, where the pump is fluidically coupled to the flow channel.
39. The apparatus of claim 38, wherein the pump is downstream from the sensor.
40. The apparatus of claim 38, wherein the lid further comprises an outlet port, wherein the pump is adjacent to the outlet port of the lid.
41. The apparatus of any of claims 38 - 40, wherein there is no removable connection between the flow channel and the pump.
42. The apparatus of any of claims 38 - 41, wherein the pump is a piezoelectric pump having a flexible diaphragm element.
43. An apparatus comprising:
a first sensor and a second sensor, where each of the first and second sensors comprises an active surface having a plurality of reaction sites, where the active surface comprises a plurality of embedded illumination sources,
where a flow channel is formed at least partially by the active surface of the first sensor and the active surface of the second sensor, where the active surface of the first sensor faces the active surface of the second sensor.
44. The apparatus of claim 43, wherein the embedded illumination sources are embedded into spaces between the reaction sites of the active surface of each of the first sensor and second sensor.
45. The apparatus of any of claims 43 - 44, wherein each of the embedded illumination sources is a light emitting diode (LED).
46. The apparatus of any of claims 43 - 45, further comprising a pump, where the pump is in fluidic communication with the flow channel.
47. The apparatus of claim 46, wherein the pump is downstream from the flow channel.
48. The apparatus of any of claims 46 - 47, wherein there is no removable connection between the flow channel and the pump.

49. The apparatus of any of claims 46 - 48, wherein the pump is a piezoelectric pump having a flexible diaphragm element.
50. A method comprising:
forming a first sensor and a second sensor on a flexible surface, where each of the first and second sensors comprises an active surface having a plurality of reaction sites, where the active surface comprises a plurality of embedded illumination sources; and
folding the flexible surface until the first sensor faces the second sensor, whereby a flow channel is formed between the first sensor and second sensor.
51. The method of claim 50, wherein the illumination sources are embedded into spaces between the reaction sites of the active surface of each of the first sensor and second sensor.
52. The method of any of claims 50 - 51, wherein each of the embedded illumination sources is a light emitting diode (LED).
53. The method of any of claims 50 - 52, further comprising fluidically coupling a pump to the flow channel.
54. The method of claim 53, wherein the pump is downstream from the flow channel.
55. The method of any of claims 53 - 54, wherein there is no removable connection between the flow channel and the pump.
56. The method of any of claims 53 - 55, wherein the pump is a piezoelectric pump having a flexible diaphragm element.
57. A device comprising:
a sensor, a lid, a flow channel bounded at least by the lid and a surface of the sensor, and at least one of the following: an illumination source, a heater, and a pump.

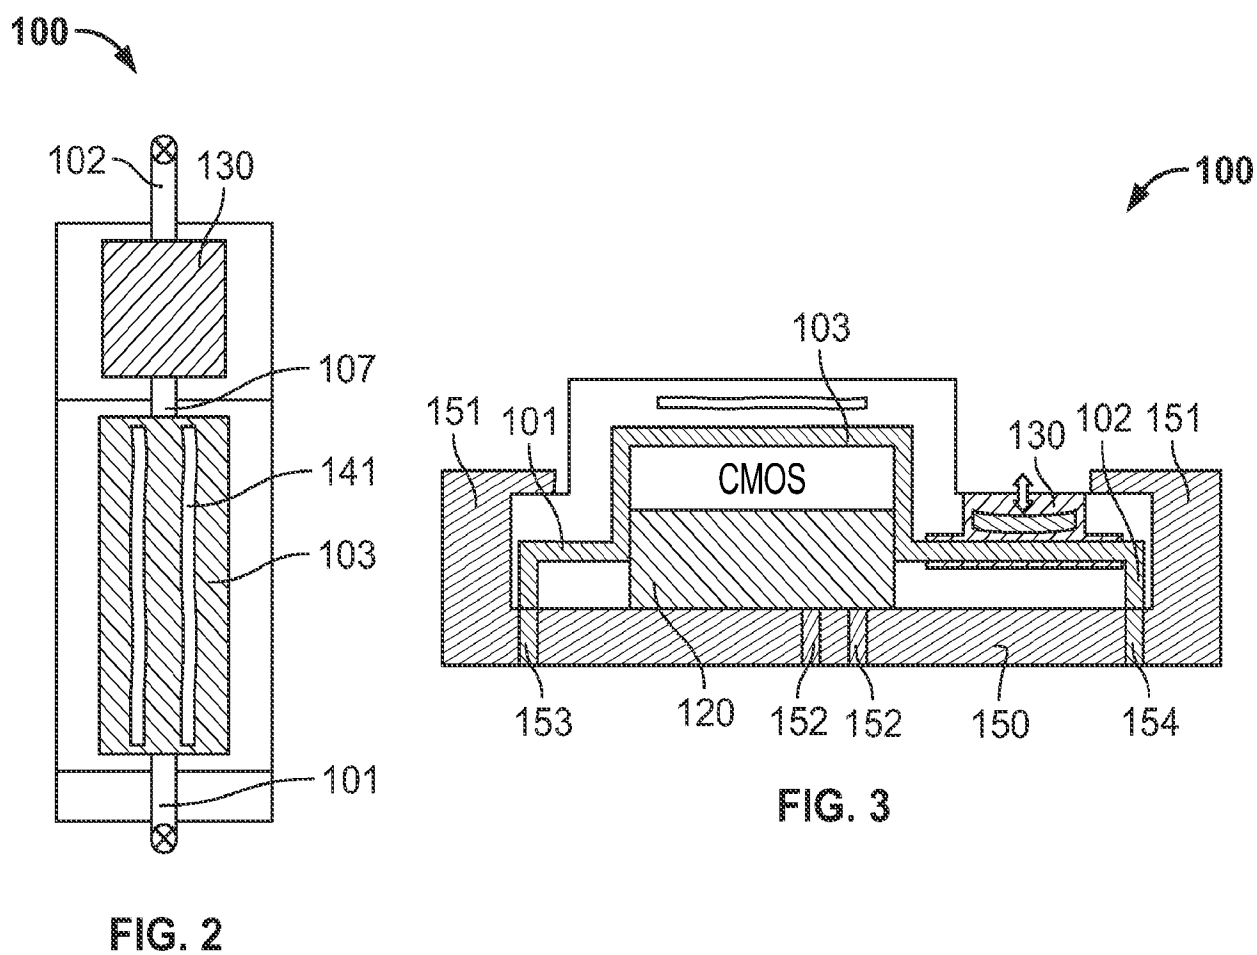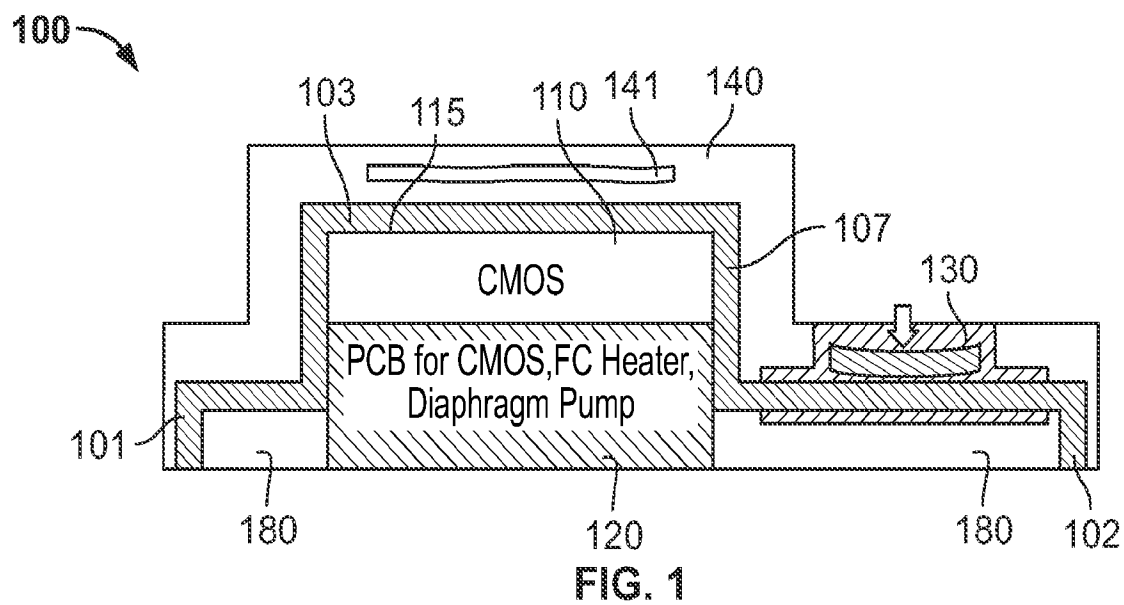

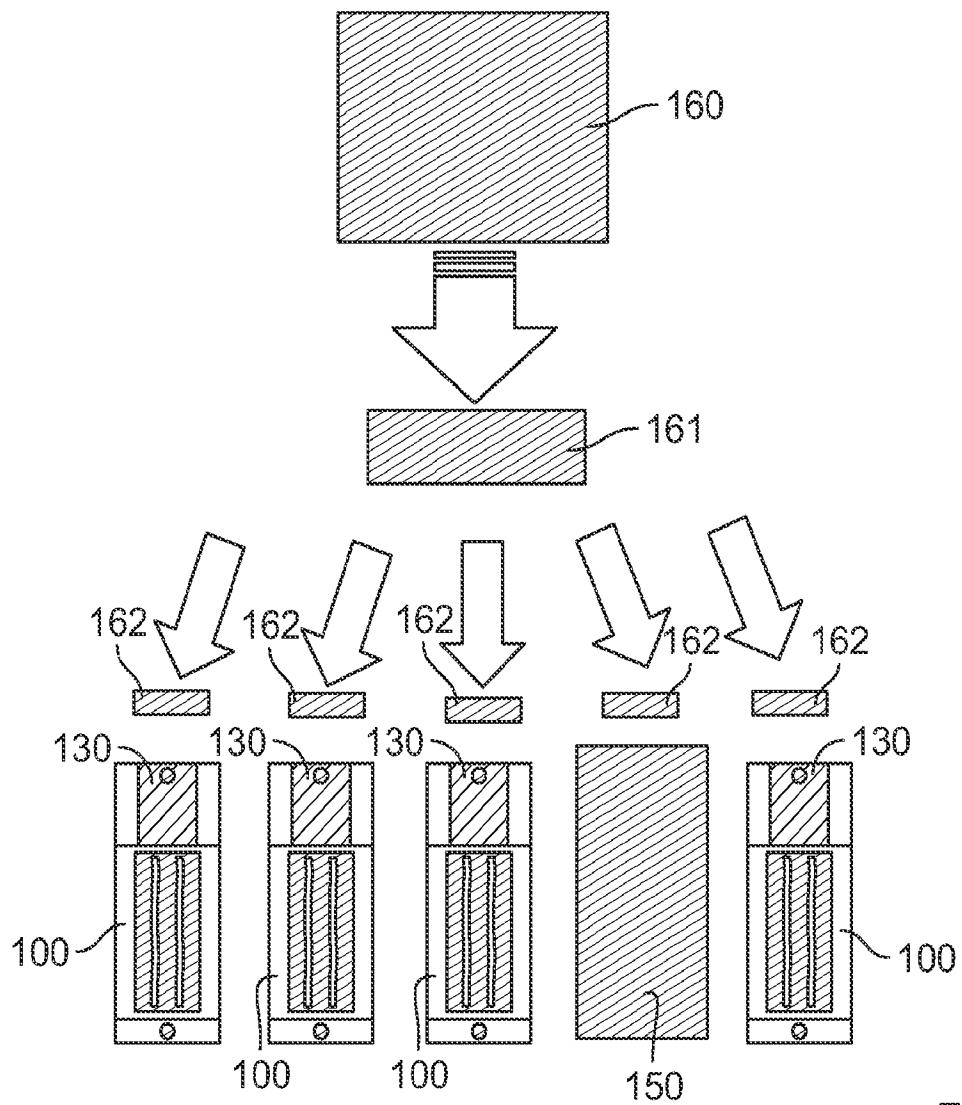


FIG. 4



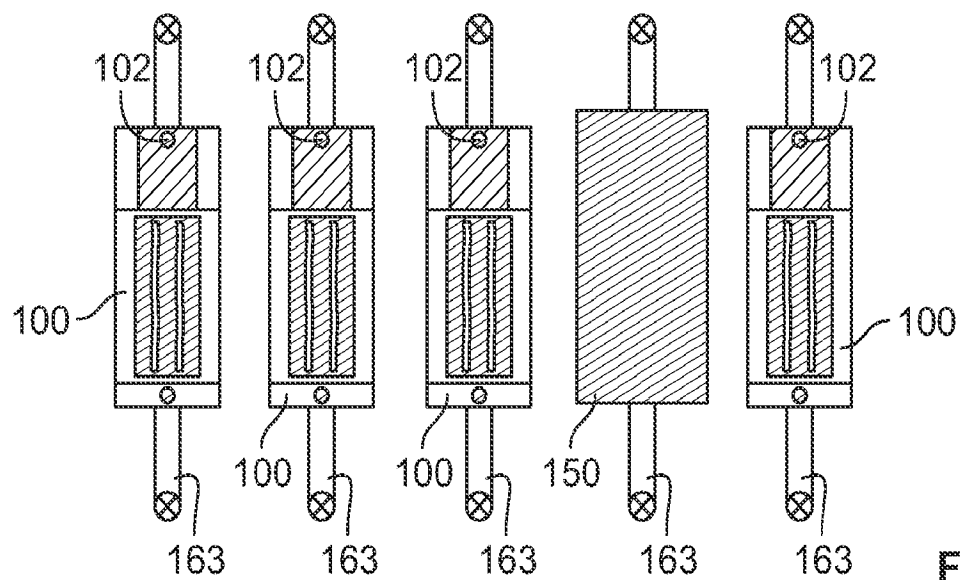




FIG. 5

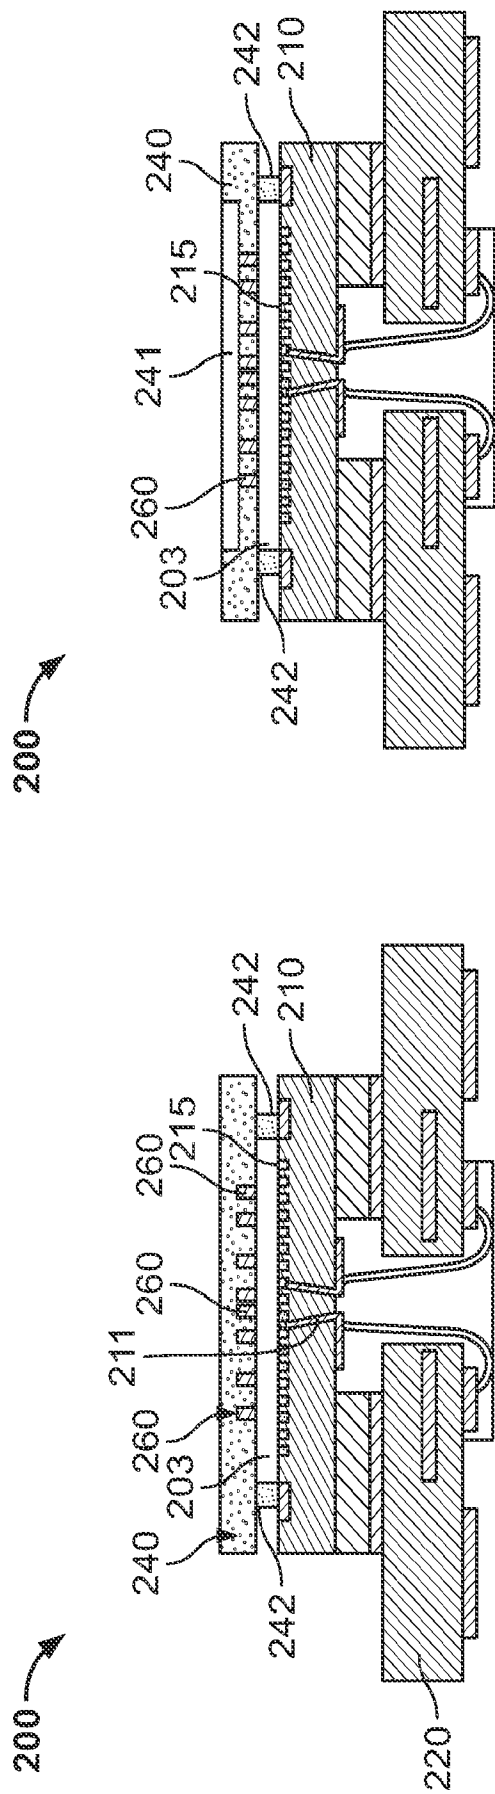

65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890

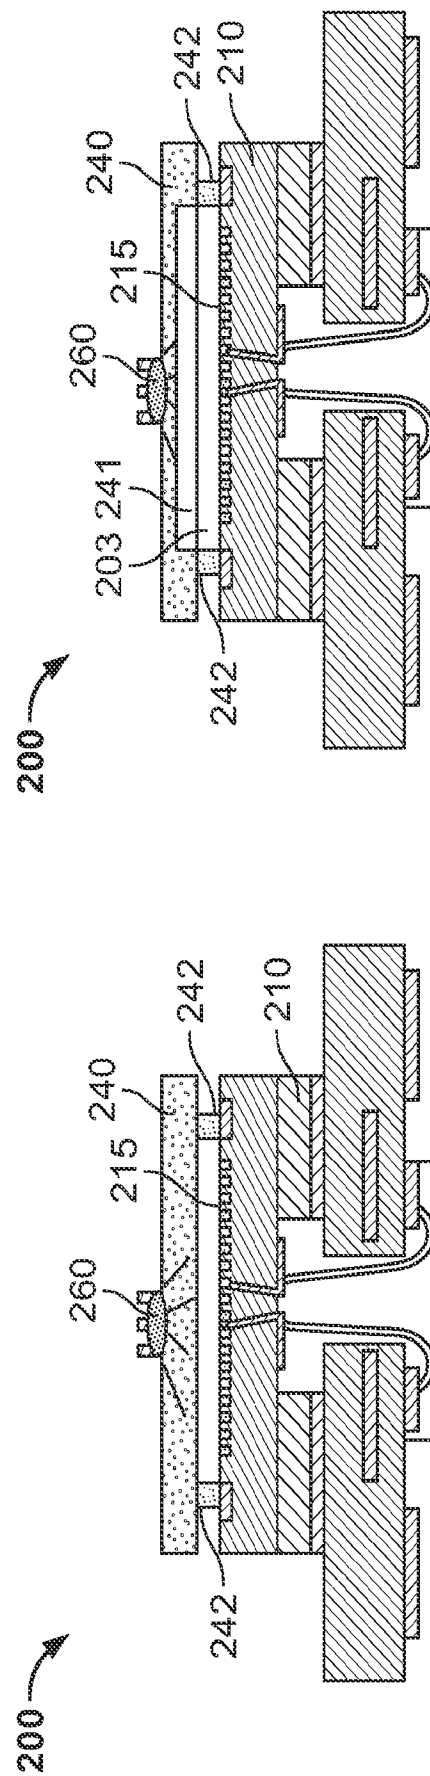

764

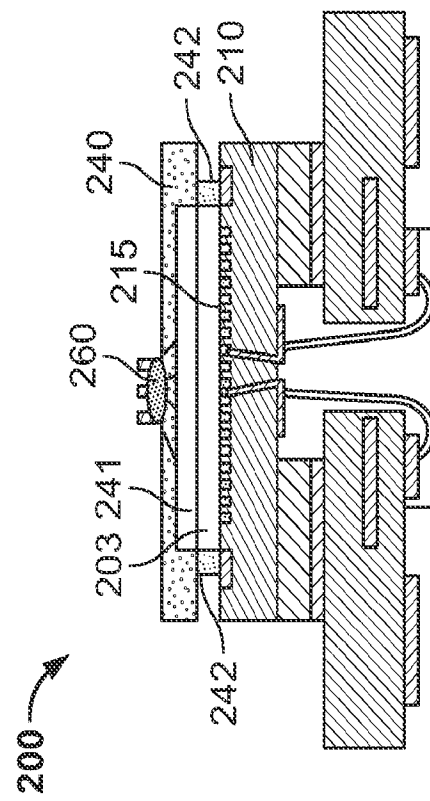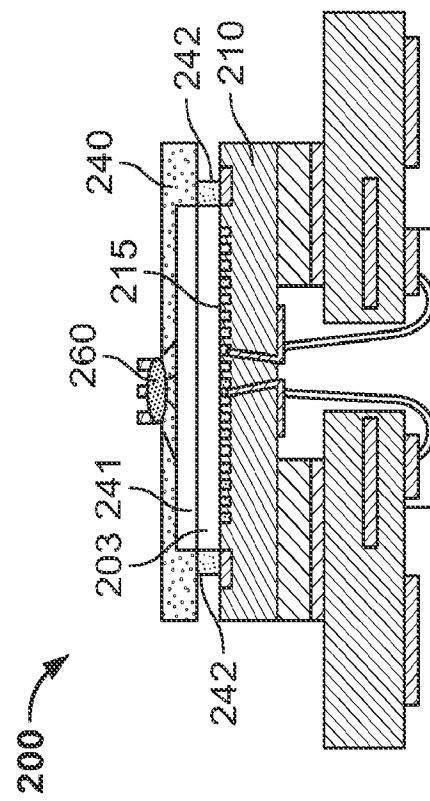

ଶ୍ରୀ

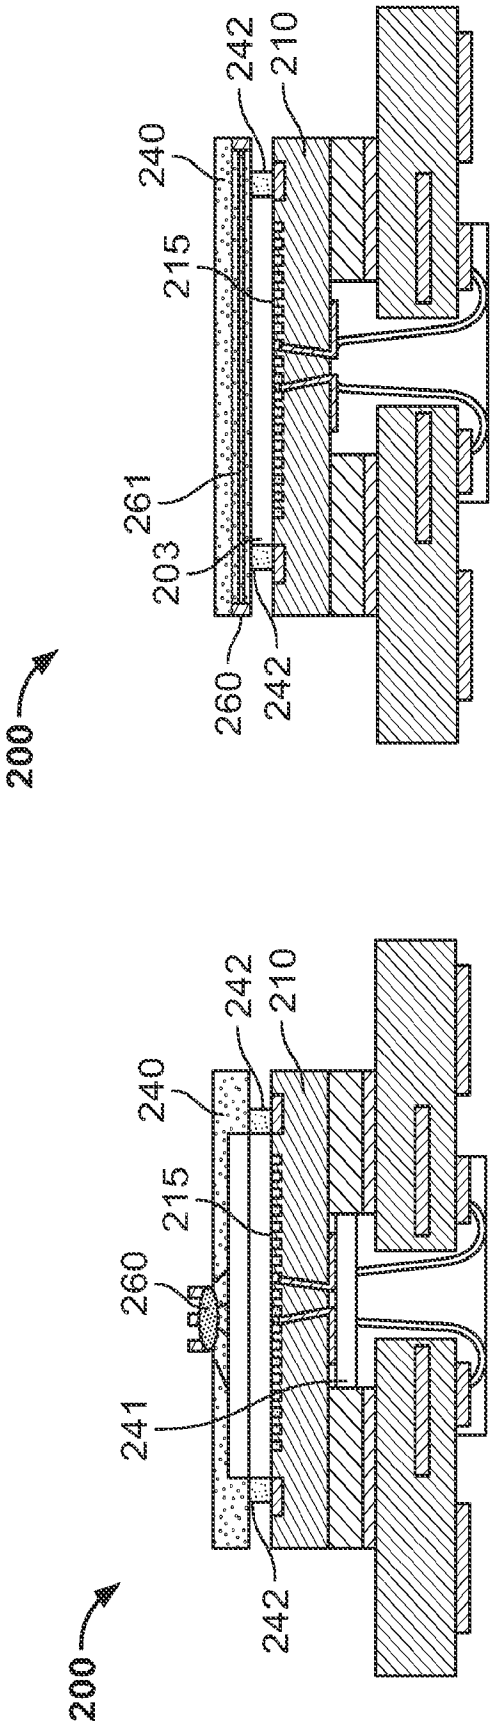


FIG. 10

FIG. 11





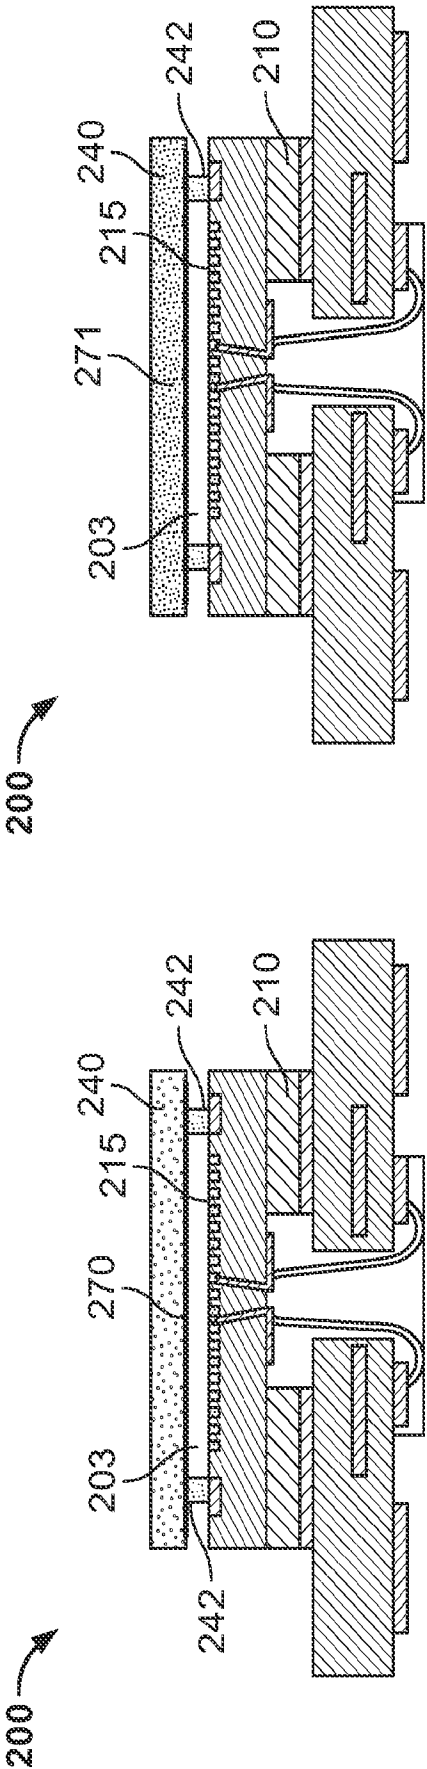


FIG. 12

FIG. 13

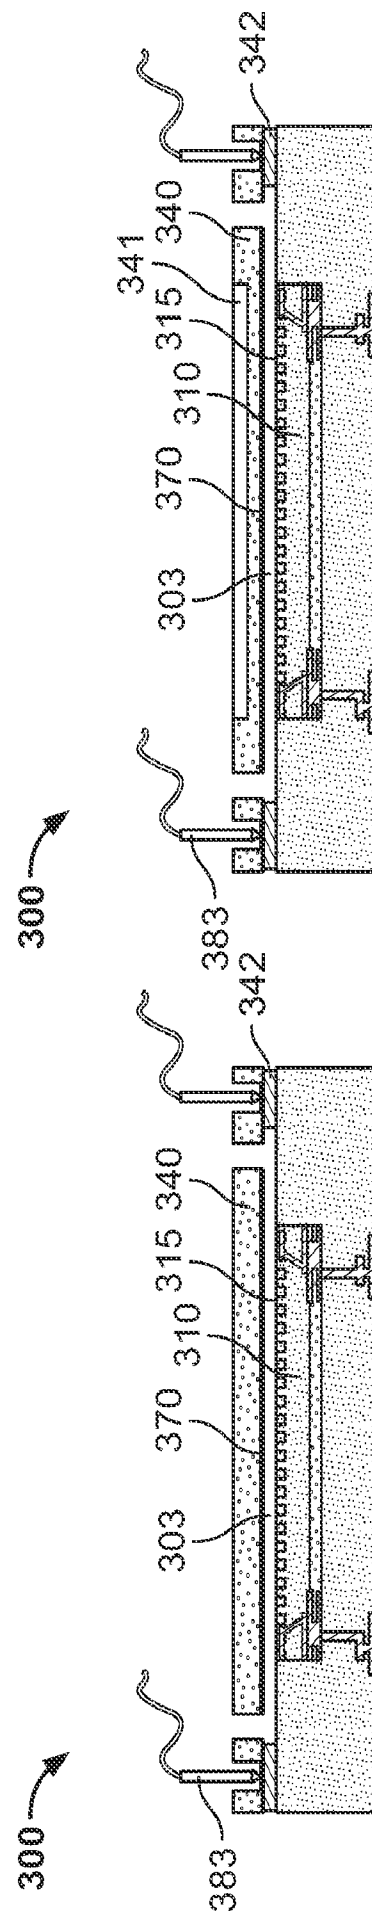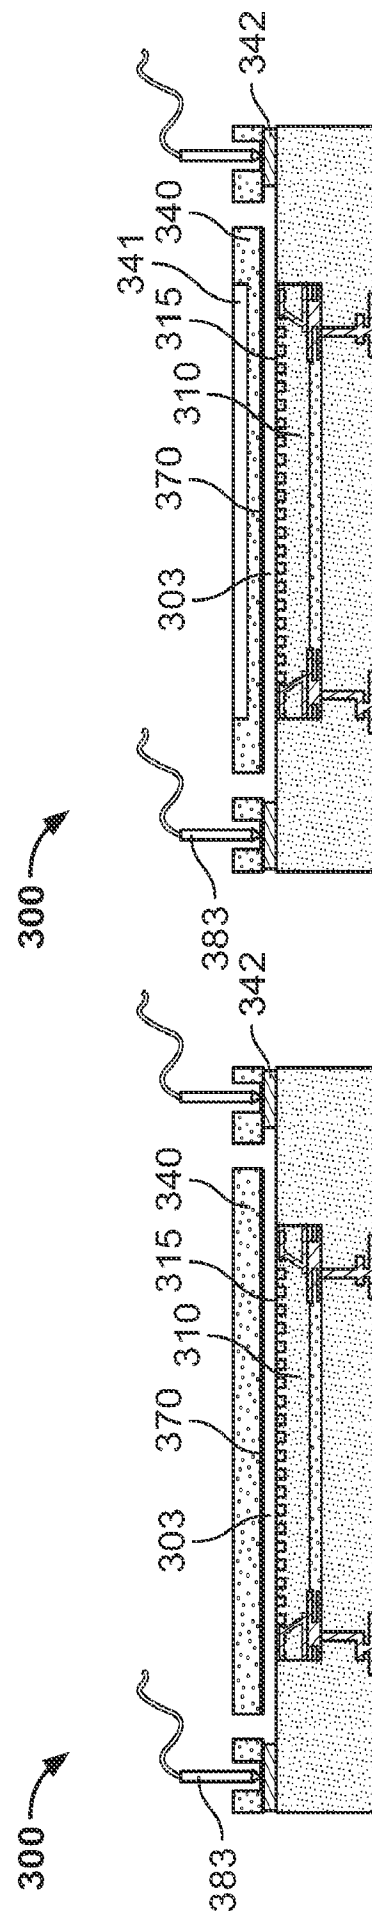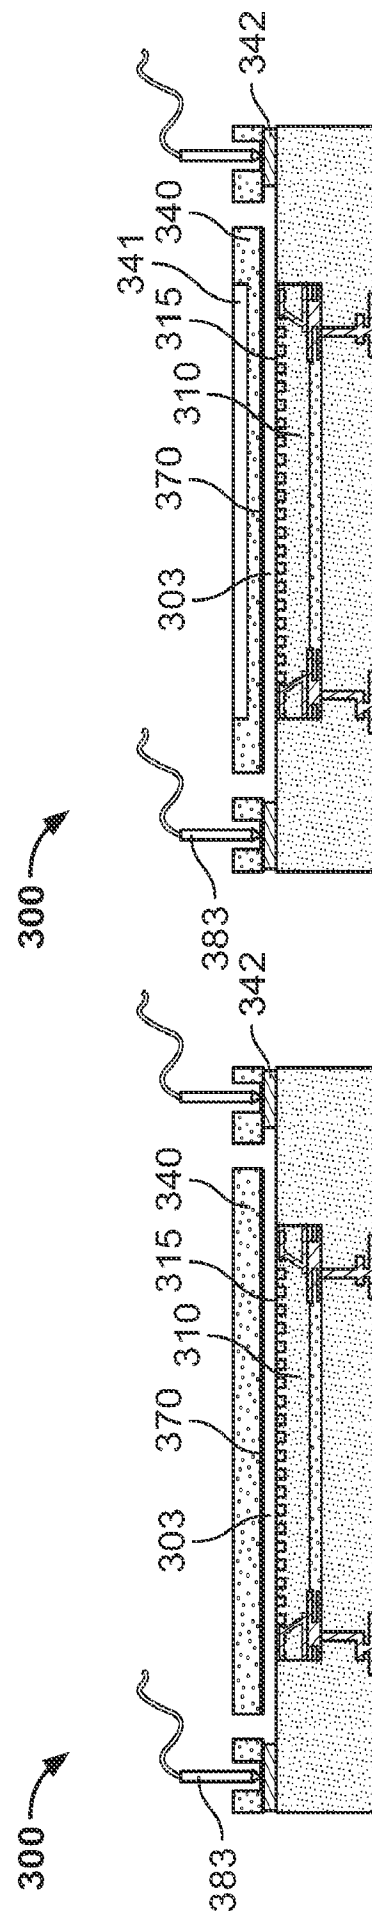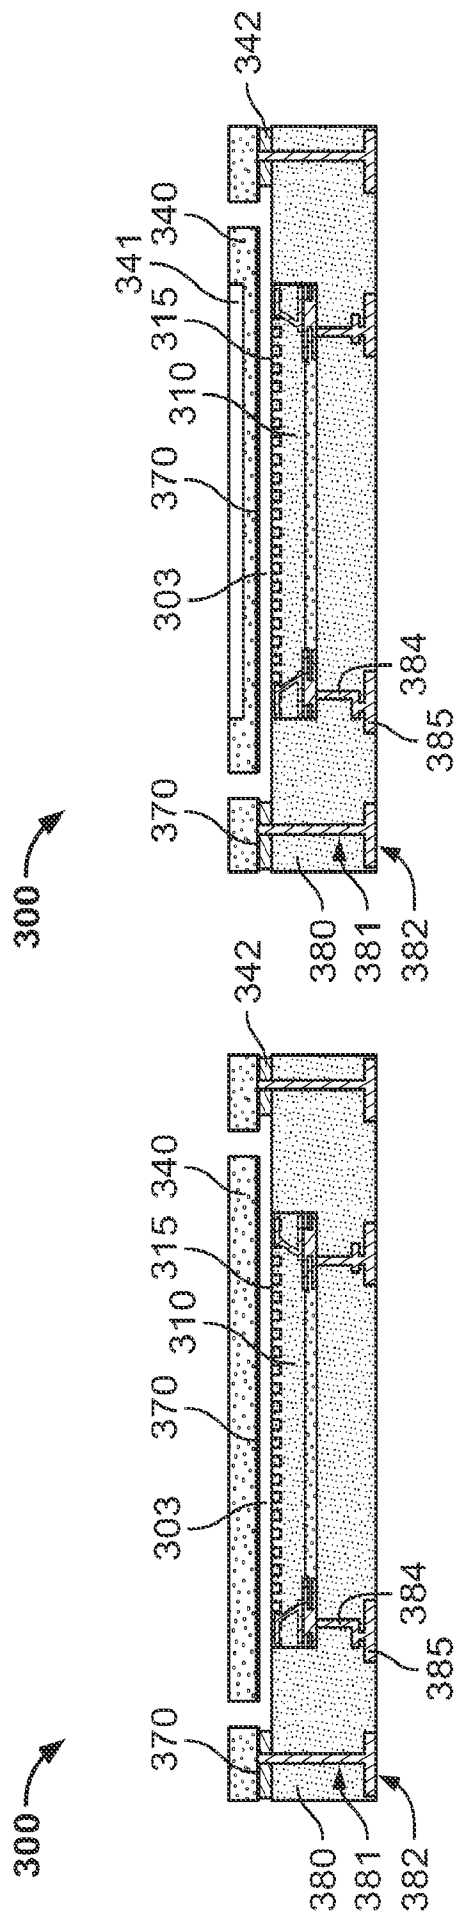

400

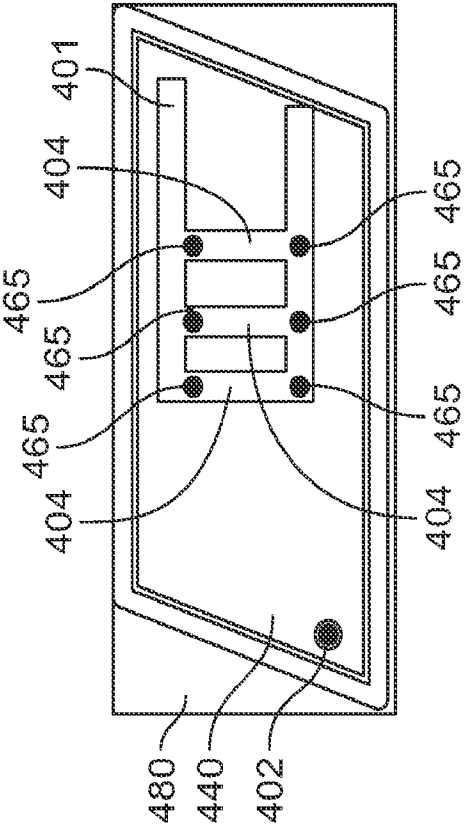


FIG. 19

400

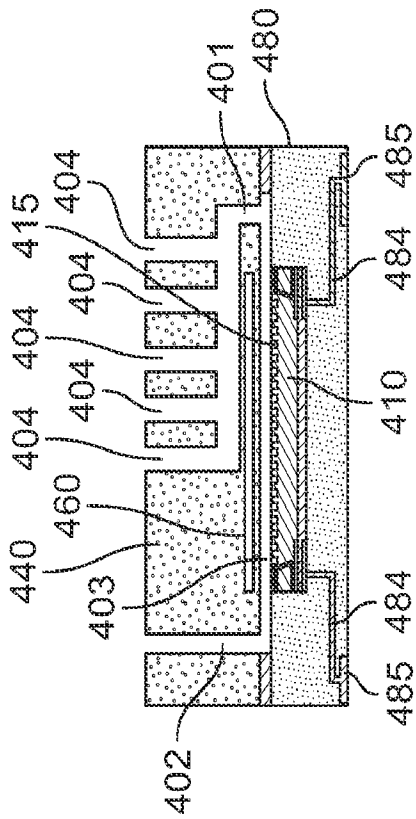


FIG. 18

500

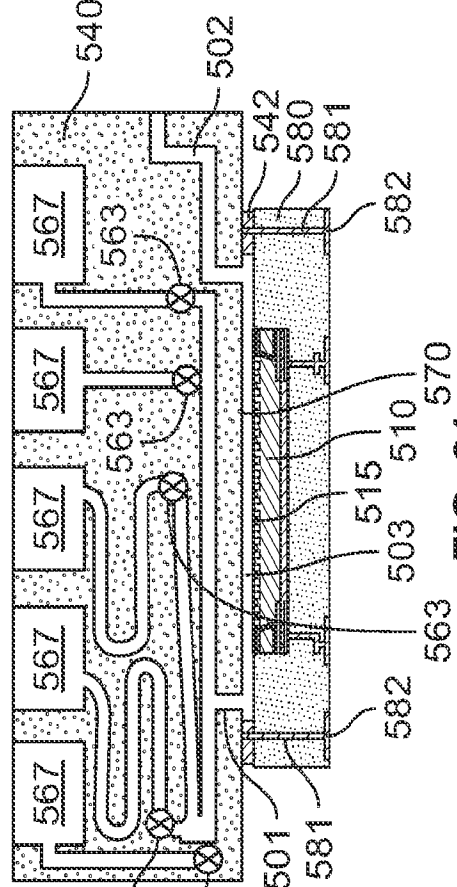


FIG. 21

400

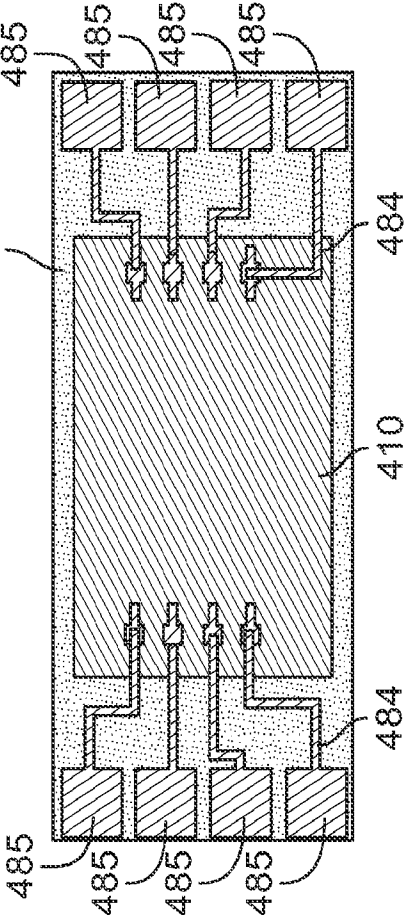


FIG. 20

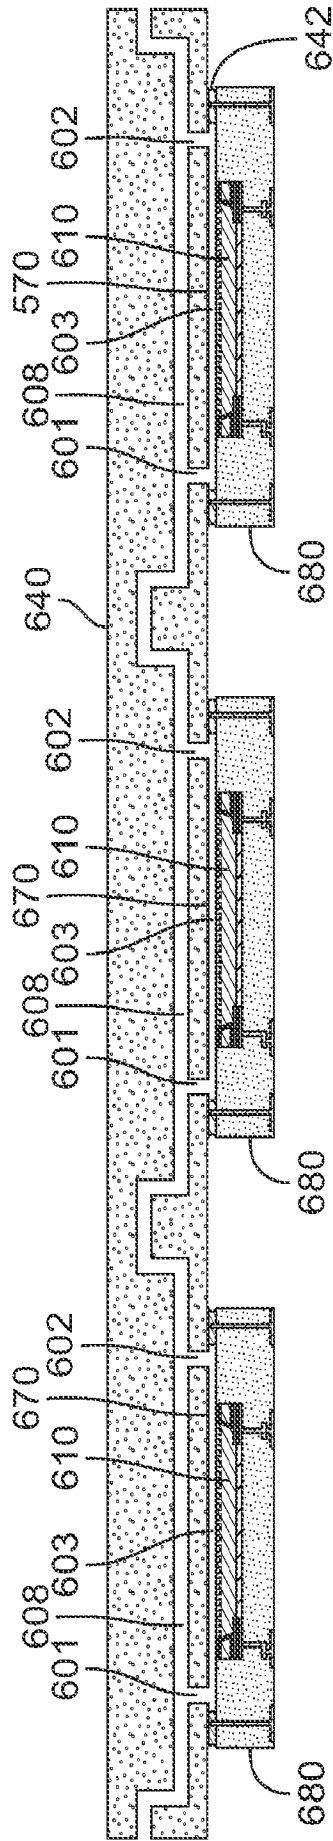


FIG. 22

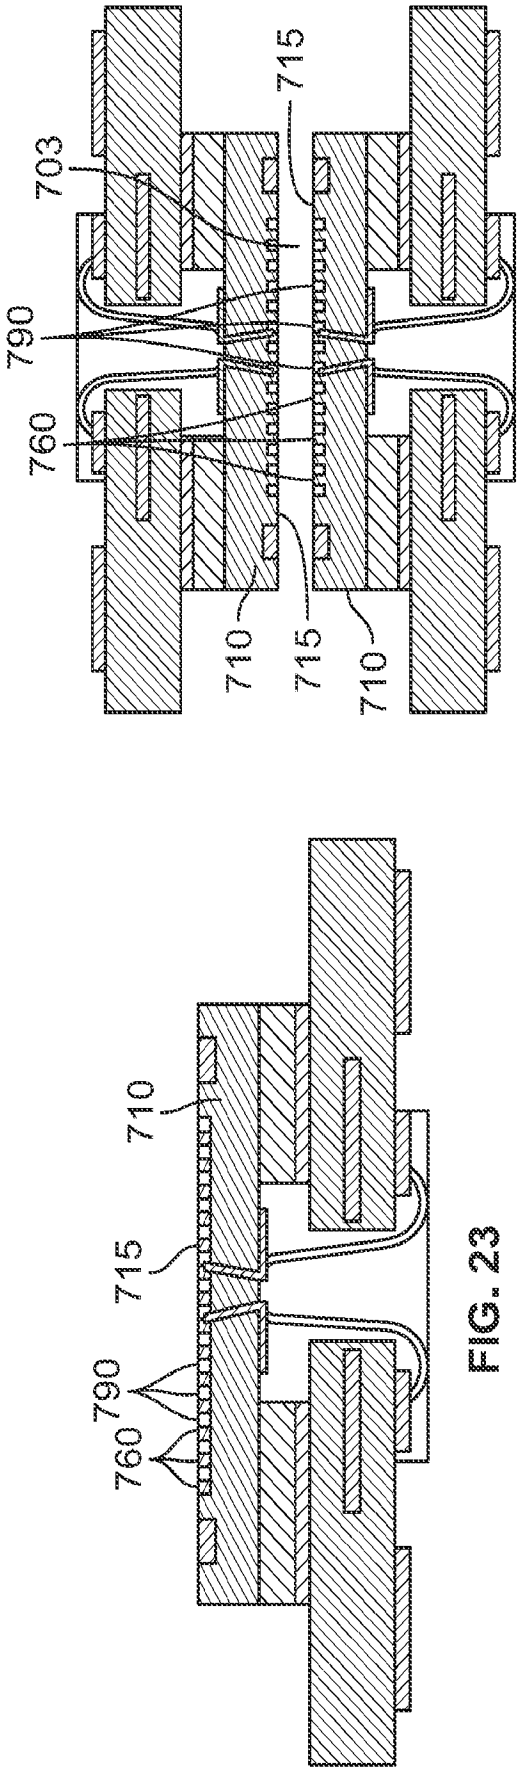


FIG. 23

FIG. 24

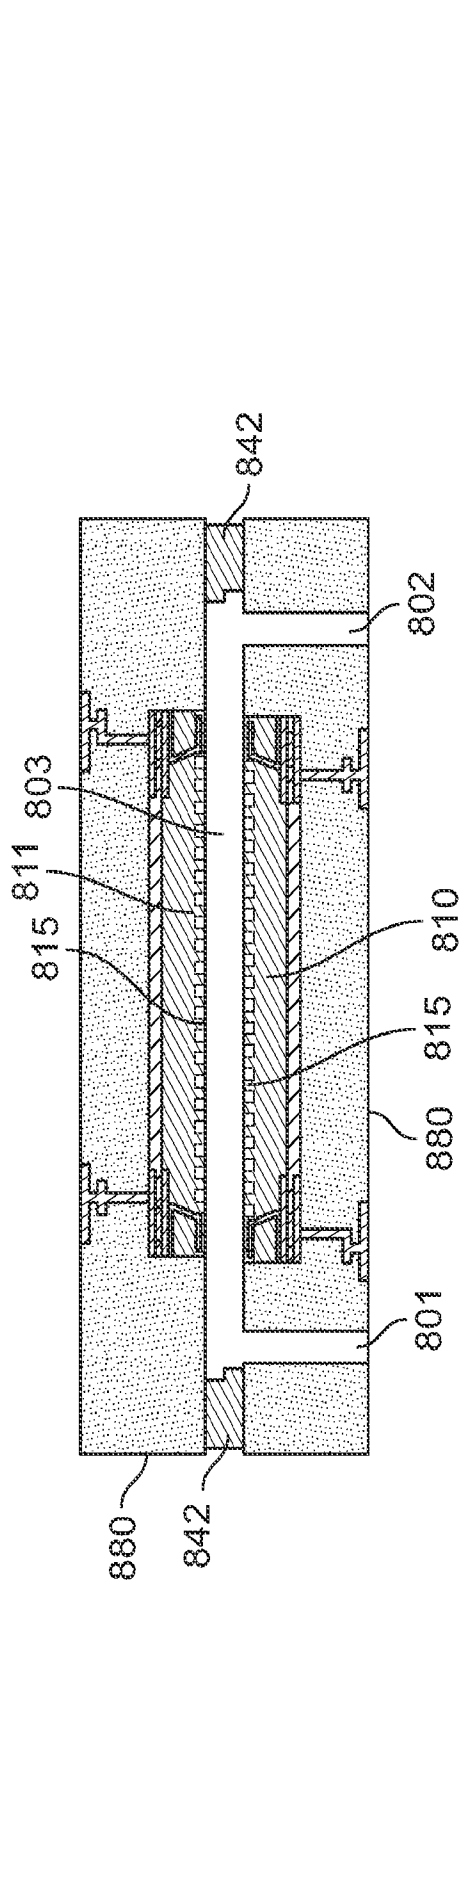


FIG. 25

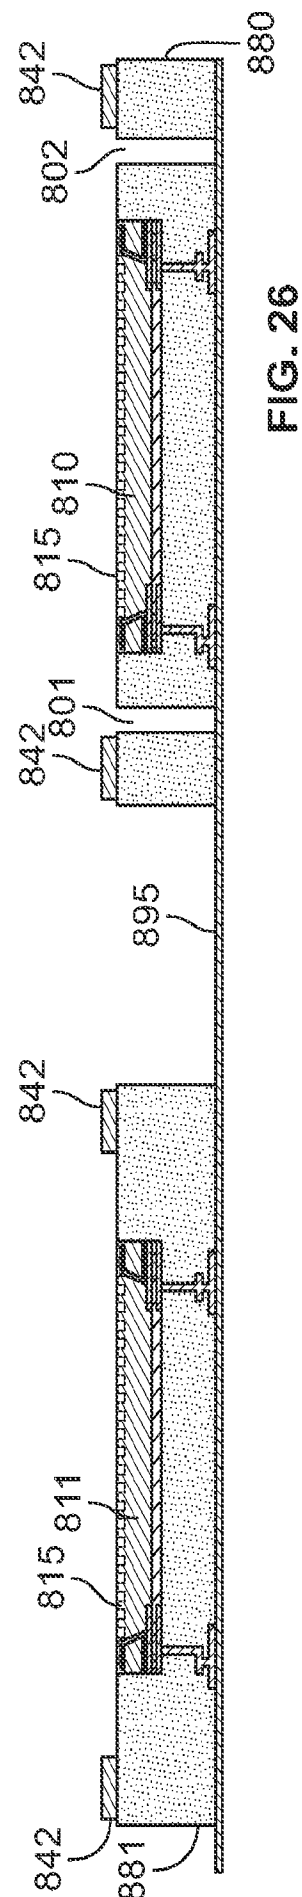


FIG. 26

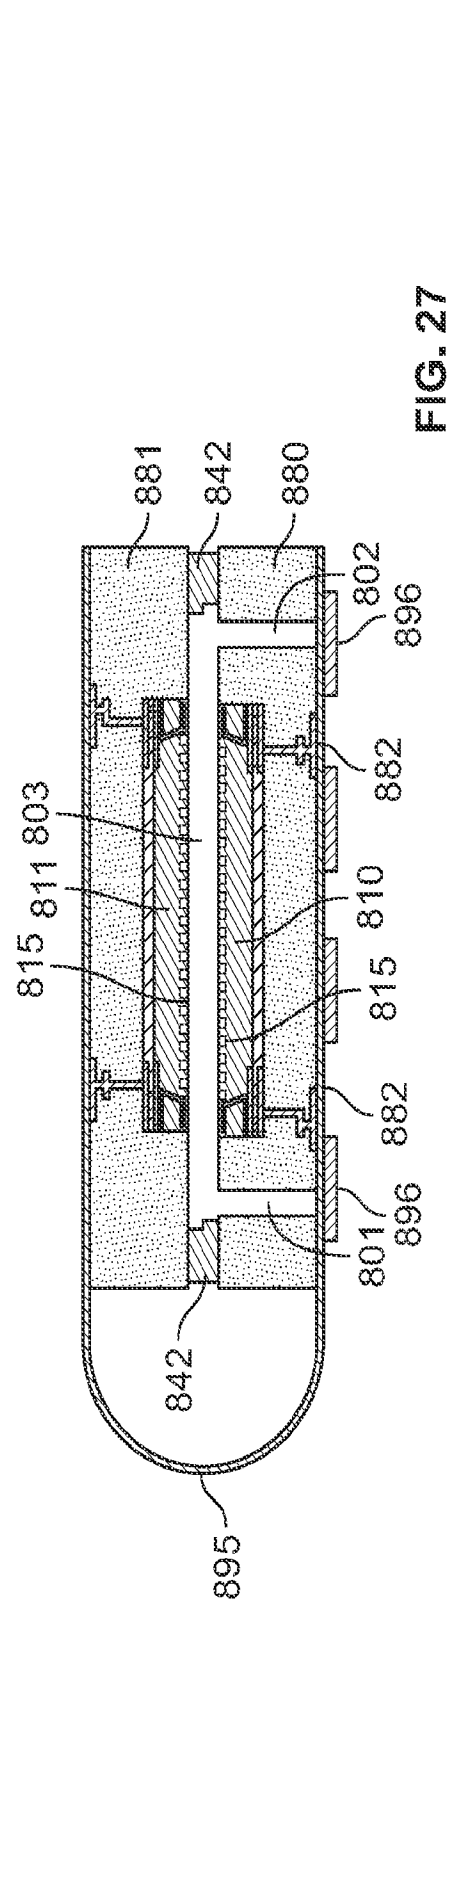


FIG. 27

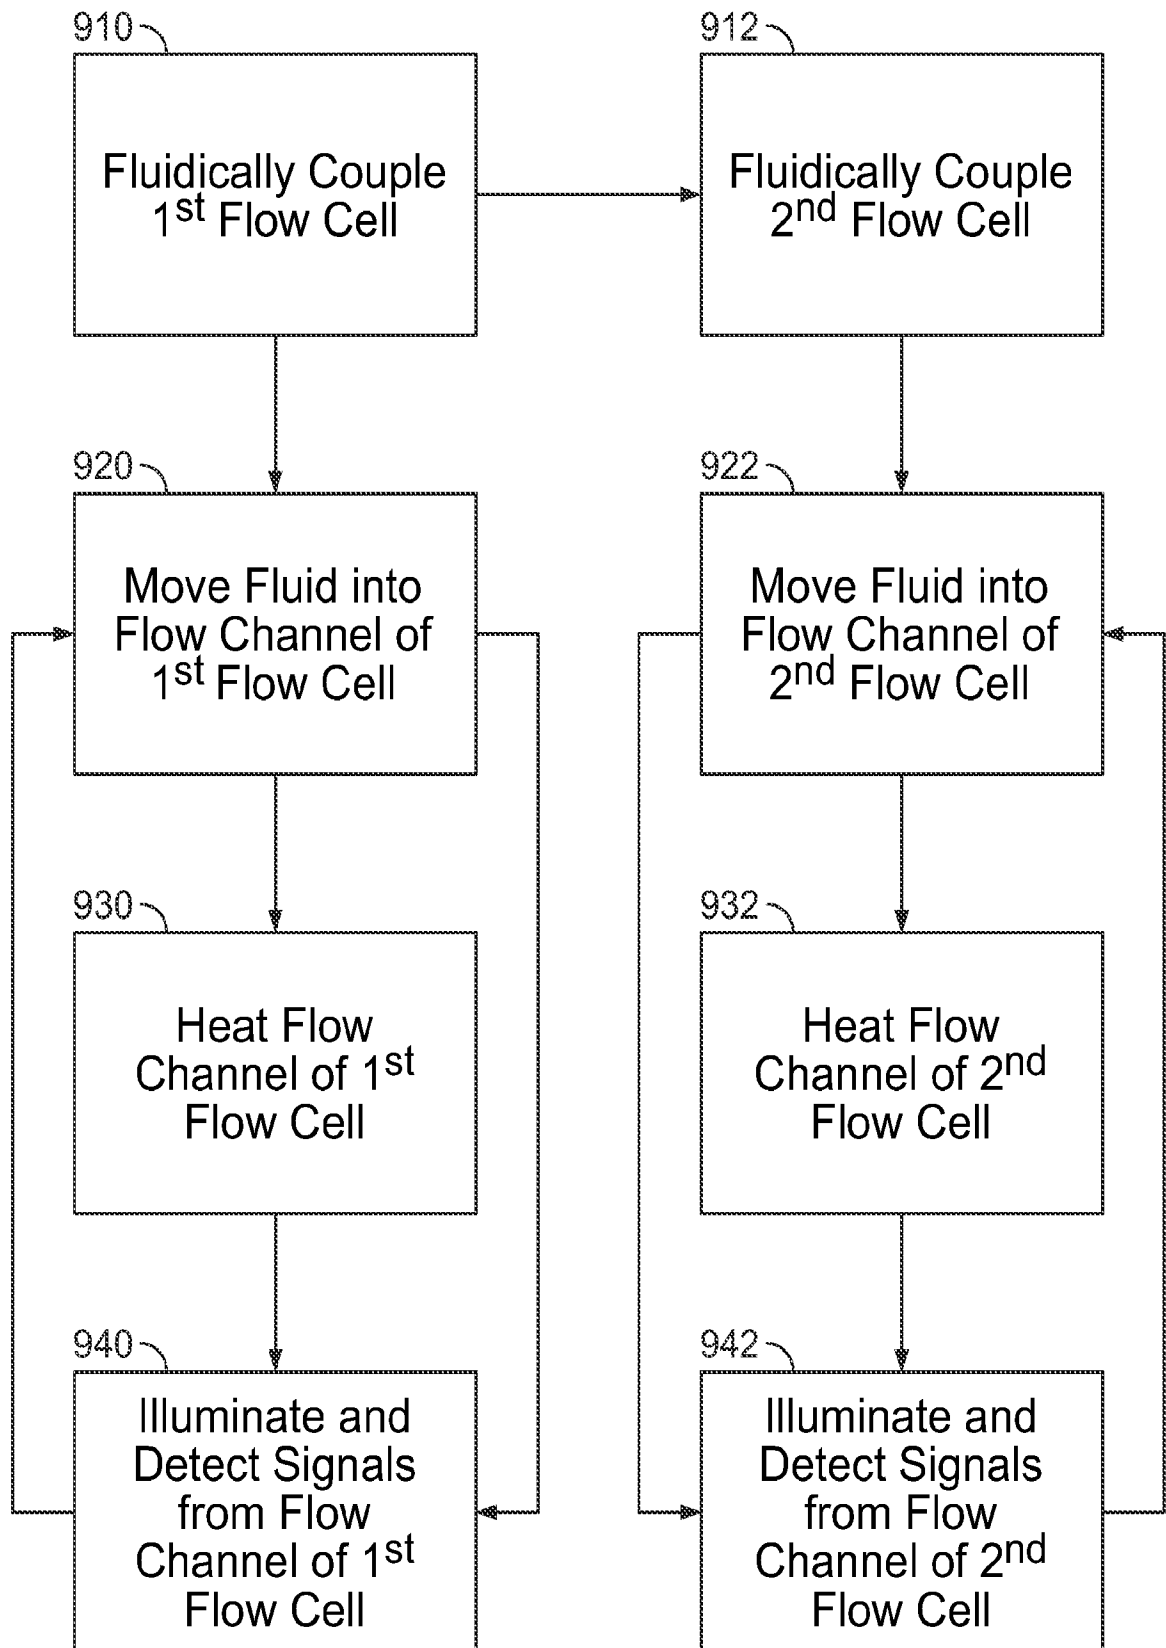


FIG. 28

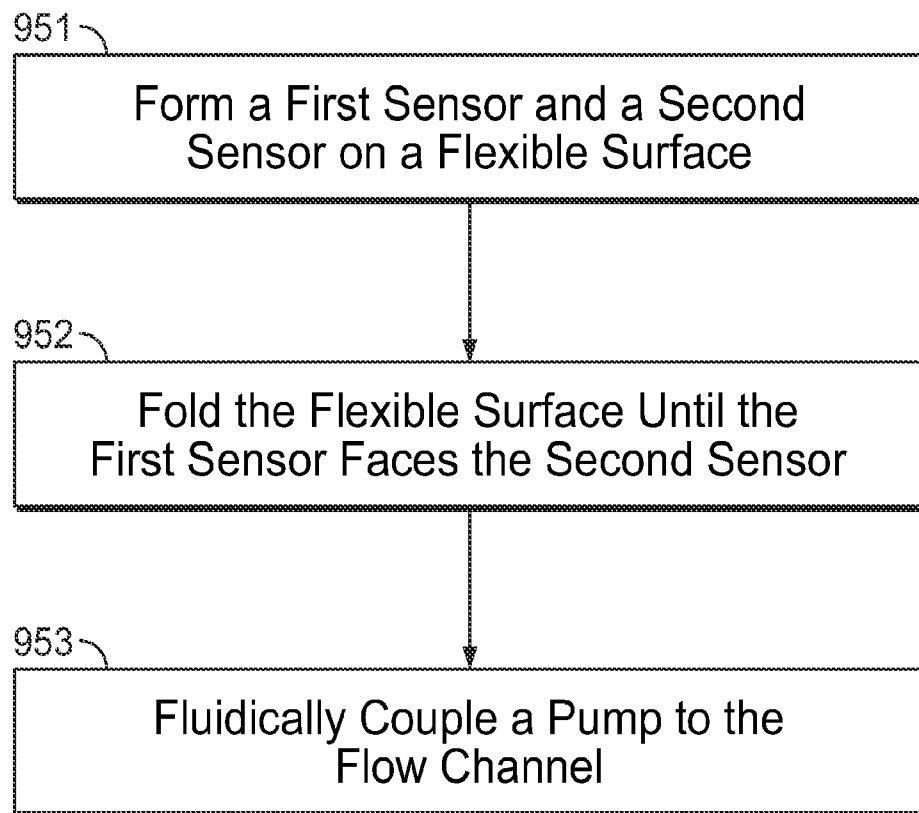


FIG. 29

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2021/033882

A. CLASSIFICATION OF SUBJECT MATTER

G01N 21/64(2006.01)i; G01N 21/76(2006.01)i; G01N 33/483(2006.01)i; B01L 3/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G01N 21/64(2006.01); B01L 3/00(2006.01); B01L 9/00(2006.01); G01N 21/05(2006.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: flow cell, active surface, lid, flow channel, illumination source, heater, pump, valve

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2020-0164360 A1 (ILLUMINA, INC.) 28 May 2020 (2020-05-28) paragraphs [0052]-[0082] and figures 5-9	1-5,24-26,34-37 ,43-45,50-52,57
Y	KR 10-2020-0012750 A (KOREA ADVANCED INSTITUTE OF SCIENCE AND TECHNOLOGY) 05 February 2020 (2020-02-05) paragraphs [0157]-[0159], [0185]-[0189], [0264]-[0270] and figures 11a, 11b, 21, 22, 33	1-5,24-26,34-37 ,43-45,50-52,57
A	US 2018-0221878 A1 (SYSMEX CORPORATION) 09 August 2018 (2018-08-09) paragraphs [0080]-[0180], claim 1, and figures 1-14	1-5,24-26,34-37 ,43-45,50-52,57
A	US 2003-0157581 A1 (GRILL et al.) 21 August 2003 (2003-08-21) paragraphs [0062]-[0067] and figures 1-4	1-5,24-26,34-37 ,43-45,50-52,57



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“D” document cited by the applicant in the international application

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

07 September 2021

Date of mailing of the international search report

08 September 2021

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon
35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

BAHNG, SEUNG HOON

Telephone No. +82-42-481-5560

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2021/033882

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: **8, 15, 20, 21, 30, 39, 40, 47, and 54**
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Claims 8, 15, 20, 21, 30, 39, 40, 47, and 54 are regarded to be unclear because they refer to a multiple dependent claim which does not comply with PCT Rule 6.4(a)
3. ☒ Claims Nos.: **6, 7, 9-14, 16-19, 22, 23, 27-29, 31-33, 38, 41, 42, 46, 48, 49, 53, 55, and 56**
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2021/033882

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2019-0204225 A1 (ILLUMINA, INC.) 04 July 2019 (2019-07-04) claim 1 and figures 1-12B	1-5,24-26,34-37 ,43-45,50-52,57

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2021/033882

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2020-0164360	A1	28 May 2020	AU	2019-388638	A1	14 January 2021
				BR	112020026401	A2	23 March 2021
				CA	3103284	A1	04 June 2020
				CN	111220548	A	02 June 2020
				CN	212111105	U	08 December 2020
				SG	11202012643	A	28 January 2021
				TW	202028719	A	01 August 2020
				TW	1722673	B	21 March 2021
				WO	2020-112327	A1	04 June 2020
KR	10-2020-0012750	A	05 February 2020	CN	112512690	A	16 March 2021
				EP	3747543	A1	09 December 2020
				EP	3778026	A1	17 February 2021
				KR	10-2020-0012752	A	05 February 2020
				US	2021-0046472	A1	18 February 2021
				WO	2020-027499	A1	06 February 2020
				WO	2020-027500	A1	06 February 2020
US	2018-0221878	A1	09 August 2018	AU	2016-335374	A1	26 April 2018
				CN	108139418	A	08 June 2018
				EP	3361263	A1	15 August 2018
				EP	3361263	B1	24 February 2021
				JP	6714603	B2	01 July 2020
				JP	WO2017-061619	A1	09 August 2018
				WO	2017-061619	A1	13 April 2017
US	2003-0157581	A1	21 August 2003	AT	285480	T	15 January 2005
				AU	2001-93709	A1	05 February 2002
				DE	10036457	A1	14 February 2002
				EP	1309729	A1	14 May 2003
				EP	1309729	B1	22 December 2004
				WO	02-08458	A1	31 January 2002
US	2019-0204225	A1	04 July 2019	AU	2014-364006	A1	23 June 2016
				AU	2014-364006	B2	11 July 2019
				AU	2019-246860	A1	31 October 2019
				AU	2019-246860	B2	08 April 2021
				BR	112016013353	B1	24 November 2020
				CA	2932916	A1	18 June 2015
				CL	2016001389	A1	28 April 2017
				CN	105980832	A	28 September 2016
				CN	105980832	B	16 August 2019
				CN	110411998	A	05 November 2019
				EP	3080585	A1	19 October 2016
				EP	3080585	A4	23 August 2017
				IL	246060	A	31 May 2020
				JP	2017-504789	A	09 February 2017
				JP	2020-112560	A	27 July 2020
				JP	6672149	B2	25 March 2020
				KR	10-2016-0096644	A	16 August 2016
				KR	10-2020-0042023	A	22 April 2020
				KR	10-2021-0080628	A	30 June 2021
				KR	10-2102934	B1	21 April 2020

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/US2021/033882

Patent document cited in search report	Publication date (day/month/year)	Patent family member(s)	Publication date (day/month/year)
		KR 10-2271774 B1	30 June 2021
		MX 2016007382 A	20 December 2016
		MX 360883 B	21 November 2018
		NZ 720871 A	27 March 2020
		RU 2016122443 A	23 January 2018
		RU 2675775 C1	24 December 2018
		SG 10201804913 A	30 July 2018
		SG 10202010045 A	27 November 2020
		SG 11201604622 A	28 July 2016
		US 10254225 B2	09 April 2019
		US 2016-0356715 A1	08 December 2016
		WO 2015-089092 A1	18 June 2015
		ZA 201603872 B	27 November 2019