



(51) International Patent Classification:

H04L 12/24 (2006.01) *H04W 24/02* (2009.01)
H04L 29/08 (2006.01) *H04W 64/00* (2009.01)

(21) International Application Number:

PCT/KR2021/009111

(22) International Filing Date:

15 July 2021 (15.07.2021)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

202010682573.2 15 July 2020 (15.07.2020) CN

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**
[KR/KR]; 129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do 16677 (KR).

(72) Inventors: **WANG, Jiankang**; 18/F Sun Palace Building,
No. 12A, TaiYangGong Middle Rd, Chaoyang District, Bei-
jing 100028 (CN). **WANG, Jiajia**; 18/F Sun Palace Build-
ing, No. 12A, TaiYangGong Middle Rd, Chaoyang District,
Beijing 100028 (CN). **YANG, Xiaohui**; 18/F Sun Palace
Building, No. 12A, TaiYangGong Middle Rd, Chaoyang
District, Beijing 100028 (CN). **ZHAO, Yi**; 18/F Sun Palace
Building, No. 12A, TaiYangGong Middle Rd, Chaoyang
District, Beijing 100028 (CN). **SHEN, Zhichun**; 18/
F Sun Palace Building, No. 12A, TaiYangGong Middle
Rd, Chaoyang District, Beijing 100028 (CN). **LI, Lin**; 18/
F Sun Palace Building, No. 12A, TaiYangGong Middle


Rd, Chaoyang District, Beijing 100028 (CN). **MAO, Min**;
18/F Sun Palace Building, No. 12A, TaiYangGong Mid-
dle Rd, Chaoyang District, Beijing 100028 (CN). **HUANG,**
Qixin; 18/F Sun Palace Building, No. 12A, TaiYang-
Gong Middle Rd, Chaoyang District, Beijing 100028
(CN). **WANG, Shoufeng**; 18/F Sun Palace Building,
No. 12A, TaiYangGong Middle Rd, Chaoyang District, Bei-
jing 100028 (CN). **LI, Xiaoyu**; 18/F Sun Palace Building,
No. 12A, TaiYangGong Middle Rd, Chaoyang District, Bei-
jing 100028 (CN).

(74) Agent: **YOON & LEE INTERNATIONAL PATENT & LAW FIRM**; 3rd Fl, Ace Highend Tower-5, 226, Gasan Digital 1-ro, Geumcheon-gu, Seoul 08502 (KR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,

(54) Title: INFORMATION PROCESSING METHOD, APPARATUS, DEVICE AND COMPUTER READABLE STORAGE MEDIUM

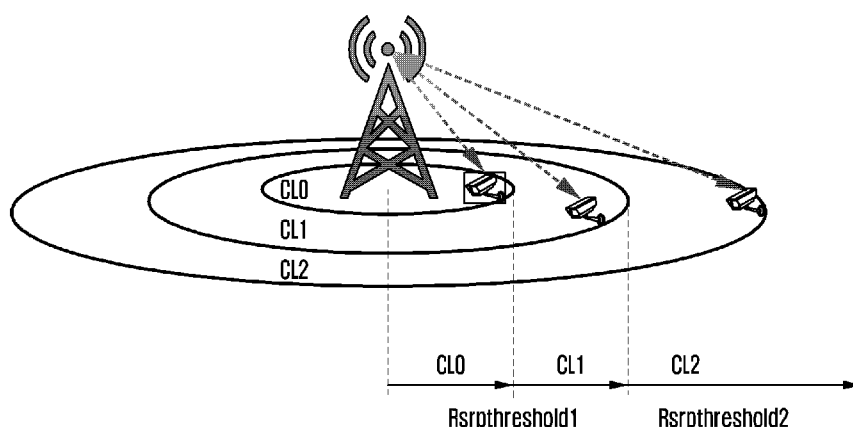

(57) Abstract: Embodiments of the present disclosure provide a method, apparatus, device, and computer-readable storage medium for processing information. The method is used in a first network device, and includes: receiving information related to a second network device; determining a first resource configuration corresponding to a coverage classification related to the second network device based on the information; and transmitting the first resource configuration to the second network device. The method may obtain the first resource configuration through making prediction and calculation analysis based on the information, which may achieve dynamic configurations of different coverage classifications, save energy consumption, and improve system capacity and performance at the same time.



TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Description

Title of Invention: INFORMATION PROCESSING METHOD, APPARATUS, DEVICE AND COMPUTER READABLE STORAGE MEDIUM

Technical Field

- [1] The disclosure relates to the field of wireless communication technology. Particularly, the disclosure relates to a method, an apparatus and a device for processing information, and computer-readable storage medium.

Background Art

- [2] As an important scenario of a fifth generation of mobile communication technology (5G), massive internet of things (MIoT) relies on a powerful connection capabilities of 5G to realize the interconnection of everything through the integration of vertical industries, which extends the communication between humans to the full-scene connection of human-thing, thing-thing. For the MIoT scenario, 3GPP defines a super-scale connection requirement of 1 million connections per square kilometer. In addition, MIoT service applications also put forward higher requirements for low cost, low power consumption, and deep coverage.

Disclosure of Invention

Technical Problem

- [3] In the current network, the division of the IOT coverage level and parameters thereof substantially use a manually unified initial configuration. In the actual network operation, a specific problem will be analyzed after it occurs, and the parameters are adjusted manually. This manual and semi-static adjustment method is not only time-consuming and laborious, but also easy to cause mismatch between the parameters and the actual network environment.
- [4] Fixed CL division cannot adapt to the time-varying distribution of IoT terminals, which results in access congestion and waste of resources.
- [5] The traditional methods of manual initial configuration or post-adjustment cannot adapt to changing network environment and IoT service distribution in actual network operation.

Solution to Problem

- [6] In view of disadvantages of the existing methods, this disclosure proposes a method, an apparatus, a device for processing information and computer-readable storage medium to solve the problem of how to save energy consumption and improve system capacity and performance.

- [7] According to a first aspect of the present disclosure, an information processing method is provided, which is used in a first network device, and includes: receiving information related to a second network device; determining a first resource configuration corresponding to a coverage classification related to the second network device based on the information; and transmitting the first resource configuration to the second network device.
- [8] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the information includes: determining a service distribution related information of a user equipment (UE) respectively corresponding to coverage characteristic during a first period based on the information, wherein the UE is included in the second network device; based on the service distribution related information of the UE during the first period, predicting or calculating the service distribution related information of the UE during a second period after the first period to determine the service distribution related information of the UE during the second period; determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period.
- [9] Optionally, before determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, the method further includes: receiving service information transmitted by an external server, wherein the service information includes location information of the UE and feature information of the UE, the location information includes at least one of location parameters of the UE provided by a positioning server and flight trajectory parameters provided by the positioning server, the feature information includes at least one of service period and periodic reporting time; the determining the service distribution related information of the UE corresponding to the coverage characteristic during the first period based on the information, includes: determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information and the service information.
- [10] Optionally, the information includes at least one of measurement information of the second network device and configuration information of the second network device; the measurement information includes at least one of signal strength data, service data, and performance data; the configuration information includes at least one of coverage classification threshold configuration used for dividing coverage classification, and resource configuration parameters corresponding to the coverage classification, the coverage classification threshold configuration is a coverage characteristic index value that is used to divide the coverage area into different coverage classifications.

- [11] Optionally, the determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, includes: based on the service data and the service information, determining the distribution information of the UE that has a service to be transmitted and need to access the second network device during the first period; and based on the performance data and the configuration information, determining an access capacity of the random access channel (RACH) corresponding to different configuration information, and the service distribution related information includes the distribution information and the access capacity of the RACH corresponding to the different configuration information.
- [12] Optionally, based on the service distribution related information of the UE during the first period, predicting or calculating the service distribution related information of the UE during the second period after the first period to determine the service distribution related information of the UE during the second period, includes: inputting the service distribution related information of the UE during N service periods into a preset prediction model; predicting the service distribution related information of the UE during the second period after the first period through the prediction model; and obtaining capacity distribution of the service over time corresponding to the coverage characteristic within a first service period (i.e., the N+1 service period) after the N service periods, wherein the first period includes N service periods, the second time period includes the first service period, and the service distribution related information of the UE during the first period is used to characterize the capacity distribution of the service over time corresponding to the coverage characteristic within the N service periods, and the service distribution related information of the UE during the second period is used to characterize the capacity distribution of the service over time corresponding to the coverage characteristic within the first service period, the N is a positive integer.
- [13] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period, includes: determining the coverage classification thresholds respectively to the coverage classification based on the service distribution related information of the UE during the second period; and determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications.
- [14] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service dis-

tribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, includes: based on the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of repetitions for transmission of resources of the UEs respectively corresponding to the coverage classifications, the modulation and coding scheme (MCS) configuration of the resource, the resource includes at least one of a physical downlink control channel (PDCCH), a physical downlink shared channel (PDSCH), a physical uplink shared channel (PUSCH), and uplink control information (UCI); based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of the coverage classifications and the number of the UEs respectively corresponding to the coverage classifications; and based on the number of the UEs respectively corresponding to the coverage classifications and the access capacity of the RACH corresponding to the configuration information of the second network device included in the information, determining a second resource configuration of the RACH respectively corresponding to the coverage classifications, wherein the first resource configuration corresponding to the coverage classification includes the coverage classification threshold of the UE respectively corresponding to the coverage classification, the number of repetitions for transmission of the resource, the MCS configuration of the resource, and the second resource configuration of the RACH respectively corresponding to the coverage classifications, and wherein the second resource configuration of the RACH includes at least one of the number of repetitions for transmission of a random access preamble, the number of RACH subcarriers, and the RACH period.

- [15] Optionally, when the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification change, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource; or after determining the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource.
- [16] Optionally, the adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the number of repetitions for transmission of the PDCCH, which includes adjusting the number of repetitions for transmission of at least one of message

msg2, message msg3, and message msg4 in the common search space, and the number of repetitions for transmission of the dedicated search space; adjusting the number of repetitions for transmission of the PDSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PDSCH carrying the message msg2; the number of repetitions for transmission of the PDSCH carrying the message msg4; and the number of repetitions for transmission of the PDSCH carrying downlink signaling and data in the connected state; adjusting the number of repetitions for transmission of the PUSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying the message msg3; and the number of repetitions for transmission of the PUSCH carrying uplink signaling and data in the connected state; and adjusting the number of repetitions for transmission of the uplink control information (UCI), which comprising adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying downlink transmission ACK and/or NACK; and the number of repetitions for transmission of the PUCCH carrying downlink transmission ACK and/or NACK.

- [17] Optionally, the adjusting the MCS configuration of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the MCS configuration of the PDSCH, which includes adjusting at least one of: the MCS configuration of the PDSCH carrying the message msg2; the MCS configuration of the PDSCH carrying the message msg4; and the MCS configuration of the PDSCH carrying the downlink signaling and data in the connected state; and adjusting the MCS configuration of the PUSCH, which includes adjusting at least one of: the MCS configuration of the PUSCH carrying the message msg3; and the MCS configuration of the PDSCH carrying the uplink signaling and data in the connected state.
- [18] Optionally, the receiving information related to the second network device includes at least one of the following: receiving the information related to the second network device transmitted by a service management and orchestration (SMO); receiving the information related to the second network device transmitted by the near-real-time RAN intelligent controller (Near-RT RIC), wherein the information related to the second network device is obtained by the Near-RT RIC from the second network device.
- [19] Optionally, the transmitting the first resource configuration to the second network device includes one of the following: transmitting the first resource configuration to the second network device; transmitting the first resource configuration to the Near-RT RIC, wherein the first resource configuration is transmitted to the second network device by the Near-RT RIC; or transmitting the first resource configuration to the second network device through the Near-RT RIC.

- [20] Optionally, the first network device is a non-real-time RAN intelligent controller (Non-RT RIC) or a near-real-time RAN intelligent controller (Near-RT RIC).
- [21] According to a second aspect of the present disclosure, the present disclosure provides an information processing apparatus used in a first network device, which includes: a first processing module configured to receive information related to a second network device transmitted by the second network device; a second processing module configured to determine a first resource configuration corresponding to a coverage classification related to the second network device based on the information; and a third processing module configured to transmit the first resource configuration to the second network device.
- [22] According to a third aspect of the present disclosure, this disclosure provides an electronic device, which includes a processor, a memory and a bus; the bus is used to connect the processor and the memory; the memory is used to store operation instructions; the processor is configured to execute the information processing method of the first aspect according to the present disclosure by invoking operation instructions.
- [23] According to a fourth aspect of the present disclosure, the present disclosure provides a computer-readable storage medium storing a computer program, and the computer program is used to execute the information processing method of the first aspect according to the present disclosure.

[24]

Advantageous Effects of Invention

- [25] The technical solutions provided by embodiments of this disclosure have at least the following beneficial effects: obtaining the first resource configuration through making prediction and calculation analysis based on the information, which may achieve dynamic configurations of different coverage classifications, save energy consumption, and improve system capacity and performance at the same time.
- [26] The additional aspects and advantages of the present disclosure will be partly given in the following description, which will become obvious from the following description, or be understood through the practice of the present disclosure.

Brief Description of Drawings

- [27] In order to describe technical solutions of embodiments according to the present disclosure more clearly, the drawings used in the description of the embodiments of the present disclosure will be briefly illustrated below.
- [28] FIG. 1 is a schematic diagram of 3GPP NB-IoT coverage level (CL) in the prior art;
- [29] FIG. 2 is a schematic diagram of the distribution of IoT terminals during the day in the prior art;
- [30] FIG. 3 is a schematic diagram of the distribution of IoT terminals during the night in

the prior art;

[31] FIG. 4 is a schematic diagram of the distribution characteristics of IoT terminals in the prior art;

[32] FIG. 5 is a schematic diagram of the O-RAN logical architecture;

[33] FIG. 6 is a schematic flowchart of an information processing method according to an embodiment of the present disclosure;

[34] FIG. 7 is a schematic diagram of the Massive IoT intelligent dynamic optimization system according to an embodiment of the present disclosure;

[35] FIG. 8 is a schematic diagram of capacity distribution corresponding to RSRP according to an embodiment of the present disclosure;

[36] FIG. 9 is a schematic diagram of an RSRP sliding window according to an embodiment of the present disclosure;

[37] FIG. 10 is a schematic diagram of system capacity distribution according to an embodiment of the present disclosure;

[38] FIG. 11-a is a schematic diagram of different RSRP thresholds according to an embodiment of the present disclosure;

[39] FIG. 11-b is a schematic diagram of different RSRP thresholds according to an embodiment of the present disclosure;

[40] FIG. 11-c is a schematic diagram of different RSRP thresholds according to an embodiment of the present disclosure;

[41] FIG. 12 is a schematic diagram of RSRP distribution probability according to an embodiment of the present disclosure;

[42] FIG. 13 is a schematic diagram of the distribution of minimum RSRP for respective coverage levels according to an embodiment of the present disclosure;

[43] FIG. 14 is a schematic diagram of calculating the number of repetitions for transmission and the MCS based on RSRP according to an embodiment of the present disclosure;

[44] FIG. 15 is a schematic diagram of capacity time-varying distribution of respective CLs according to an embodiment of the disclosure;

[45] FIG. 16-a is a schematic diagram of a system framework corresponding to information processing according to an embodiment of the disclosure;

[46] FIG. 16-b is a schematic diagram of a principle flow of information processing according to an embodiment of the disclosure;

[47] FIG. 17 is a schematic diagram of an implementation flow of information processing according to an embodiment of the disclosure;

[48] FIG. 18-a is a schematic diagram of a system framework corresponding to information processing according to an embodiment of the disclosure;

[49] FIG. 18-b is a schematic diagram of a principle flow of information processing

- according to an embodiment of the disclosure;
- [50] FIG. 19 is a schematic diagram of an implementation flow of information processing according to an embodiment of the disclosure;
- [51] FIG. 20-a is a schematic diagram of a system framework corresponding to information processing according to an embodiment of the disclosure;
- [52] FIG. 20-b is a schematic diagram of a principle flow of information processing according to an embodiment of the disclosure;
- [53] FIG. 21 is a schematic diagram of an implementation flow of information processing according to an embodiment of the disclosure;
- [54] FIG. 22-a is a schematic diagram of a system framework corresponding to information processing according to an embodiment of the disclosure;
- [55] FIG. 22-b is a schematic diagram of a principle flow of information processing according to an embodiment of the disclosure;
- [56] FIG. 23 is a schematic diagram of an implementation flow of information processing according to an embodiment of the disclosure;
- [57] FIG. 24-a is a schematic diagram of a system framework corresponding to information processing according to an embodiment of the disclosure;
- [58] FIG. 24-b is a schematic diagram of a principle flow of information processing according to an embodiment of the disclosure;
- [59] FIG. 25 is a schematic diagram of an implementation flow of information processing according to an embodiment of the disclosure;
- [60] FIG. 26 is a schematic structural diagram of an information processing apparatus according to an embodiment of the disclosure; and
- [61] FIG. 27 is a schematic structural diagram of an electronic device according to an embodiment of the disclosure.

Best Mode for Carrying out the Invention

- [62] The embodiments of the present disclosure are described in detail below, and the examples of the embodiments are illustrated in the drawings, where throughout the drawings, the same or similar reference numbers are used to depict the same or similar elements or elements having the same or similar functions. The embodiments described below with reference to the accompanying drawings are illustrative, and are only used to explain the present disclosure, rather than being construed as limiting the present disclosure.
- [63] The various operations, methods, steps, measures, and solutions in the process that have been discussed in this disclosure may be alternated, changed, combined, or deleted. The various steps and various solutions in this disclosure may be combined; some steps in an embodiment of this disclosure may also be combined into a new

solution, and all the steps in this embodiment are not required.

[64] Those skilled in the art should understand that the singular forms "a", "an", "said" and "the" include plural referents unless the context clearly dictates otherwise. It should be further understood that the expression "comprising" or "include" used in the specification of the present disclosure means the existence of the features, integers, steps, operations, elements and/or components, but does not preclude the existence or addition of one or more other features, integers, steps, operations, elements, components and/or combinations thereof. It should be understood when an element is referred to as being "connected to" or "coupled to" another element, it may be directly connected or coupled to the other element, or an intervening element may be present. Furthermore, the terms "connected" or "coupled" used herein may include a wireless connection or a wireless coupling. The phrase "and/or" used herein includes all or any one and all combinations of one or more of the associated listed items.

[65] In order to better understand and explain the solutions of the embodiments of the present disclosure, some technologies involved in the embodiments of the present disclosure are briefly described below.

[66] Coverage classification may include or be referred to as coverage level, coverage class, and so on.

[67] The coverage characteristics may include RSRP, signal to interference plus noise ratio (SINR), reference signal receiving quality (RSRQ), or other indicators that indicate the coverage classification. According to the current 3GPP protocol, based on the division of coverage levels, NB-IoT supports up to 3 coverage levels and eMTC supports up to 4 coverage levels. The maximum number of coverage levels may change in other wireless communication systems or future 3GPP protocol.

[68] According to the current 3GPP protocol, different coverage levels are determined by defining reference signal receiving power (RSRP) thresholds. In the future 3GPP protocol or in other wireless communication systems, the division of coverage classifications may be determined by defining other threshold indicators, including SINR, RSRQ or other indicators that identify coverage differences. In this case, RSRP is taken as an example.

[69] The resource configuration (a set of parameters affected by RSRP threshold) for each coverage level may include random access resource configuration, which includes time domain/frequency domain resources for transmitting the preamble (msg1) and the number of repetitions of the preamble.

[70] Where, time domain resources include time domain periods; frequency domain resources include the number of subcarriers; the number of repetitions of preamble represents the number of repetitions for transmission required for transmitting a preamble; scheduling resource configuration includes the number of repetitions for

transmission and/or modulation and coding scheme (MCS) configuration for physical downlink control channel (PDCCH), physical downlink shared channel (PDSCH), physical uplink shared channel (PUSCH), physical uplink control channel (PUCCH).

- [71] Specifically, the IoT terminal may compare the measured signal strength (RSRP) with the RSRP threshold to determine the coverage level (CL) where it is located, and then use the corresponding (random access channel (RACH) resource to initiate random access, a base station selects the corresponding resource configuration based on the CL that the UE accesses. For example, for a CL with a good signal strength, the transmission requirement can be met without setting the number of repetitions or with a small amount of repetitions while ensuring a higher data transmission rate; for a CL with a poor signal strength, the coverage characteristics can be met by setting a larger number of repetitions.
- [72] The open radio access network (O-RAN) focuses on the needs of network intelligence, interface openness, open source software and hardware white box, which is intended to promote the openness of wireless device interfaces, and realize intelligent wireless networks by introducing new technologies such as artificial intelligence, thereby to raise the openness of the next generation wireless communication network to a new level.
- [73] According to the open radio access network (O-RAN) specification, the logical architecture of the open radio access network (O-RAN) is shown in FIG. 5. The entities of wireless side may include Near-RT RIC, O-CU-CP, O-CU-UP, O-DU, and O-eNB.
- [74] Service management and orchestration (SMO) entities may provide a variety of management services and network management functions, such as RAN management, core network management, transmission management, and end-to-end slice management.
- [75] Non-real time RAN intelligent controller (Non-RT RIC) is a logical entity built into SMO, which supports non-real-time control and optimization of RAN network elements and resources, AI/ML model establishing, reasoning and updating; RAN is optimized through data analysis and AI/ML training/reasoning, and it provides strategic guidance and ML model management to the near-real Time RAN intelligent controller (Near-RT RIC) through the A1 interface.
- [76] The Near-RT RIC logical entity may support near-real-time control and optimization of RAN network elements and resources, and may include artificial intelligence (AI)/ machine learning (ML) model training, reasoning and updating, and strategy guidance. The Near-RT RIC provides network optimization instructions to the E2 node through the E2 interface.
- [77] E2 node: which may include O-RAN control unit control plane (O-CU-CP), O-RAN control unit user plane (O-CU-UP), O-RAN data unit (O-DU), O-eNB and other

entities, where O-CU-CP, O-CU-UP, and O-DU are used for 5G NR access, O-eNB is used for E-UTRA access. Compared with the CU-CP, CU-UP and DU of the non-O-RAN system, the E2 node adds support for the E2 interface.

- [78] O-eNB: which is eNB or ng-eNB supporting O-RAN architecture.
- [79] O-Cloud: which is O-RAN cloud computing platform.
- [80] External server: which is a server for various application APP, etc., and may provide SMO with rich data.
- [81] The O-RAN architecture mainly includes four interfaces:
- [82] A1: which is located between Non-RT RIC and near-RT RIC, and supports strategy management, rich information and ML model management services.
- [83] E2: which is used to connect the near-RT RIC and E2 node. One E2 node can only be connected to one near-RT RIC. The Near-RT RIC entity can collect the near-real-time information (UE-level or cell-level) measured by respective functional entity of the wireless network through the E2 interface, and can also issue control command words to the base station through the E2 interface, and finally the E2 interface may control the behavior of the base station.
- [84] O1: which is an interface located between the O-RAN managed entity (near-RT RIC, E2 node) and the O-RAN management entity (SMO), and supports operation and management, including network fault/configuration/accounting/performance/security (FCAPS) management, physical network function (PNF) software management and file management.
- [85] O2: which connects SMO and O-Cloud to support O-RAN virtualization.
- [86] Open fronthaul M-plane interface: which is located between SMO and O-RAN radio unit (O-RU) to support O-RU management.
- [87] In order to make the objectives, technical solutions, and advantages of the present disclosure clear, the implementations of the present disclosure will be further described in detail below in conjunction with the accompanying drawings.
- [88] To support large-scale connections, 3GPP has proposed two cellular IoT protocol standards of Narrow Band IOT (NB-IoT) and enhanced machine type communication (eMTC). In the protocol, 3GPP introduced the concept of coverage level (CL). As shown in FIG. 1, CL is divided by defining a signal strength threshold (rsrpThreshold), and differentiated resource configurations are defined for respective coverage levels to achieve requirements of coverage, capacity, and management for a large number of terminals.
- [89] CL division is mainly achieved by defining reference signal receiving power (RSRP) threshold. In actual networks, the RSRP threshold is generally determined based on the maximum and deepest coverage of the cell. However, since IoT services are mostly transmitted infrequently, in fact, the distribution of IoT terminals that truly have

service transmitting and receiving requirements in the cell has time-varying characteristics. As shown in FIG. 2 and FIG. 3, for example, IoT terminals are distributed evenly during the day, but at night, most of the terminals that transmit IoT services fall into a range of strong signal strength. In this case, a fixed division of three CLs and a fixed resource configuration may lead to insufficient resources for CL0, which may cause access congestion; at the same time, the resources reserved for CL1 and CL2 may be wasted since the actual number of users is small, thereby reducing resource utilization.

[90] (2) The semi-static resource configuration cannot adapt to the time-varying distribution of IoT terminals, which results in an increased power consumption and a decreased system capacity.

[91] As above mentioned, the distribution of IoT terminals that truly have service transmitting and receiving requirements in the cell has time-varying characteristics. The CL-based semi-static resource configuration cannot adapt to the time-varying characteristics of terminal distribution, and may allocate a larger number of repetitions, which not only wastes terminal power, but also causes unnecessary resource waste, thereby reducing system capacity.

[92] As shown in FIG. 4, during the morning time period, an actual effective terminal of CL0 in the area is UE1/UE2; during the noon time period, the actual effective terminal of CL0 is UE1/UE5; during the afternoon time period, the actual effective terminal of CL0 is UE1/UE2. Where, UE1/UE5 have higher RSRP, it may meet transmission requirement that the number of repetitions is 1; UE2 has lower RSRP, and the number of repetitions is 2. In this case, if it uses the semi-static configuration that the number of repetitions is 2, the number of repetitions for UE1 and UE5 would be too high during the noon time period, which results in an increased resource occupation.

[93] An information processing method is provided according to an embodiment of the present disclosure, which is used in a first network device. A schematic flowchart of the method is shown in FIG. 6, and the method may include the following steps.

[94] Step S101: receiving information related to a second network device.

[95] Step S102: determining a first resource configuration corresponding to a coverage classification related to the second network device based on the information.

[96] Step S103: transmitting the first resource configuration to the second network device.

[97] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the information includes: determining a service distribution related information of a user equipment (UE) respectively corresponding to coverage characteristic during a first period based on the information, wherein the UE is included in the second network device; based on the service distribution related information of the UE during the first period, predicting

or calculating the service distribution related information of the UE during a second period after the first period to determine the service distribution related information of the UE during the second period; determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period.

- [98] Optionally, the coverage classification is a coverage area with different location information; the coverage characteristic is a reference quantity, the reference quantity reflects a feature of the coverage location, and the reference quantity is used to distinguish different coverage classifications.
- [99] Optionally, the coverage classification may include coverage level, coverage area, and so on; the coverage characteristic may include reference signal received power (RSRP), signal-to-interference plus noise ratio (SINR), reference signal received quality (RSRQ), other indicators that identify coverage classifications, and so on.
- [100] Optionally, service distribution related information may include the time distribution of the number of terminal connections under the coverage characteristic, the distribution of service delay performance under the coverage characteristic, the distribution of service throughput capacity under the coverage characteristic, the distribution of service location information under the coverage characteristic, and the periodic distribution characteristics of service occurrence under the coverage characteristics, and service capacity performance reference under the coverage characteristics. The capacity performance reference is the access capacity of the corresponding random access channel RACH under various configuration information. According to an embodiment of disclosure, the time distribution of the number of terminal connections and the service capacity performance reference under the coverage characteristics are taken as examples for illustration.
- [101] Optionally, as shown in FIG. 7, the massive IoT intelligent dynamic optimization system includes a calculation and control unit 101, a network device 102, an external server 103 and an IoT terminal 104. The calculation and control unit 101 is mainly responsible for data analysis and dynamic configuration, judgment, and control operations; the calculation and control unit 101 is the first network device. The network device 102 may be conventional 4G base station, 5G base station, enhanced 4G/5G base station, such as O-RAN architecture-based O-eNB, O-CU, O-DU, or the like, or future network device, such as 6G network device; the second network device includes network device 102. The external server 103 may provide auxiliary information, and the external server 103 may be a positioning server, a vertical industry service server, and the like. The IoT terminal 104 may refer to a terminal that supports services of the internet of things, such as a meter reading terminal, a positioning terminal, a temperature or humidity sensor node, and so on; the second network device also includes a

user equipment (UE), and the user equipment is the IoT terminal 104.

- [102] Optionally, the calculation and control unit 101 may be located in a newly-added entity, or may be located in an existing entity, such as the network device 102, the RIC entity under the O-RAN architecture, and so on.
- [103] Optionally, before determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, the method further includes: receiving service information transmitted by an external server, wherein the service information includes location information of the UE and feature information of the UE, the location information includes at least one of location parameters of the UE provided by a positioning server and flight trajectory parameters provided by the positioning server, the feature information includes at least one of service period and periodic reporting time;
- [104] The determining the service distribution related information of the UE corresponding to the coverage characteristic during the first period based on the information, includes: determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information and the service information..
- [105] Optionally, the information includes at least one of measurement information of the second network device and configuration information of the second network device; the measurement information includes at least one of signal strength data, service data, and performance data; the configuration information includes at least one of coverage classification threshold configuration used for dividing coverage classification, and resource configuration parameters corresponding to the coverage classification, the coverage classification threshold configuration is a coverage characteristic index value that is used to divide the coverage area into different coverage classifications.
- [106] Optionally, the coverage classification threshold configuration may include RSRP, SINR, RSRQ, and other indicators for identifying coverage classifications.
- [107] Optionally, the determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, includes: based on the service data and the service information, determining the distribution information of the UE that has a service to be transmitted and need to access the second network device during the first period; and based on the performance data and the configuration information, determining an access capacity of the random access channel (RACH) corresponding to different configuration information, and the service distribution related information includes the distribution information and the access capacity of the RACH corresponding to the different configuration information.
- [108] Optionally, based on the service distribution related information of the UE during the

first period, predicting or calculating the service distribution related information of the UE during the second period after the first period to determine the service distribution related information of the UE during the second period, includes: inputting the service distribution related information of the UE during N service periods into a preset prediction model; predicting the service distribution related information of the UE during the second period after the first period through the prediction model; and obtaining capacity distribution of the service over time corresponding to the coverage feature within a first service period (i.e., the N+1 service period) after the N service periods, wherein the first period includes N service periods, the second time period includes the first service period, and the service distribution related information of the UE during the first period is used to characterize the capacity distribution of the service over time corresponding to the coverage feature within the N service periods, and the service distribution related information of the UE during the second period is used to characterize the capacity distribution of the service over time corresponding to the coverage feature within the first service period, the N is a positive integer.

[109] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period, includes: determining the coverage classification thresholds respectively to the coverage classification based on the service distribution related information of the UE during the second period; and determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications.

[110] Optionally, the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, includes: based on the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of repetitions for transmission of resources of the UEs respectively corresponding to the coverage classifications, the modulation and coding scheme (MCS) configuration of the resource, the resource includes at least one of a physical downlink control channel (PDCCH), a physical downlink shared channel (PDSCH), a physical uplink shared channel (PUSCH), and uplink control information (UCI); based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of the coverage classifications and the number of the UEs respectively corresponding to the

coverage classifications; and based on the number of the UEs respectively corresponding to the coverage classifications and the access capacity of the RACH corresponding to the configuration information of the second network device included in the information, determining a second resource configuration of the RACH respectively corresponding to the coverage classifications, wherein the first resource configuration corresponding to the coverage classification includes the coverage classification threshold of the UE respectively corresponding to the coverage classification, the number of repetitions for transmission of the resource, the MCS configuration of the resource, and the second resource configuration of the RACH respectively corresponding to the coverage classifications, and wherein the second resource configuration of the RACH includes at least one of the number of repetitions for transmission of a random access preamble, the number of RACH subcarriers, and the RACH period.

- [111] Optionally, when the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification change, it may adjust the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource; or after determining the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification, it may adjust the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource.
- [112] Optionally, the adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the number of repetitions for transmission of the PDCCH, which includes adjusting the number of repetitions for transmission of at least one of message msg2, message msg3, and message msg4 in the common search space, and the number of repetitions for transmission of the dedicated search space; adjusting the number of repetitions for transmission of the PDSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PDSCH carrying the message msg2; the number of repetitions for transmission of the PDSCH carrying the message msg4; and the number of repetitions for transmission of the PDSCH carrying downlink signaling and data in the connected state; adjusting the number of repetitions for transmission of the PUSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying the message msg3; and the number of repetitions for transmission of the PUSCH carrying uplink signaling and data in the connected state; and adjusting the number of repetitions for transmission of the uplink control information (UCI), which comprising adjusting at least one of: the number of

repetitions for transmission of the PUSCH carrying downlink transmission ACK and/or NACK; and the number of repetitions for transmission of the PUCCH carrying downlink transmission ACK and/or NACK..

- [113] Optionally, the adjusting the MCS configuration of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the MCS configuration of the PDSCH, which includes adjusting at least one of: the MCS configuration of the PDSCH carrying the message msg2; the MCS configuration of the PDSCH carrying the message msg4; and the MCS configuration of the PDSCH carrying the downlink signaling and data in the connected state; and adjusting the MCS configuration of the PUSCH, which includes adjusting at least one of: the MCS configuration of the PUSCH carrying the message msg3; and the MCS configuration of the PDSCH carrying the uplink signaling and data in the connected state.
- [114] Optionally, the receiving information transmitted by the second network device includes at least one of the following: receiving the information related to the second network device transmitted by a service management and orchestration (SMO); receiving the information related to the second network device transmitted by the near-real-time RAN intelligent controller (Near-RT RIC), wherein the information related to the second network device is obtained by the Near-RT RIC from the second network device.
- [115] Optionally, the transmitting the first resource configuration to the second network device includes one of the following: transmitting the first resource configuration to the second network device; transmitting the first resource configuration to the Near-RT RIC, wherein the first resource configuration is transmitted to the second network device by the Near-RT RIC; or transmitting the first resource configuration to the second network device through the Near-RT RIC.
- [116] Optionally, the first network device is a non-real-time RAN intelligent controller (Non-RT RIC) or a near-real-time RAN intelligent controller (Near-RT RIC).
- [117] The technical solutions provided by the embodiments of this disclosure have at least the following beneficial effects: through predicting or calculating the service distribution related information of the user equipment during the second period after the first period, it may realize dynamic configurations of different coverage classifications in the cell, save energy consumption, and improve system capacity and performance at the same time.
- [118] In order to describe the methods provided in the embodiments of the present disclosure in more detail, the following will fully describe the solutions of the present disclosure through a plurality of optional embodiments.
- [119] Alternative embodiment 1

- [120] The embodiment of the present disclosure provides still another information processing method, which is used in a calculation and control unit, and the method may include the following steps.
- [121] Step 1: the network device is responsible for collecting data and reporting it to the calculation and control unit.
- [122] Optionally, the collected data is mainly regular measurement information and configuration information of the network device. Where, the conventional measurement information may include signal strength data, service data and performance data.
- [123] Signal strength data: which refers to the signal strength parameters reported by the UE, such as measured RSRP information.
- [124] Service data: which refers to cache changes of each UE counted by network device, such as uplink cache information and downlink cache information.
- [125] Performance data: which refers to the access performance data of each coverage level calculated by the network device, including the number of messages successfully received in the random access process, the number of preamble codes (Msg1), and the number of contention resolutions (Msg4) during the statistical period.
- [126] Where, the configuration information includes RSRP threshold configuration used for dividing coverage level, and resource configuration parameters corresponding to respective coverage levels.
- [127] The resource configuration parameters corresponding to respective coverage levels may include physical random access channel (PRACH) resource configuration parameters and scheduling resource configuration parameters. The PRACH resource configuration parameters may include PRACH period, the number of frequency domain subcarriers, and so on; the scheduling resource configuration parameters may include the number of repetitions for transmission for PDCCH, PDSCH, PUSCH and MCS configuration parameters.
- [128] Step 2: the external server may transmit the external data to the calculation and control unit through the open interface.
- [129] Optionally, the external data mainly includes the location information of the IoT terminal and the feature information of the IoT service. The location information of the IoT terminal includes the location parameter provided by the positioning server and flight trajectory parameters, etc.; the feature information of the IoT service includes the IoT service period and periodic reporting time provided by the service server, and so on.
- [130] Step 3: the calculation and control unit may analyze the measured data and external data to obtain the time-varying distribution of IoT services under respective RSRPs.
- [131] Optionally, the calculation and control unit analyzes the measurement data and external data, including: by using the reported cache information and IoT service in-

formation, it is possible to obtain the time-varying distribution of IoT terminals (hereinafter referred to as 'IoT service terminals') that have services to be transmitted and need to access to network devices.

[132] Optionally, by using external location information, it is possible to further obtain the time distribution of IoT service terminals under respective RSRPs.

[133] By using the reported access performance data and configuration information, it is possible to obtain the capacity performance reference of the system under different RACH configurations.

[134] Step 4: the calculation and control unit may predict the IoT service terminal distribution in the next time period.

[135] Optionally, in step 4, it may use the time distribution of IoT service terminals under respective RSRPs obtained in step 3 to predict the time distribution of IoT service terminals under respective RSRPs in the next time period.

[136] Step 5: the calculation and control unit may form optimized wireless resources and transmission parameters based on the predicted IoT service terminal distribution.

[137] Optionally, in step 5, it may use the predicted IoT service terminal distribution under respective RSRPs obtained in step 4 to cluster RSRP thresholds of different coverage levels.

[138] Optionally, based on obtained the RSRP thresholds, it is possible to calculate the number of repetitions of PDCCH/PDSCH/PUSCH/UCI (uplink control information) and MCS (modulation and coding scheme) configuration of the IoT terminal under respective CLs.

[139] Specifically: the adjusting of the number of repetitions for transmission of the physical downlink control channel may include adjusting the number of repetitions of message msg2, message msg3, and message msg4 in the common search space, and the number of repetitions of the dedicated search space.

[140] The adjusting of the number of repetitions of the physical downlink shared channel and the MCS configuration may include adjusting the number of repetitions of the physical downlink shared channel that carries msg2 messages/msg4 messages, and carries downlink signaling and data in the connected state and adjusting the MCS configuration.

[141] The adjusting of the number of repetitions of the physical uplink shared channel and the adjusting of the MCS configuration may include adjusting the number of repetitions of the physical uplink shared channel that carries the msg3 message, and carries the uplink signaling and data in the connected state, and adjusting the MCS configuration.

[142] Optionally, the adjustment of the number of repetitions and the MCS configuration may be performed when the number of CL coverage levels and thresholds change, to

adjust the number of repetitions and MCS value for each coverage level; the adjustment of the number of repetitions and the MCS configuration may be performed after the number of CL coverage levels and thresholds are determined, to adjust the number of repetitions and MCS value for each coverage level at finer granularity.

[143] Optionally, the number of IoT terminals under respective coverage levels may be obtained based on the obtained RSRP threshold in combination with the distribution of IoT service terminals under respective RSRPs.

[144] Optionally, the optimal random access channel (RACH) configuration parameter under respective coverage levels may be obtained based on the number of IoT terminals under respective coverage levels in combination with the access performance capacity reference obtained in step 3.

[145] Step 6: the calculation and control unit may transmit the optimized radio resources and transmission parameters to the network device, and the network device performs the parameter updating and configuration.

[146] Optionally, for step 4, the calculation and control unit may use at least one of an artificial intelligence (AI) model and a machine learning ML model to predict the service distribution in the next time period, which involves using historical data (for example, data from the past year) to train the AI model, and the distribution of the IOT service capacity over time under different RSRPs in the next period is predicted based on the distribution characteristics of the most recent N (≥ 1) periods. For example, the predicted requirement capacity distribution under the i^{th} RSRP in the next period T is as the following formula (1):

[147] $\text{Capacity_RSRP}_i(t) \ (0 < t < T) \ (1)$

[148] Optionally, for step 5, the calculation and control unit may form optimized wireless resources and transmission parameters based on the predicted IoT service terminal distribution, which specifically includes the following steps.

[149] Step 5-1: estimating the classification configuration parameters of the CL in the system, which include the RSRP threshold and the number of CLs.

[150] Based on the predicted IoT service terminal distribution, the method of variance analysis is used to obtain the number of coverage levels and the corresponding RSRP threshold.

[151] Step 1: based on the AI prediction result obtained in step 4, a formula (2) is used to calculate the sum of capacity requirements under the i^{th} RSRP within the prediction period T , formula (2) is as follows:

[152] $\text{Capacity_RSRP}_i(T) = \sum_T \text{Capacity_RSRP}_i(t) \ (2)$

[153] Then, the distribution of the required capacity within the period T is obtained. As shown in FIG. 8, the X-axis represents RSRP value, and the Y-axis represents the capacity corresponding to respective RSRPs within the prediction period T .

[154] Step 2: as shown in FIG. 9, through a sliding window, the RSRP distribution range within the period T is divided into m regions. The set number of sliding windows depends on the maximum number of coverage levels supported by the system. If the maximum number of coverage levels supported by the system is M (for example, which is 3 in the current NB-IOT system, 3 is taken as an example for analysis in this case), then M-1 sliding windows are used for division, and m=1~M.

[155] Step 3: variance analysis is performed on the m divided regions obtained by each sliding of the sliding window in step 2, as shown in FIG. 10, it may perform corresponding weighting processing by taking into account the influence of capacity distribution, the weighted variance for the i^{th} region is the following formula (3):

$$[156] \quad \sigma^2_{CL_i} = \frac{\sum_{i=1}^{N_i} c(r_i)}{\sum_{i=1}^{N_i} c(r_i)} \left(r_i - \frac{1}{N_i} \sum_{i=1}^{N_i} r_i \right)^2 \quad (3)$$

[157] Where, CL_i indicates the i^{th} coverage level, $i=1\sim M$; r_i indicates the RSRP value of the IoT service terminal, of which the range is [RSRPmin, RSRPmax]; $C(r)$ indicates the capacity function; N_i indicates the overall value of RSRP in the i^{th} coverage level; M indicates the maximum number of coverage levels supported by the system.

[158] Step 4: values for RSRP TH_1 & TH_2 & ... & TH_{M-1} are selected so that the discrete variance corresponding to the system is the smallest in the divided area, as shown in formula (4), formula (4) represents the minimum value for the sum of M weighted variances.

$$[159] \quad \arg \min \sum_{i=1}^M \sigma^2_{CL_i} \quad (4)$$

[160] Step 5: based on the values for RSRP TH_1 & TH_2 & ... & TH_{M-1} obtained in Step 4, obtaining the system configuration of the RSRP threshold.

[161] Optionally, NB-IoT supports up to 3 coverage levels.

[162] The RSRP TH_1 & TH_2 values obtained in step 4 may be divided into three situations as shown in FIG. 11-a, 11-b and 11-c.

[163] As shown in FIG. 11-a, when $TH_1 = \text{RSRPmax}$ and $TH_2 = \text{RSRPmin}$, the variance is smallest, then it may be considered that the RSRP distribution of all IoT terminals has the smallest variance under the condition of not dividing the range, so there is no need to configure RSRP thresholds, and the cell has only 1 coverage level.

[164] As shown in FIG. 11-b, when $TH_2 = \text{RSRPmin}$, $TH_1 \neq \text{RSRPmin}$, the variance is smallest, then it may be determined that it only needs to configure one threshold of TH_1 , and the cell is divided into 2 coverage levels.

[165] As shown in FIG. 11-c, when $TH_2 \neq \text{RSRPmin}$, $TH_1 \neq TH_2$, and $TH_1 \neq \text{RSRPmax}$, the variance is smallest, then it may be determined that the thresholds are TH_1 and TH_2 ,

and the cell is divided into 3 coverage levels.

[166] Step 5-2-1: calculating the configuration of data parameters under different CLs, including the number of repetitions for transmission and the MCS value.

[167] Step 1: estimating the distribution of the minimum RSRP value of IOT services in different CL ranges over time. Based on the RSRP threshold obtained above, the range of RSRP values in different CLs in the next period may be obtained.

[168] Optionally, as shown in FIG. 12, the AI-based prediction may obtain the capacity requirement distribution under respective RSRPs, as shown in formula (1):

[169] $\text{Capacity_RSRPI}(t) \ (0 < t < T)$

[170] Optionally, when $\text{Capacity_RSRPI}(t_1)=0$ or $\text{Capacity_RSRPI}(t_1) < \text{Capacity_Threshold}$, then at time t_1 , the probability of IOT services occurring under RSRPi is zero (or very small), and there will be no data transmission, then the probability of corresponding RSRP existing is 0, otherwise the probability of corresponding RSRP existing is 1.

[171] Optionally, through the analysis of all RSRPs in the CL range at each time t within the time period T , the RSRP set with the probability of all RSRPs existing in the CL range is obtained, and then at each time t in the period T , the minimum RSRP value corresponding to the system is obtained, which refers to the distribution of the minimum RSRP value in CL over time.

[172] Optionally, as shown in FIG. 13, the distribution of the minimum RSRP value under respective CLs of the system over time may be obtained.

[173] Step 2: analyzing the fluctuation features of the minimum RSRPmin(t) value over time in respective CLs. The calculation duration is the minimum RSRP change in the two time periods t_1 and t_2 before and after t_{d1} and t_{d2} , respectively, as shown in formula (5):

[174] $\text{RSRP} = \text{RSRP}_{\min}(t_2) - \text{RSRP}_{\min}(t_1) \ (5)$

[175] Step 3: based on RSRP, estimating the change in the number of data retransmissions and MCS configuration within the time period t_2 . The change in the number of repetitions is defined as Rep, and the change in code modulation is defined as ΔMCS . A possible related algorithm is shown in FIG. 14, where X, Y, and Z values depend on the performance of the device and can be pre-configured.

[176] The RSRP obtained in S301 is rounded to obtain an integer difference.

[177] S302: determining whether RSRP is not less than XdB; when ΔRSRP is not less than XdB, the change in the number of repetitions for transmission is as follows:

[178] S303, $\Delta\text{Rep} = \text{floor}(\Delta\text{RSRP}/X)$.

[179] After adjusting the number of repetitions, the difference of remaining RSRPs is as follows:

[180] S304, $\Delta\text{RSRPr} = \Delta\text{RSRP} - X * \Delta\text{Rep}$;

- [181] S305, determining whether ΔRSRPr is greater than YdB ; when ΔRSRPr is less than YdB , then S309, MCS configuration will not be changed: $\Delta\text{MCS}=0$; when ΔRSRPr is greater than YdB , then S306;
- [182] S306, determining whether ΔRSRPr is greater than ZdB ; when ΔRSRPr is greater than YdB but less than ZdB , then S307, MCS configuration change is: $\Delta\text{MCS}=1$; when ΔRSRPr is greater than ZdB , then S308, MCS configuration change is: $\Delta\text{MCS}=2$;
- [183] S302, determining whether RSRP is not less than XdB ; if ΔRSRP is less than XdB , the number of repetitions for transmission does not change, S310 $\Delta\text{Rep}=0$; MCS configuration change is:
- [184] S311: determining whether ΔRSRPr is greater than YdB ; when ΔRSRP is less than YdB , then S312, MCS configuration will not be changed: $\Delta\text{MCS}=0$;
- [185] S313: determining whether ΔRSRPr is greater than ZdB ; when ΔRSRP is greater than YdB but less than ZdB , then S314, MCS configuration change is: $\Delta\text{MCS}=1$; when ΔRSRP is greater than ZdB , then S315, MCS configuration changes is: $\Delta\text{MCS}=2$.
- [186] Step 4: based on the number of data retransmissions RepN_{um1} and MCS_1 in the time period t_1 , configuring the number of data retransmissions RepN_{um2} and MCS_2 in the time period t_2 , as shown in formulas (6) and (7):
- [187] $\text{RepNum}_2 = \text{RepNum}_1 + \text{Rep}$ (6)
- [188] $\text{MCS}_2 = \text{MCS}_1 + \text{MCS}$ (7)
- [189] Step 5-2-2: calculating the parameter configuration of RACH under different CLs, including the number of repetitions for transmission of random access preamble, the number of subcarriers, and the period.
- [190] Step 1: estimating the time-varying distribution of IOT service capacity requirements over time in different CL ranges.
- [191] First, according to the RSRP threshold obtained above, the range of RSRP values in different CLs in the next period may be obtained;
- [192] The required capacity distribution under respective RSRPs obtained based on AI prediction is shown in formula (1):
- [193] $\text{Capacity_RSRP}_i(t)$ ($0 < t < T$)
- [194] In the period T , the distribution characteristics of the total required capacity of the IOT service under CL_x over time is shown in formula (8):
- [195] $\text{Capacity}_{\text{CL}_x_RSRP}(t) = \sum_i \text{Capacity_RSRP}_i(t)$ (8)
- [196] In this way, the distribution of the capacity requirements of the IOT services under respective CLs of the system over time may be obtained, as shown in FIG. 15.
- [197] Step 2: analyzing the fluctuation features of IOT capacity requirement over time in each CL. The calculation duration is the change of the capacity requirement in the two

time periods t_1 and t_2 before and after t_{d1} and t_{d2} , respectively, as shown in formula (9):

[198] $\Delta\text{Capacity} = \text{Capacity}_{\text{CLx_RSRP}(t_2)} - \text{Capacity}_{\text{CLx_RSRP}(t_1)}$ (9)

[199] Step 3: determining whether to reconfigure RACH resources of CL based on $\Delta\text{Capacity}$. If $\Delta\text{Capacity}$ is greater than the threshold $\Delta\text{Capacity_Threshold}$, it is considered that the current IoT capacity increases, and the existing RACH resources cannot meet the access requirements, and RACH resources need to be reconfigured; otherwise, the RACH resource configuration does not change.

[200] Step 4: determining the resource configuration of RACH in CL.

[201] Based on the previously obtained capacity performance reference under different RACH configurations, it may estimate the RACH resource configuration that meets the $\text{Capacity}_{\text{CLx_RSRP}(t_2)}$ capacity requirement in the time period t_2 , which includes the number of repetitions, the period, and the number of subcarriers.

[202] The capacity performance reference gives the system's access success rate or system's access capacity value under different RACH resource configurations (the number of repetitions, period, the number of subcarriers) and the number of users with access requirements.

[203] According to the estimated required capacity $\text{Capacity}_{\text{CLx_RSRP}(t_2)}$, the configuration that enables the highest system access success rate under the required capacity is selected from the capacity references as the RACH configuration in the time period t_2 .

[204] Alternative embodiment 2

[205] FIG. 16-a and FIG. 16-b show a principle flow of information processing under the O-RAN system and the modules and interfaces in the corresponding O-RAN system framework.

[206] As shown in FIG. 16-a and FIG. 16-b: step (1): the SMO module collects the location information of the terminal and the feature information of the IOT service (such as the periodic characteristic of the service) from the application server. The above information is used to realize the estimation and prediction of IOT coverage characteristics and service feature in the cell.

[207] The location of IoT users is mostly static (for example, meter reading service) or the running trajectory is regular (for example, high-voltage power line inspection service). Operators may obtain relevant information from vertical industries and store it in the operation server in advance.

[208] IOT services generally have periodic regularities. For example, the humidity detection service detects and reports the humidity indicators of the surrounding environment every fixed time interval. Operators can also store the relevant requirement information of vertical industries in the operation server in advance.

[209] SMO may obtain the configuration information about the terminals and services of

vertical industries (such as location and periodicity of service occurrence) stored in the server in advance from the running server through the public interface.

- [210] Step (2): the SMO receives information from the O-eNB or O-DU through the O1 interface. The information may include the measurements about RSRP and BSR reported by the IOT terminal, and information about the base station measurement statistics and configuration; the base station measurement statistics and configuration information may include the number of Msg1s received in each CL, the number of Msg4s received in each CL, and the UE downlink BO size; the current cell configuration information may include RACH configuration information (number of subcarrier resources for each CL, the number of repetitions of the preamble code, period), the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.
- [211] Step (3): the SMO transmits the received measurements to Non-RT RIC via the internal bus. The Non-RT RIC analyzes the measurement and statistical results, which involves using user BO and vertical industry preset period or time settings to obtain the periodic characteristics of IOT services under the coverage of respective RSRPs, involves using the number of Msg1 and Msg4 received in each CL and the corresponding RACH configuration information to analyze the capacity performance reference under different RACH configurations. This capacity reference gives different RACH configurations (the number of repetitions, period, the number of subcarriers), the access success rate or the access capacity value of the system under any number of users with access requirements.
- [212] Step (4): the Non-RT RIC uses AI/ML to predict the service distribution in the next time period, which involves Non-RT RIC using historical data (such as the data of the past year) to train the AI model to obtain an AI model suitable for IoT service in a cell. It involves using the trained AI model in combining with the service period distribution characteristics obtained in step (3) and the actual measurement data in the last N (≥ 1) periods to predict the distribution of the IOT service capacity over time under different RSRPs in the next period.
- [213] Step (5): the Non-RT RIC dynamically configures cell radio resources and transmission parameters based on the distribution characteristics of IOT services in the cell, which includes clustering IOT terminals in the same cell by using the capacity

weighted variance analysis method, which is realized particularly through estimating and setting different RSRP thresholds. Further, for IOT users in the same cluster, the fluctuation features of the coverage characteristics over time are estimated, and the number of repetitions required for data transmission and the change of MCS are dynamically estimated based on the fluctuation features, so as to obtain the number of repetitions of data transmission and the optimal configuration of MCS for the same type of IOT users in different time periods. On the other hand, in order to ensure the access performance of the same type of IOT users, it may estimate the capacity requirement distribution of the same type of user IOT services in different time periods, and use the capacity performance reference under different RACH configurations obtained in step (3) to estimate the best RACH resource and transmission parameter configuration in different time periods (including the number of RACH subcarriers, period, and the number of repetitions).

- [214] Step (6): it may transmit the resource and transmission parameter configuration obtained in step (5) to SMO through the internal bus interface Non-RT RIC. Next, SMO transmits the relevant parameter configuration to the O-eNB or O-DU by using the O1 interface. Finally, the O-eNB or O-DU completes the update of resource configuration parameters.
- [215] Optionally, a principle flow of information processing is shown in FIG. 17.
- [216] S401: the OAM receives data information transmitted by an external server.
- [217] Optionally, the data information may include location information of the IOT terminal, and feature information of the IOT service, such as the time and period of the service occurring.
- [218] S402: the OAM receives measurement and configuration information from the E2 node through the O1 interface, which includes RSRP measurement value, data size in the terminal buffer, RACH-related configuration and performance information, data and control channel and other cell configuration information.
- [219] S403, the OAM extracts and transmits the data to the Non-RT RIC.
- [220] S404, the Non-RT RIC analyzes and obtains the coverage characteristics, period characteristics and capacity performance of the IOT service.
- [221] S405, the Non-RT RIC trains the AI/ML model and predicts the RSRP-level capacity distribution.
- [222] S406, the Non-RT RIC estimates and determines the service coverage level and transmission and resource configuration parameters.
- [223] S407, the Non-RT RIC transmits the configuration information of the IOT service to the OAM through the internal bus.
- [224] S408, the OAM delivers the configuration information of the cell IOT service to the E2 node through the O1 interface.

- [225] Alternative embodiment 3
- [226] FIG. 18-a and FIG. 18-b show a principle flow of information processing under the O-RAN system and the modules and interfaces in the corresponding O-RAN system framework. Compared with the embodiment 2, the embodiment 3 has different transmission interface for the configuration parameters.
- [227] As shown in FIG. 18-a and FIG. 18-b: steps (1)~(5): which are same as the corresponding steps (1)~(5) in the embodiment 2.
- [228] Step (6): it may transmit the resource and transmission parameter configuration results obtained by Non-RT RIC in step (5) to Near-RT RIC through the A1 interface, then, it is transmitted to the O-eNB or O-DU by using the E2 interface. Finally, the O-eNB or O-DU completes the update of resource configuration parameters.
- [229] Optionally, a principle flow of information processing, as shown in FIG. 19.
- [230] S501, the OAM receives data information transmitted by an external server.
- [231] Optionally, the data information may include location information of the IOT terminal, and feature information of the IOT service, such as the time and period of the service occurrence.
- [232] S502, the OAM receives measurement and configuration information from the E2 node through the O1 interface, which includes RSRP measurement value, data size in the terminal buffer, RACH-related configuration and performance information, data and control channel and other cell configuration information.
- [233] S503, the OAM extracts and transmits the data to Non-RT RIC.
- [234] S504, the Non-RT RIC analyzes and obtains the coverage characteristics, period characteristics and capacity performance of IOT services.
- [235] S505, the Non-RT RIC trains the AI/ML model and predicts the RSRP-level capacity distribution.
- [236] S506, the Non-RT RIC estimates and determines the service coverage level and transmission and resource configuration parameters.
- [237] S507, the Non-RT RIC delivers the configuration of the cell IOT service to the Near-RT RIC through the A1 interface.
- [238] S508, the Near-RT RIC delivers the configuration information of the cell IOT service through the E2 interface.
- [239] Alternative embodiment 4
- [240] FIG. 20-a and FIG. 20-b show a principle flow of information processing under the O-RAN system and the modules and interfaces in the corresponding O-RAN system framework.
- [241] As shown in FIG. 20-a and FIG. 20-b: Step (1): the SMO module collects the location information of the terminal and the feature information of the IOT service from the application server, such as the periodic characteristic of the service. The

above information is used to realize the estimation and prediction of IOT coverage characteristics and service characteristics in the cell.

- [242] The location of IoT users is mostly static (for example, meter reading service) or the running trajectory is regular (for example, high-voltage power line inspection service). Operators may obtain relevant information from vertical industries and store it in the operation server in advance.
- [243] IOT services generally have periodic regularities. For example, the humidity detection service detects and reports the humidity indicators of the surrounding environment every fixed time interval. Operators can also store the relevant requirement information of vertical industries in the operation server in advance.
- [244] SMO may obtain the configuration information of terminals and services from vertical industries (such as location and periodicity of service occurrence) stored in the server in advance from the running server through the public interface.
- [245] Step (2.1): SMO receives information from O-eNB or O-DU through O1 interface, which includes measurements about RSRP and BSR reported by IOT terminal, and base station measurement statistics and configuration information, where the base station measurement statistics and configuration information include the number of Msg1 received in each CL, the number of Msg4 received in each CL, the UE downlink BO size; the current cell configuration information may include RACH configuration information (number of subcarrier resources for each CL, the number of repetitions of the preamble code, period), the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.
- [246] Step (2.2): the Near-RT RIC receives information from O-eNB or O-DU through the E2 interface, which includes the measurements about RSRP and BSR reported by the IOT terminal, and base station measurement statistics and configuration information. The base station measurement statistics and configuration information may include UE downlink BO size, the current cell configuration information, the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS

transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.

- [247] Step (3.1): the SMO transmits the received measurements to Non-RT RIC via the internal bus. The Non-RT RIC analyzes the measurement and statistical results, which involves using user BO and vertical industry preset period or time settings to obtain the periodic characteristics of IOT services under the coverage of respective RSRPs, involves using the number of Msg1 and Msg4 received in each CL and the corresponding RACH configuration information to analyze the capacity performance reference under different RACH configurations. This capacity reference gives different RACH configurations (the number of repetitions, period, the number of subcarriers), the access success rate or the access capacity value of the system under any number of users with access requirements.
- [248] Step (3.2): the Non-RT RIC transfers the analyzed period characteristics of IOT services under the coverage of each RSRP and the capacity performance reference results under different RACH configurations to Near-RT RIC through the A1 interface.
- [249] Step (4.1): the Non-RT RIC uses long-term historical data (such as the data of the past year) to train the AI model to obtain an AI model suitable for the IOT service in the cell.
- [250] Step (4.2): the Non-RT RIC deploys the trained AI model suitable for the IOT service to the Near-RT RIC through the O1 interface.
- [251] Step (4.3): the Near-RT RIC uses the AI/ML model to predict the service distribution in the next time period, which involves using the trained AI model in combining with the service period distribution characteristics obtained in step (3.2) and the actual measurement data in the last N (≥ 1) periods to predict the distribution of the IOT service capacity over time under different RSRPs in the next period.
- [252] Step (5): the Non-RT RIC dynamically configures cell radio resources and transmission parameters based on the distribution characteristics of IOT services in the cell, which includes clustering IOT terminals in the same cell by using the capacity weighted variance analysis method, which is realized particularly through estimating and setting different RSRP thresholds. Further, for IOT users in the same cluster, the fluctuation features of the coverage characteristics over time are estimated, and the number of repetitions required for data transmission and the change of MCS are dynamically estimated based on the fluctuation features, so as to obtain the number of repetitions of data transmission and the optimal configuration of MCS for the same type of IOT users in different time periods. On the other hand, in order to ensure the access performance of the same type of IOT users, it may estimate the capacity requirement distribution of the same type of user IOT services in different time periods, and use the capacity performance reference under different RACH configurations

obtained in step (3.2) to estimate the best RACH resource and transmission parameter configuration in different time periods (including the number of RACH subcarriers, period, and the number of repetitions).

- [253] Step (6): the Near-RT RIC transmits configuration information about wireless resources and transmission parameters to O-eNB or O-DU through the E2 interface, and O-eNB or O-DU completes the update of resource configuration parameters.
- [254] Optionally, a principle flow of information processing, as shown in FIG. 21.
- [255] S601: the OAM receives data information transmitted by an external server.
- [256] Optionally, the data information may include location information of the IOT terminal, and feature information of the IOT service, such as the time and period of the service occurring.
- [257] S602: the OAM receives measurement and configuration information from the E2 node through the O1 interface, which includes RSRP measurement value, data size in the terminal buffer, RACH-related configuration and performance information, data and control channel and other cell configuration information.
- [258] S603, the OAM extracts and transmits the data to the Non-RT RIC.
- [259] S604, the Non-RT RIC analyzes and obtains the coverage characteristics, period characteristics and capacity performance of IOT services.
- [260] S605, the Non-RT RIC uses long-term historical measurement data to train AI/ML models.
- [261] S606, the Non-RT RIC transmits AI/ML model to near-RT RIC through O1 interface.
- [262] S607, the Non-RT RIC transmits the service characteristic and performance information obtained by analysis to the near-RT RIC through the A1 interface.
- [263] S608, the Near-RT RIC receives the measurement and configuration information from the E2 node through the E2 interface, which includes RSRP measurement value, data size in terminal buffer, RACH-related configuration and performance information, data and control channel and other cell configuration information.
- [264] S609, the Near-RT RIC trains the AI/ML model and predicts the RSRP-level capacity distribution.
- [265] S610, the Near-RT RIC estimates and determines the service coverage level and transmission and resource configuration parameters.
- [266] S611, the Near-RT RIC delivers the configuration information of the cell IOT service through the E2 interface.
- [267] Alternative embodiment 5
- [268] FIG. 22-a and FIG. 22-b show a principle flow of information processing under the O-RAN system and the corresponding modules and interfaces in the O-RAN system framework.

- [269] As shown in FIG. 22-a and FIG. 22-b: Step (1): the SMO module collects the location information of the terminal and the feature information of the IOT service from the application server, such as the periodic characteristic of the service. The above information is used to realize the estimation and prediction of IOT coverage characteristics and service characteristics in the cell.
- [270] The location of IoT users is mostly static (for example, meter reading service) or the running trajectory is regular (for example, high-voltage power line inspection service). Operators may obtain relevant information from vertical industries and store it in the operation server in advance.
- [271] IOT services generally have periodic regularities. For example, the humidity detection service detects and reports the humidity indicators of the surrounding environment every fixed time interval. Operators can also store the relevant requirement information of vertical industries in the operation server in advance.
- [272] SMO may obtain the configuration information of terminals and services from vertical industries (such as location and periodicity of service occurrence) stored in the server in advance from the running server through the public interface.
- [273] Step (2.1): SMO receives information from O-eNB or O-DU through O1 interface, which includes measurements about RSRP and BSR reported by IOT terminal, and base station measurement statistics and configuration information, where the base station measurement statistics and configuration information include the number of Msg1 received in each CL, the number of Msg4 received in each CL, the UE downlink BO size; the current cell configuration information may include RACH configuration information (number of subcarrier resources for each CL, the number of repetitions of the preamble code, period), the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.
- [274] Step (2.2): the Near-RT RIC receives information from O-eNB or O-DU through the E2 interface, which includes the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of

repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.

- [275] Step (3.1): the SMO transmits the received measurements to Non-RT RIC via the internal bus. The Non-RT RIC analyzes the measurement and statistical results, which involves using user BO and vertical industry preset period or time settings to obtain the periodic characteristics of IOT services under the coverage of respective RSRPs, involves using the number of Msg1 and Msg4 received in each CL and the corresponding RACH configuration information to analyze the capacity performance reference under different RACH configurations. This capacity reference gives different RACH configurations (the number of repetitions, period, the number of subcarriers), the access success rate or the access capacity value of the system under any number of users with access requirements. Where, the periodic characteristics of IOT services covered by each RSRP will be transferred to the AI prediction processing link within the Non-RT RIC.
- [276] Step (3.2), the Non-RT RIC transfers the analyzed capacity performance reference results under different RACH configurations to the Near-RT RIC through the A1 interface.
- [277] Step (4.1), the Non-RT RIC uses long-term historical data (such as the data of the past year) to train the AI model to obtain an AI model suitable for the IOT service in the cell. And the Non-RT RIC uses the trained AI model in combining with the service period distribution characteristics obtained in step (3.1) and the actual measurement data collected in step (2.1) in the last N (≥ 1) periods to predict the distribution of the IOT service capacity over time under different RSRPs in the next period.
- [278] Step (4.2), the Non-RT RIC uses the A1 interface to transfer the predicted distribution information of IOT service capacity over time under different RSRPs to Near-RT RIC.
- [279] Step (5): the Non-RT RIC dynamically configures cell radio resources and transmission parameters based on the distribution characteristics of IOT services in the cell, which includes clustering IOT terminals in the same cell by using the capacity weighted variance analysis method, which is realized particularly through estimating and setting different RSRP thresholds. Further, for IOT users in the same cluster, the fluctuation features of the coverage characteristics over time are estimated, and the number of repetitions required for data transmission and the change of MCS are dynamically estimated based on the fluctuation features, so as to obtain the number of repetitions of data transmission and the optimal configuration of MCS for the same type of IOT users in different time periods. On the other hand, in order to ensure the access performance of the same type of IOT users, it may estimate the capacity requirement distribution of the same type of user IOT services in different time periods,

and use the capacity performance reference under different RACH configurations obtained in step (3.2) to estimate the best RACH resource and transmission parameter configuration in different time periods (including the number of RACH subcarriers, period, and the number of repetitions).

- [280] Step (6): the Near-RT RIC transmits configuration information about wireless resources and transmission parameters to O-eNB or O-DU through the E2 interface, and O-eNB or O-DU completes the update of resource configuration parameters.
- [281] Optionally, a principle flow of information processing, as shown in FIG. 23.
- [282] S701: the OAM receives data information transmitted by an external server.
- [283] Optionally, the data information may include the location information of the IOT terminal, and feature information of the IOT service, such as the time and period when the service occurring.
- [284] S702: the OAM receives measurement and configuration information from the E2 node through the O1 interface, which includes RSRP measurement value, data size in the terminal buffer, RACH-related configuration and performance information, data and control channel and other cell configuration information.
- [285] S703, the OAM extracts and transmits the data to Non-RT RIC. S704, Non-RT RIC analyzes and obtains the coverage characteristics, period characteristics and capacity performance of IOT services.
- [286] S705, the Non-RT RIC uses long-term historical measurement data to train AI/ML models.
- [287] S706, the Non-RT RIC trains the AI/ML model and predicts the RSRP-level capacity distribution.
- [288] S707, the Non-RT RIC transmits the analyzed service characteristics and performance information to the near-RT RIC through the A1 interface.
- [289] S708, the Non-RT RIC transmits the predicted capacity distribution information to the near-RT RIC through the A1 interface.
- [290] S709, the Near-RT RIC receives the configuration information from the E2 node through the E2 interface, which includes RACH-related configuration, cell configuration information such as data and control channels, etc.
- [291] S710, the Near-RT RIC estimates and determines the service coverage level and transmission and resource configuration parameters.
- [292] S711, the Near-RT RIC delivers the configuration information of the cell IOT service through the E2 interface.
- [293] Alternative embodiment 6
- [294] FIG. 24-a and FIG. 24-b show a principle flow of information processing under the O-RAN system and the corresponding modules and interfaces in the O-RAN system framework.

- [295] As shown in FIG. 24-a and FIG. 24-b: Step (1): the SMO module collects the location information of the terminal and the feature information of the IOT service from the application server, such as the periodic characteristic of the service. The above information is used to realize the estimation and prediction of IOT coverage characteristics and service characteristics in the cell.
- [296] The location of IoT users is mostly static (for example, meter reading service) or the running trajectory is regular (for example, high-voltage power line inspection service). Operators may obtain relevant information from vertical industries and store it in the operation server in advance.
- [297] IOT services generally have periodic regularities. For example, the humidity detection service detects and reports the humidity indicators of the surrounding environment every fixed time interval. Operators can also store the relevant requirement information of vertical industries in the operation server in advance.
- [298] SMO may obtain the configuration information of terminals and services from vertical industries (such as location and periodicity of service occurrence) stored in the server in advance from the running server through the public interface.
- [299] Step (2.1), the Near-RT RIC receives information from O-eNB or O-DU through E2 interface, which includes measurements about RSRP and BSR reported by IOT terminal, and base station measurement statistics and configuration information, which includes the number of Msg1 received in each CL, the number of Msg4 received in each CL, the UE downlink BO size; the current cell configuration information may include RACH configuration information (number of subcarrier resources for each CL, the number of repetitions of the preamble code, period), the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.
- [300] Step (2.2), the Near-RT RIC forwards the information from O-eNB or O-DU and configuration to SMO through O1 interface.
- [301] Step (3.1), the SMO transmits the received and configured information to Non-RT RIC through the internal bus. The Non-RT RIC analyzes the measurement and statistical results, which involves using user BO and vertical industry preset period or time settings to obtain the periodic characteristics of IOT services under the coverage of respective RSRPs, involves using the number of Msg1 and Msg4 received in each CL and the corresponding RACH configuration information to analyze the capacity

performance reference under different RACH configurations. This capacity reference gives different RACH configurations (the number of repetitions, period, the number of subcarriers), the access success rate or the access capacity value of the system under any number of users with access requirements.

- [302] Step (3.2): the Non-RT RIC transfers the analyzed period characteristics of IOT services under the coverage of each RSRP and the capacity performance reference results under different RACH configurations to Near-RT RIC through the A1 interface.
- [303] Step (4.1): the Non-RT RIC uses long-term historical data (such as the data of the past year) to train the AI model to obtain an AI model suitable for the IOT service in the cell.
- [304] Step (4.2): the Non-RT RIC deploys the trained AI model suitable for the IOT service to the Near-RT RIC through the O1 interface.
- [305] Step (4.3): the Near-RT RIC uses the AI/ML model to predict the service distribution in the next time period, which involves using the trained AI model in combining with the service period distribution characteristics obtained in step (3.2) and the actual measurement data in the last N (≥ 1) periods to predict the distribution of the IOT service capacity over time under different RSRPs in the next period.
- [306] Step (5): the Non-RT RIC dynamically configures cell radio resources and transmission parameters based on the distribution characteristics of IOT services in the cell, which includes clustering IOT terminals in the same cell by using the capacity weighted variance analysis method, which is realized particularly through estimating and setting different RSRP thresholds. Further, for IOT users in the same cluster, the fluctuation features of the coverage characteristics over time are estimated, and the number of repetitions required for data transmission and the change of MCS are dynamically estimated based on the fluctuation features, so as to obtain the number of repetitions of data transmission and the optimal configuration of MCS for the same type of IOT users in different time periods. On the other hand, in order to ensure the access performance of the same type of IOT users, it may estimate the capacity requirement distribution of the same type of user IOT services in different time periods, and use the capacity performance reference under different RACH configurations obtained in step (3.2) to estimate the best RACH resource and transmission parameter configuration in different time periods (including the number of RACH subcarriers, period, and the number of repetitions).
- [307] Step (6): the Near-RT RIC transmits configuration information about wireless resources and transmission parameters to O-eNB or O-DU through the E2 interface, and O-eNB or O-DU completes the update of resource configuration parameters.
- [308] Optionally, a principle flow of information processing, as shown in FIG. 25.
- [309] S801: The OAM receives data information transmitted by an external server.

- [310] Optionally, the data information may include the location information of the IOT terminal, and feature information of the IOT service, such as the time and period when the service occurring.
- [311] S802, the near-RT RIC receives measurement and configuration information from the E2 node through the E2 interface.
- [312] S803: the OAM receives the measurement information from the E2 node transmitted by the near-RT RIC through the O1 interface.
- [313] S804, the OAM extracts and transmits the data to Non-RT RIC.
- [314] S805, the Non-RT RIC analyzes the coverage characteristics, period characteristics and capacity performance of IOT services.
- [315] S806, the Non-RT RIC uses long-term historical measurement data to train AI/ML models.
- [316] S807, the Non-RT RIC transmits AI/ML model to near-RT RIC through O1 interface.
- [317] S808, the Non-RT RIC transmits the service characteristic and performance information obtained by analysis through the A1 interface.
- [318] S809, the Near-RT RIC trains AI/ML models and predicts RSRP-level capacity distribution.
- [319] S810, the Near-RT RIC estimates and determines the service coverage level and transmission and resource configuration parameters.
- [320] S811, the Near-RT RIC delivers the configuration information of the cell IOT service through the E2 interface.
- [321] It should be noted that the following messages need to be introduced in order to implement the embodiments of the application described above:
- [322] A1 interface, downlink direction: 1) If data analysis and prediction are implemented in Non-RT RIC, and the final resource configuration parameters are estimated (embodiment 1 and embodiment 2), then the optimized configuration parameter values are transferred to the Near-RT RIC (embodiment 2). At this time, the configuration parameters that need to be provided by the A1 interface may include the RSRP threshold corresponding to each CL, and the RACH resource configuration under respective CLs (the number of subcarriers, period And the number of repetitions), each CL downlink data transmission parameter configuration (MCS, the number of repetitions of data channel, the number of repetitions of control channel), each CL uplink data transmission parameter configuration (MCS, the number of repetitions of data channel, the number of repetitions of feedback information). 2) If AI/ML prediction is implemented in Near-RT RIC (Embodiment 3 and Embodiment 5), the parameters that need to be provided by the A1 interface may include the periodic characteristics of IOT services under the coverage of respective RSRPs and capacity performance reference

results under different RACH configurations. 3) If AI/ML prediction is implemented in None-RT RIC, but the estimation processing of the configuration is implemented in Near-RT RIC (embodiment 4), the parameters provided by the A1 interface may include capacity performance reference results under different RACH configurations, and information on the distribution of IOT service capacity over time under different RSRPs predicted by AI.

[323] E2 interface, downlink direction: If the Near-RT RIC receives the configuration information from the A1 interface or performs data estimation processing in the Near-RT RIC to obtain the final system configuration information, the downlink direction of the E2 interface needs to be able to provide the following parameters, which include RSRP threshold corresponding to each CL, RACH resource configuration (the number of subcarriers, period and the number of repetitions) under respective CLs, and downlink data transmission parameter configuration for each CL (MCS, the number of repetitions of data channel, the number of repetitions of control channel), the uplink data transmission parameter configuration of each CL (MCS, the number of repetitions of data channel, the number of repetitions of the feedback information).

[324] E2 interface, uplink direction: 1), if AI/ML prediction is implemented in Near-RT RIC (Embodiment 3 and Embodiment 5), the parameters that need to be provided by the E2 interface may include the measurements about RSRP and BSR reported by the IOT terminal, and base station measurement statistics and configuration information, which includes UE downlink BO size, current cell configuration information, including: the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell. 2) If AI/ML prediction is implemented in None-RT RIC, but the configured estimation processing is implemented in Near-RT RIC (embodiment 4), the parameters that need to be provided in the uplink direction of the E2 interface may include: the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding

to the CL in the cell.

- [325] O1 interface, uplink direction: it needs to support the reporting of related measurement data, which includes measurements about RSRP and BSR reported by IOT terminal, and base station measurement statistics and configuration information, which involves the number of Msg1 received in each CL, the number of Msg4 received in each CL, the UE downlink BO size; the current cell configuration information may include RACH configuration information (number of subcarrier resources for each CL, the number of repetitions of the preamble code, period), the MCS value of the uplink transmission of each CL, the number of repetitions of the uplink transmission of each CL, the number of repetitions for transmission of the Ack/NACK for Msg4 of each CL, the number of repetitions for transmission of Ack/NACK for the PDSCH of each C, the MCS value of the downlink transmission of each CL, the number of repetitions of the downlink transmission of each CL, the number of repetitions of the CSS transmission of each CL, the number of repetitions of the USS transmission of each CL, and the RSRP threshold corresponding to the CL in the cell.
- [326] O1 interface, downlink direction: the obtained resource and transmission parameter configuration are transmitted to SMO through the internal bus interface Non-RT RIC. The SMO transmits related parameter configurations to the O-eNB or O-DU through uses the O1 interface. The parameters that need to be provided in the downlink direction of the O1 interface may include the RSRP threshold corresponding to each CL, the RACH resource configuration under respective CLs (the number of sub-carriers, the period and the number of repetitions), and the downlink data transmission parameter configuration of each CL (MCS, the number of repetitions of data channel, the number of repetitions of control channel), each CL uplink data transmission parameter configuration (MCS, the number of repetitions of data channel, the number of repetitions of feedback information).
- [327] Optionally, in order to support the embodiments of this disclosure, the following IE is added to the interface:
- [328] 1. IOT_RACH_Configurations, which is defined as in Table (1):

[329] [Table 1]

message unit/ group name	optional/ required	range	message unit/ parameter	semantic de- scription
>RACH con- figuration parameter list	required	SEQUENCE (SIZE (1.. M) OF IOT_PRACH_Paramet ers	36.331 6.7, 6.3	RACH con- figuration parameter list
>RSRP threshold	optional	SEQUENCE (SIZE(1..M-1)) of RSRP-Range	36.331 6.7, 6.3	RSRP thresholds for respective coverage level
>PRACH con- figuration	required		36.331 6.7, 6.3	
>>PRACH period	required	ENUM{40, 80, 160, 240, 320, 640, 1280, 2560}	36.331 6.7, 6.3	PRACH resource period
>>the number of repetitions for transmission of preamble	required	ENUM{1, 2, 4, 8, 16, 32, 64, 128}	36.331 6.7, 6.3	the number of repetitions taken per preamble
>>PRACH the number of sub- carriers	required	ENUM{12, 24, 36, 48}	36.331 6.7, 6.3	frequency domain resource available to PRACH

[330] This structure is configured for reporting and distributing, which involves interfaces O1, E2, and A1.

[331] 2. IOT_DL_ Configurations, which is defined as in Table (2):

[332] [Table 2]

message unit/ group name	optional/ required	range	message unit/ parameter	semantic de- scription
>IoT downlink con- figuration	required	SEQUENCE (SIZE (1..M) OF IOT_DL_Parameters	36.331 6.7, 6.3	downlink con- figuration parameter list
>IoT downlink con- figuration parameter	required		36.331 6.7, 6.3	downlink con- figuration pa- rameters for re- spective coverage level
>downlink MCS	optional	INTEGER(0 ...13)	36.331 6.7, 6.3	downlink PDSCH MCS
>> the number of repetitions of downlink	optional	ENUM{1, 2, 4, 8, 16, 32, 64, 128, 192, 256, 384, 512, 768, 1024, 1536, 2048}	36.331 6.7, 6.3	the number of repetitions of PDSCH
>>the number of repetitions of PDCCH for msg2	required	ENUM{1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048}	36.331 6.7, 6.3	the number of repetitions of PDCCH for msg2
>> the number of repetitions of PDCCH for USS	optional	ENUM{1, 2, 4, 8, 16, 32, 64, 128, 256, 512, 1024, 2048}	36.331 6.7, 6.3	the number of repetitions of PDCCH for USS

[333] This structure is configured for reporting and distributing, which involves interfaces O1, E2, and A1.

[334] 3. IOT_UL_ Configurations, which is defined as in Table (3):

[335] [Table 3]

message unit/ group name	optional/ required	range	message unit/ parameter	semantic de- scription
>IoT uplink configuration	required	SEQUENCE (SIZE (1..M) OF IOT_UL_Parameters	36.331 6.7, 6.3	uplink con- figuration parameter list
>IoT uplink configuration parameter	optional		36.331 6.7, 6.3	uplink con- figuration pa- rameters for re- spective coverage level
>uplink MCS	optional	INTEGER(0..13)	36.331 6.7, 6.3	uplink PDSCH MCS
>> the number of repetitions of uplink	optional	ENUM{1, 2, 4, 8, 16, 32, 64, 128}	36.331 6.7, 6.3	the number of repetitions of uplink PUSCH
>>the number of repetitions of ACK/ NACK for msg2	required	ENUM{1, 2, 4, 8, 16, 32, 64, 128}	36.331 6.7, 6.3	the number of repetitions of PDCCH for msg2
>> the number of repetitions of ACK/ NACK	optional	ENUM{1, 2, 4, 8, 16, 32, 64, 128}	36.331 6.7, 6.3	the number of repetitions of msg 4 UCI
>> the number of repetitions of PUCCH	optional	ENUM{1, 2, 4, 8, 16, 32, 64, 128}	36.331 6.3	the number of repetitions of PUCCH

[336] The technical solutions provided by the embodiments of this disclosure have at least the following beneficial effects: by invoking Non-RT RIC or Near-RT RIC to predict the service distribution related information of IOT terminals, it may achieve the dynamic configuration of different coverage levels (CL) in the cell, save energy consumption, and improve system capacity and performance at the same time.

[337] Based on the same inventive concept as the foregoing embodiments, an embodiment

of the present disclosure also provides an information processing apparatus, which is used in a first network device. The schematic structural diagram of the apparatus is shown in FIG. 26. The information processing apparatus 30 includes a first processing module 301, a second processing module 302, and a third processing module 303.

[338] The first processing module 301 is configured to receive information related to the second network device. The second processing module 302 is configured to determine the first resource configuration corresponding to the coverage classification related to the second network device based on the information. The third processing module 303 is configured to transmit the first resource configuration to the second network device.

[339] Optionally, the second processing module 302 is specifically configured to determine a service distribution related information of a user equipment (UE) respectively corresponding to coverage characteristic during a first period based on the information, wherein the UE is included in the second network device; based on the service distribution related information of the UE during the first period, predict or calculate the service distribution related information of the UE during a second period after the first period to determine the service distribution related information of the UE during the second period; determine the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period; the coverage classification includes at least one of a coverage level and a coverage domain class.

[340] Optionally, the first processing module 301 is further configured to receive service information transmitted by an external server, wherein the service information includes location information of the UE and feature information of the UE, the location information includes at least one of location parameters of the UE provided by a positioning server and flight trajectory parameters provided by the positioning server, the feature information includes at least one of service period and periodic reporting time.

[341] The second processing module 302 is specifically configured to determine the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information and the service information.

[342] Optionally, the information includes at least one of measurement information of the second network device and configuration information of the second network device; the measurement information includes at least one of signal strength data, service data, and performance data; the configuration information includes at least one of coverage classification threshold configuration used for dividing coverage classification, and resource configuration parameters corresponding to the coverage classification, the coverage classification threshold configuration is a coverage characteristic index value that is used to divide the coverage area into different coverage classifications.

- [343] Optionally, the second processing module 302 is specifically configured to determine, based on the service data and the service information, the distribution information of the UE that has a service to be transmitted and need to access the second network device during the first period; and determine, based on the performance data and the configuration information, an access capacity of the random access channel (RACH) corresponding to different configuration information, and the service distribution related information includes the distribution information and the access capacity of the RACH corresponding to the different configuration information.
- [344] Optionally, the second processing module 302 is specifically configured to input the service distribution related information of the UE during N service periods into a preset prediction model; predict the service distribution related information of the UE during the second period after the first period through the prediction model; and obtain capacity distribution of the service over time corresponding to the coverage feature within a first service period (i.e., the N+1 service period) after the N service periods, wherein the first period includes N service periods, the second time period includes the first service period, and the service distribution related information of the UE during the first period is used to characterize the capacity distribution of the service over time corresponding to the coverage feature within the N service periods, and the service distribution related information of the UE during the second period is used to characterize the capacity distribution of the service over time corresponding to the coverage feature within the first service period, the N is a positive integer.
- [345] Optionally, the second processing module 302 is specifically configured to determine the coverage classification thresholds respectively to the coverage classification based on the service distribution related information of the UE during the second period; and determine the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications.
- [346] Optionally, the second processing module 302 is specifically configured to determine, based on the coverage classification threshold respectively corresponding to the coverage classifications, the number of repetitions for transmission of resources of the UEs respectively corresponding to the coverage classifications, the modulation and coding scheme (MCS) configuration of the resource, the resource includes at least one of a physical downlink control channel (PDCCH), a physical downlink shared channel (PDSCH), a physical uplink shared channel (PUSCH), and uplink control information (UCI); based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, determine the number of the coverage classifications and

the number of the UEs respectively corresponding to the coverage classifications; and based on the number of the UEs respectively corresponding to the coverage classifications and the access capacity of the RACH corresponding to the configuration information of the second network device, determine a second resource configuration of the RACH respectively corresponding to the coverage classifications, wherein the first resource configuration corresponding to the coverage classification includes the coverage classification threshold of the UE respectively corresponding to the coverage classification, the number of repetitions for transmission of the resource, the MCS configuration of the resource, and the second resource configuration of the RACH respectively corresponding to the coverage classifications, and wherein the second resource configuration of the RACH includes at least one of the number of repetitions for transmission of a random access preamble, the number of RACH subcarriers, and the RACH period.

[347] Optionally, when the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification change, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource; or after determining the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource.

[348] Optionally, the adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the number of repetitions for transmission of the PDCCH, which includes adjusting the number of repetitions for transmission of at least one of message msg2, message msg3, and message msg4 in the common search space, and the number of repetitions for transmission of the dedicated search space; adjusting the number of repetitions for transmission of the PDSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PDSCH carrying the message msg2; the number of repetitions for transmission of the PDSCH carrying the message msg4; and the number of repetitions for transmission of the PDSCH carrying downlink signaling and data in the connected state; adjusting the number of repetitions for transmission of the PUSCH, which includes adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying the message msg3; and the number of repetitions for transmission of the PUSCH carrying uplink signaling and data in the connected state; and adjusting the number of repetitions for transmission of the uplink control information (UCI), which comprising adjusting at least one of: the number of repetitions

for transmission of the PUSCH carrying downlink transmission ACK and/or NACK; and the number of repetitions for transmission of the PUCCH carrying downlink transmission ACK and/or NACK.

- [349] Optionally, the adjusting the MCS configuration of the resource of the UE corresponding to the coverage classification, includes at least one of the following: adjusting the MCS configuration of the PDSCH, which includes adjusting at least one of: the MCS configuration of the PDSCH carrying the message msg2; the MCS configuration of the PDSCH carrying the message msg4; and the MCS configuration of the PDSCH carrying the downlink signaling and data in the connected state; and adjusting the MCS configuration of the PUSCH, which includes adjusting at least one of: the MCS configuration of the PUSCH carrying the message msg3; and the MCS configuration of the PDSCH carrying the uplink signaling and data in the connected state.
- [350] Optionally, the first processing module 301 is specifically configured to receive information transmitted by the second network device, which includes at least one of the following: receiving the information related to the second network device transmitted by a service management and orchestration (SMO); receiving the information related to the second network device transmitted by the near-real-time RAN intelligent controller (Near-RT RIC), wherein the information related to the second network device is obtained by the Near-RT RIC from the second network device.
- [351] Optionally, the third processing module 303 is specifically configured to transmit the first resource configuration to the second network device, which includes one of the following: transmitting the first resource configuration to the second network device; transmitting the first resource configuration to the Near-RT RIC, wherein the first resource configuration is transmitted to the second network device by the Near-RT RIC; or transmitting the first resource configuration to the second network device through the Near-RT RIC.
- [352] Optionally, the first network device is a non-real-time RAN intelligent controller (Non-RT RIC) or a near-real-time RAN intelligent controller (Near-RT RIC).
- [353] The technical solutions provided by the embodiments of this disclosure have at least the following beneficial effects: through predicting or calculating the service distribution related information of the user equipment during the second period after the first period, it may realize dynamic configurations of different coverage classifications in the cell, save energy consumption, and improve system capacity and performance at the same time.
- [354] Based on the same inventive concept, an embodiment of the present disclosure also provides an electronic device. The structural diagram of the electronic device is shown in FIG. 27. The electronic device 6000 includes at least one processor 6001, a memory

6002, and a bus 6003. The at least one processor 6001 is electrically connected to the memory 6002; the memory 6002 is configured to store at least one computer-executable instruction, and the processor 6001 is configured to execute the at least one computer-executable instruction, so as to execute the steps of any information processing method provided by the embodiment or any optional implementation of the present disclosure.

[355] Further, the processor 6001 may be field-programmable gate array (FPGA) or other devices with logic processing capabilities, such as microcontroller unit (MCU), central processing unit (CPU).

[356] The application of the embodiments of this disclosure has at least the following beneficial effects: achieving the dynamic configuration of different coverage levels, saving energy consumption, and improving system capacity and performance at the same time.

[357] Based on the same inventive concept, an embodiment of the present disclosure also provides another computer-readable storage medium storing a computer program. The computer program is used to, when executed by a processor, implement the steps of any information processing method provided by any one of embodiments or any one of implementations of the present disclosure.

[358] The computer-readable storage medium provided by the embodiments of this disclosure includes, but is not limited to, any type of disk (including floppy disk, hard disk, optical disk, CD-ROM, and magneto-optical disk), ROM (Read-Only Memory), RAM (Random Access Memory, EPROM (Erasable Programmable Read-Only Memory), EEPROM (Electrically Erasable Programmable Read-Only Memory), flash memory, magnetic Card or light card. That is, a readable storage medium includes any medium that stores or transmits information in a readable form by a device (for example, a computer).

[359] The application of the embodiments of this disclosure has at least the following beneficial effects: achieving the dynamic configuration of different coverage levels, saving energy consumption, and improving system capacity and performance at the same time.

[360] Those skilled in the art can understand that computer program instructions can be used to implement each block in these structural diagrams and/or block diagrams and/or flow diagrams and combinations of blocks in these structural diagrams and/or block diagrams and/or flow diagrams. Those skilled in the art can understand that these computer program instructions can be provided to processors of general-purpose computers, professional computers, or other programmable data processing methods for implementation, so that the computer or other programmable data processing method processors can execute this structure diagram and/or block diagram and/or

flow diagram disclosed in the application or the schemes specified in multiple boxes.

[361] Those skilled in the art can understand that the various operations, methods, and steps, measures, and solutions in the process that have been discussed in this disclosure can be alternated, changed, combined, or deleted. Further, various operations, methods, and other steps, measures, and solutions in the process that have been discussed in this disclosure can also be alternated, changed, rearranged, decomposed, combined, or deleted. Further, the steps, measures, and solutions in the various operations, methods, and procedures disclosed in the present disclosure in the prior art can also be alternated, changed, rearranged, decomposed, combined or deleted.

[362] The above are only part of the implementation of this disclosure. It should be pointed out that for those of ordinary skill in the art, without departing from the principles of this disclosure, several improvements and modifications can be made, and these improvements and modifications also should be regarded as the scope of protection of this disclosure.

Claims

- [Claim 1] An information processing method used in a first network device, comprising:
receiving information related to a second network device;
determining a first resource configuration corresponding to a coverage classification related to the second network device based on the information; and
transmitting the first resource configuration to the second network device.
- [Claim 2] The method of claim 1, wherein the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the information comprises:
determining a service distribution related information of a user equipment (UE) respectively corresponding to each coverage characteristic during a first period based on the information, wherein the UE is included in the second network device;
based on the service distribution related information of the UE during the first period, predicting or calculating the service distribution related information of the UE during a second period after the first period to determine the service distribution related information of the UE during the second period;
determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period.
- [Claim 3] The method of claim 2, wherein, before determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, further comprising:
receiving service information transmitted by an external server, wherein the service information includes location information of the UE and feature information of the UE, the location information includes at least one of location parameters of the UE provided by a positioning server and flight trajectory parameters provided by the positioning server, the feature information includes at least one of service period and periodic reporting time;
the determining the service distribution related information of the UE

corresponding to the coverage characteristic during the first period based on the information, comprises:

determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information and the service information.

[Claim 4]

The method of claim 3, wherein the information includes at least one of measurement information of the second network device and configuration information of the second network device; the measurement information includes at least one of signal strength data, service data, and performance data; the configuration information includes at least one of coverage classification threshold configuration used for dividing coverage classification, and resource configuration parameters corresponding to the coverage classification, the coverage classification threshold configuration is a coverage characteristic index value that is used to divide the coverage area into different coverage classifications.

[Claim 5]

The method of claim 4, wherein the determining the service distribution related information of the UE respectively corresponding to the coverage characteristic during the first period based on the information, comprises:

based on the service data and the service information, determining the distribution information of the UE that has a service to be transmitted and need to access the second network device during the first period; and

based on the performance data and the configuration information, determining an access capacity of the random access channel (RACH) corresponding to different configuration information, and the service distribution related information includes the distribution information and the access capacity of the RACH corresponding to the different configuration information.

[Claim 6]

The method of claim 2, wherein, based on the service distribution related information of the UE during the first period, predicting or calculating the service distribution related information of the UE during the second period after the first period to determine the service distribution related information of the UE during the second period, comprises:

inputting the service distribution related information of the UE during N service periods into a preset prediction model;

predicting the service distribution related information of the UE during

the second period after the first period through the prediction model;
and

obtaining capacity distribution of the service over time corresponding to the coverage characteristic within a first service period after the N service periods,

wherein the first period includes N service periods, the second time period includes the first service period, and the service distribution related information of the UE during the first period is used to characterize the capacity distribution of the service over time corresponding to the coverage characteristic within the N service periods, and the service distribution related information of the UE during the second period is used to characterize the capacity distribution of the service over time corresponding to the coverage characteristic within the first service period, the N is a positive integer.

[Claim 7]

The method of claim 2, wherein the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period, comprises:
determining the coverage classification thresholds respectively to the coverage classification based on the service distribution related information of the UE during the second period; and
determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications.

[Claim 8]

The method of claim 7, wherein the determining the first resource configuration corresponding to the coverage classification related to the second network device based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, comprises:
based on the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of repetitions for transmission of resources of the UEs respectively corresponding to the coverage classifications, the modulation and coding scheme (MCS) configuration of the resource, the resource includes at least one of a physical downlink control channel (PDCCH), a physical

downlink shared channel (PDSCH), a physical uplink shared channel (PUSCH), and uplink control information (UCI);
based on the service distribution related information of the UE during the second period and the coverage classification threshold respectively corresponding to the coverage classifications, determining the number of the coverage classifications and the number of the UEs respectively corresponding to the coverage classifications; and
based on the number of the UEs respectively corresponding to the coverage classifications and the access capacity of the RACH corresponding to the configuration information of the second network device, determining a second resource configuration of the RACH respectively corresponding to the coverage classifications,
wherein the first resource configuration corresponding to the coverage classification includes the coverage classification threshold of the UE respectively corresponding to the coverage classification, the number of repetitions for transmission of the resource, the MCS configuration of the resource, and the second resource configuration of the RACH respectively corresponding to the coverage classifications, and
wherein the second resource configuration of the RACH includes at least one of the number of repetitions for transmission of a random access preamble, the number of RACH subcarriers, and the RACH period.

[Claim 9]

The method of claim 8, further comprising:

when the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification change, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource; or

after determining the number of the coverage classifications and the coverage classification threshold respectively corresponding to the coverage classification, adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification and the modulation and coding scheme (MCS) configuration of the resource.

[Claim 10]

The method of claim 9, wherein the adjusting the number of repetitions for transmission of the resource of the UE corresponding to the coverage classification, comprises at least one of the following:

adjusting the number of repetitions for transmission of the PDCCH, which comprises adjusting the number of repetitions for transmission of at least one of message msg2, message msg3, and message msg4 in the common search space, and the number of repetitions for transmission of the dedicated search space;

adjusting the number of repetitions for transmission of the PDSCH, which comprises adjusting at least one of: the number of repetitions for transmission of the PDSCH carrying the message msg2; the number of repetitions for transmission of the PDSCH carrying the message msg4; and the number of repetitions for transmission of the PDSCH carrying downlink signaling and data in the connected state;

adjusting the number of repetitions for transmission of the PUSCH, which comprises adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying the message msg3; and the number of repetitions for transmission of the PUSCH carrying uplink signaling and data in the connected state; and

adjusting the number of repetitions for transmission of the uplink control information (UCI), which comprising adjusting at least one of: the number of repetitions for transmission of the PUSCH carrying downlink transmission ACK and/or NACK; and the number of repetitions for transmission of the PUCCH carrying downlink transmission ACK and/or NACK.

[Claim 11]

The method of claim 9, wherein the adjusting the MCS configuration of the resource of the UE corresponding to the coverage classification, comprises at least one of the following:

adjusting the MCS configuration of the PDSCH, which comprises adjusting at least one of: the MCS configuration of the PDSCH carrying the message msg2; the MCS configuration of the PDSCH carrying the message msg4; and the MCS configuration of the PDSCH carrying the downlink signaling and data in the connected state; and adjusting the MCS configuration of the PUSCH, which comprises adjusting at least one of: the MCS configuration of the PUSCH carrying the message msg3; and the MCS configuration of the PDSCH carrying the uplink signaling and data in the connected state.

[Claim 12]

The method of claim 1, wherein the receiving information related to the second network device comprises at least one of the following: receiving the information related to the second network device transmitted by a service management and orchestration (SMO);

receiving the information related to the second network device transmitted by the near-real-time RAN intelligent controller (Near-RT RIC), wherein the information related to the second network device is obtained by the Near-RT RIC from the second network device.

[Claim 13] The method of claim 1, wherein the transmitting the first resource configuration to the second network device comprises one of the following:

transmitting the first resource configuration to the second network device;

transmitting the first resource configuration to the Near-RT RIC, wherein the first resource configuration is transmitted to the second network device by the Near-RT RIC; or

transmitting the first resource configuration to the second network device through the Near-RT RIC.

[Claim 14] The method of any one of claims 1-13, wherein the first network device is a non-real-time RAN intelligent controller (Non-RT RIC) or a near-real-time RAN intelligent controller (Near-RT RIC).

[Claim 15] An electronic device, comprising:
a processor; and
a memory configured to store instructions that, when executed by the processor to perform the method of any one of claims 1-14.


PRB

					CC2
					CC1
					CC0


The diagram illustrates the PRB (Physical Resource Block) allocation for a cellular network. The left side shows a hexagonal cell with a central base station and several mobile phones. The right side shows a table mapping PRBs to different channels: CC2, CC1, and CC0.

PRB	CC2	CC1	CC0
1	1	1	1
2	1	1	1
3	1	1	1
4	1	1	1
5	1	1	1
6	1	1	1
7	1	1	1
8	1	1	1
9	1	1	1
10	1	1	1
11	1	1	1
12	1	1	1
13	1	1	1
14	1	1	1
15	1	1	1
16	1	1	1
17	1	1	1
18	1	1	1
19	1	1	1
20	1	1	1
21	1	1	1
22	1	1	1
23	1	1	1
24	1	1	1
25	1	1	1
26	1	1	1
27	1	1	1
28	1	1	1
29	1	1	1
30	1	1	1
31	1	1	1
32	1	1	1
33	1	1	1
34	1	1	1
35	1	1	1
36	1	1	1
37	1	1	1
38	1	1	1
39	1	1	1
40	1	1	1
41	1	1	1
42	1	1	1
43	1	1	1
44	1	1	1
45	1	1	1
46	1	1	1
47	1	1	1
48	1	1	1
49	1	1	1
50	1	1	1
51	1	1	1
52	1	1	1
53	1	1	1
54	1	1	1
55	1	1	1
56	1	1	1
57	1	1	1
58	1	1	1
59	1	1	1
60	1	1	1
61	1	1	1
62	1	1	1
63	1	1	1
64	1	1	1
65	1	1	1
66	1	1	1
67	1	1	1
68	1	1	1
69	1	1	1
70	1	1	1
71	1	1	1
72	1	1	1
73	1	1	1
74	1	1	1
75	1	1	1
76	1	1	1
77	1	1	1
78	1	1	1
79	1	1	1
80	1	1	1
81	1	1	1
82	1	1	1
83	1	1	1
84	1	1	1
85	1	1	1
86	1	1	1
87	1	1	1
88	1	1	1
89	1	1	1
90	1	1	1
91	1	1	1
92	1	1	1
93	1	1	1
94	1	1	1
95	1	1	1
96	1	1	1
97	1	1	1
98	1	1	1
99	1	1	1
100	1	1	1


[Fig. 4]

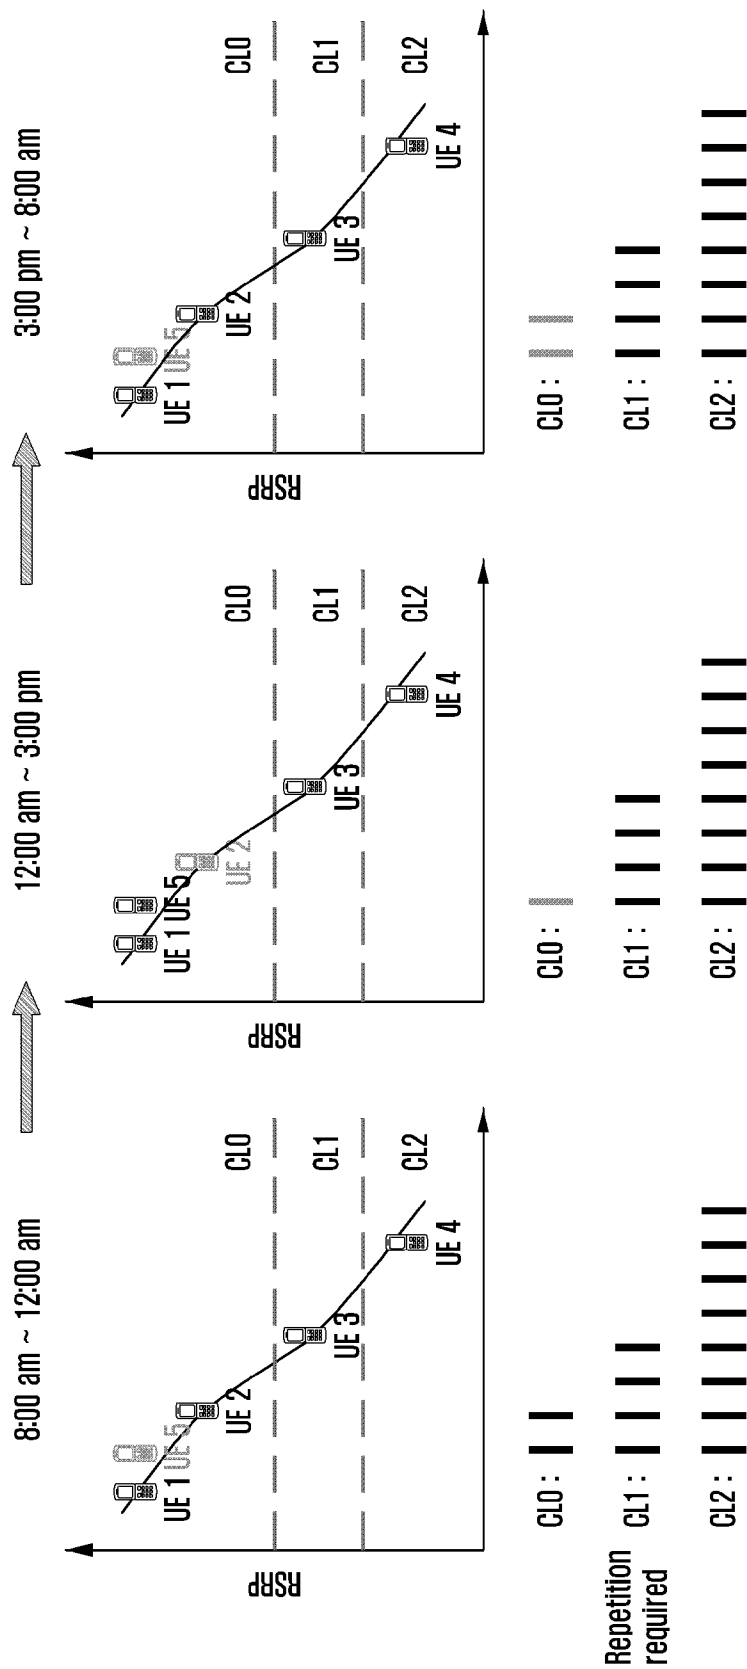


[Fig. 5]

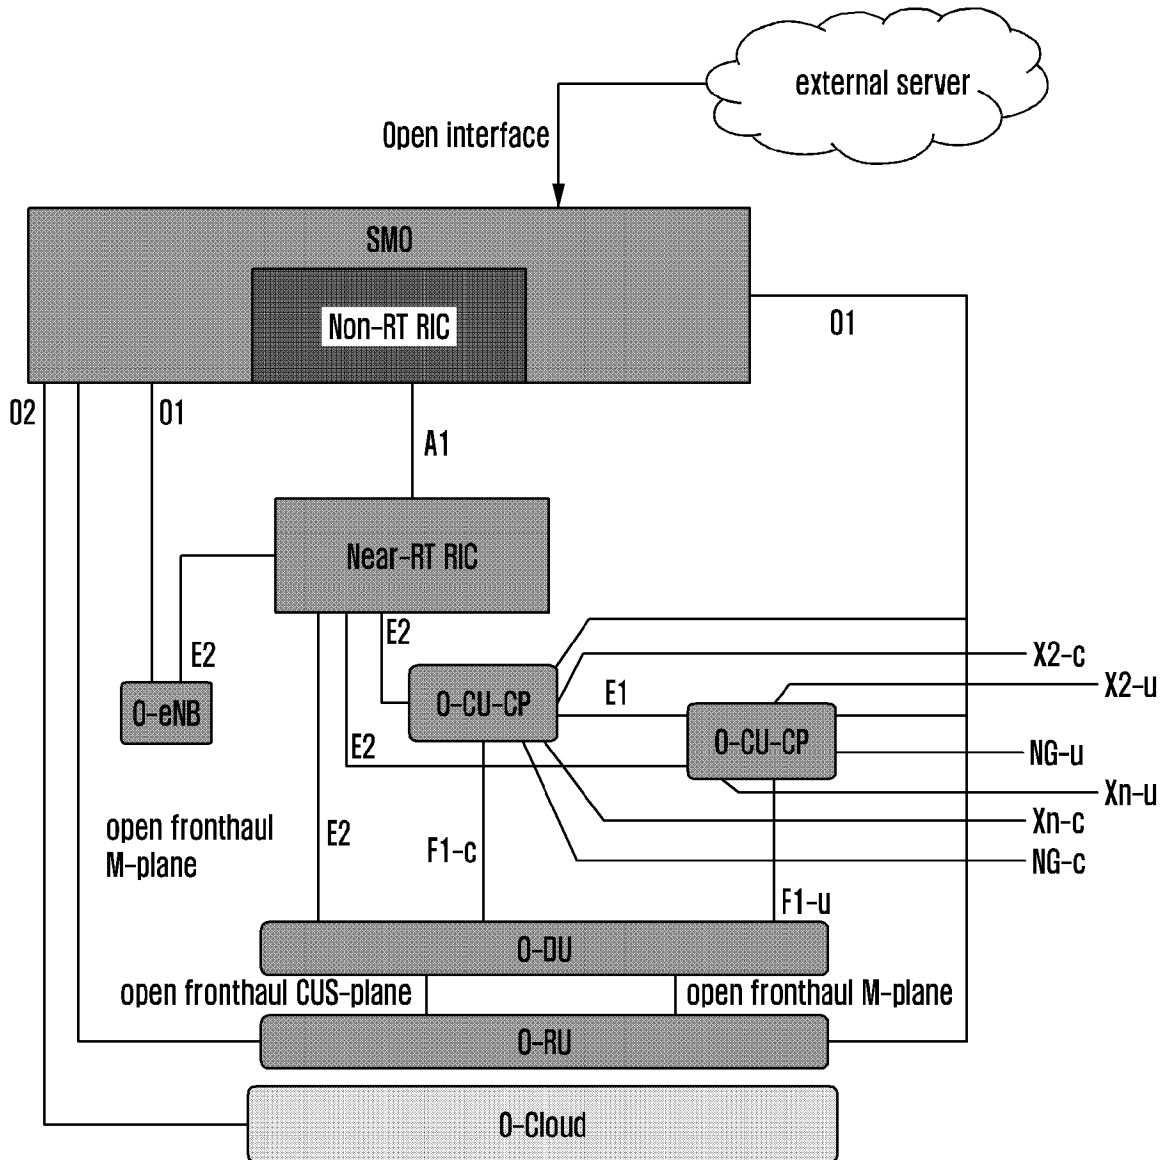


[Fig. 6]

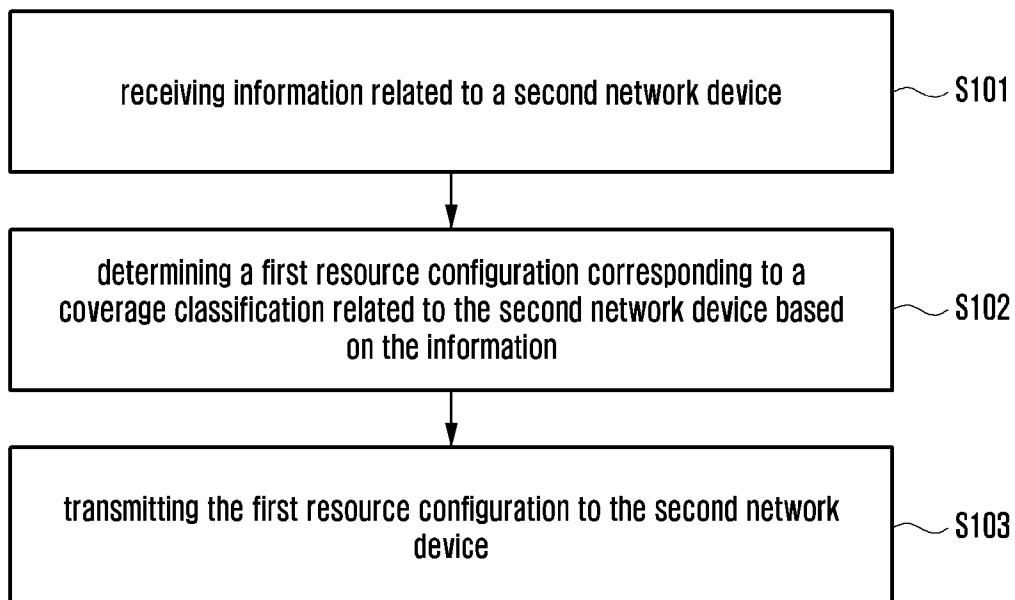


[Fig. 7]

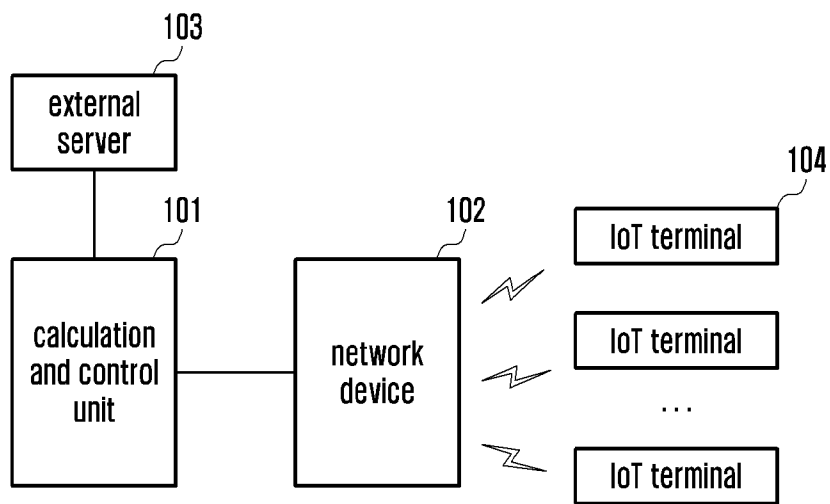


[Fig. 8]

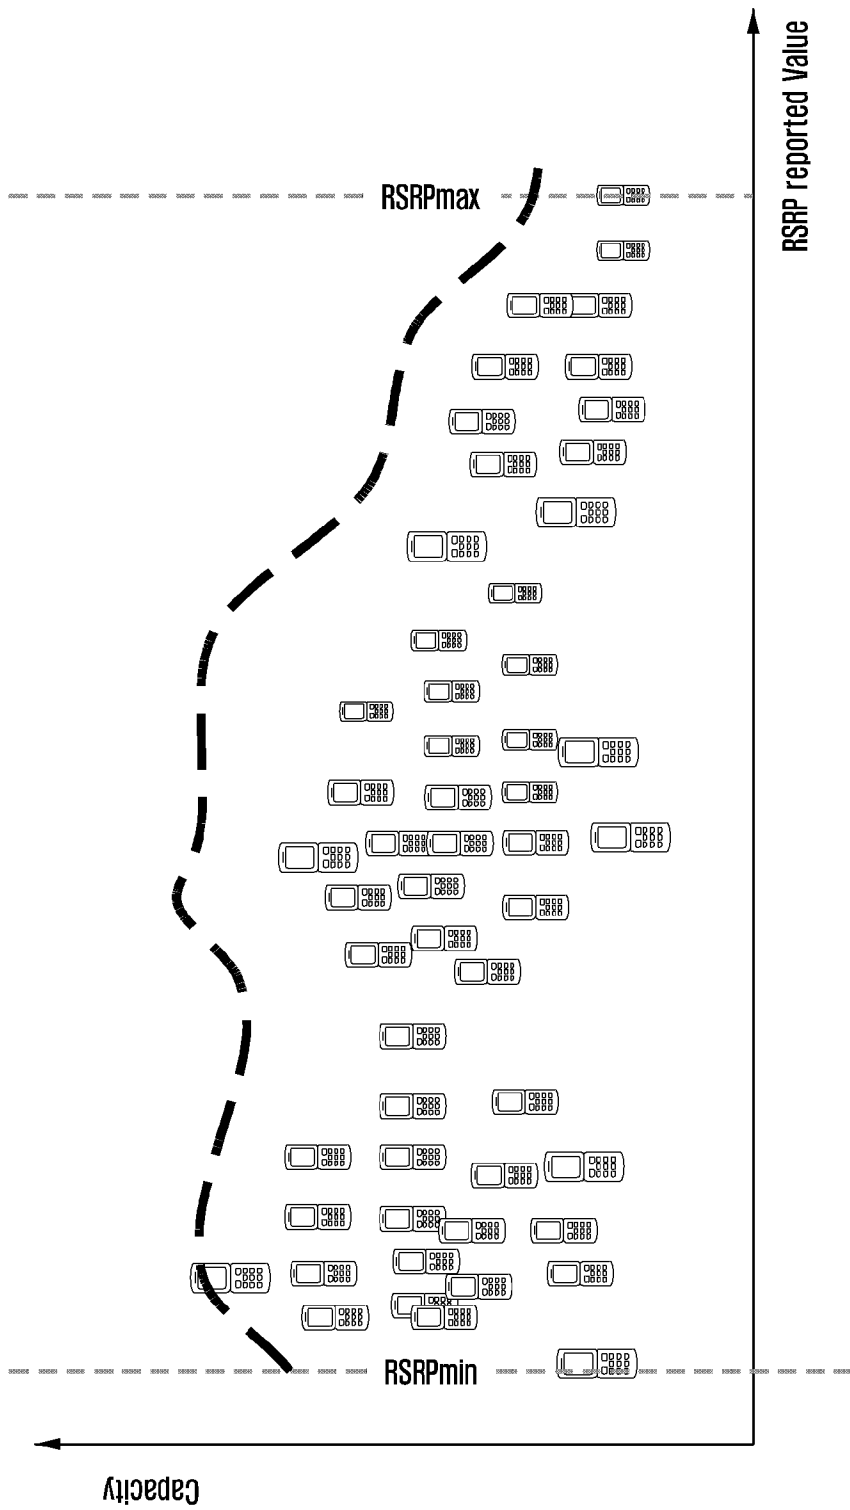


[Fig. 9]

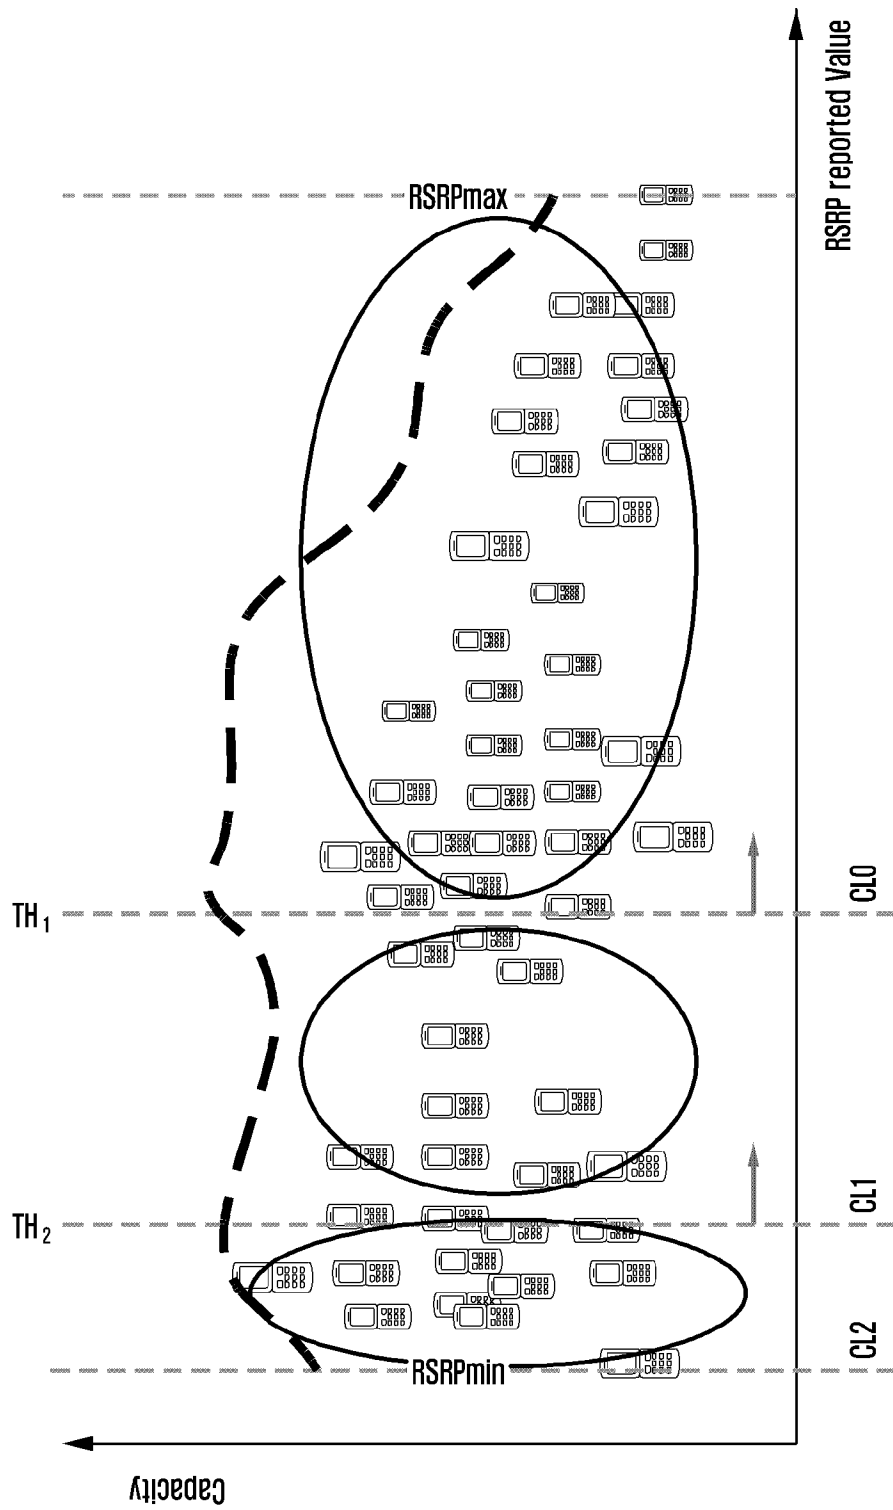


[Fig. 10]

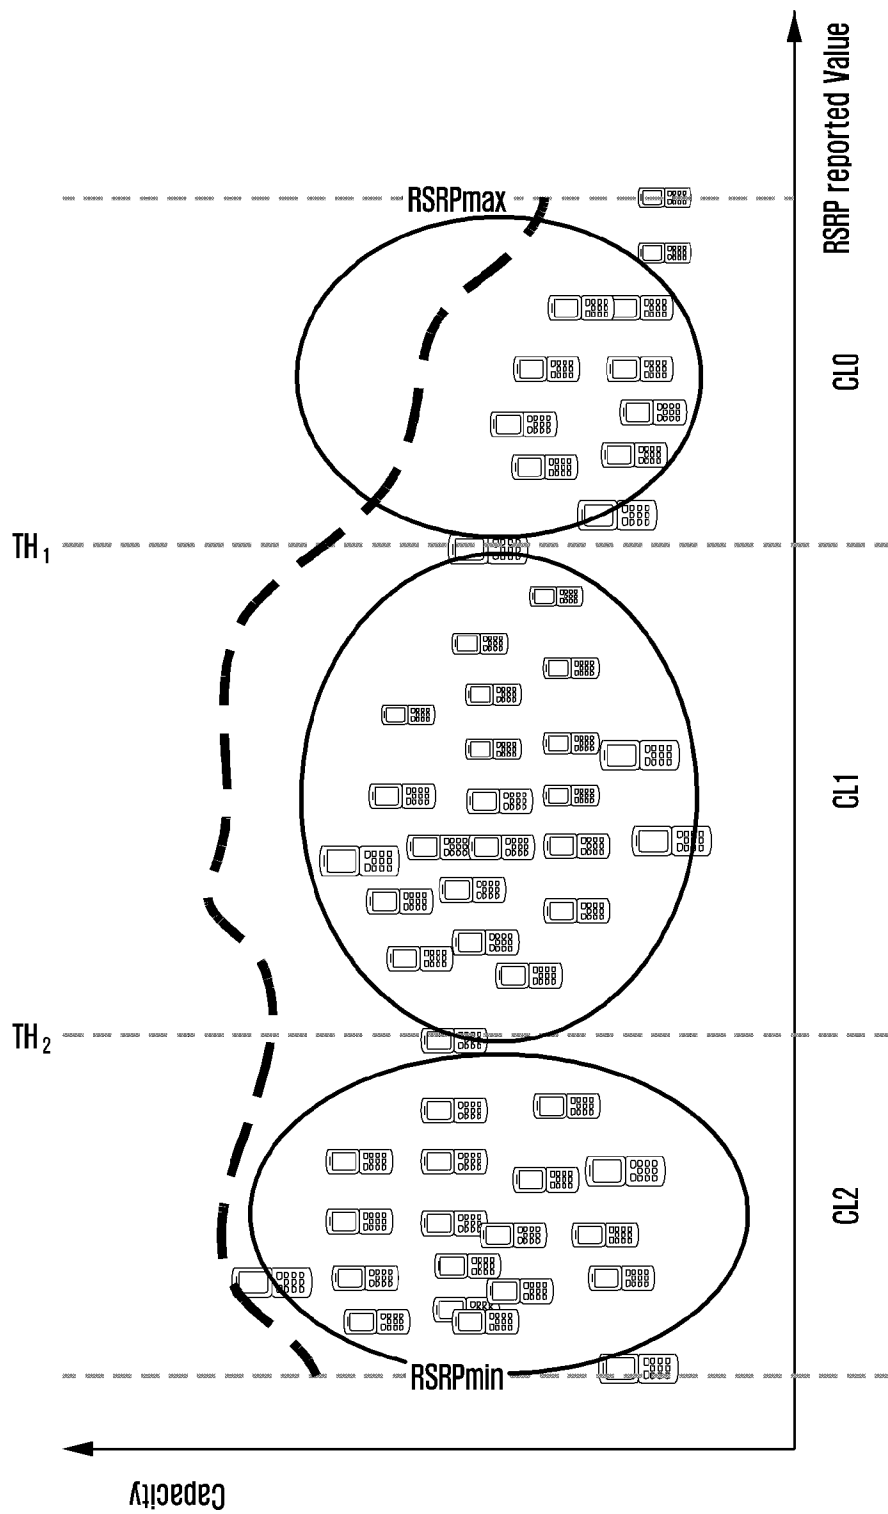


[Fig. 11a]

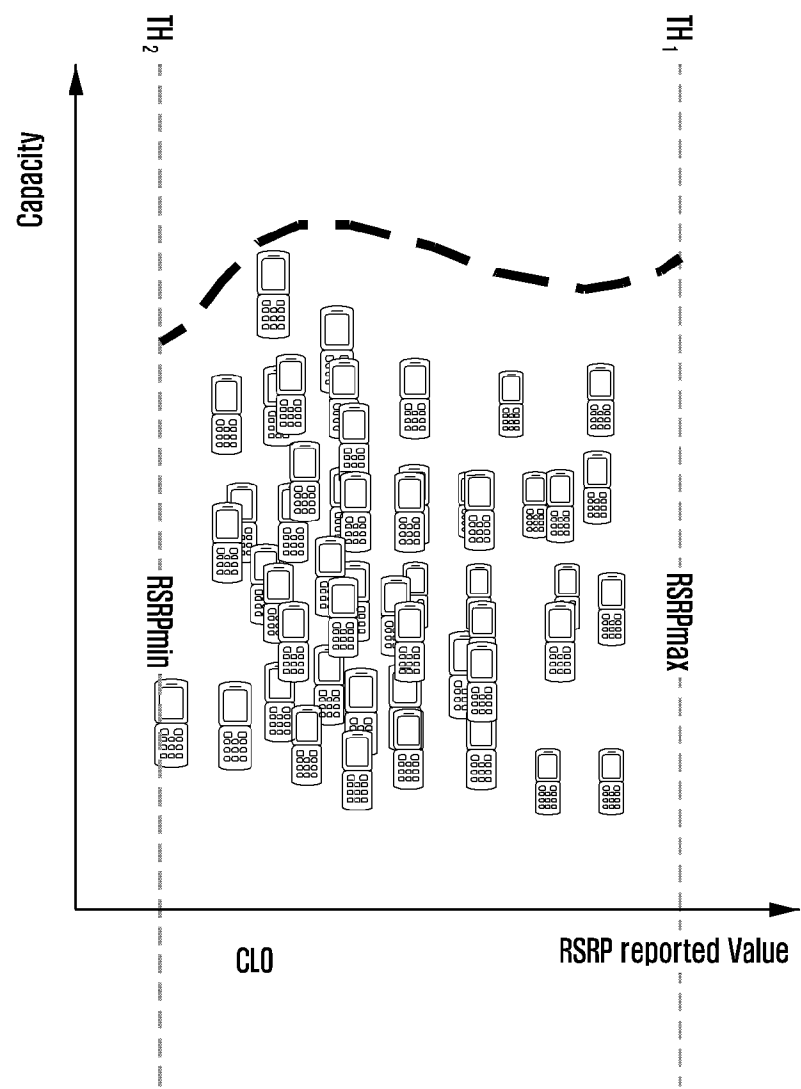


[Fig. 11b]

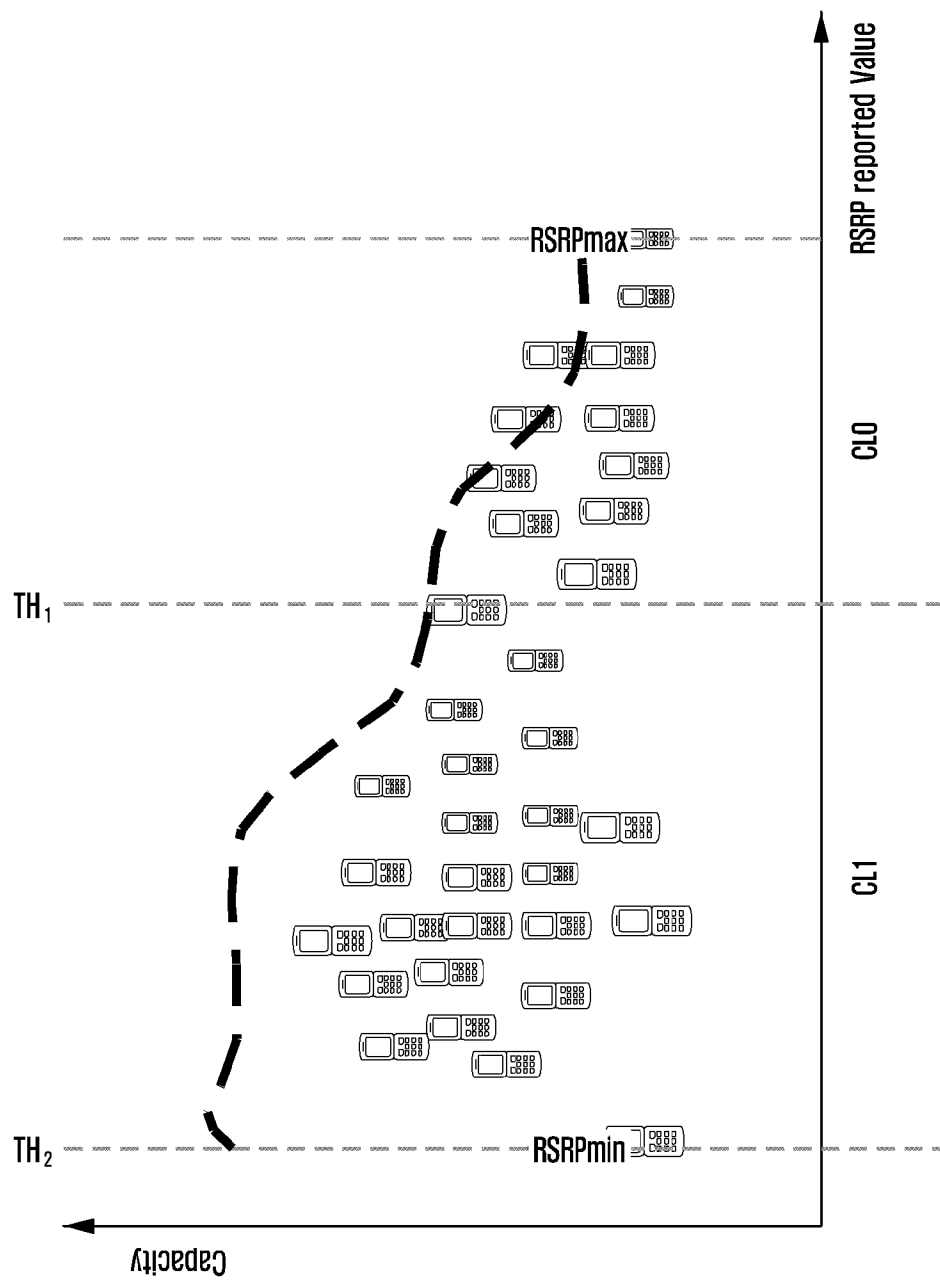


[Fig. 11c]

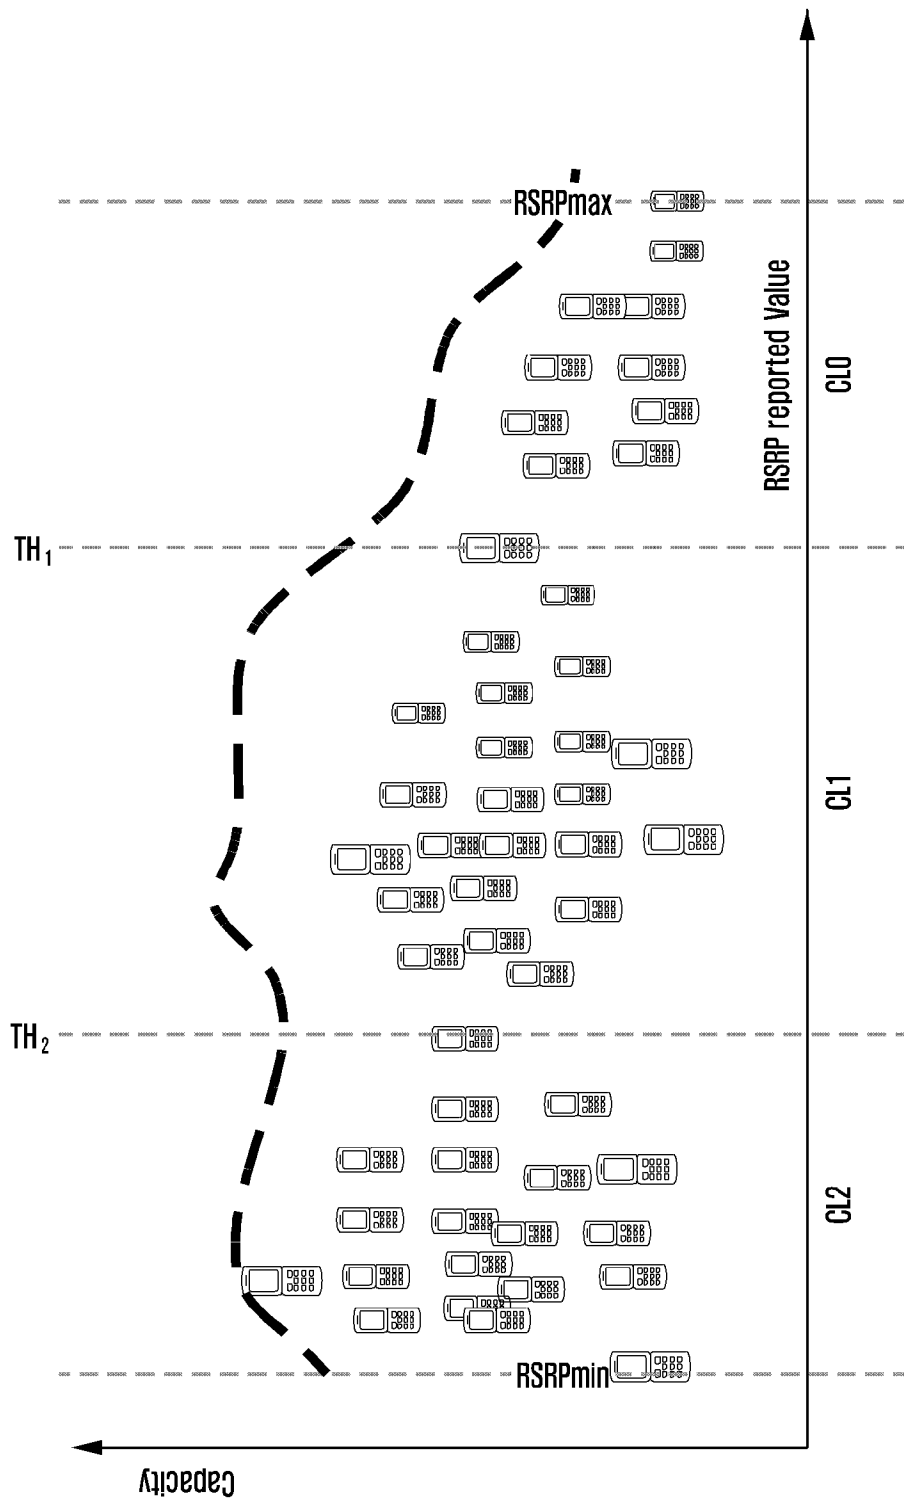


[Fig. 12]

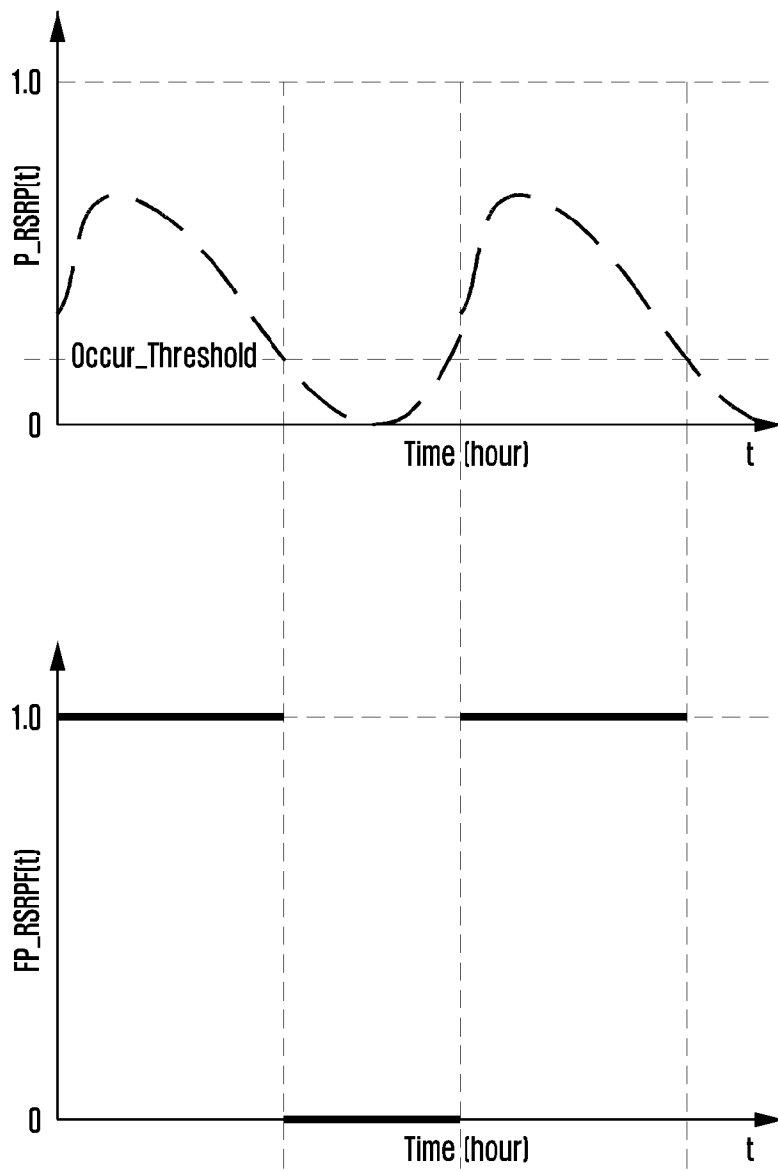


[Fig. 13]

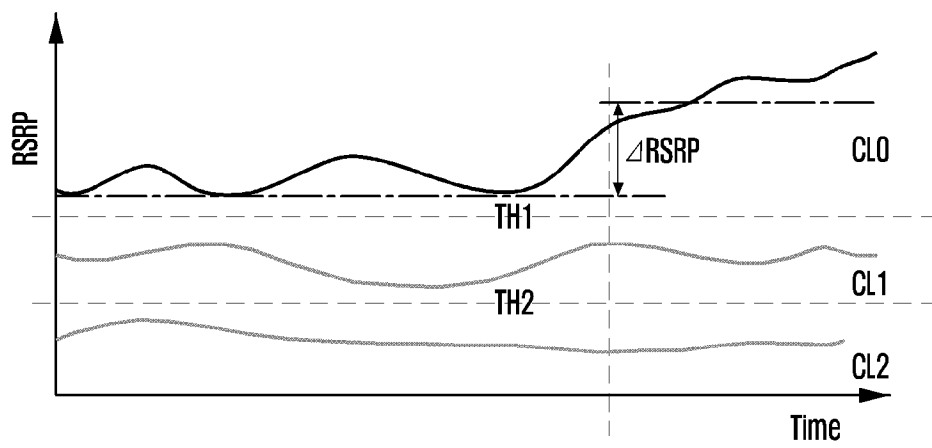


[Fig. 14]

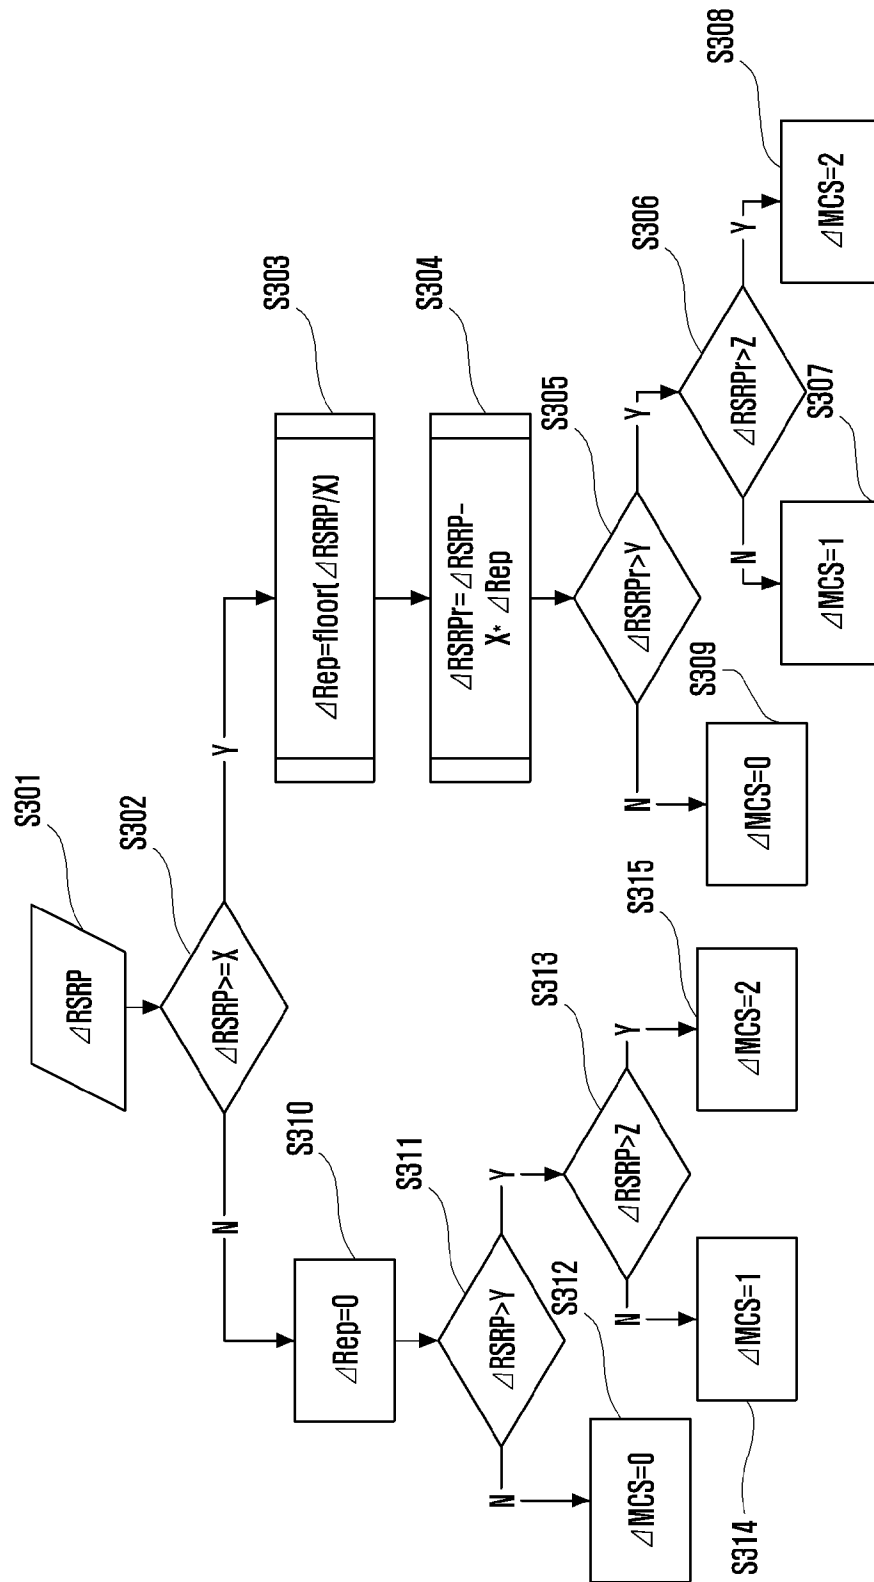


[Fig. 15]

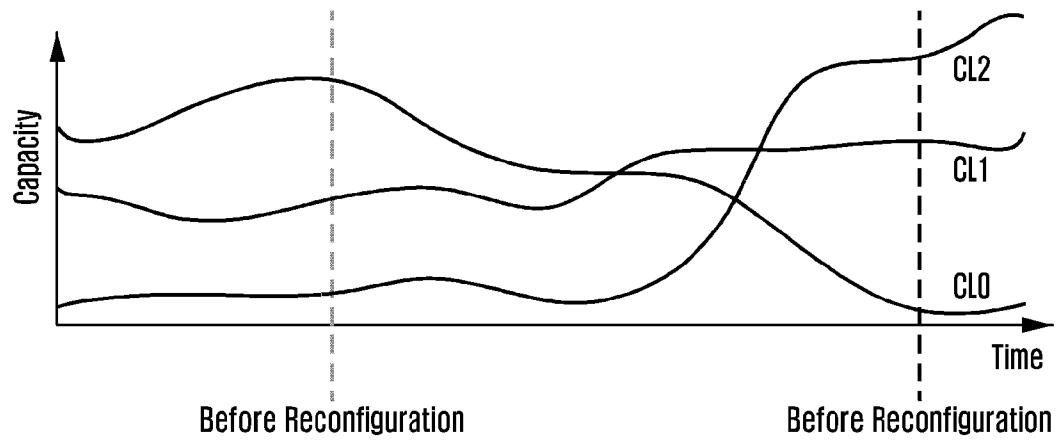


[Fig. 16a]

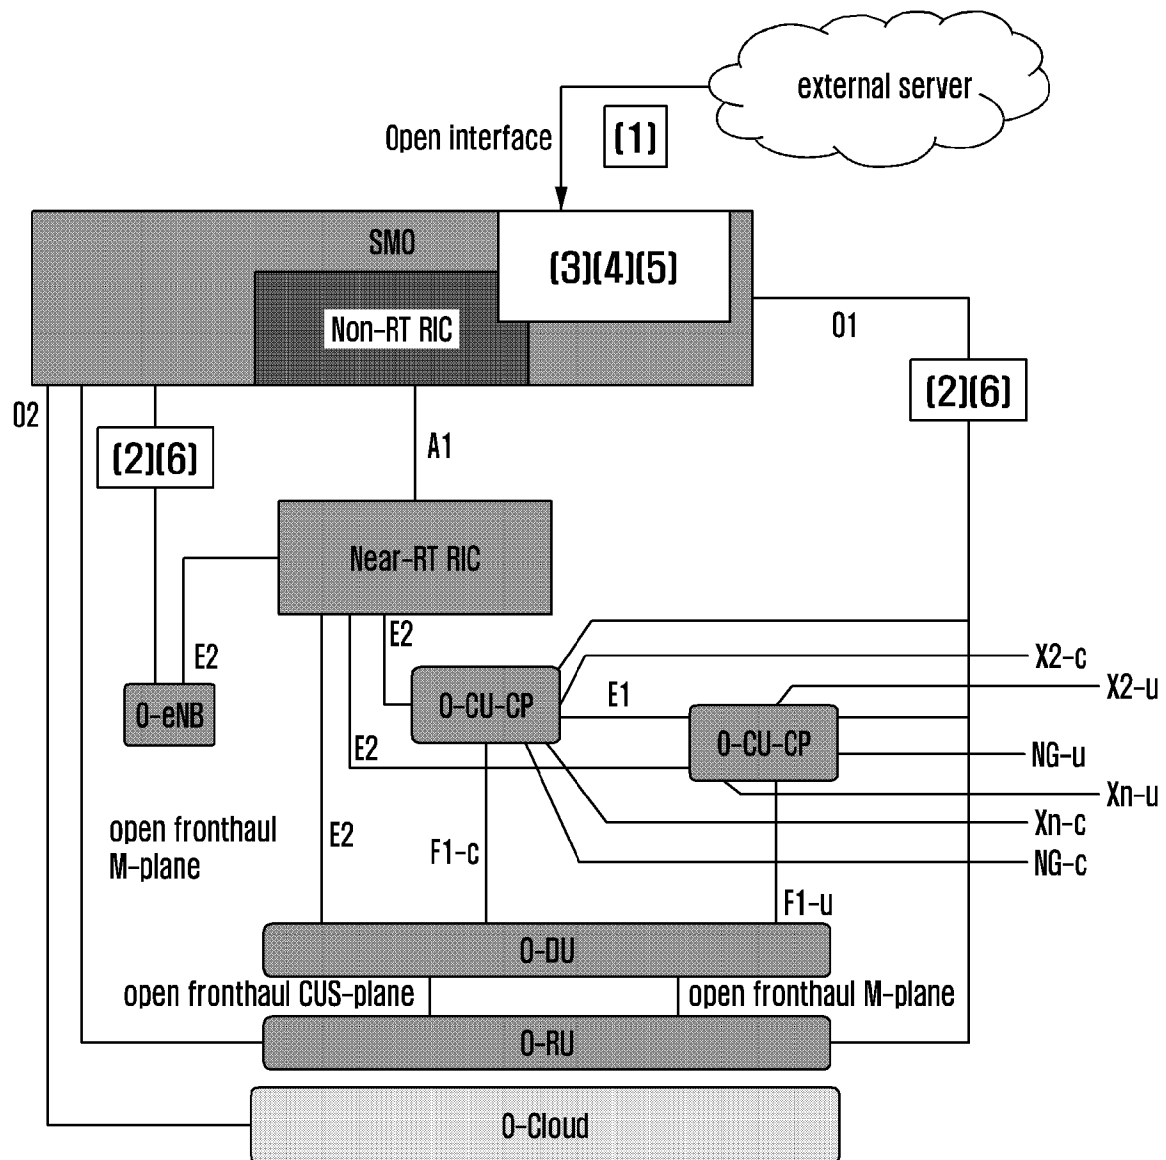


[Fig. 16b]

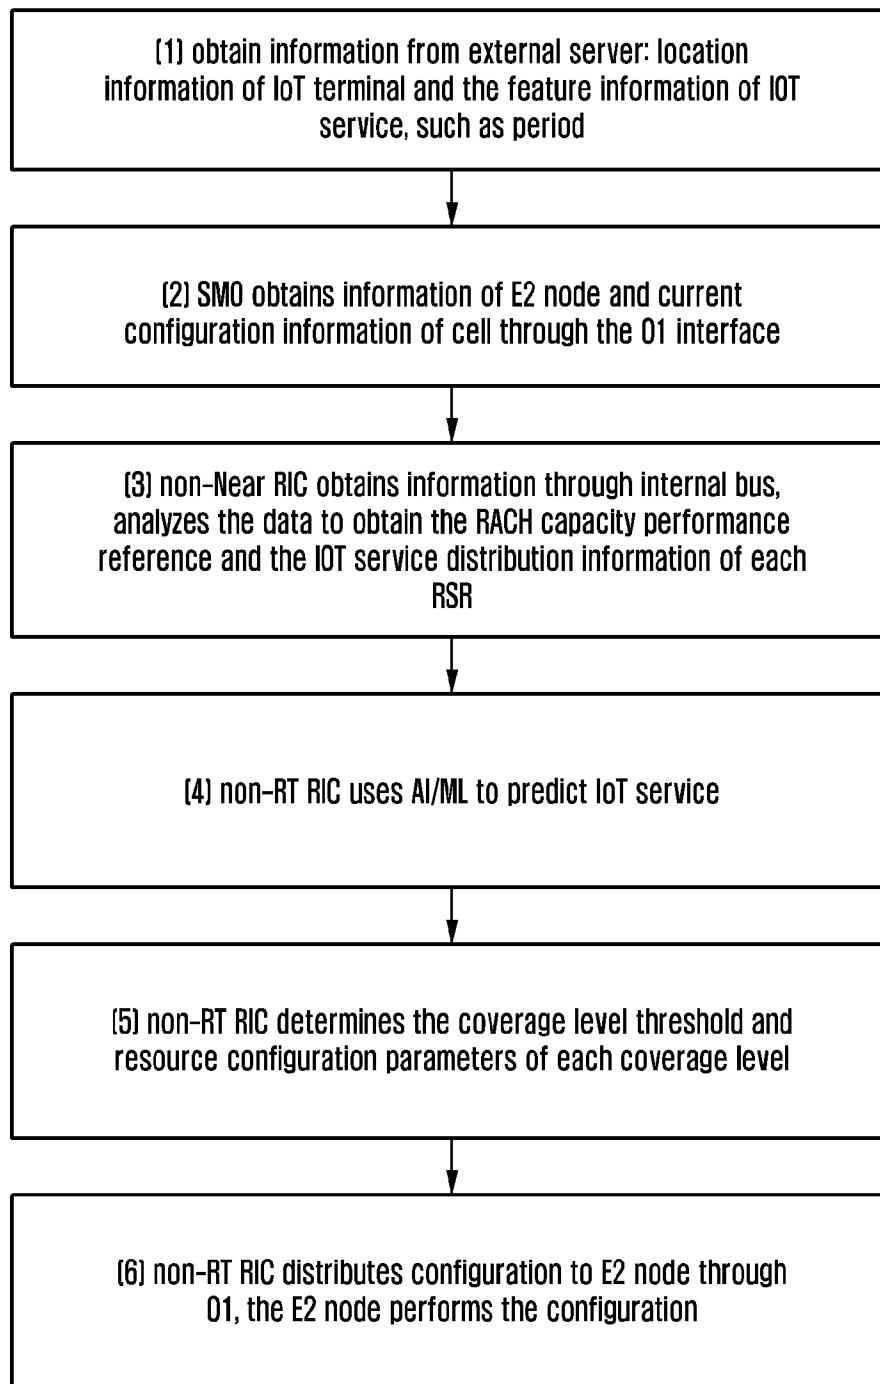


[Fig. 17]

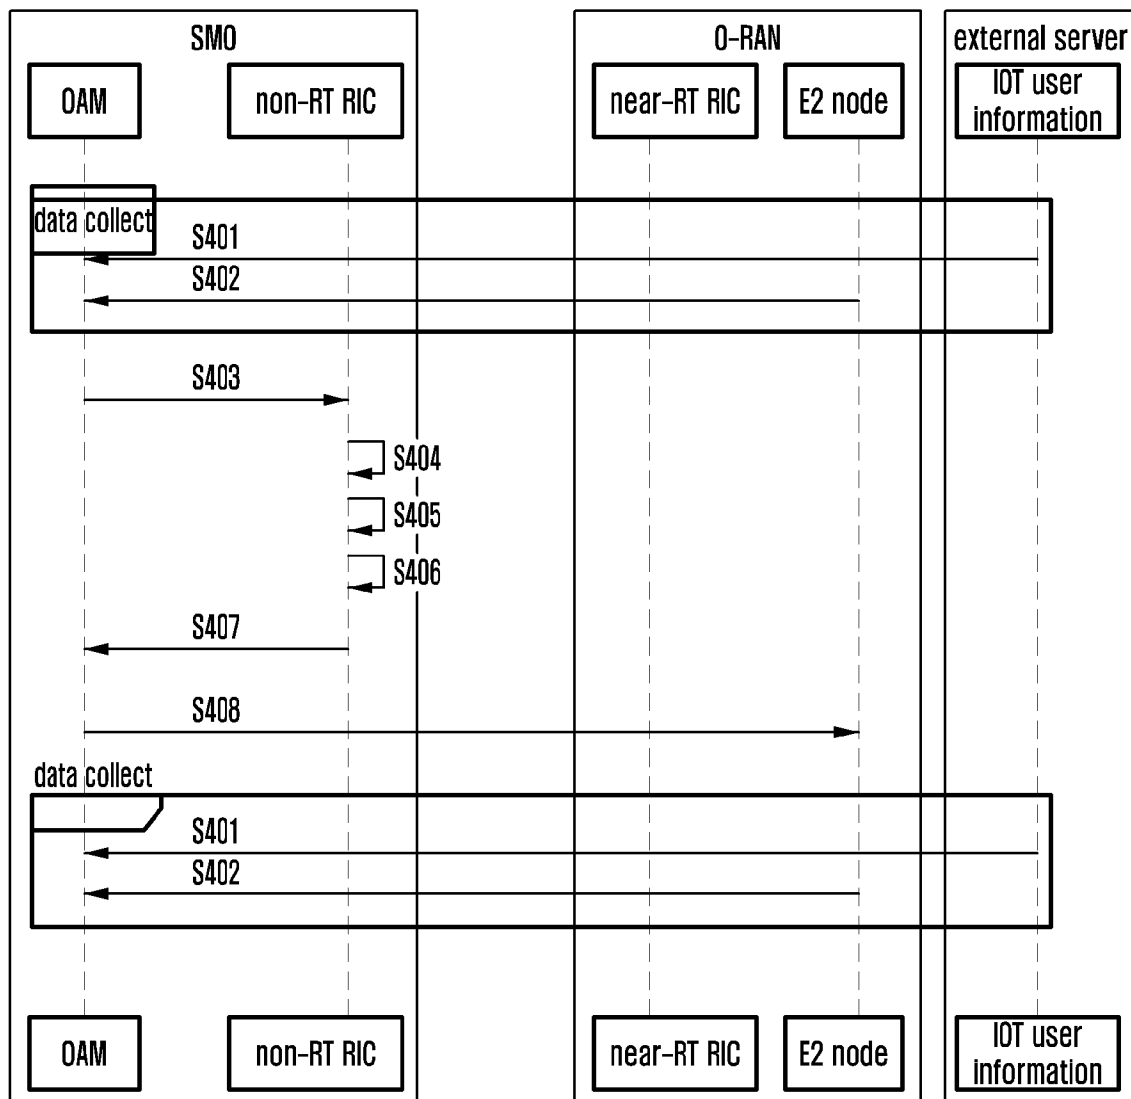


[Fig. 18a]

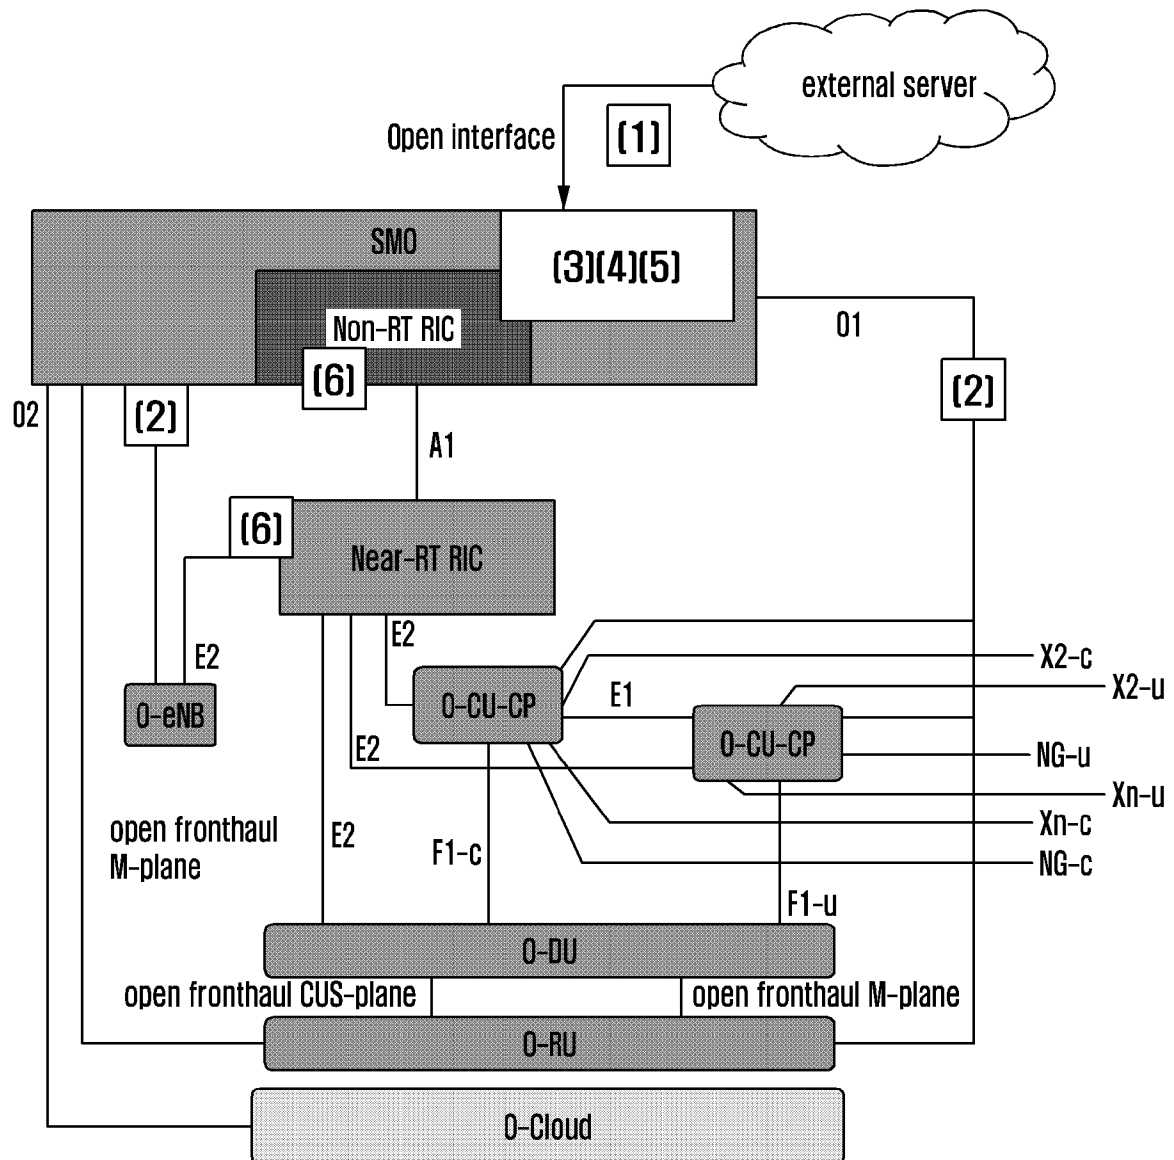


[Fig. 18b]

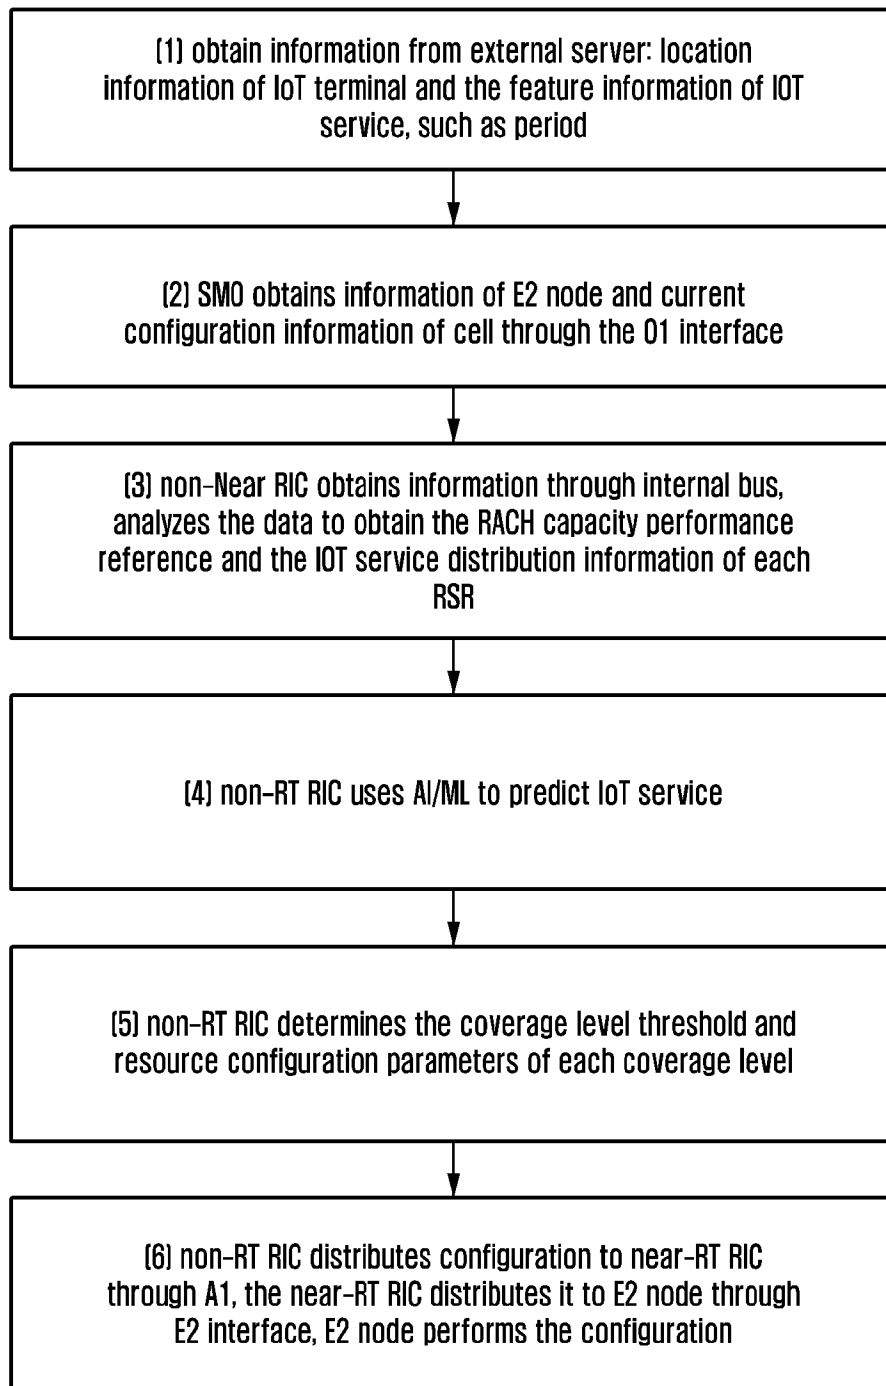


[Fig. 19]

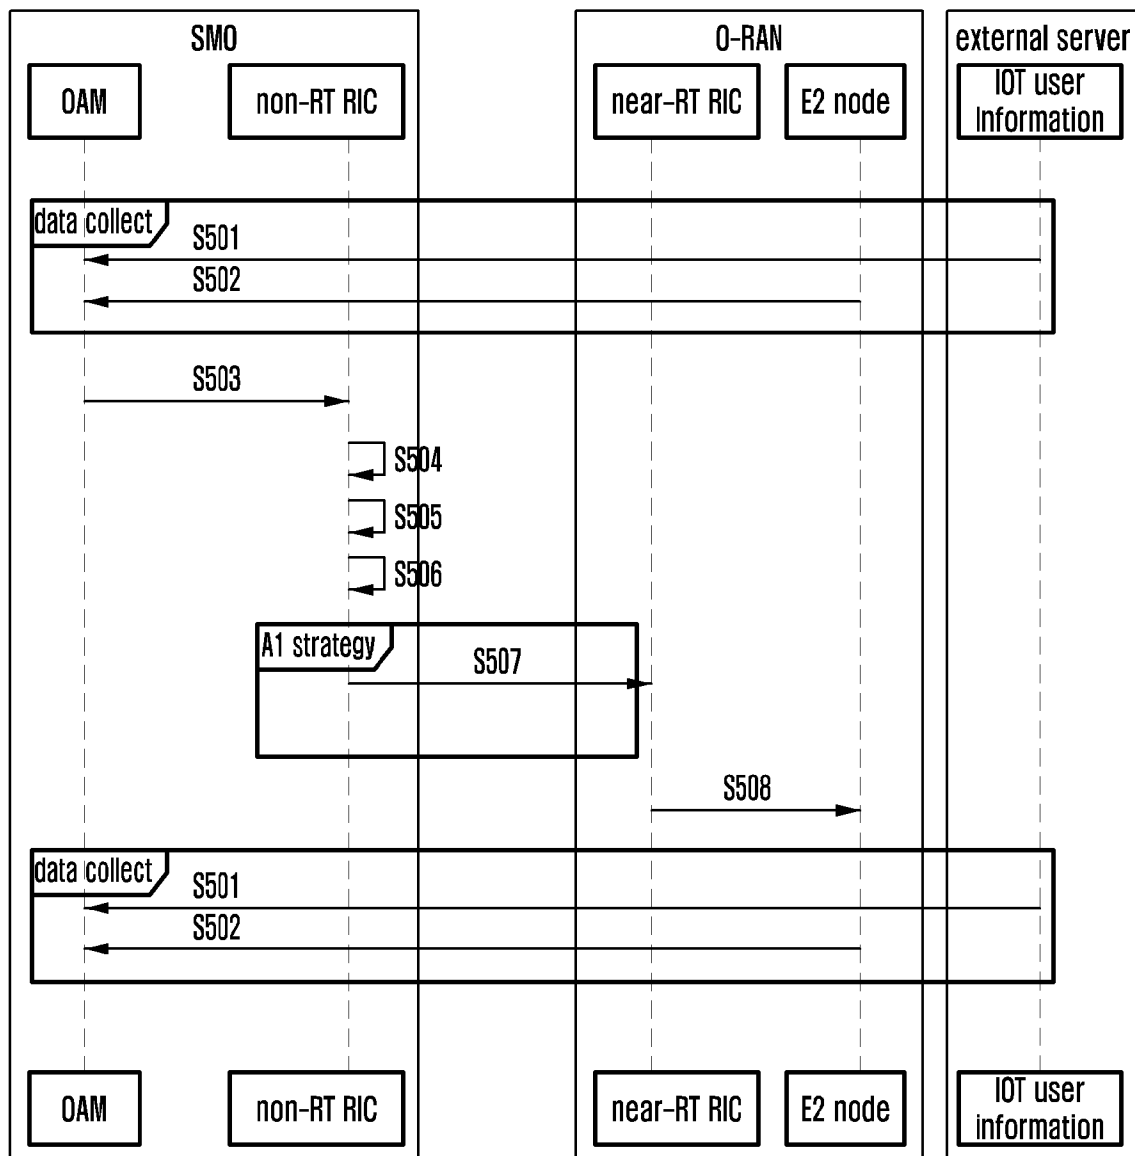


[Fig. 20a]

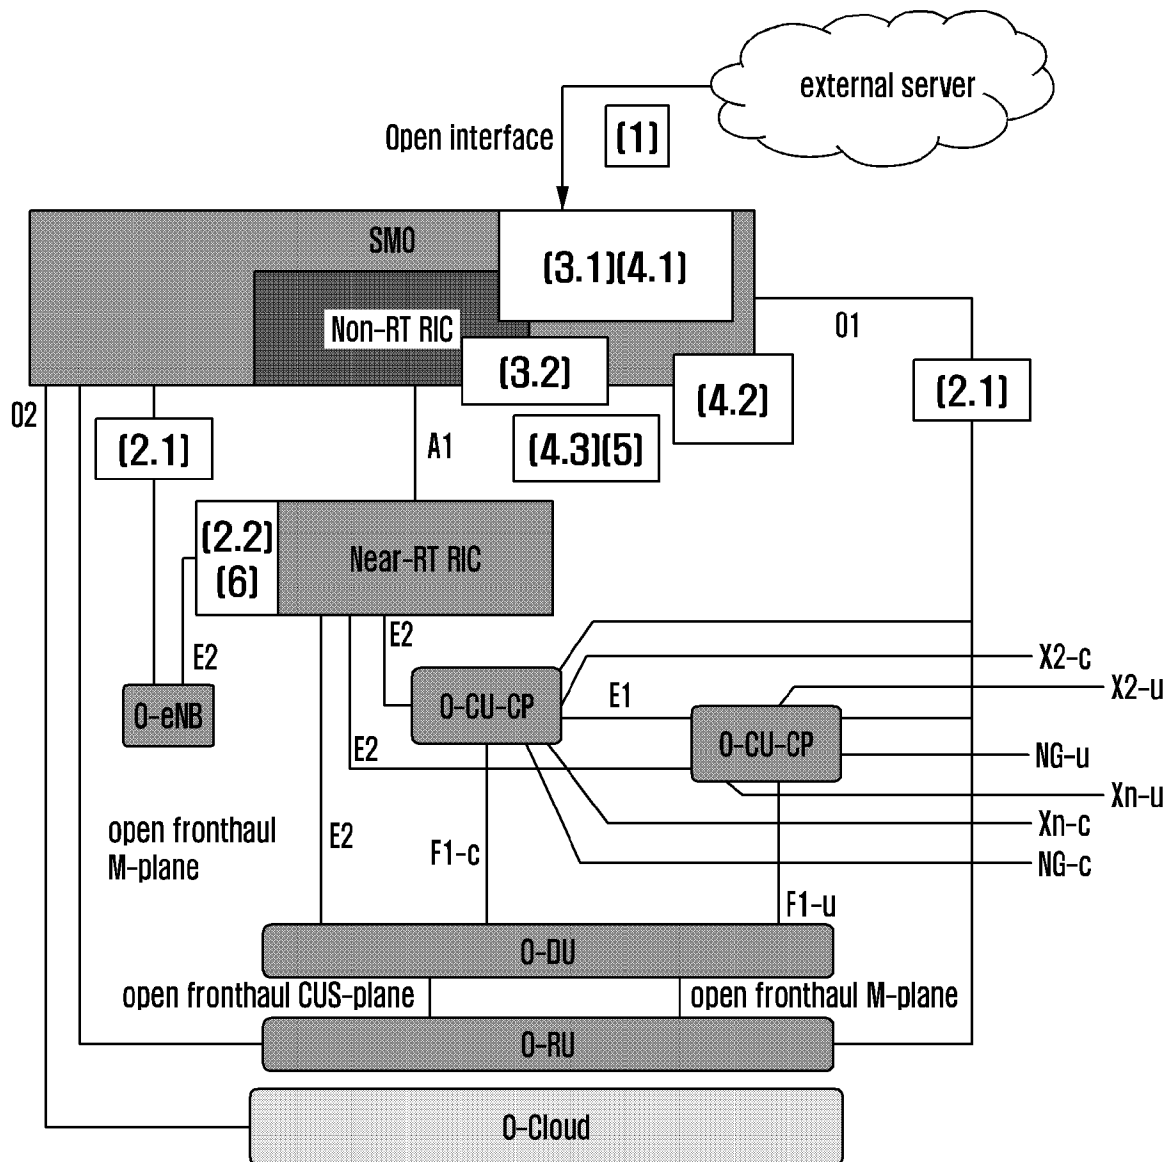


[Fig. 20b]

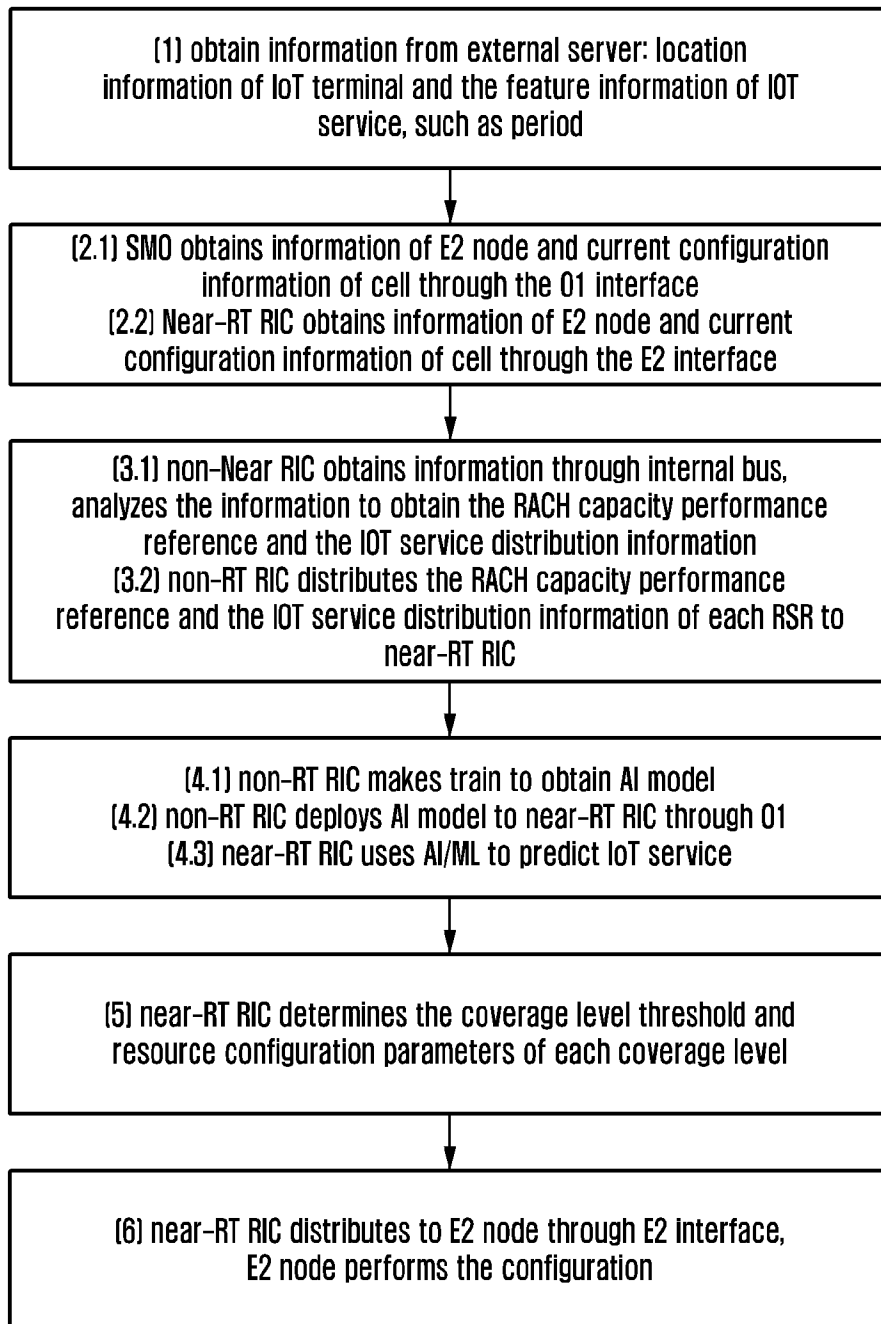


[Fig. 21]

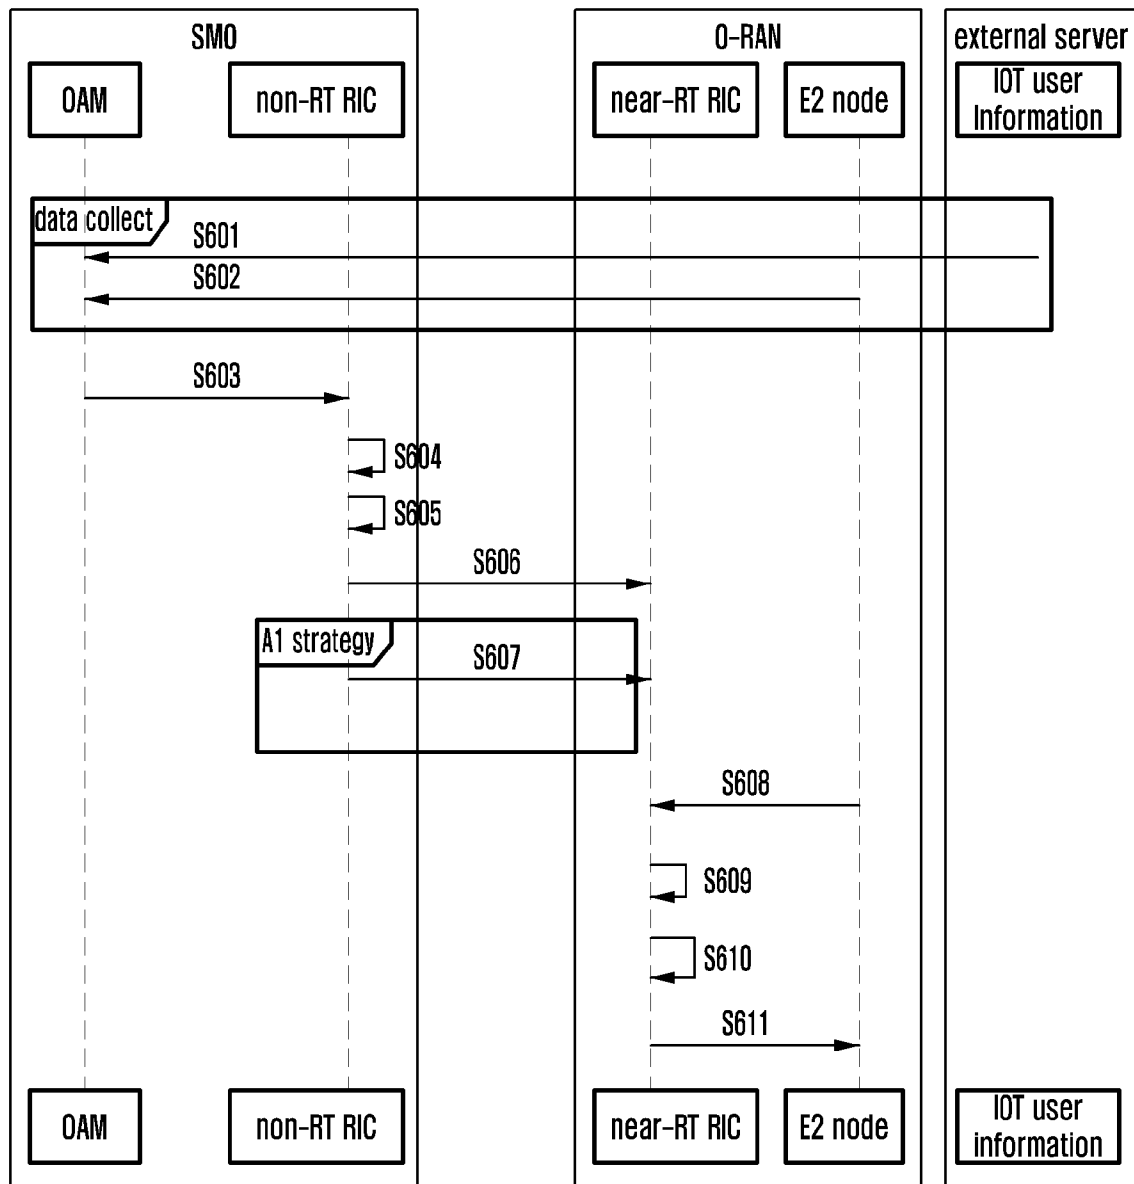


[Fig. 22a]

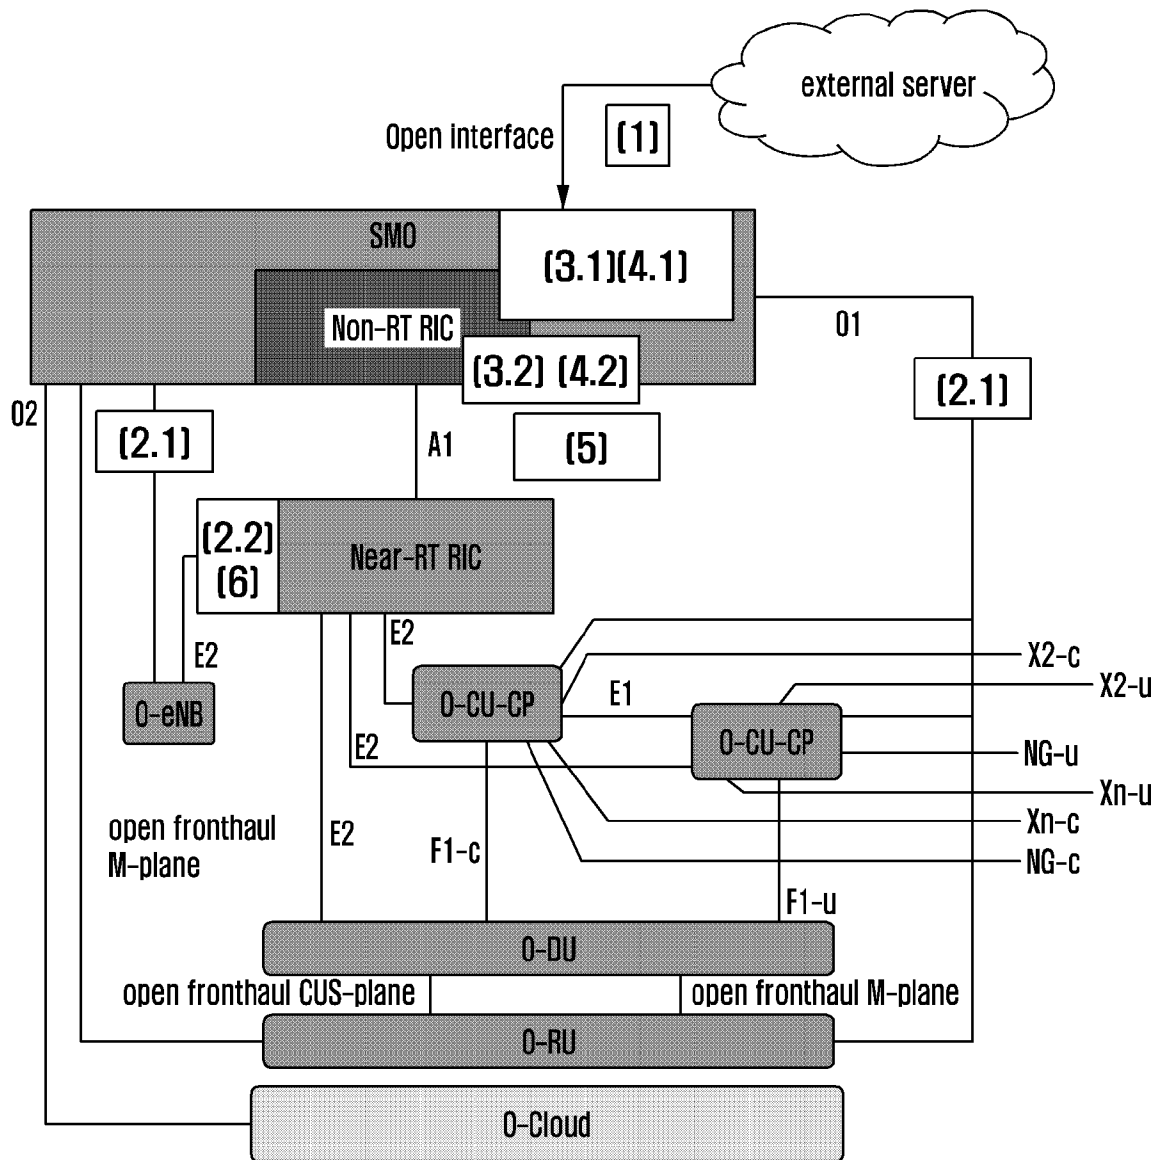


[Fig. 22b]

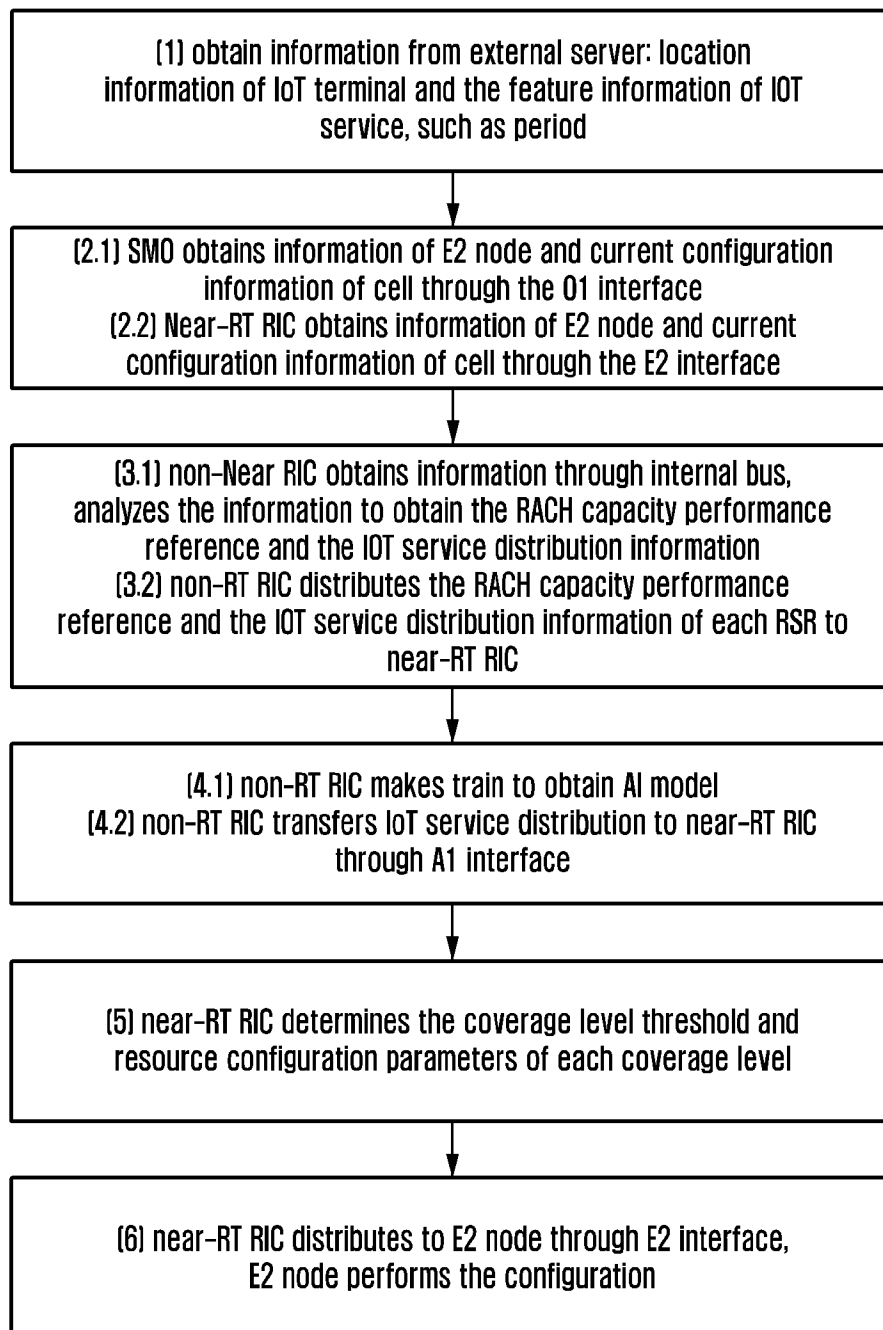


[Fig. 23]

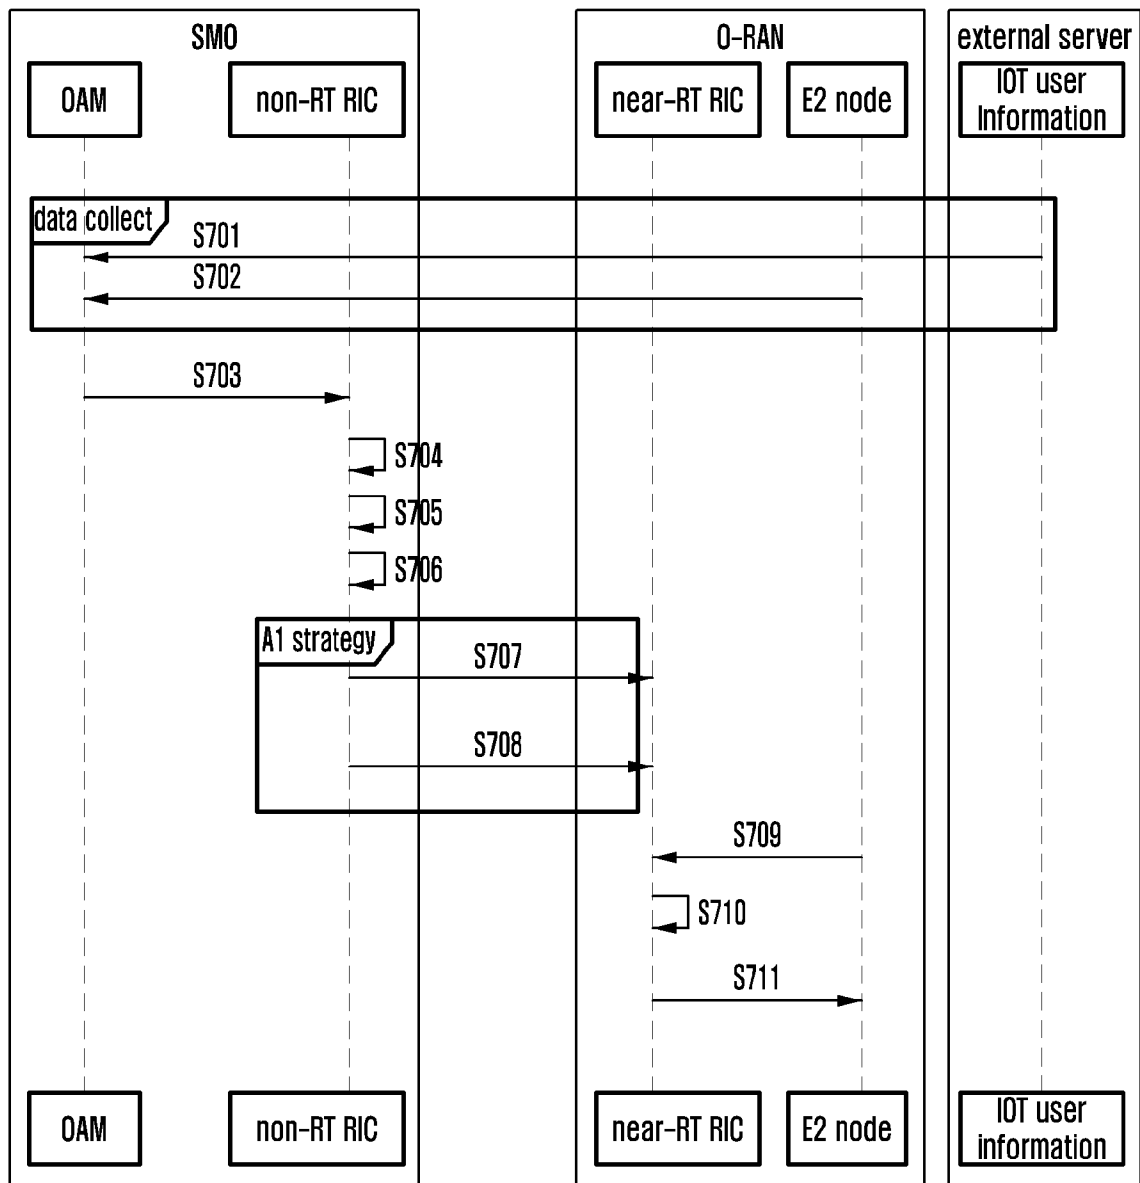


[Fig. 24a]

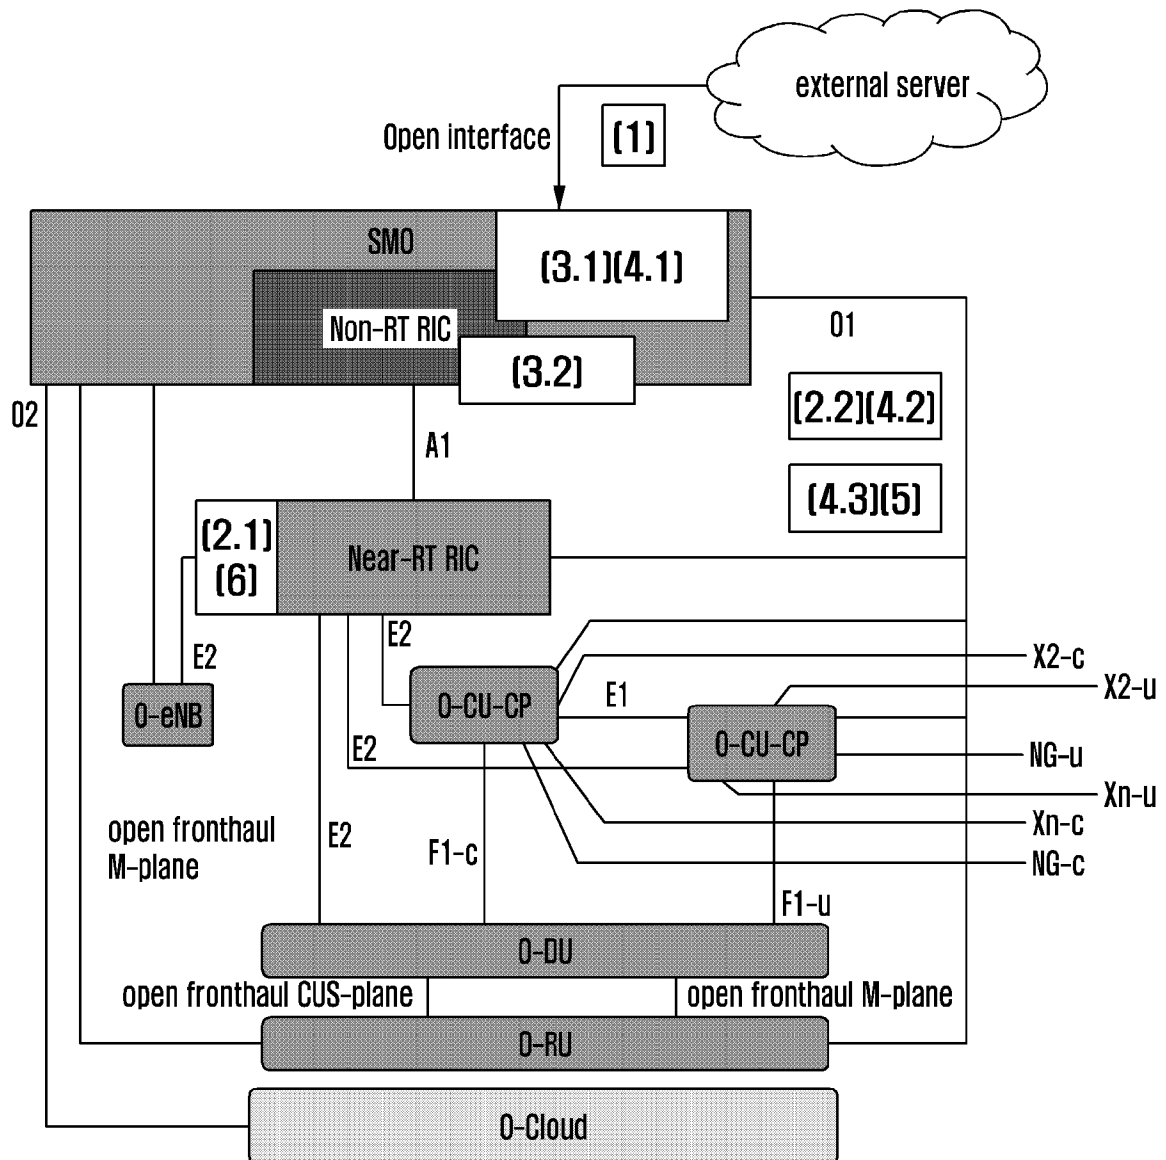


[Fig. 24b]

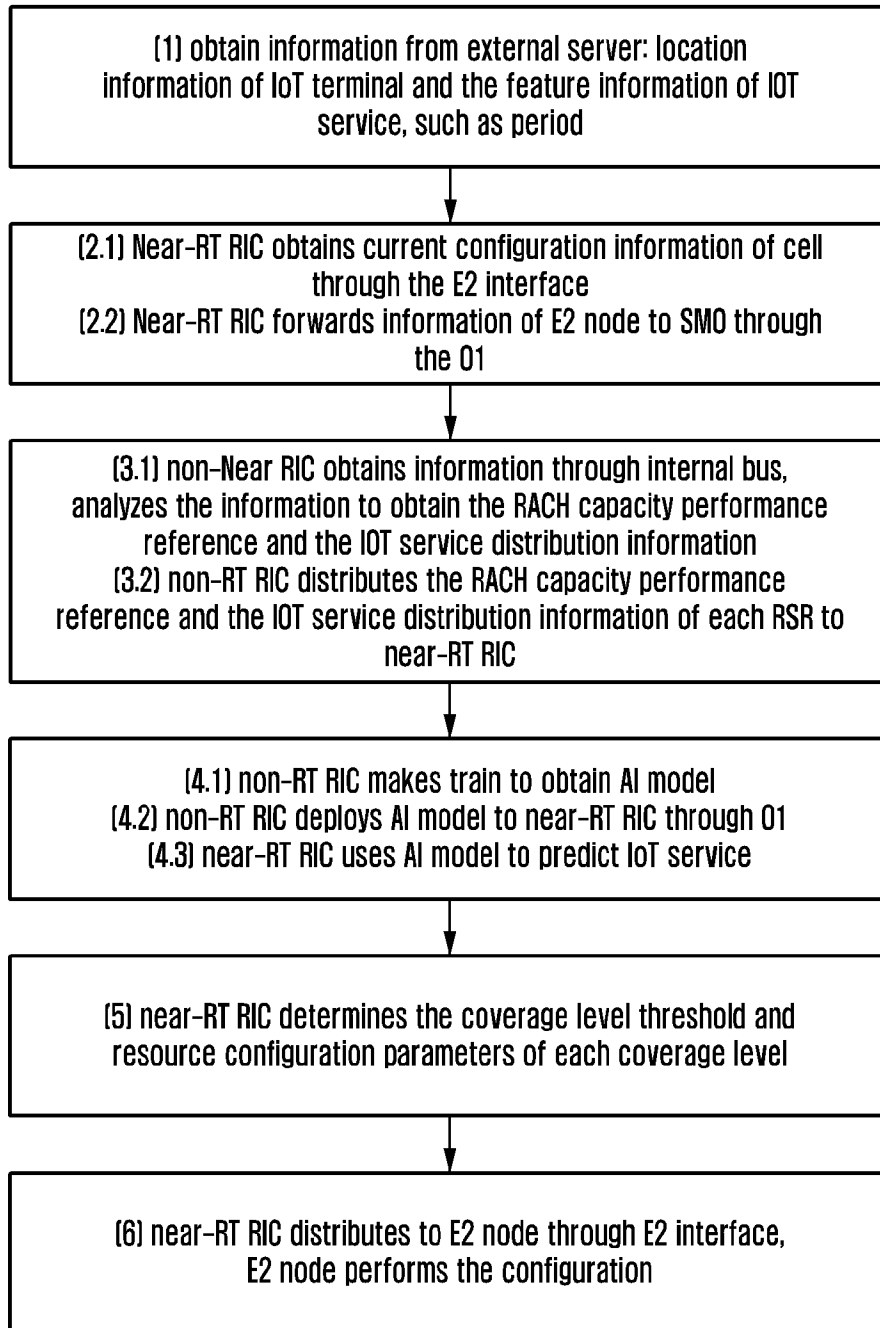


[Fig. 25]

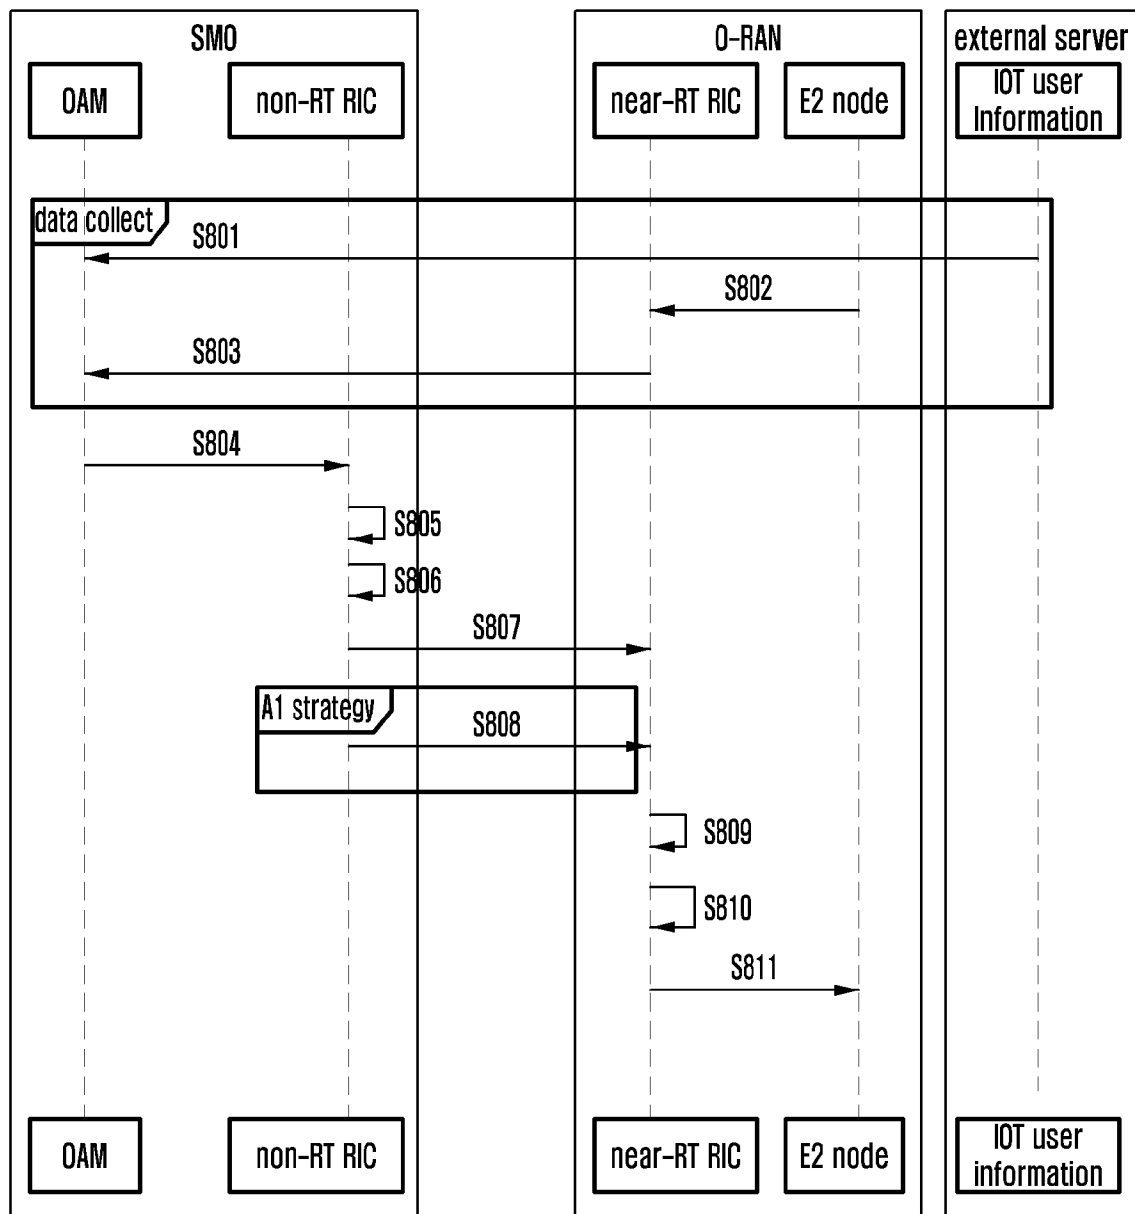

[Fig. 26]

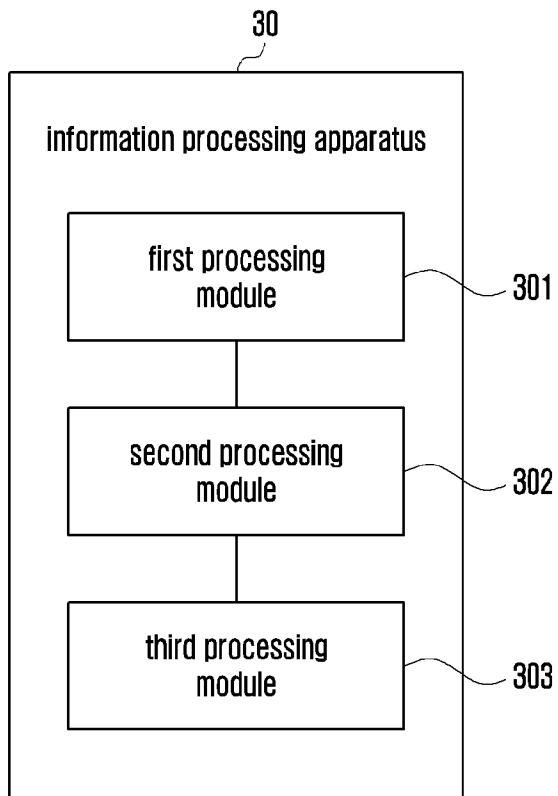

[Fig. 27]

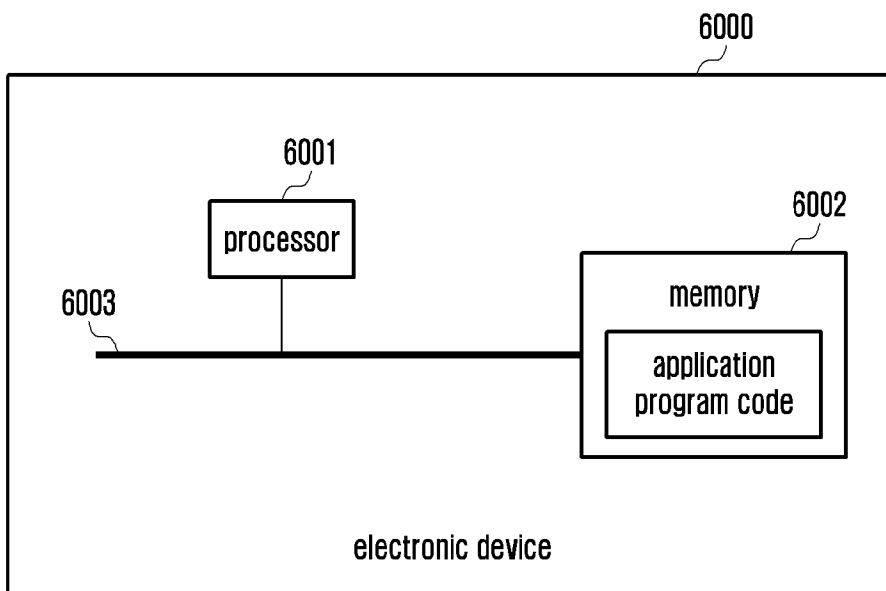

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2021/009111

A. CLASSIFICATION OF SUBJECT MATTER H04L 12/24(2006.01)i; H04L 29/08(2006.01)i; H04W 24/02(2009.01)i; H04W 64/00(2009.01)i According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) H04L 12/24(2006.01); H04B 7/06(2006.01); H04L 5/00(2006.01); H04W 4/06(2009.01); H04W 56/00(2009.01); H04W 72/04(2009.01); H04W 74/00(2009.01); H04W 74/08(2009.01); H04W 88/18(2009.01) Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & keywords: service distribution, resource configuration, coverage, classification		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2014-0022976 A1 (HUA CHAO et al.) 23 January 2014 (2014-01-23) paragraphs [0032]-[0041]; and figure 2	1,15
A		2-14
Y	US 2019-0261428 A1 (NEC CORPORATION) 22 August 2019 (2019-08-22) claim 1	1,15
A	US 2019-0089436 A1 (QUALCOMM INCORPORATED) 21 March 2019 (2019-03-21) paragraph [0084]; and figure 10	1-15
A	US 2018-0035398 A1 (LG ELECTRONICS INC.) 01 February 2018 (2018-02-01) paragraphs [0155]-[0168]; and figure 14	1-15
A	US 2016-0183295 A1 (ZTE CORPORATION) 23 June 2016 (2016-06-23) paragraphs [0123]-[0161]; and claim 1	1-15
☐ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 13 October 2021		Date of mailing of the international search report 14 October 2021
Name and mailing address of the ISA/KR Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea Facsimile No. +82-42-481-8578		Authorized officer YANG, JEONG ROK Telephone No. +82-42-481-5709

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2021/009111

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)		Publication date (day/month/year)
US	2014-0022976	A1	23 January 2014	BR	112013025453 A2	07 November 2017
				CN	102740219 A	17 October 2012
				CN	102740219 B	20 January 2016
				EP	2695403 A2	12 February 2014
				EP	2695403 B1	12 July 2017
				IN	7507CHN2013 A	31 July 2015
				JP	2014-523655 A	11 September 2014
				JP	5805300 B2	04 November 2015
				KR	10-1539522 B1	24 July 2015
				KR	10-2014-0003628 A	09 January 2014
				TW	201246968 A	16 November 2012
				TW	I492646 B	11 July 2015
				US	10560812 B2	11 February 2020
				WO	2012-137075 A2	11 October 2012
				WO	2012-137075 A3	29 November 2012
US	2019-0261428	A1	22 August 2019	BR	112017006136 A2	26 December 2017
				CN	107079482 A	18 August 2017
				EP	3198971 A1	02 August 2017
				EP	3198971 B1	26 May 2021
				GB	201417068 D0	12 November 2014
				GB	2530566 A	30 March 2016
				JP	2017-529800 A	05 October 2017
				JP	2018-164316 A	18 October 2018
				JP	2020-018012 A	30 January 2020
				JP	6376371 B2	22 August 2018
				KR	10-1949062 B1	15 February 2019
				KR	10-2017-0060136 A	31 May 2017
				RU	2650491 C1	16 April 2018
				US	10609733 B2	31 March 2020
				US	11122626 B2	14 September 2021
US	2019-0089436	A1	21 March 2019	CN	109155926 A	04 January 2019
				EP	3453201 A1	13 March 2019
				US	10727920 B2	28 July 2020
				WO	2017-190273 A1	09 November 2017
				WO	2017-190626 A1	09 November 2017
US	2018-0035398	A1	01 February 2018	US	10356738 B2	16 July 2019
US	2016-0183295	A1	23 June 2016	CN	104349476 A	11 February 2015
				CN	104349476 B	24 September 2019
				EP	3032910 A1	15 June 2016
				EP	3032910 B1	05 September 2018
				JP	2016-527831 A	08 September 2016
				JP	6198950 B2	20 September 2017
				WO	2014-176935 A1	06 November 2014