
(12) PATENT ABRIDGMENT **(11) Document No. AU-B-52313/90**
(19) AUSTRALIAN PATENT OFFICE **(10) Acceptance No. 628503**

- (54) Title
ELECTRONIC CROSS CONNECT FRAME
- International Patent Classification(s)
(51)⁵ **H04Q 003/52** **H04Q 003/64**
- (21) Application No. : **52313/90** (22) Application Date : **28.03.90**
- (30) Priority Data
- (31) Number (32) Date (33) Country
8907315 **31.03.89** **GB UNITED KINGDOM**
- (43) Publication Date : **04.10.90**
- (44) Publication Date of Accepted Application : **17.09.92**
- (71) Applicant(s)
GPT LIMITED
- (72) Inventor(s)
NIGEL PAUL DYER
- (74) Attorney or Agent
SHELSTON WATERS , 55 Clarence Street, SYDNEY NSW 2000
- (56) Prior Art Documents
AU 54630/86 H04Q 3/64
US 4847828
- (57) Claim

1. An electronic cross connect frame for an exchange or a multiplexer therefore, comprising an analogue access matrix having n inputs for subscriber lines, a corresponding n outputs to a distribution frame, and a further x outputs to the distribution frame and a control means for the matrix, the matrix being configured such that each input is normally connected to the corresponding output, the matrix being arranged to switch in response to the control means on a one-to-one basis certain of the inputs to the further outputs.

- 1 -

628503

AUSTRALIA

PATENTS ACT 1990

C O M P L E T E S P E C I F I C A T I O N

FOR A STANDARD PATENT

O R I G I N A L

Name of Applicant: GPT LIMITED, of New Century Park, Coventry,
CV3 1HJ, England

Actual Inventor: Nigel Paul Dyer

Address for Service: SHELSTON WATERS
55 Clarence Street
SYDNEY NSW 2000

Invention Title: "IMPROVEMENTS IN OR RELATING TO EXCHANGES"

The following statement is a full description of this invention,
including the best method of performing it known to us:-



IMPROVEMENTS IN OR RELATING TO EXCHANGES

5 This invention concerns exchanges of the kind having a
distribution frame and subscriber interface cards. There is a growing
need to provide an analogue switch facility between the distribution
frame and the interface cards within the exchange or in a multiplexor
10 of the exchange. Such an analogue switching facility is sometimes
called an Electronic Cross Connect Frame (ECCF). An ECCF permits
"sparing" (the continued provision of service to a subscriber whose
interface card has failed by switching the subscriber to a spare
interface card) and also alternative service provision e.g. when a
15 subscriber requests a service provided only by a different physical
interface circuit which can only be provided immediately by the
network operator switching in a different interface card.

20 Ideally, a network operator would be able immediately to
switch any subscriber to any of the different types of interface cards
provided within the exchange or its multiplexor. However, such an
ECCF would not be cost effective with present or foreseeable
technology.

For example, for an exchange (or multiplexor) with 900
subscriber lines for which the connections may be of the 2-wire or 4-
20 wire type, then a three stage switching matrix of the kind shown in
Figure 1 of the accompanying drawings would be necessary to
provide such complete interconnectivity. Each indicated line may
represent a 4-wire connection. The matrix would then be constituted
by 144566 four pole switches. Using relays, with their associated

circuit boards, edge connectors, drivers etc., the cost would be in excess of \$230 per line and the volume would be considerable.

5 As an alternative approach, if separate non-interconnecting but fully available switches are implemented for modules each of 60 subscriber lines, the number of switches required would be 33880 four pole switches. Again, the cost for a 900 line exchange would be prohibitive.

10 If the switching matrix was implemented with solid-state cross points, the volume (but not to any great extent, the cost) would be reduced. For example, either gated diodes or high voltage FETs (Field Effect Transistors) may be used instead of relays. Gated Diodes, for three stage switching, would have a path resistance of approximately 100 ohms. High voltage FETs are prohibitively expensive. It is difficult also to provide well
15 matched impedances using such devices (a balance about earth of some 70 ohms).

20 It is an object of the present invention to provide an electronic cross connect frame, for use in an exchange or a multiplexor of an exchange, wherein the foregoing disadvantages are minimised.

25 According to the present invention, there is provided an electronic cross connect frame for an exchange or a multiplexor therefore, comprising an analogue access matrix having n inputs for subscriber lines, a corresponding n outputs to a distribution frame, a further x outputs to the distribution frame and a control means for the matrix, the matrix being configured such that each input is normally connected to the corresponding output, the matrix being arranged to switch in response to the control means on a one-to-one basis certain of the inputs to the further outputs



The electronic cross connect frame may further include an electronic cross connect frame having interface cards connected to the outputs at the distribution frame wherein the interface cards connected to the x outputs are similar to the interface cards connected to the n outputs whereby "sparing" may be provided.

Preferably, the master controller comprises a master electronic cross connect frame processor and a slave electronic cross connect frame processor.

It is preferred that the analogue access matrix comprises two switch planes.

For 4-wire inputs, a first pair of wires may be switched in the first switch plane and the other pair of wires may be switched in the second switch plane. In such case, the switch planes may be identical.

A 2-wire line may be connected in parallel across the first and second switch planes.



For 2-wire inputs, the two planes may also be identical, the second switch plane paralleling the first switch plane. Alternatively, the second switch plane may serve for selective connection of a ring source to a redundant pair of lines for a particular path through the matrix.

Test access relays may tap into a subscriber pair of lines so as not to interrupt the lines. Independant splitting relays are employed to break the connection between the subscriber and the line cards. In this way two stage circuit validation may be achieved.

Where the second switch plane is identical to the first, it may parallel the same for 2-wire lines. In this way, either switch plane could be removed without interrupting services to the subscribers of the particular module using that analogue access matrix.

The invention will be described further, by way of examples, with reference to the accompanying drawings, in which:-

Figure 1, as above described, represents a three stage switching matrix representing a conventional way of providing "sparing" or alternative subscriber service;

Figure 2 is a block diagram of an electronic cross connect frame, for use in an exchange or a multiplexor thereof, according to the present invention;

Figure 3 is a block diagram illustrating the interconnection between an analogue access matrix and subscriber interfaces of one module of the electronic cross connect frame of Figure 2; and,

Figure 4 is a schematic diagram of the structure of an analogue access matrix shown in Figures 2 and 3.



Referring to the drawings, Figure 2 shows a block diagram of a proposed electronic cross connect frame (ECCF). The incoming subscriber lines are assigned to modules 10. Each module 10 comprises an Analogue Access Matrix (AAM) 12, for each module 10 of subscriber interface circuits. In this description, each module consists of $\underline{n} + \underline{x}$ e.g. 64 line interface circuits and is used to provide service to up to $\underline{n}$ e.g. 60 subscribers at any given time, and excess lines $\underline{x} = 4$ being available for sparing etc.. The interfaces may be 2-wire or 4-wire.

The AAM12 normally provides direct interconnection between a Distribution Frame (not shown) and Interface Circuits in the line modules 10. The AAMs 12 can also provide a limited number of flexibility cross connects, that is the ability to switch to spare line cards should an original line card develop a fault or to offer alternative service to a subscriber on a particular circuit. The AAMs 12 also provide the test access connection to a common test facility 14.

The AAMs 12 are controlled by two independent processors 16, 18 working in a master slave configuration, connected independently to a central exchange/multiplexor processor 20 via duplex communications links 22. Each Processor 16, 18 has independent control links 24 to each AAM 12.

Figure 3 is a block diagram illustrating the interconnection between one of the AAM's 12 and Line Cards within a module 10 serving 60 4-wire subscriber interfaces. The AAM 12 consists of 2 identical relay matrices 12a and 12b, arranged in 2 planes, the alpha

and beta plane, one plane for each of the two wire pairs that make up a 4-wire subscriber interface.

Figure 4 shows the structure of an AAM 12a or 12b. Each subscriber pair/quad, from the distribution frame, is connected directly through to a line card (see Fig.3) resulting in a fixed correspondence between connection positions on the distribution frame and physical card positions within the Line Modules 10.

Relays associated with the cross connect and the connection to the cross connect and indicated diagrammatically by reference numeral 30 may be magnetic latching relays. This ensures that the switching matrix stays latched in the absence of power. Relays associated with the test access function, of the test facility 14, however, would be non-latching, such that in their relaxed state, there are no connections to the common line test facility 14 and all splitting relays (described below) are closed.

The two ECCF processors 16, 18 (Fig.2), configured in a master-slave configuration are connected independently to the central processor 20 using communications links 22 such as HDLC. Each processor 16 or 18 has an independent connection to each of the AAMs 12. Control to each AAM 12 is via separate duplex serial control links 24, using a fully handshaked and error checked message based protocol such as HDLC.

Each processor 16 and 18 maintains a full record of the ECCF configuration in non-volatile memory. In normal operation, both Master and Slave ECCF processors 16, 18 communicate with the central processor. The master processor 16 is responsible for determining how a particular interconnection requirement is to be implemented using -----



the cross connect matrix 28, and this is confirmed by the slave processor 18. The master processor 16 then initiates the change to the cross connect as appropriate and updates its configuration map. The other processor 18 is informed that the operation has been completed so that its configuration map can also be updated.

In addition to the 'straight through connection' mode described above any 8 subscriber loops and interface circuits within each module 10 can be connected to a flexibility cross point matrix 28. This allows the subscriber pairs access to the excess alternative interface circuits for line sparing and provision of alternative services, i.e. flexibility cross connects.

The arrangement adopted is blocking in that it is not possible to spare any combination of the n subscriber connections to any combination of n line circuits. However, circuit provisioning rules will keep the risk of blocking to a minimum.

There are two ways in which the system can be configured. It can be configured such that change of service or sparing is largely provided using excess line circuits from within the same module with limited provision for sparing, or change of service using interface circuits for another module 10. Alternatively, it can be configured so that the majority of sparing and change of service provision is provided from a common pool of interfaces in a designated module shelf.

If a continuity check fails then the ECCF processor 16 will attempt to set up an alternative pathway through the flexibility cross-point 28. The new path way is then continuity tested. The

result of the second test is then used to generate detailed diagnostic information which is passed to the central processor 20.

If the new pathway through the switch is sound then service is provided to the subscriber using a new pathway, and the cross point map is updated to reflect the failure and new matrix configuration.

If it is still not possible to provide service, the central processor 20 is informed so that alternative action can be taken.

The structure has been designed to allow evolution towards a larger number of cross connects, both within a module shelf and between modules. This will become possible when solid state switching technology has evolved to a stage where this can be implemented cost effectively within the cabinet volume.

It is also possible to operate 2 AAMs 12 in parallel to each 60 line module 10. This would permit up to 16 cross connects within a module using the AAMs as proposed. This would also have the advantage that an AAM 12 could be removed without disrupting service to the customers because all the traffic could be handled by the other AAM 12. The tolerance to single point failures would also be improved.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. An electronic cross connect frame for an exchange or a multiplexer therefore, comprising an analogue access matrix having n inputs for subscriber lines, a corresponding n outputs to a distribution frame, and a further x outputs to the distribution frame and a control means for the matrix, the matrix being configured such that each input is normally connected to the corresponding output, the matrix being arranged to switch in response to the control means on a one-to-one basis certain of the inputs to the further outputs.
2. An electronic cross connect frame as claimed in Claim 1 further including interface cards connected to the outputs at the distribution frame wherein the interface cards connected to the x outputs are similar to the interface cards connected to the n outputs whereby "sparing" may be provided.
3. An electronic cross connect frame as claimed in Claim 1 or Claim 2 wherein the analogue access matrix comprises first and second switch planes.
4. An electronic cross connect frame as claimed in Claim 3 wherein the first and second switch planes are identical.
5. An electronic cross connect frame as claimed in Claim 3 or Claim 4 wherein connections are made thereto by 4-wire lines and the first pair of each 4-wire line is switched by the first switch plane and the second pair of each 4-wire line is switched by the second switch plane.



6. An electronic cross connect frame as claimed in Claim 3 having a 2-wire line connected to the first switch plane and a ring source connected to the second switch plane, the matrix being arranged to switch the line to the ring source in response to the control means.

7. An electronic cross connect frame as claimed in Claim 4 wherein a 2-wire line is connected in parallel across the first and second switch planes.

8. An electronic cross connect frame as claimed in any preceding claim wherein the control means comprises a master and a slave processor.

9. An electronic cross connect frame substantially as here before described with reference to and as illustrated in Figures 2 to 4 of the accompanying drawings.

10. An exchange or multiplexer therefore having an electronic cross connect frame as claimed in any preceding claim.

DATED this 14th day of February 1992

GPT LIMITED

Attorney: PETER HEATHCOTE

Fellow Institute of Patent Attorneys of Australia
of SHELSTON WATERS



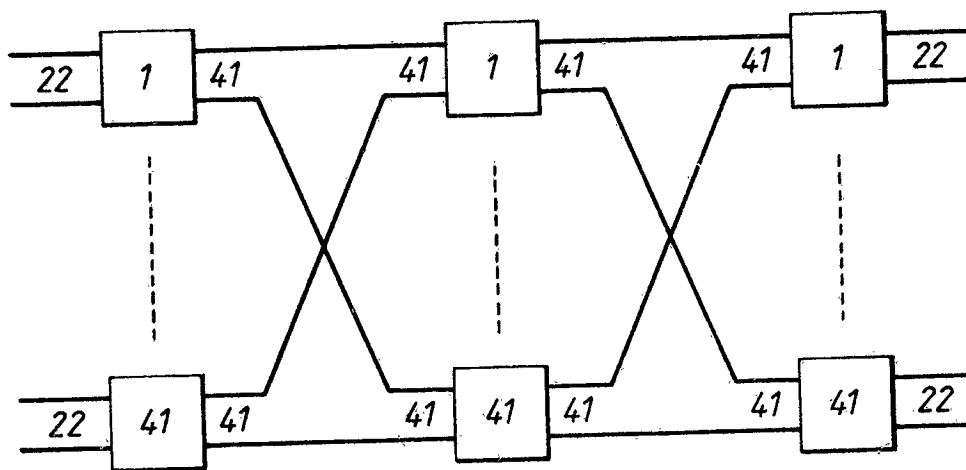


Fig.1.

52313/90


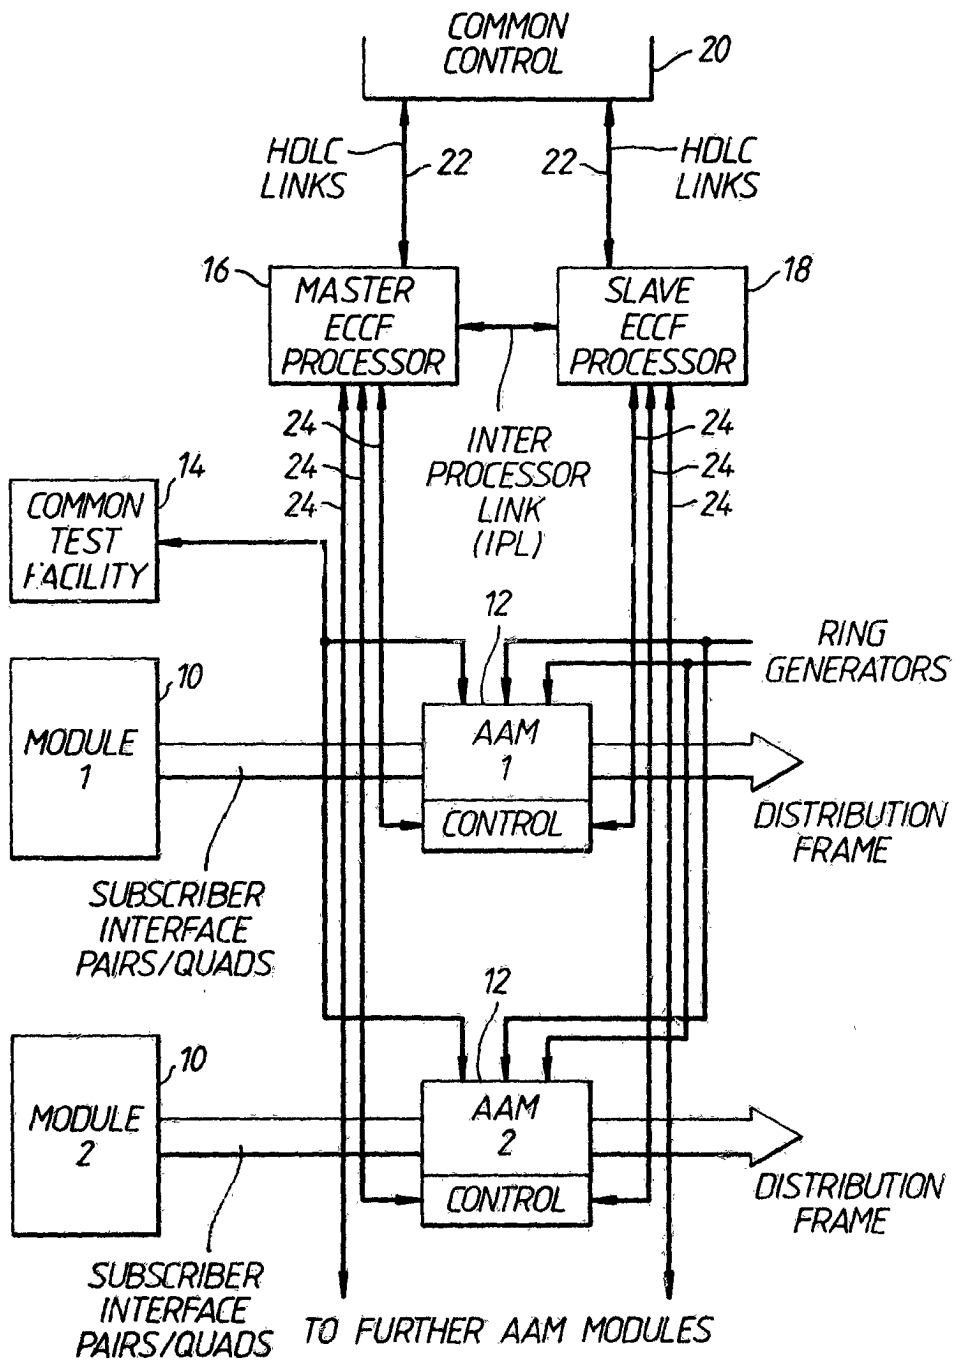


Fig.2.

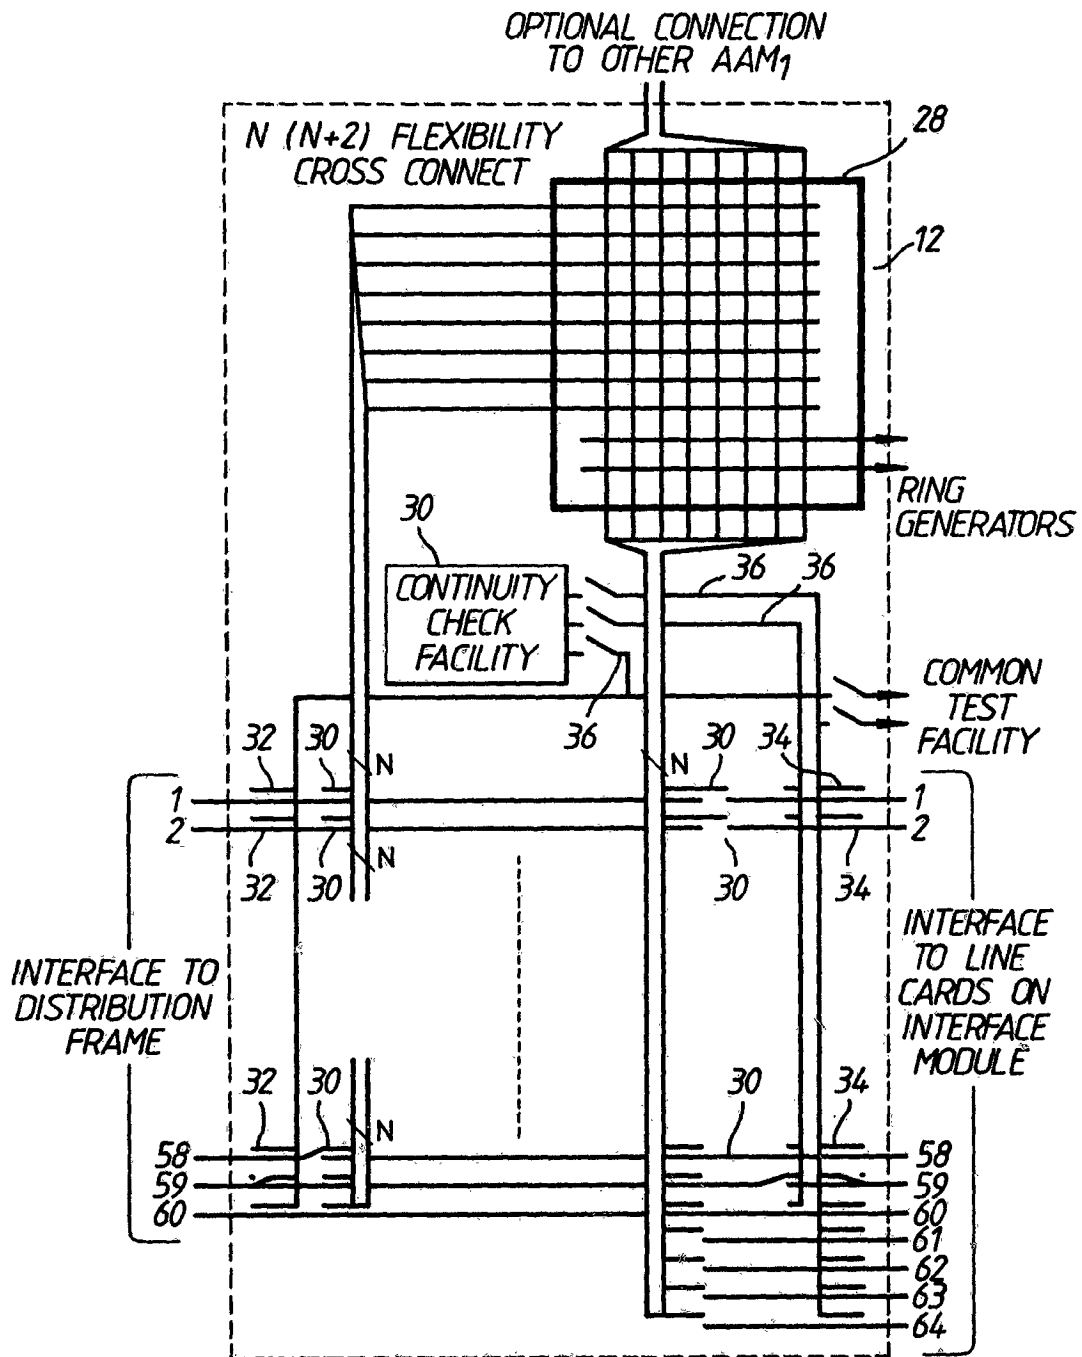

1 = 4 WIRE INTERCONNECTION PATH
 TEST ACCESS ENERGISED ON CHANNEL 59
 DISTRIBUTION FRAME INTERFACE 58
 CONNECTED TO FLEXIBILITY CROSSCONNECT

Fig.4.

52313/90

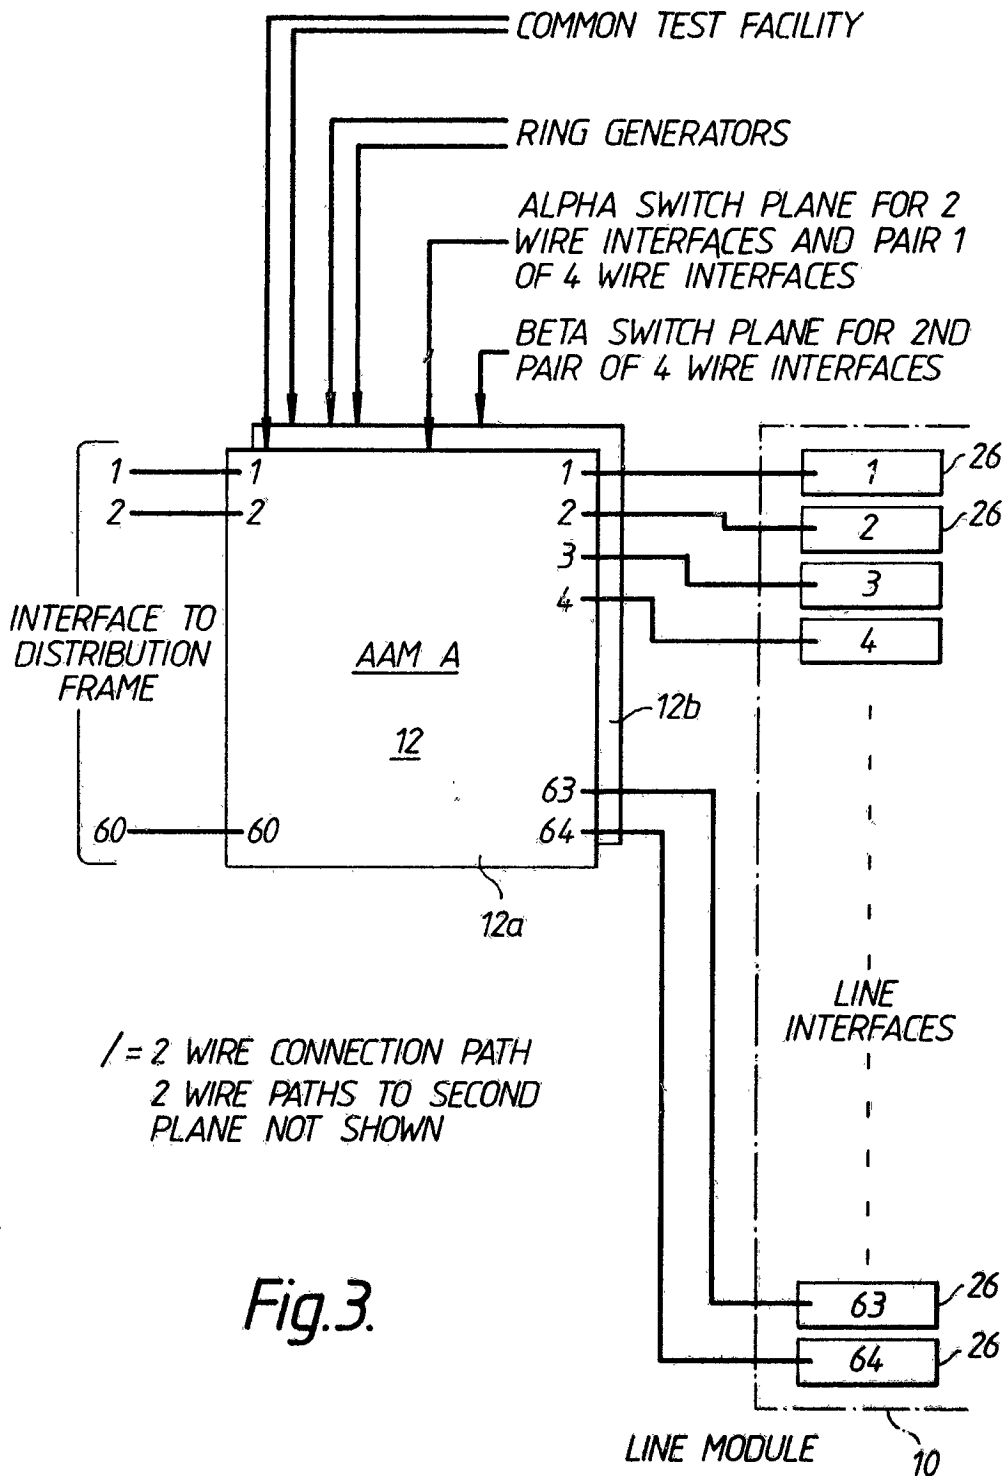


Fig.3.