



(51) International Patent Classification:

H05B 33/08 (2006.01)

DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/EP2016/054620

(22) International Filing Date:

4 March 2016 (04.03.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15159157.5 16 March 2015 (16.03.2015) EP

(71) Applicant: **PHILIPS LIGHTING HOLDING B.V.**
[NL/NL]; High Tech Campus 45, 5656 AE Eindhoven (NL).(72) Inventors: **TAO, Haimin**; High Tech Campus 5, 5656AE Eindhoven (NL). **DE JONGH, Frits, Tobi**; High Tech Campus 5, 5656AE Eindhoven (NL).(74) Agent: **VERWEIJ, Petronella, Daniëlle**; High Tech Campus 5, 5656 AE Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) Title: FILAMENT CIRCUIT FOR LAMP POWERED VIA BALLAST

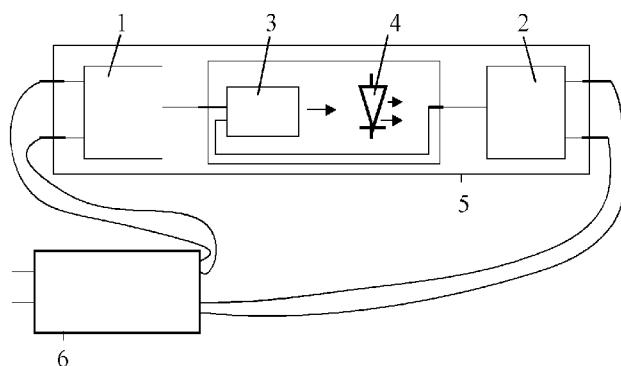**Fig. 2**

(57) **Abstract:** Filament circuits (1) for lamps (5) powered via ballasts (6) comprise first filament-inputs (11) coupled to first ballast-outputs, second filament-inputs (12) coupled to second ballast-outputs, first circuits (13) comprising resistive components, second circuits (14) comprising reactive components, direct-current paths between the first and second filament-inputs (11, 12) whereby series configurations of the first and second circuits (13, 14) comprise these direct-current paths, and filament-outputs (15) coupled to a driver-input of a driver (3) for driving a light source (4) of the lamp (5). These filament-outputs (15) may correspond with the first filament-inputs (11), or with the second filament-inputs (12). The resistive components may comprise first resistors (16). The reactive components may comprise first capacitors (17) with the second circuits (14) comprising parallel configurations of the first capacitors (17) and second resistors (18), or the reactive components may comprise inductors (20). The first circuits (13) may comprise parallel configurations of the first resistors (16) and second capacitors (19).

Filament circuit for lamp powered via ballast

FIELD OF THE INVENTION

The invention relates to a filament circuit for a lamp, which lamp is configured to be powered via a ballast. The invention further relates to a device comprising such a filament circuit, and to a lamp comprising such a filament circuit.

5 Examples of such a device are driving devices. Examples of such a lamp are retrofit tubes for replacing fluorescent tubes.

BACKGROUND OF THE INVENTION

US 2012 / 0306403 A1 discloses a driver circuit for powering a direct-current lamp in a non-direct-current lamp fitting. This driver circuit comprises two filament circuits each one consisting of two serial resistors or of two serial coils. US2014035463A1 and US2014225520A1 disclose a filament circuit with two parallel RC circuits connected in series between the two input pins and the interconnection of the two RC circuits is the output of the filament circuit. US2014225520A1 and DE202013000880U1 disclose a filament circuit with one parallel RC circuit connected between the two input pins and the input pin is directly the output of the filament circuit.

SUMMARY OF THE INVENTION

In the prior art US2014035463A1 and US2014225520A1, power loss is high 20 since the current will flow through the resistors. In the prior art US2014225520A1 and DE202013000880U1, HF current is very large due to the capacitor shunts the HF current and such large current may damage the ballasts.

It is an object of the invention to provide an improved filament circuit. Further objects are to provide a device and a lamp.

25 According to a first aspect, a filament circuit for a lamp is provided, which lamp is configured to be powered via a ballast, the filament circuit comprising
- a first filament-input configured to be coupled to a first ballast-output of the ballast,
- a second filament-input configured to be coupled to a second ballast-output of the ballast,
- a first circuit comprising a resistive component,

- a second circuit comprising a reactive component,
- a direct-current path between the first filament-input and the second filament-input, a series configuration of the first and second circuits comprising the direct-current path, and
- a filament-output configured to be coupled to a driver-input of a driver for driving a light source of the lamp, wherein the filament-output is derived from the first filament-input or from the second filament-input or from an interconnection between the first and second circuits.

The filament circuit comprises first and second filament-inputs which are configured to be coupled to first and second ballast-outputs of a ballast, such as for example an electronic ballast. The filament circuit further comprises a first circuit and a second circuit. This first circuit comprises a resistive component. This second circuit comprises a reactive component. The filament circuit further comprises a direct-current path between the first filament-input and the second filament-input. A series configuration of the first and second circuits comprises this direct-current path. In other words, the first and second circuits are serially coupled to each other, between the first and second filament-inputs, and a direct-current path is present via these first and second circuits. The filament circuit further comprises a filament-output configured to be coupled to a driver-input of a driver for driving a light source of the lamp. This filament-output is directly derived from the first filament-input or from the second filament-input. So, this filament-output corresponds with the first filament-input or with the second filament-input. In other words, the filament-output is for example formed by the first filament-input or by the second filament-input. In yet other words, the filament-output may for example comprise the first filament-input or the second filament-input, or vice versa.

The resistive component comprises a first resistor, and the reactive component comprises a first capacitor, and the second circuit comprises a parallel configuration of the first capacitor and a second resistor or the resistive component comprises a first resistor, and the reactive component comprises an inductor. The series configuration of the first and second circuits provides fail safety and reduces a risk of the ballast getting too hot. In case of a single component failure, such as for example an “open” failure or a “short” failure, an impedance of the filament circuit as present between the first and second filament-inputs is still larger than zero, and the ballast cannot get too hot. The series configuration of the first (resistive) and second (reactive) circuits allows a total impedance of the filament circuit to be optimized

- for limiting an amplitude of a high-frequency current flowing through the filament circuit from one of the first and second filament-inputs to the other one, from the first filament-input to the filament-output and/or from the second filament-input to the filament-output,
 - for reducing a waveform distortion introduced in the filament circuit,
- 5 - for limiting a voltage drop present across the filament circuit between the first and second filament-inputs, between the first filament-input and the filament-output and/or between the second filament-input and the filament-output, and/or
- for reducing a power consumption in the filament circuit.

And the direct-current path guarantees compatibility with most of the
10 electronic ballasts. As a result, a filament circuit has been created that can be fully optimized for a variety of criteria. This is a great technical advantage.

An embodiment of the filament circuit is defined, wherein the first circuit comprises a parallel configuration of the first resistor and a second capacitor.

In case the resistive component comprises a first resistor, and the reactive
15 component comprises a first capacitor, the second circuit needs to be provided with a second resistor in a parallel configuration with the first capacitor to create the direct-current path. In case the resistive component comprises a first resistor, and the reactive component comprises an inductor, the direct-current path is already present. In both cases, the first circuit may be extended with a second capacitor in a parallel configuration with the first resistor.

20 An embodiment of the filament circuit is defined, wherein the resistive component comprises a first resistor, and the reactive component comprises a first capacitor, and the second circuit comprises a parallel configuration of the first capacitor and a second resistor, or wherein the resistive component comprises a first resistor, and the reactive component comprises a first capacitor, and the first circuit comprises a parallel configuration
25 of the first resistor and a second capacitor, and the second circuit comprises a parallel configuration of the first capacitor and a second resistor.

An embodiment of the filament circuit is defined, wherein the resistive component comprises a first resistor, and the reactive component comprises an inductor, or wherein the resistive component comprises a first resistor, and the reactive component
30 comprises an inductor, and the first circuit comprises a parallel configuration of the first resistor and a second capacitor.

Each first / second resistor may comprise one resistor or may comprise two or more resistors in whatever configuration. Each first / second capacitor may comprise one capacitor or may comprise two or more capacitors in whatever configuration. Each inductor

may comprise one inductor or may comprise two or more inductors in whatever configuration. The first resistor may have a value between $1\ \Omega$ and $100\ \Omega$, the second resistor may have a value between $1\ \Omega$ and $1000\ \Omega$, the first / second capacitor may have a value between $1\ \text{nF}$ and $1000\ \text{nF}$, and the inductor may have a value between $1\ \mu\text{H}$ and $1000\ \mu\text{H}$.

5 According to a second aspect, a device is provided comprising the filament circuit as defined above, the device further comprising the driver. Such a device may comprise a driving device or may comprise a lamp wherein the light source is still lacking.

An embodiment of the device is defined, wherein the second filament circuit comprises

- 10 - a third filament-input configured to be coupled to a third ballast-output of the ballast,
- a fourth filament-input configured to be coupled to a fourth ballast-output of the ballast,
- a third circuit comprising a further resistive component,
- a fourth circuit comprising a further reactive component,
- a further direct-current path between the third filament-input and the fourth filament-input,
- 15 a series configuration of the third and fourth circuits comprising the further direct-current path, and
- a further filament-output coupled to a further driver-input of the driver, wherein the further filament-output is directly derived from the third filament-input or from the fourth filament-input, wherein
- 20 - the further resistive component comprises a third resistor, and the further reactive component comprises a third capacitor, and the fourth circuit comprises a parallel configuration of the third capacitor and a fourth resistor, or
- the further resistive component comprises a third resistor, and the further reactive component comprises a further inductor.

25 In a further embodiment, the third circuit comprises a parallel configuration of the third resistor and a fourth capacitor.

Each third / fourth resistor may comprise one resistor or may comprise two or more resistors in whatever configuration. Each third / fourth capacitor may comprise one capacitor or may comprise two or more capacitors in whatever configuration. Each further inductor may comprise one inductor or may comprise two or more inductors in whatever configuration. The third resistor may have a value between $1\ \Omega$ and $100\ \Omega$, the fourth resistor may have a value between $1\ \Omega$ and $1000\ \Omega$, the third / fourth capacitor may have a value between $1\ \text{nF}$ and $1000\ \text{nF}$, and the further inductor may have a value between $1\ \mu\text{H}$ and $1000\ \mu\text{H}$.

The first resistor and the third resistor may have similar values or not. The second resistor and the fourth resistor may have similar values or not. The first capacitor and the third capacitor may have similar values or not. The second capacitor and the fourth capacitor may have similar values or not. The inductor and the further inductor may have 5 similar values or not. The first and second filament circuits may be similar circuits or not.

According to a third aspect, a lamp is provided comprising the filament circuit as defined above and further comprising one or more of the driver and the light source. Such a lamp may comprise the driver without the light source, or the light source without the driver, or both the driver and the light source.

10 According to a fourth aspect, a lamp is provided comprising the filament circuit as defined above and further comprising the light source, wherein the light source comprises a light emitting diode circuit.

A light emitting diode circuit comprises one or more light emitting diodes of whatever kind and in whatever configuration.

15 A basic idea is that a filament circuit should comprise, between its filament-inputs, a direct-current path, as a part of a series configuration of a first circuit that comprises a resistive component and a second circuit that comprises a reactive component.

20 A problem to provide an improved filament circuit has been solved. Further advantages are that safety can be provided to a combination of the lamp and the ballast, an amplitude of a high-frequency current as produced by an electronic ballast can be limited, a waveform distortion can be reduced, a voltage drop can be limited, a power consumption can be reduced, and compatibility with most electronic ballasts can be guaranteed.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

25

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings:

Fig. 1 shows a prior art lamp,

Fig. 2 shows an embodiment of a lamp,

30 Fig. 3 shows a general embodiment of a filament circuit,

Fig. 4 shows a first embodiment of a filament circuit,

Fig. 5 shows a second embodiment of a filament circuit,

Fig. 6 shows a third embodiment of a filament circuit,

Fig. 7 shows a fourth embodiment of a filament circuit, and

Fig. 8 shows waveforms.

DETAILED DESCRIPTION OF EMBODIMENTS

In the Fig. 1, a prior art lamp is shown. The prior art lamp 500 comprises a first filament circuit in the form of a resistor 100 and a second filament circuit in the form of a resistor 200. Both sides of the resistor 100 are coupled to first and second ballast-outputs of a ballast 6, and both sides of the resistor 200 are coupled to third and fourth ballast-outputs of the ballast 6. One of the sides of the resistor 100 and one of the sides of the resistor 200 are coupled to a light source 400 possibly including a driver. Ballast-inputs of the ballast 6 are configured to be coupled to a supply such as mains.

Alternatively, a prior art driver circuit is shown in US 2012 / 0306403 A1 for powering a direct-current lamp in a non-direct-current lamp fitting. This driver circuit comprises two filament circuits each one consisting of two serial resistors or of two serial coils, wherein the interconnections between the serial resistors or between the serial coils form the filament-outputs.

In the Fig. 2, an embodiment of a lamp is shown. The lamp 5 comprises a filament circuit 1 such as for example a first filament circuit, a second filament circuit 2, a driver 3 and a light source 4, such as for example a light emitting diode circuit. A first filament-input of the filament circuit 1 is coupled to a first ballast-output of a ballast 6, and a second filament-input of the filament circuit 1 is coupled to a second ballast-output of the ballast 6. A filament-output of the filament circuit 1 is coupled to a driver-input of the driver 3. A third filament-input of the second filament circuit 2 is coupled to a third ballast-output of the ballast 6, and a fourth filament-input of the second filament circuit 2 is coupled to a fourth ballast-output of the ballast 6. A further filament-output of the second filament circuit 2 is coupled to a further driver-input of the driver 3. The driver 3 is configured to drive the light source 4. The lamp 5 is configured to be powered via the ballast 6, such as for example an electronic ballast. Ballast-inputs of the ballast 6 are configured to be coupled to a supply such as mains. The lamp 5 may for example comprise a retrofit tube for replacing a fluorescent tube while keeping the ballast 6 that has originally been designed to be used in combination with such a fluorescent tube.

In the Fig. 3, a general embodiment of a filament circuit is shown. This filament circuit 1 comprises a first filament-input 11 configured to be coupled to the first ballast-output of the ballast 6, and a second filament-input 12 configured to be coupled to the second ballast-output of the ballast 6. The filament circuit 1 further comprises a first circuit

13 coupled to the first filament-input 11 and a second circuit 14 coupled to the second filament-input 12. The first circuit 13 comprises a resistive component, and the second circuit 14 comprises a reactive component. There is a direct-current path between the first filament-input 11 and the second filament-input 12. A series configuration of the first and second 5 circuits 13, 14 comprises this direct-current path. The filament circuit 1 further comprises a filament-output 15 configured to be coupled to the driver-input of the driver 3.

In the upper drawing, the filament-output 15 is formed by the first filament-input 11. In the middle drawing, the filament-output 15 is formed by an interconnection between the first and second circuits 13, 14. In the lower drawing, the filament-output 15 is 10 formed by the second filament-input 12.

In the Fig. 4, a first embodiment of a filament circuit is shown. The resistive component discussed for the Fig. 3 comprises a first resistor 16, and the reactive component discussed for the Fig. 3 comprises a first capacitor 17 coupled in parallel to a second resistor 18. In the upper drawing, the filament-output 15 is formed by the first filament-input 11. In 15 the middle drawing, the filament-output 15 is formed by an interconnection between the first resistor 16 and the parallel configuration of the first capacitor 17 and the second resistor 18. In the lower drawing, the filament-output 15 is formed by the second filament-input 12.

The parallel configuration of the first capacitor 17 and the second resistor 18 allows a DC current to flow through the second circuit 14 such that the direct-current path is 20 present. Preferably, the filament circuit 1 comprises the first resistor 16, the first capacitor 17 and the second resistor 18 only, whereby each resistor 16, 18 may be realized through one resistor or through two or more resistors in whatever configuration, and whereby each capacitor 17 may be realized through one capacitor of whatever kind or through two or more capacitors of whatever kind and in whatever configuration.

25 In the Fig. 5, a second embodiment of a filament circuit is shown. This second embodiment differs from the first embodiment in that, in the first circuit 13, the first resistor 16 is coupled in parallel to a second capacitor 19. The parallel configuration of the first resistor 16 and the second capacitor 19 allows a DC current to flow through the first circuit 13 such that the direct-current path is present. Preferably, the filament circuit 1 comprises the 30 first resistor 16, the first capacitor 17, the second resistor 18 and the second capacitor 19 only, whereby each resistor 16, 18 may be realized through one resistor or through two or more resistors in whatever configuration, and whereby each capacitor 17, 19 may be realized through one capacitor of whatever kind or through two or more capacitors of whatever kind and in whatever configuration.

The first embodiment shown in the Fig. 4 has, compared to the second embodiment shown in the Fig. 5, fewer elements. The second embodiment shown in the Fig. 5 has, compared to the first embodiment shown in the Fig. 4, a reduced (high frequency) power dissipation.

5 In the Fig. 6, a third embodiment of a filament circuit is shown. The resistive component discussed for the Fig. 3 comprises a first resistor 16, and the reactive component discussed for the Fig. 3 comprises an inductor 20. In the upper drawing, the filament-output 15 is formed by the first filament-input 11. In the middle drawing, the filament-output 15 is formed by an interconnection between the first resistor 16 and the inductor 20. In the lower 10 drawing, the filament-output 15 is formed by the second filament-input 12.

15 The inductor 20 allows a DC current to flow through the second circuit 14 such that the direct-current path is present. Preferably, the filament circuit 1 comprises the first resistor 16 and the inductor 20 only, whereby each resistor 16 may be realized through one resistor or through two or more resistors in whatever configuration, and whereby each inductor 20 may be realized through one inductor of whatever kind or through two or more inductors of whatever kind and in whatever configuration.

20 In the Fig. 7, a fourth embodiment of a filament circuit is shown. This fourth embodiment differs from the third embodiment in that, in the first circuit 13, the first resistor 16 is coupled in parallel to a second capacitor 19. The parallel configuration of the first resistor 16 and the second capacitor 19 allows a DC current to flow through the first circuit 13 such that the direct-current path is present here. Preferably, the filament circuit 1 comprises the first resistor 16, the second capacitor 19 and the inductor 20 only, whereby each resistor 16 may be realized through one resistor or through two or more resistors in whatever configuration, whereby each capacitor 19 may be realized through one capacitor of whatever kind or through two or more capacitors of whatever kind and in whatever 25 configuration, and whereby each inductor 20 may be realized through one inductor of whatever kind or through two or more inductors of whatever kind and in whatever configuration.

30 The third embodiment shown in the Fig. 6 has, compared to the fourth embodiment shown in the Fig. 7, fewer elements. The fourth embodiment shown in the Fig. 7 has, compared to the third embodiment shown in the Fig. 6, a reduced (high frequency) power dissipation.

In the Fig. 3, 4, 5, 6 and 7, the filament-output 15 may be formed by the first filament-input 11, by the interconnection between the first and second circuits 13, 14, or by

the second filament-input 12. In other words, the filament-output 15 may be derived from and/or comprise and/or be coupled to and/or be connected to the first filament-input 11, the interconnection between the first and second circuits 13, 14, or the second filament-input 12. Or the first filament-input 11, the interconnection between the first and second circuits 13,

- 5 14, or the second filament-input 12 may comprise and/or be coupled to and/or be connected to the filament-output 15.

In the Fig. 8 waveforms are shown (vertical axis: power dissipation increasing in an upward direction, horizontal axis: light intensity increasing from left to right, in a dimming situation). The upper graph indicated by R corresponds with the power dissipation 10 in a prior art filament circuit in the form of a pure resistive filament circuit. The lower graph indicated by RCR corresponds with the power dissipation in a filament circuit 1 as shown in the Fig. 4. In a dimming situation, a frequency of a signal as produced by an electronic ballast increases when a light output decreases. Clearly, in such a dimming situation, compared to the prior art filament circuit, the power dissipation in the filament circuit 1 is reduced much. 15 This is due to the fact that a reactive component in the filament circuit reduces a power dissipation in a resistive component. In case of a capacitor coupled in parallel to a resistor, for a high frequency current the capacitor has a reduced impedance and thereby reduces the power dissipation in the resistor. In case of an inductor coupled serially to a resistor, for the high frequency current the inductor has an increased impedance and thereby reduces the 20 power dissipation in the resistor.

First and second elements can be coupled in many different ways, for example in an indirect way and in a direct way. When being coupled indirectly, the first and second elements are coupled via a third element. When being coupled directly, the first and second elements are coupled without the third element being in between. Similarly, an output can be 25 derived from an input or from an interconnection in many different ways, for example indirectly, via an element, or directly, without the element being in between.

Summarizing, filament circuits 1 for lamps 5 powered via ballasts 6 comprise first filament-inputs 11 coupled to first ballast-outputs, second filament-inputs 12 coupled to second ballast-outputs, first circuits 13 comprising resistive components, second circuits 14 comprising reactive components, direct-current paths between the first and second filament-inputs 11, 12 whereby series configurations of the first and second circuits 13, 14 comprise these direct-current paths, and filament-outputs 15 coupled to a driver-input of a driver 3 for driving a light source 4 of the lamp 5. These filament-outputs 15 may correspond with the first filament-inputs 11, with the second filament-inputs 12 or with interconnections between

the first and second circuits 13, 14. The resistive components may comprise first resistors 16. The reactive components may comprise first capacitors 17 with the second circuits 14 comprising parallel configurations of the first capacitors 17 and second resistors 18, or the reactive components may comprise inductors 20. The first circuits 13 may comprise parallel 5 configurations of the first resistors 16 and second capacitors 19.

While the invention has been illustrated and described in detail in the drawings and foregoing description, such illustration and description are to be considered illustrative or exemplary and not restrictive; the invention is not limited to the disclosed embodiments. Other variations to the disclosed embodiments can be understood and effected by those 10 skilled in the art in practicing the claimed invention, from a study of the drawings, the disclosure, and the appended claims. In the claims, the word "comprising" does not exclude other elements or steps, and the indefinite article "a" or "an" does not exclude a plurality. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage. Any reference 15 signs in the claims should not be construed as limiting the scope.

CLAIMS:

1. A filament circuit (1) for a lamp (5), which lamp (5) is configured to be powered via a ballast (6), the filament circuit (1) comprising

- a first filament-input (11) configured to be coupled to a first ballast-output of the ballast (6),
- a second filament-input (12) configured to be coupled to a second ballast-output of the ballast (6),

5 ballast (6),

- a first circuit (13) comprising a resistive component,
- a second circuit (14) comprising a reactive component,
- a direct-current path between the first filament-input (11) and the second filament-input (12), a series configuration of the first and second circuits (13, 14) comprising the direct-current path, and
- a filament-output (15) configured to be coupled to a driver-input of a driver (3) for driving a light source (4) of the lamp (5), wherein the filament-output (15) is directly derived
 - a) from the first filament-input (11) or
 - b) from the second filament-input (12); and

15 wherein

- x) the resistive component comprises a first resistor (16), and the reactive component comprises a first capacitor (17), and the second circuit (14) comprises a parallel configuration of the first capacitor (17) and a second resistor (18) or
- y) the resistive component comprises a first resistor (16), and the reactive component comprises an inductor (20).

20 2. The filament circuit (1) as defined in claim 1, wherein in conditions x) and y) the first circuit (13) comprises a parallel configuration of the first resistor (16) and a second capacitor (19).

25

3. A device comprising the filament circuit (1) as defined in claim 1, the device further comprising the driver (3).

4. The device as defined in claim 3, wherein the filament circuit (1) comprises a first filament circuit, and wherein the device further comprises a second filament circuit (2).

5. The device as defined in claim 4, wherein the second filament circuit (2) comprises

- a third filament-input configured to be coupled to a third ballast-output of the ballast (6),
- a fourth filament-input configured to be coupled to a fourth ballast-output of the ballast (6),
- a third circuit comprising a further resistive component,
- a fourth circuit comprising a further reactive component,
- 10 - a further direct-current path between the third filament-input and the fourth filament-input, a series configuration of the third and fourth circuits comprising the further direct-current path, and
- a further filament-output coupled to a further driver-input of the driver (3), wherein the further filament-output is directly derived

15 a') from the third filament-input or
b') from the fourth filament-input;
wherein
x') the further resistive component comprises a third resistor, and the further reactive component comprises a third capacitor, and the fourth circuit comprises a parallel configuration of the third capacitor and a fourth resistor, or
20 y') the further resistive component comprises a third resistor, and the further reactive component comprises a further inductor.

6. The device as defined in claim 5, wherein in conditions x' and y' the third circuit comprises a parallel configuration of the third resistor and a fourth capacitor.

7. A lamp (5) comprising the filament circuit (1) as defined in claim 1 and further comprising one or more of the driver (3) and the light source (4).

30 8. A lamp (5) comprising the filament circuit (1) as defined in claim 1 and further comprising the light source (4), wherein the light source (4) comprises a light emitting diode circuit.

9. A lamp (5) comprising the device (1) as defined in any one of claims 4 to 6, and further comprising the light source (4)

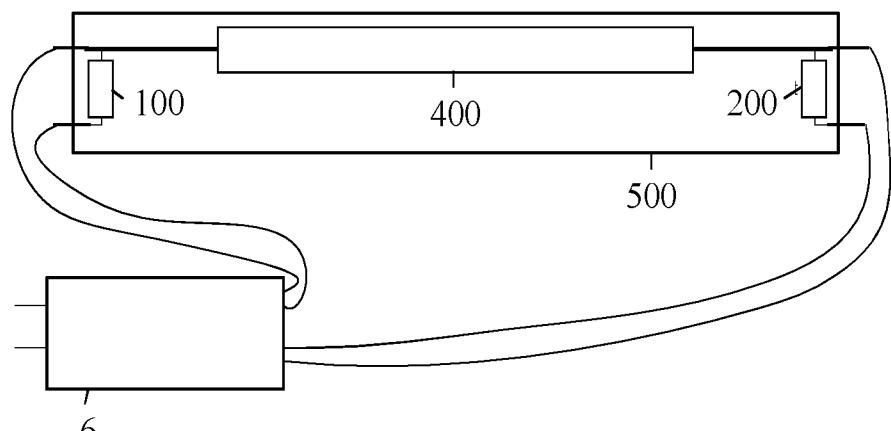


Fig. 1 (prior art)

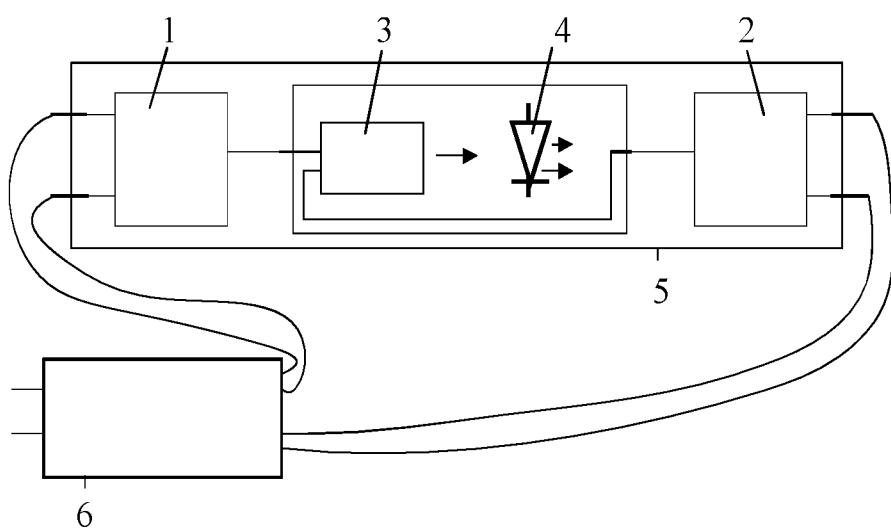


Fig. 2

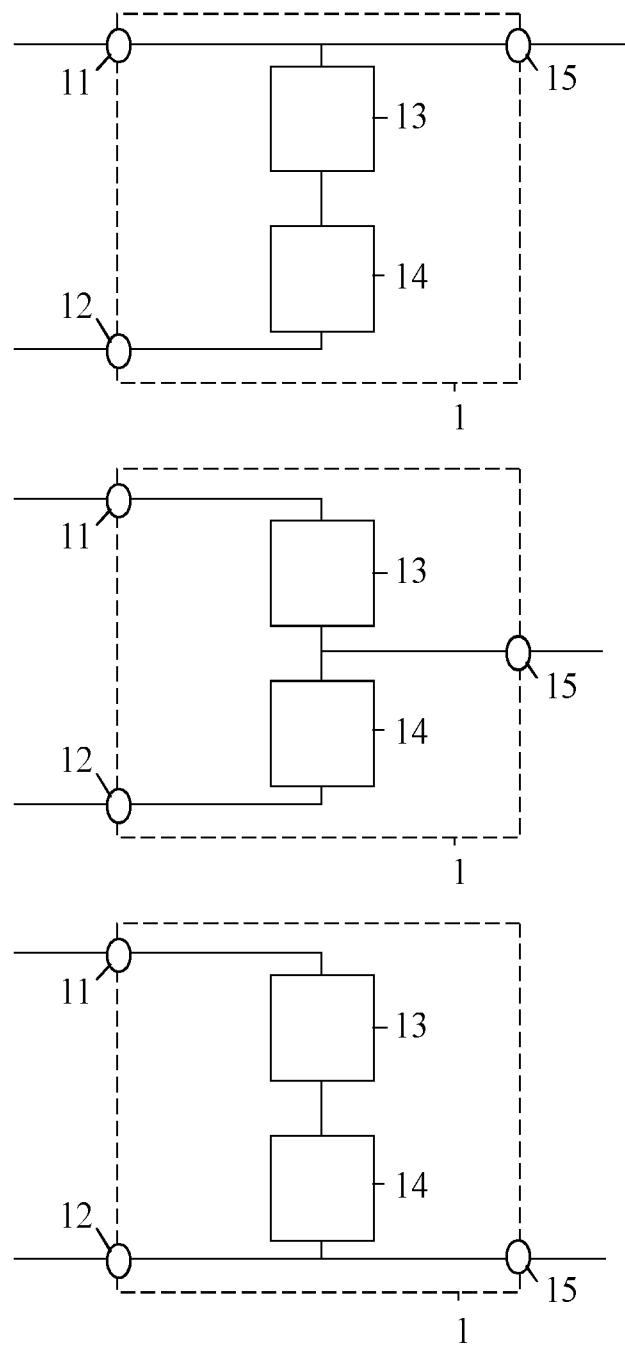


Fig. 3

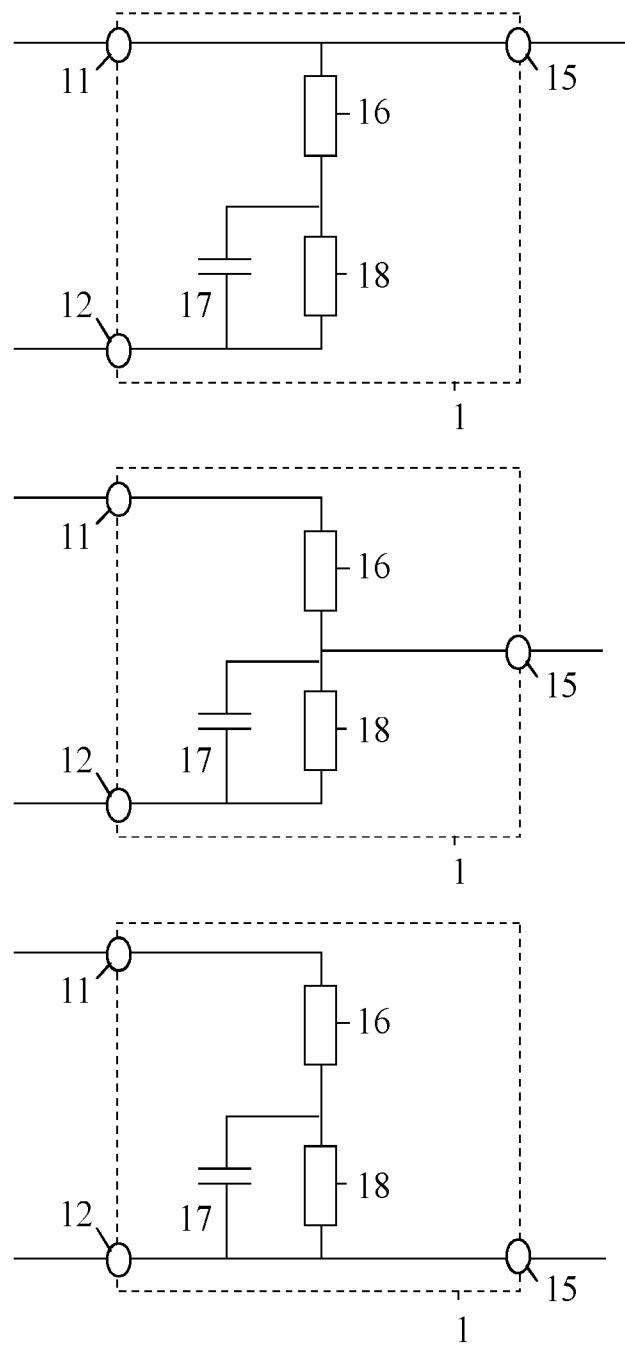


Fig. 4

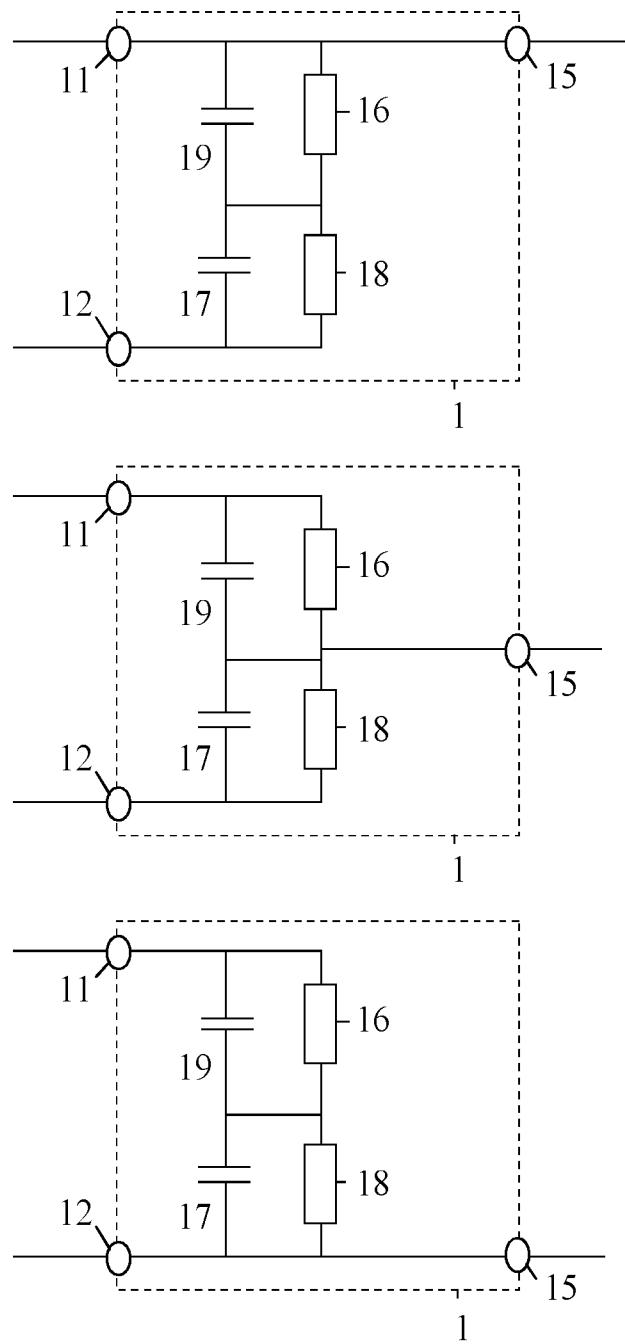


Fig. 5

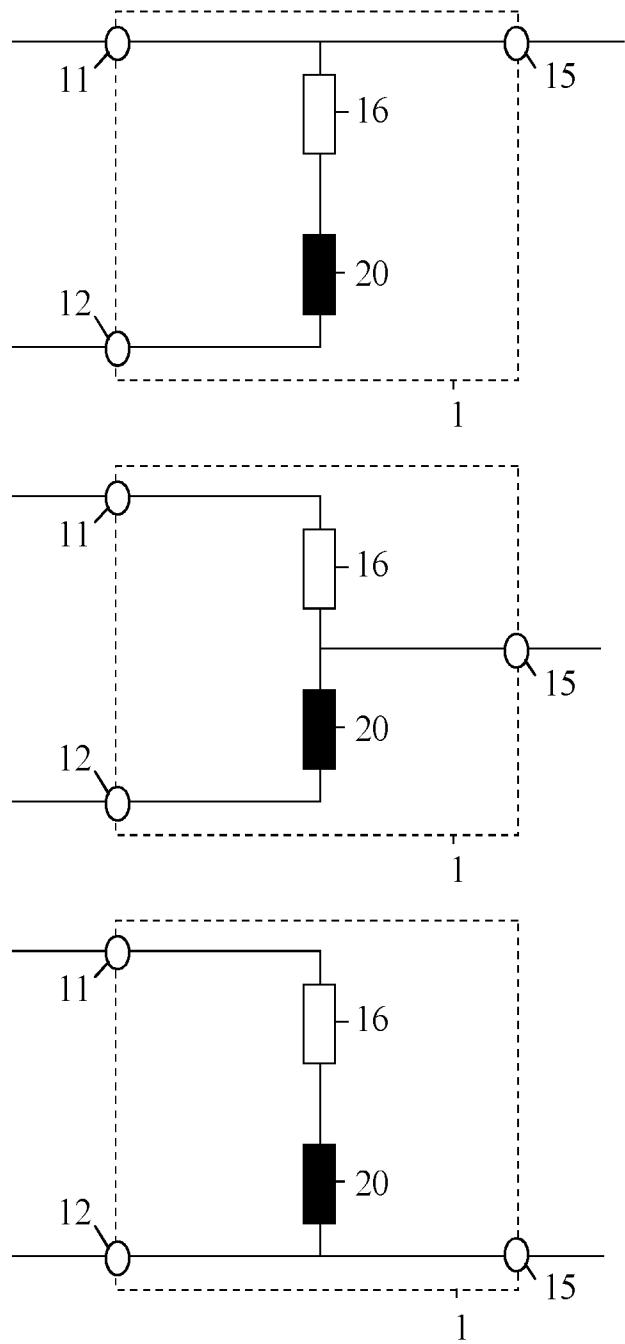


Fig. 6

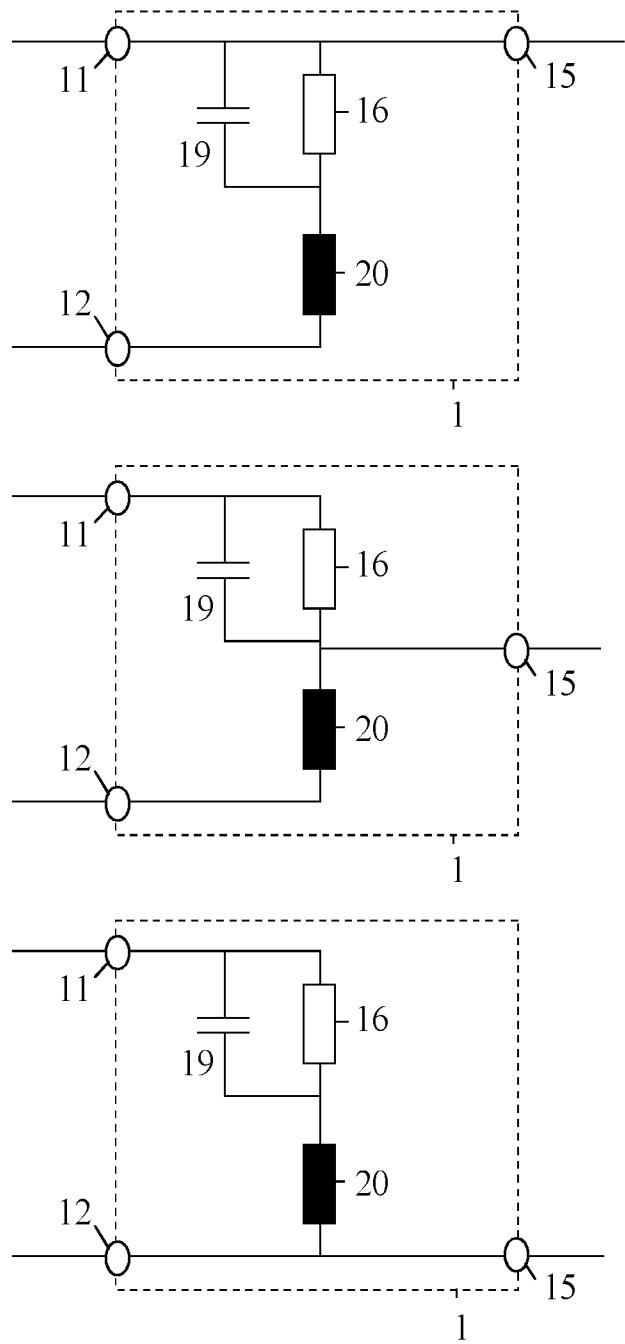


Fig. 7

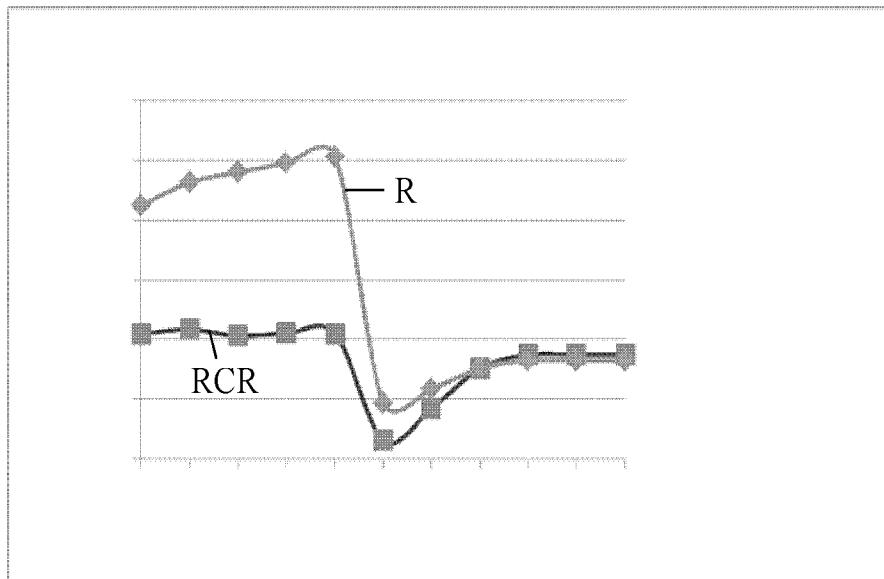


Fig. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/054620

A. CLASSIFICATION OF SUBJECT MATTER
INV. H05B33/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 20 2015 000387 U1 (WU CHENG HSUN [TW]) 28 January 2015 (2015-01-28) paragraphs [0011] - [0014]; figure 1 -----	1-9
A	US 2014/035463 A1 (MIYAMICHI SABURO [JP]) 6 February 2014 (2014-02-06) pages 4, 5; figures 1, 2 -----	1-9
A	US 2014/225520 A1 (ZHANG JUN [US]) 14 August 2014 (2014-08-14) page 4; figure 13 -----	1-9
A	DE 20 2013 000880 U1 (OSRAM GMBH [DE]) 14 February 2013 (2013-02-14) paragraphs [0026] - [0035]; figures 1, 3 -----	1-9



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
6 June 2016	13/06/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Morrish, Ian

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/054620

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
DE 202015000387 U1	28-01-2015	NONE		
US 2014035463 A1	06-02-2014	CN 103503573 A		08-01-2014
		EP 2838321 A1		18-02-2015
		HK 1192994 A1		09-10-2015
		JP 5108994 B1		26-12-2012
		JP W02013153612 A1		17-12-2015
		KR 20130124501 A		14-11-2013
		SG 11201406314T A		27-11-2014
		TW 201342994 A		16-10-2013
		US 2014035463 A1		06-02-2014
		WO 2013153612 A1		17-10-2013
US 2014225520 A1	14-08-2014	NONE		
DE 202013000880 U1	14-02-2013	CN 203813988 U		03-09-2014
		DE 202013000880 U1		14-02-2013