



(51) International Patent Classification:
H04W 16/02 (2009.01)

(21) International Application Number:
PCT/US2010/051734

(22) International Filing Date:
7 October 2010 (07.10.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/611,207 3 November 2009 (03.11.2009) US

(71) Applicant (for all designated States except US): **MOTOROLA MOBILITY, INC.** [US/US]; 600 North US Highway 45, Libertyville, Illinois 60048 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SANKARAN, Chandrasekar** [IN/US]; 900 West Rand Road #C204, Arlington Heights, Illinois 60004 (US). **BENES, Stanley, J.** [US/US]; 2176 N. Aster Place, Round Lake Beach, Illinois 60073 (US). **FLEMING, Philip, J.** [US/US]; 309 Prince Edward Road, Glen Ellyn, Illinois 60137 (US).

(74) Agents: **BRETSCHER, John, T.** et al.; 600 North US Highway 45, Libertyville, Illinois 60048 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

[Continued on next page]

(54) Title: FRACTIONAL FREQUENCY REUSE IN A COMMUNICATION SYSTEM

(57) Abstract: An apparatus and method for fractional frequency reuse in a communication system. The method includes a first step 400 of partitioning a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one. A next step 408 includes scheduling resources for a mobile station in a sector in each resource partition used by that sector.

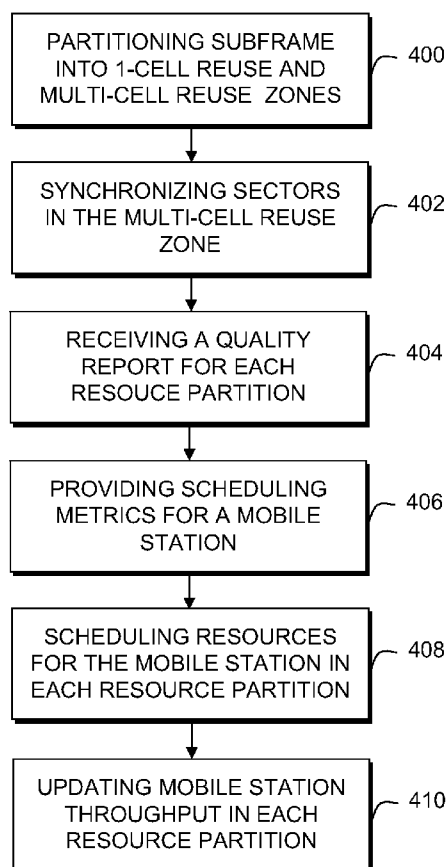


FIG. 4



KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,

Published:

- *with international search report (Art. 21(3))*
- *with amended claims (Art. 19(1))*

FRACTIONAL FREQUENCY REUSE IN A COMMUNICATION SYSTEM

FIELD OF THE INVENTION

5 This invention relates to wireless communication systems, in particular, to a mechanism for fractional frequency reuse in a wireless communication system.

BACKGROUND OF THE INVENTION

10 In a wireless communication system, a mobile station (MS) is assigned a frequency sub-channel and a time slot in a physical layer for its communications with a base station, nodeB, or access point (AP). Since there are limited resources in existing systems (note that there are two dimensions to the resources – time and frequency, hence the total available resource = bandwidth*time), frequency reuse plans can be utilized to share the same resources between different cells. Reusing the same resources in all sectors all the time can result in interference
15 between neighboring MSs that are using the same frequency at the same time. This plan, referred to as a one-cell reuse, is a spectrally efficient reuse scheme for users close in to a cell site (e.g., 114 in Figures 1B and 1C) but suffers from heavy interference issues for cell-edge users (e.g., 112 in Figures 1B and 1C).

20 Fractional frequency reuse plans can be used for separate sectors within a single cell. One form of fractional frequency reuse plan that can be used for a single cell is to limit each sector to use only a fraction of the available resources for the cell site (such that the sum of the mutually disjoint fractions equals the total available resources). Examples of this plan are (in a N -sector per site system - e.g., N could be 3 or 4): (a) Allocate $1/N$ of the total bandwidth to each sector all the time, (b) Allocate the full bandwidth to each sector for $1/N$ of the time. This plan, referred to

as multi-cell reuse plan, effectively reduces interference, but results in the loss of $(N-1)/N$ resources within each sector, even for users that are closer in to the cell site and who don't suffer as much interference. Although this multi-cell reuse plan offers lower interference for cell edge users (e.g., 112 in Figures 1B and 1C), it is not spectrally efficient for users close in to the cell site (e.g., 114 in Figures 1B and 1C).

There is currently no fractional frequency reuse (FFR) technique that performs better than the one-cell reuse and multi-cell reuse fractional frequency reuse plans across different traffic models.

Accordingly, what is needed is a technique to mitigate the problems associated with the one-cell reuse and multi-cell reuse FFR reuse plans.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is pointed out with particularity in the appended claims. However, other features of the invention will become more apparent and the invention will be best understood by referring to the following detailed description in conjunction with the accompanying drawings in which:

Figures 1A, 1B, and 1C are overviews diagram of a wireless communication system, in accordance with the present invention;

Figure 2 and Figure 3 illustrate diagrams of a sub-frame, as used in the system of Figures 1A through 1C;

Figure 4 is a flow chart illustrating a method, in accordance with the present invention.

Skilled artisans will appreciate that common but well-understood elements that are useful or necessary in a commercially feasible embodiment are typically not depicted or described in order to facilitate a less obstructed view of these various embodiments of the present invention.

5 DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention provides a framework to combine the benefits of the one-cell reuse and multi-cell reuse FFR reuse plans. In particular, the present invention allows all MSs in a sector to be scheduled in both the one-cell reuse and the multi-cell reuse zones of a sub-frame used by that sector, wherein a scheduler decides which MSs get resources at different instants in
10 both zones. Specifically, the present invention partitions the available resources into a one-cell reuse zone, where the entire available resources of the cell cite is used by all sectors; and a multi-cell reuse zone, where each sector uses a fraction of the available resources (such that the sum of the fractions adds up to the total available resources), and then schedules MSs in a sector in *both* zones used by that sector as will be detailed below. The split between the zones (either in time or
15 frequency) is configurable (but would need to be synchronized across sectors). Separate instances of a proportional fair (PPF) scheduler can be run in each zone, where each zone will have its own scheduler queue. Alternatively, users can be scheduled using one queue for both zones.

Figures 1A, 1B, and 1C are block-diagram depictions of cell in a wireless communication
20 system, (such as the IEEE 802.16 WiMAX system or 3GPP LTE system or 3GPP LTE-A system or 3GPP2 UMB system), in accordance with the present invention. At present, standards bodies such as OMA (Open Mobile Alliance), 3GPP (3rd Generation Partnership Project), 3GPP2 (3rd Generation Partnership Project 2) and IEEE (Institute of Electrical and Electronics Engineers)

802 are developing standards specifications for such wireless telecommunications systems. The communication system represents a system operable in a packet data access network that may be based on different wireless technologies.

Referring to Figure 1A, there is shown a block diagram of a scheduler 100 adapted to
5 support the inventive concepts of the preferred embodiments of the present invention. The scheduler is typically embodied in a processor of an access point (AP) or base station (BS) that is serving a cell site 120. Those skilled in the art will recognize that Figures 1A, 1B, and 1C do not depict all of the network equipment necessary for system to operate but only those system components and logical entities particularly relevant to the description of embodiments herein.
10 For example, an access point or base station can comprise one or more devices such as wireless area network stations (which include access nodes (ANs), AP controllers, and/or switches), base transceiver stations (BTSSs), base site controllers (BSCs) (which include selection and distribution units (SDUs)), packet control functions (PCFs), packet control units (PCUs), and/or radio network controllers (RNCs), depending on the wireless access technology. However, none
15 of these other devices are specifically shown in Figures 1A, 1B, or 1C.

The processor of the scheduler can be coupled to a transceiver, such as a receiver and a transmitter. In general, components such as processors and transceivers are well-known. For example, AP processing units are known to comprise basic components such as, but not limited to, microprocessors, microcontrollers, memory devices, application-specific integrated circuits
20 (ASICs), and/or logic circuitry. Such components are typically adapted to implement algorithms and/or protocols that have been expressed using high-level design languages or descriptions, expressed using computer instructions, expressed using messaging flow diagrams, and/or expressed using logic flow diagrams.

Thus, given an algorithm, a logic flow, a messaging/signalling flow, and/or a protocol specification, those skilled in the art are aware of the many design and development techniques available to implement a scheduler that performs the given logic. Therefore, scheduler 100 represents a known apparatus that has been adapted, in accordance with the description herein, to
5 implement various embodiments of the present invention. Furthermore, those skilled in the art will recognize that aspects of the present invention may be implemented in and across various physical components and none are necessarily limited to single platform implementations. For example, the processor aspect of the present invention may be implemented in any of the devices listed above or distributed across such components. It is within the contemplation of the
10 invention that the operating requirements of the present invention can be implemented in software, firmware or hardware, with the function being implemented in a software processor as being merely a preferred option.

The scheduler is coupled to its transceiver that uses a wireless interface for communication with one or more mobile stations, such as MS A 112, MS B 114 and MS C 116,
15 as is known in the art.

Mobile stations (MS) or remote unit platforms are known to refer to a wide variety of consumer electronic platforms such as, but not limited to, mobile nodes (MNs), access terminals (ATs), terminal equipment, gaming devices, personal computers, and personal digital assistants (PDAs). In particular, each MS 112, 114, 116 can comprise a processor coupled to a transceiver,
20 antenna, a keypad, a speaker, a microphone, and a display, as are known in the art and therefore not shown. Mobile stations are also known to comprise basic components such as, but not limited to, microprocessors, digital signal processors (DSPs), microcontrollers, memory devices, application-specific integrated circuits (ASICs), and/or logic circuitry. Such mobile stations are

typically adapted to implement algorithms and/or protocols that have been expressed using high-level design languages or descriptions, expressed using computer instructions, expressed using messaging/signaling flow diagrams, and/or expressed using logic flow diagrams. Thus, given an algorithm, a logic flow, a messaging/signaling flow, a call flow, and/or a protocol specification, those skilled in the art are aware of the many design and development techniques available to implement user equipment that performs the given logic.

Each mobile station 112, 114, 116 receives respectively downlink signals from the transceiver of the base station that contains the timing and frequency schedule, among other parameters, to use for communications in the downlink and uplink, in accordance with the present invention. In a typical scenario, a base station is situated at the center 118 of a cell site. The base station typically controls N transceivers, each of which serves MSs 112, 114, 116 in respective sectors 106, 108, 110 of the cell. MSs can experience different channel conditions depending on their location from the base station transceiver of their sector, among other parameters. As shown in this example MS A 112 is located near a cell edge and experiences poorer channel conditions, MS B 114 is located close in to the cell 118 and experiences better channel conditions, while MS C 116 is in between.

Referring to Figure 2, a sub-frame 200 (e.g., a Partial Usage of Sub-Channel (PUSC) tile in IEEE 802.16 WiMaX) is shown, in accordance with one embodiment of the present invention. The sub-frame is partitioned into two resource partitions, wherein one resource partition 202 has frequency reuse of one (one-cell reuse - e.g., PUSC 1/1 time zone in the context of WiMaX), and the other resource partition 204 has a frequency reuse of greater than one (multi-cell reuse - e.g., PUSC 1/ N time zone in the context of WiMaX), where each sector, sector 1 through sector N (e.g., 106, 108, 110 of Figure 1B), is provided its own operating frequency bandwidth.

Preferably, the N sectors in the multi-cell reuse time zone 204 are time synchronized 206. Optionally, it is possible to do a time division method (TDM) of one-cell reuse and multi-cell reuse sub-frames in a periodic pattern. In accordance with the present invention, a mobile station in a sector can be scheduled in both of the one-cell reuse and multi-cell reuse time zone resource partitions used by that sector, as will be detailed below.

Referring to Figure 3, a sub-frame 300 is shown, in accordance with another embodiment of the present invention. The sub-frame is partitioned into two resource partitions, wherein one resource partition 302 has frequency reuse of one (one-cell reuse), and the other resource partition 304 has a frequency reuse greater than one (multi-cell reuse), where each sector, sector 1 through sector N (e.g., 106, 108, 110 of Figure 1B), is provided its own operating frequency bandwidth. Preferably, the N sectors in the multi-cell reuse zone 304 are time synchronized 306. Optionally, it is possible to do a time division method (TDM) of the multi-cell reuse zone in a periodic manner across the N sectors. In accordance with the present invention, a mobile station in a sector can be scheduled in both of the zones/partitions used by that sector.

Metrics are defined for each mobile station in each zone. These metrics can include Signal-to-Noise Ratio (SNR), Carrier-to-Interference-plus-Noise-Ratio (CINR) or other channel quality indicator (CQI) measurement in that zone, spectral efficiency achievable in a zone, which is a function of SNR, CINR or CQI in that zone, and average data throughput for a mobile station. These metrics are then utilized in a Proportional Fair (PPF) scheduler (100 in Figure 1A) to provide a PPF metric in both zones for each mobile station.

In practice, a SNR, CINR or CQI is obtained for user J in each zone, and this channel quality measurement is then used to determine, as is known in the art, a spectral efficiency in each zone for user J . An average data throughput for user J until the current time instant is also

obtained. These inputs are then used to run an independent PPF scheduler in both zones for user J in order to determine a PPF metric for that user in each zone. Each zone has its own scheduler queue (102, 104 in Figure 1A). Users are then sorted in each queue in order of their PPF metric for that zone. In this way, each user is assigned resources in both zones based on their position in the respective queue for that zone. As a result, different resources can be assigned to the same user in the different zones. In addition, the metrics used for sorting can be different in different zones. Further, users can be assigned different modulation coding schemes in different zones depending on their report channel quality measurements.

One example for a PPF metric is shown below, that can be used for either zone. A spectral efficiency, $SE_J(\text{zone})$ is determined as a function of reported CINR of user J in a zone. An average data throughput for user J , Ave_Tput_J , up to the current time instant is also determined. The PPF metric for that user in that zone, $\text{PPF}_J(\text{zone})$, is then determined as $SE_J(\text{zone})^\alpha / \text{Ave_Tput}_J^\beta$, where α and β are parameters used by the scheduler to control the fairness across users in the system. These two parameters can be varied to select a scheduling method anywhere between the two extremes of (i) round-robin scheduling ($\alpha = 0, \beta = 1$) where the scheduler attempts to equalize the average throughput achieved by all the users in the sector and (ii) maximum C/I scheduling ($\alpha = 1, \beta = 0$) where the scheduler assigns all the resources to the user that is capable of achieving the maximum spectral efficiency. Each user is then sorted in each queue (102, 104 in Figure 1A) using its PPF metric for that zone, and is assigned resources for each zone by its position in the queue for that zone. At the end of a frame, Ave_Tput_J is updated using total bits transmitted in both zones for user J , which is then used for the next sub-frame resource allocation for user J . A control message scheduling the resources is then sent to the users in the two zones.

A novel aspect of the present invention is scheduling users in a sector in *both* zones used by that sector. In a preferred embodiment, the scheduler (100 in Figure 1A) maintains two separate sorted queues (102, 104 in Figure 1A), one for each zone, wherein the PPF metric as described above is used to sort each user in both queues. In another embodiment, the scheduler
 5 can maintain only one sorted queue that is used for both zones. In this case, the PPF metric (PPF_J) for user J is given by $PPF_J = \{\gamma * SE_J (\text{one_cell_reuse_zone}) + (1-\gamma) * SE_J (\text{multi_cell_reuse_zone})\}^\alpha / Ave_Tput_J^\beta$, where γ is the fraction of bandwidth assigned to one-cell reuse zone, and SE_J and Ave_Tput_J are as previously defined.

It should also be recognized that a user can be scheduled only in one of the two zones
 10 (each zone runs its scheduler with set of users assigned to that zone), wherein a user's zone is determined by the user's long term CINR for both zones, where a configurable CINR threshold determines the user's zone. A user's zone could also be determined by the user's periodic CINR feedback for both zones, by computing the spectral efficiency for each zone (as a function of that zone's CINR) and assign the user to the zone with the higher spectral efficiency.

15 Example

To evaluate the performance of the present invention, computer simulations were conducted in the context of FIG 2 using the following IEEE 802.16/WiMAX downlink system simulation parameters. TDD split: 60/40 - 18 DL symbols for data (10 symbols for MAP). MIMO A/B: 2 transmit/2 receive antennas: 5 watts transmit power per antenna. Pathloss (PL)
 20 Model - COST 231: $PL \text{ (dB)} = 128.0 + 35.2 \log(d)$, d in km. Penetration loss = 12 dB. MS Antenna Gain = 6 dBi. Lognormal Standard deviation = 8 dB. BS Antenna Configuration: 90° beamwidth, 14.5 dBi gain. System layout: 19 sites, 3 sectors/site; Mobiles dropped uniformly. Cell (site) Area = 0.6 sq. km. PedB channel with all users at 3 km/hr. Traffic Models: Web

Browsing & Full Buffer. CINR feedback once in 8 frames (for FFR, feedback for both PUSC 1/1 & PUSC 1/3 zones, where $N = 3$ for the multi-cell reuse). FFR Dual-8: 8 symbols for PUSC 1/1 (one-cell reuse zone), and 10 symbols for PUSC 1/3 (three-cell reuse zone). In operation, each user “reads” for 45 seconds then transmits a 500 Kbyte file and waits for the file transmission to complete, then reads for 45 seconds and repeats this cycle until the simulation is over. File size: 4 Mbits average. Maximum size = 10 Mbits. A truncated lognormal distribution was used with a standard deviation of 1.44 Mbits. Reading time (Dpc) is 45 seconds average (exponentially distributed).

Table 1 shows the improvement provided by the present invention. As can be seen, the present invention provides significant improvement over the downlink with the proposed FFR technique compared to solely using either PUSC 1/3 or PUSC 1/1.

Table 1
Improvement in Downlink with FFR compared to PUSC 1/3 and PUSC 1/1

Metric	Traffic Model	Improvement over PUSC 1/3	Improvement over PUSC 1/1
Site Throughput	Full Buffer	15%	14%
Cell Edge Throughput	Web Browsing (120 users)	28%	69%
	Full Buffer	3%	50%
User Capacity (10% outage @ 256Kbps)	Web Browsing	6%	10%

Figure 4 shows a flowchart that illustrates a method for fractional frequency reuse in a communication system.

A first step 400 includes partitioning a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one.

A next step 402 includes synchronizing sectors in those resource partitions with a
5 frequency reuse greater than one.

A next step 404 includes receiving a channel quality report from the mobile station for each resource partition.

A next step 406 includes providing scheduling metrics for the mobile station in each resource partition. In particular, the scheduling metrics include a proportional fair metric for the
10 mobile station in each resource partition. Specifically, the proportional fair metric (PPF) for the mobile station in any zone is given by:

$$PPF = \frac{\text{Spectral efficiency achievable in zone}^{\alpha}}{\text{Average throughput for mobile station until current time}^{\beta}}$$

where α and β are fairness parameters as defined above. The spectral efficiency achievable in a zone is derived from a Signal-to-Noise Ratio (SNR) or Carrier-to-Interference-plus-Noise-Ratio
15 (CINR) measurement in that zone.

A next step 408 includes scheduling resources for the mobile station in a sector in each resource partition used by that sector, and in particular both zones, in accordance to the scheduling metrics and the channel quality report. Scheduling 408 includes establishing an independent scheduling queue for each resource partition, and placing the mobile station data
20 traffic into each scheduling queue. Alternatively, scheduling 408 could include establishing one scheduling queue for both resource partitions, and placing the mobile station data traffic for both resource partitions into the one scheduling queue. Optionally, this step includes sending a

downlink control message to the mobile station to indicate the resources assigned to the mobile in the different partitions.

5 A next step 410 includes updating, at an end of a sub-frame, the average throughput in the PPF for the mobile station using the total bits transmitted in each resource partition for the mobile station.

Advantageously, the present invention combines both the one-cell reuse zone and the multi-cell reuse zone to provide good cell edge coverage and throughput without compromising overall sector and user throughput.

10 It will be understood that the terms and expressions used herein have the ordinary meaning as is accorded to such terms and expressions by persons skilled in the field of the invention as set forth above except where specific meanings have otherwise been set forth herein.

15 The sequences and methods shown and described herein can be carried out in a different order than those described. The particular sequences, functions, and operations depicted in the drawings are merely illustrative of one or more embodiments of the invention, and other implementations will be apparent to those of ordinary skill in the art. The drawings are intended to illustrate various implementations of the invention that can be understood and appropriately carried out by those of ordinary skill in the art. Any arrangement, which is calculated to achieve the same purpose, may be substituted for the specific embodiments shown.

20 The invention can be implemented in any suitable form including hardware, software, firmware or any combination of these. The invention may optionally be implemented partly as computer software running on one or more data processors and/or digital signal processors. The elements and components of an embodiment of the invention may be physically, functionally and

logically implemented in any suitable way. Indeed the functionality may be implemented in a single unit, in a plurality of units or as part of other functional units. As such, the invention may be implemented in a single unit or may be physically and functionally distributed between different units and processors.

5 Although the present invention has been described in connection with some embodiments, it is not intended to be limited to the specific form set forth herein. Rather, the scope of the present invention is limited only by the accompanying claims. Additionally, although a feature may appear to be described in connection with particular embodiments, one skilled in the art would recognize that various features of the described embodiments may be
10 combined in accordance with the invention. In the claims, the term comprising does not exclude the presence of other elements or steps.

CLAIMS

We claim:

1. A method for fractional frequency reuse in a communication system, the method comprising:
 - partitioning a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one; and
 - scheduling resources for a mobile station in a sector in each resource partition used by that sector.
2. The method of claim 1 wherein partitioning includes partitioning the sub-frame into a zone with a frequency reuse of one and a zone with a frequency reuse of greater than one, and wherein the scheduling step include scheduling resources for the mobile station in a sector in both zones used by that sector.
3. The method of claim 1 wherein scheduling includes:
 - establishing a scheduling queue for each resource partition; and
 - placing mobile station data traffic into each scheduling queue.
4. The method of claim 3 further comprising providing scheduling metrics for the mobile station in each resource partition.

5. The method of claim 4 wherein the scheduling metrics includes a proportional fair metric for the mobile station in each resource partition.
6. The method of claim 5 further comprising receiving a channel quality report from the mobile station for each resource partition, and wherein scheduling includes scheduling transmissions for the mobile station in each resource partition according to the scheduling metrics and the channel quality report.
7. The method of claim 1 further comprising synchronizing sectors in those resource partitions with a frequency reuse greater than one.
8. A method for fractional frequency reuse in an Orthogonal Frequency Division Multiple Access (OFDMA) Worldwide Interoperability for Microwave Access (WiMAX) communication system utilizing a Partial Usage of Sub-Channels (PUSC) tile structure, the method comprising:
 - partitioning a sub-frame into a PUSC time zone with a frequency reuse of one and a PUSC time zone with a frequency reuse greater than one; and
 - scheduling resources for a mobile station in a sector in both PUSC time zones used by that sector by:
 - establishing a scheduling queue for each resource partition; and
 - placing mobile station data traffic into each of the scheduling queues.

9. The method of claim 8 further comprising:
- providing scheduling metrics for each mobile station in each queue,
- receiving a channel quality report from the mobile station for each resource partition; and
- wherein the scheduling step includes scheduling transmissions for the mobile station in a sector in each zone used by that sector according to the scheduling metrics and the channel quality report.
10. The method of claim 9 wherein scheduling metrics include a proportional fair metric for the mobile station in each resource partition.
11. The method of claim 10 wherein the proportional fair metric (PPF) for the mobile station in any zone is given by:
- $$PPF = \frac{\text{Spectral efficiency achievable in zone}^{\alpha}}{\text{Average throughput for mobile station until current time}^{\beta}}$$
- where α and β are fairness parameters.
12. The method of claim 11 wherein the spectral efficiency achievable in a zone is derived from a Carrier-to-Interference-plus-Noise-Ratio (CINR) measurement in that zone.
13. The method of claim 11 further comprising updating the average throughput in the PPF for the mobile station using the total bits transmitted in all zones for the mobile station.

14. A scheduler operable to provide fractional frequency reuse in a communication system, the scheduler comprising:

a processor operable to partition a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one, and schedule resources for the mobile station in a sector in each resource partition used by that sector; and

a transceiver coupled to the processor, the transceiver operable to communicate the schedule in each resource partition from the processor to the mobile station.

AMENDED CLAIMS

received by the International Bureau on 25 January 2011 (25.01.2011)

We claim:

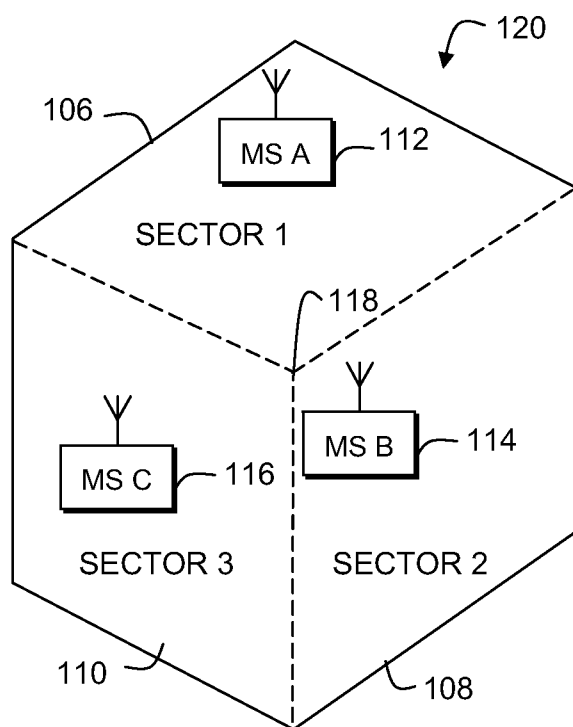
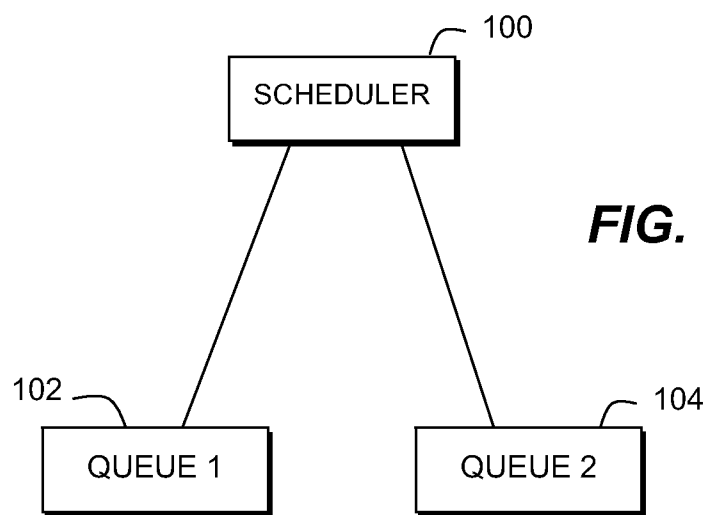
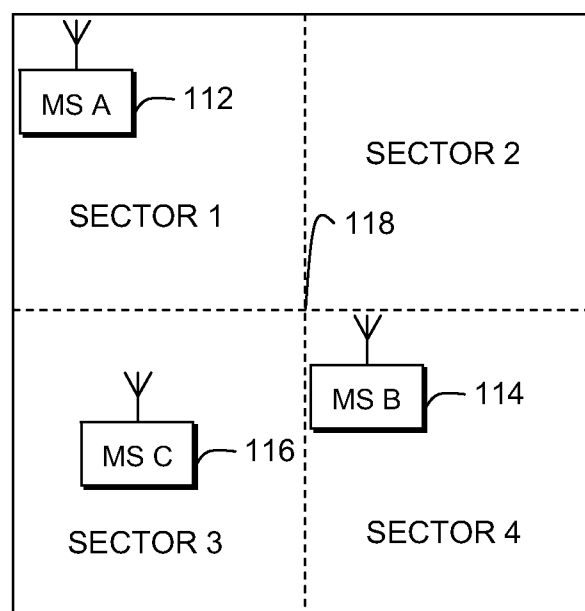
1. A method for fractional frequency reuse in a communication system, the method comprising:
 - partitioning (400) a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one; and
 - scheduling (408) resources for a mobile station in a sector in each resource partition used by that sector.
2. The method of claim 1:
 - wherein partitioning includes partitioning the sub-frame into a zone with a frequency reuse of one and a zone with a frequency reuse of greater than one and
 - wherein the scheduling step includes scheduling resources for the mobile station in a sector in both zones used by that sector.
3. The method of claim 1 wherein scheduling includes:
 - establishing a scheduling queue for each resource partition; and
 - placing mobile station data traffic into each scheduling queue.
4. The method of claim 3 further comprising providing scheduling metrics for the mobile station in each resource partition.
5. The method of claim 4 wherein the scheduling metrics include a proportional fair metric for the mobile station in each resource partition.
6. The method of claim 5 further comprising:
 - receiving a channel quality report from the mobile station for each resource partition;
 - wherein scheduling includes scheduling transmissions for the mobile station in each resource partition according to the scheduling metrics and the channel quality report.

7. The method of claim 1 further comprising synchronizing sectors in those resource partitions with a frequency reuse greater than one.
8. A method for fractional frequency reuse in an Orthogonal Frequency Division Multiple Access Worldwide Interoperability for Microwave Access communication system utilizing a Partial Usage of Sub-Channels (PUSC) tile structure, the method comprising:
 - partitioning (400) a sub-frame into a PUSC time zone with a frequency reuse of one and a PUSC time zone with a frequency reuse greater than one; and
 - scheduling (408) resources for a mobile station in a sector in both PUSC time zones used by that sector by:
 - establishing a scheduling queue for each resource partition; and
 - placing mobile station data traffic into each of the scheduling queues.
9. The method of claim 8 further comprising:
 - providing scheduling metrics for each mobile station in each queue; and
 - receiving a channel quality report from the mobile station for each resource partition;
 - wherein the scheduling step includes scheduling transmissions for the mobile station in a sector in each zone used by that sector according to the scheduling metrics and the channel quality report.
10. The method of claim 9 wherein scheduling metrics include a proportional fair metric for the mobile station in each resource partition.
11. The method of claim 10 wherein the proportional fair metric (PPF) for the mobile station in any zone is given by:

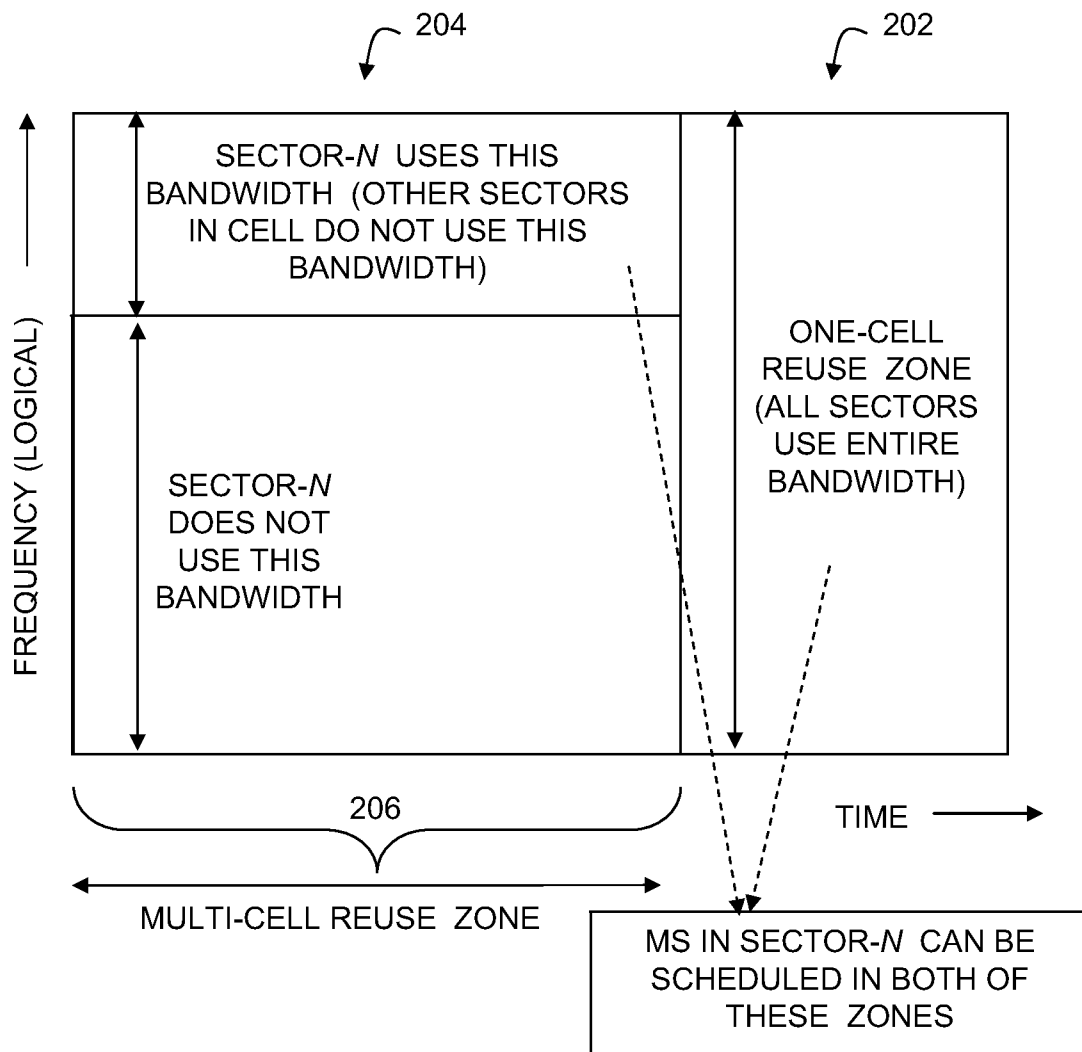
$$PPF = \frac{\text{Spectral efficiency achievable in zone}^{\alpha}}{\text{Average throughput for mobile station until current time}^{\beta}};$$
 where α and β are fairness parameters.
12. The method of claim 11 wherein the spectral efficiency achievable in a zone is derived from a Carrier-to-Interference-plus-Noise-Ratio measurement in that zone.

13. The method of claim 11 further comprising updating the average throughput in the PPF for the mobile station using the total bits transmitted in all zones for the mobile station.
14. A scheduler operable to provide fractional frequency reuse in a communication system, the scheduler comprising:
 - a processor operable to partition (400) a sub-frame into resource partitions, wherein at least one resource partition has frequency reuse of one and all other resource partitions have frequency reuse greater than one, and to schedule (408) resources for the mobile station in a sector in each resource partition used by that sector; and
 - a transceiver coupled to the processor, the transceiver operable to communicate the schedule in each resource partition from the processor to the mobile station.

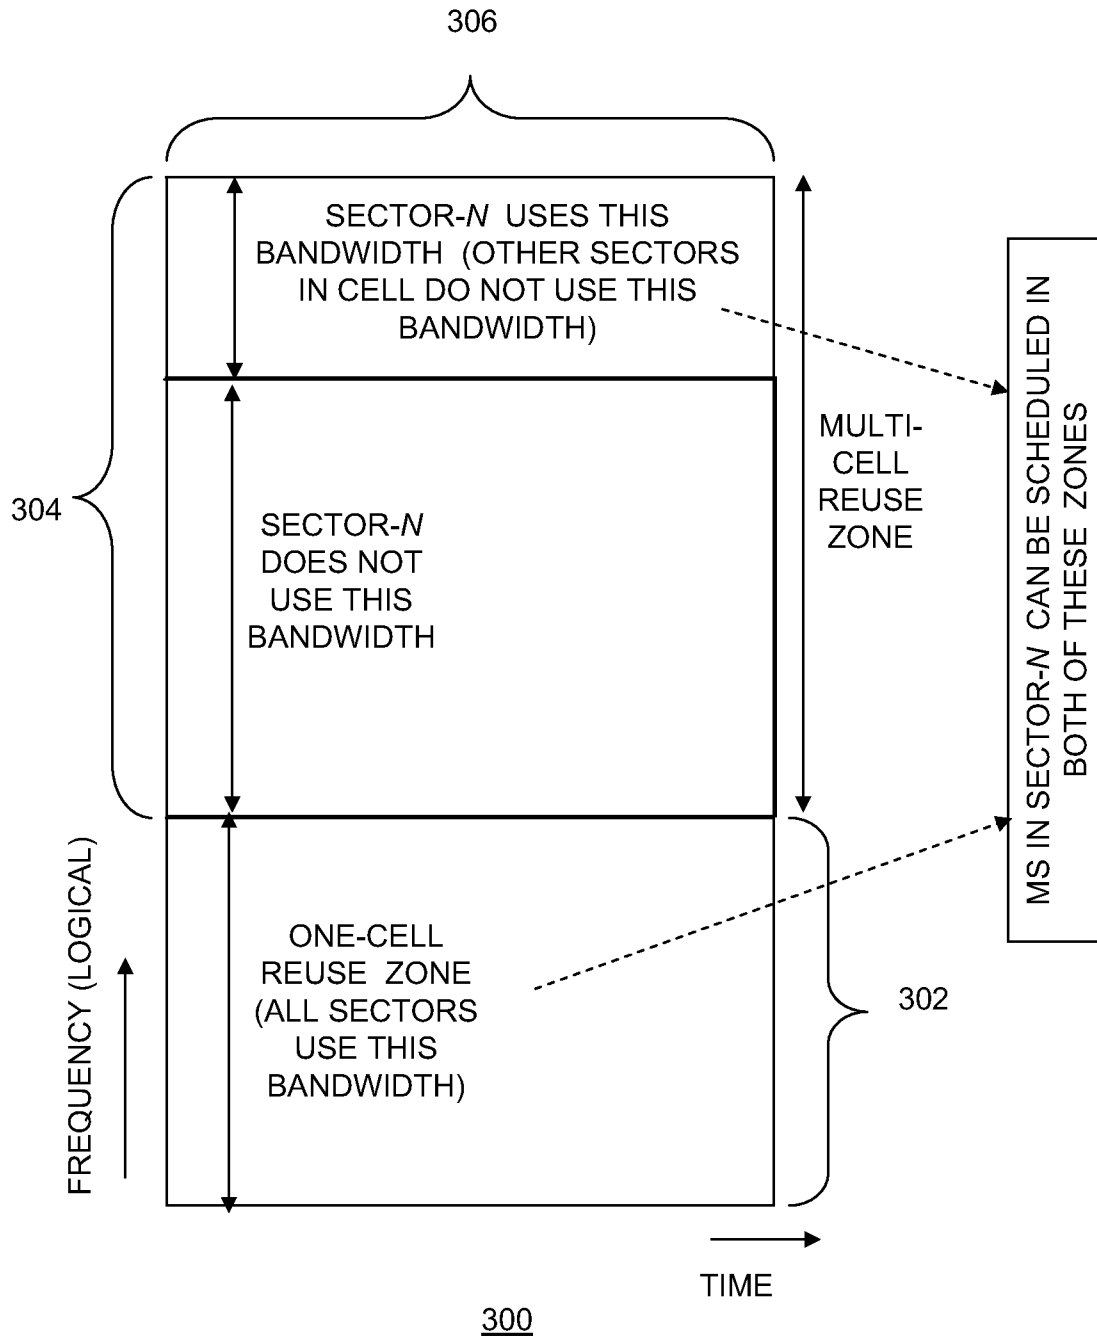
1/4

3 SECTOR SYSTEM**FIG. 1B**4 SECTOR SYSTEM**FIG. 1C**

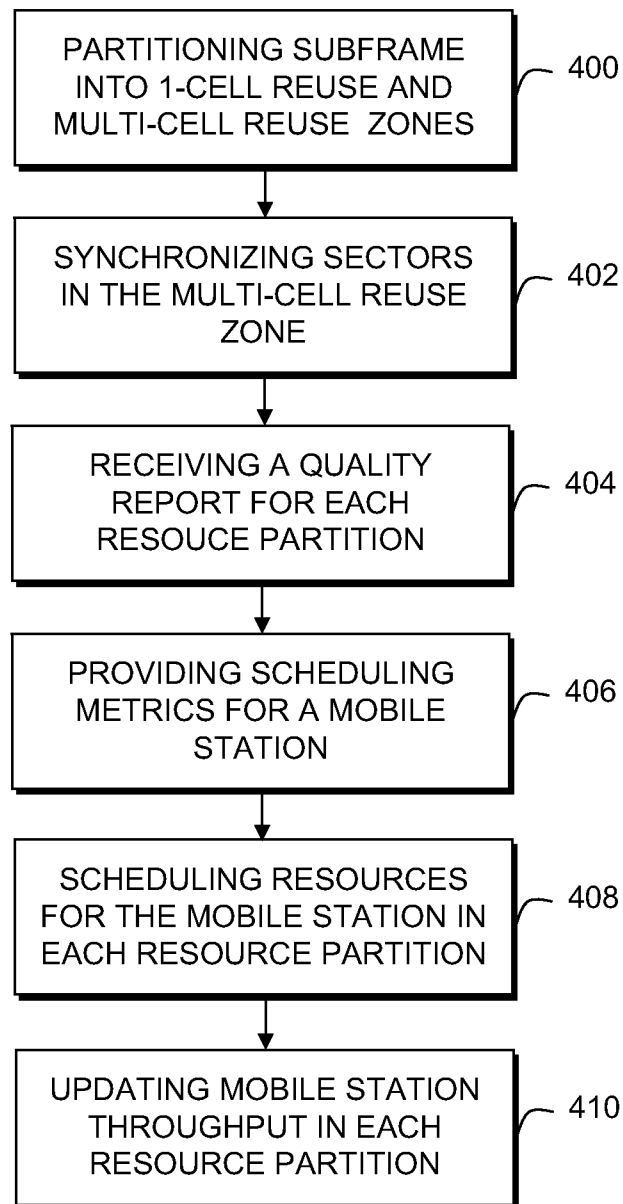
2/4

**FIG. 2**

3/4

**FIG. 3**

4/4

**FIG. 4**

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2010/051734

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W16/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SANKARAN C ET AL: "Performance of Frequency Selective Scheduling and Fractional Frequency Reuse Schemes for WIMAX", 2009 IEEE 69TH VEHICULAR TECHNOLOGY CONFERENCE; APRIL 26-29, 2009, BARCELONA, SPAIN, IEEE, PISCATAWAY, NJ, USA, 26 April 2009 (2009-04-26), pages 1-5, XP031474742, ISBN: 978-1-4244-2517-4	1,8,14
Y	paragraphs I to III figures 8 and 9 ----- -/--	2-7,9-13

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

11 January 2011

Date of mailing of the international search report

19/01/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Rabe, Marcus

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2010/051734

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 086 274 A2 (FUJITSU LTD [JP]) 5 August 2009 (2009-08-05)	1,8,14
Y	paragraph [0006] - paragraph [0011] paragraph [0031] - paragraph [0036] paragraph [0076] - paragraph [0079] figures 1,2A,5A -----	2-4,6,7, 9,12
Y	DOPPLER K ET AL: "Interference Aware Scheduling for Soft Frequency Reuse", 2009 IEEE 69TH VEHICULAR TECHNOLOGY CONFERENCE; APRIL 26-29, 2009, BARCELONA, SPAIN, IEEE, PISCATAWAY, NJ, USA, 26 April 2009 (2009-04-26), pages 1-5, XP031474555, ISBN: 978-1-4244-2517-4 paragraphs I and III -----	5,6,10, 11,13
X	US 2009/047971 A1 (FU I-KANG [TW]) 19 February 2009 (2009-02-19)	1,8,14
A	paragraph [0005] paragraph [0031] figures 1-3 -----	2-7,9-13
X	SOUMAYA HAMOUDA ET AL: "Dynamic hard Fractional Frequency Reuse for mobile WiMAX", PERVASIVE COMPUTING AND COMMUNICATIONS, 2009. PERCOM 2009. IEEE INTERNATIONAL CONFERENCE ON, IEEE, PISCATAWAY, NJ, USA, 9 March 2009 (2009-03-09), pages 1-6, XP031453207, ISBN: 978-1-4244-3304-9 -----	1,8,14
A	paragraphs I to III figure 1 -----	2-7,9-13

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2010/051734

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 2086274	A2	05-08-2009	CN	101505483 A	12-08-2009
			JP	2009188537 A	20-08-2009
			US	2009197623 A1	06-08-2009
US 2009047971	A1	19-02-2009	US	2009092059 A1	09-04-2009