



(51) International Patent Classification:
H04W 72/04 (2009.01)

(21) International Application Number:
PCT/CN2017/084614

(22) International Filing Date:
16 May 2017 (16.05.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/341,877 26 May 2016 (26.05.2016) US
15/289,638 10 October 2016 (10.10.2016) US

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian, Long-
gang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **STIRLING-GALLACHER, Richard**; 5385
Toscana Way #3410, San Diego, California 92122 (US).
ZHANG, Lili; No. 1704, Building B of Changkunmingju,
Banbi Street South Road 2, Beijing 100089 (CN). **TENNY,**
Nathan Edward; 11025 Beeler Canyon Road, Poway, Cal-
ifornia 92064 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to the applicant's entitlement to claim the priority of the
earlier application (Rule 4.17(iii))*

(54) Title: SYSTEM AND METHOD FOR TIME DIVISION DUPLEXED MULTIPLEXING IN TRANSMISSION-RECEPTION
POINT TO TRANSMISSION-RECEPTION POINT CONNECTIVITY

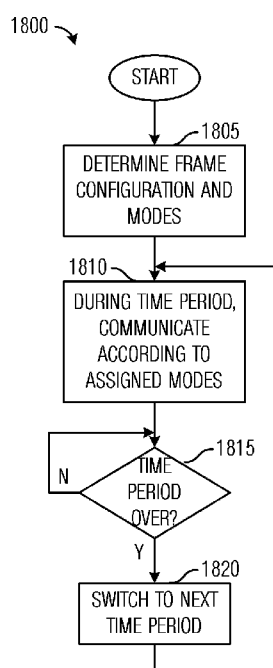


Fig. 18

(57) Abstract: A method for operating a transmission-reception point (TRP) includes determining a first cycle of backhaul communications modes for the TRP, each backhaul communications mode of the first cycle is associated with a different time period and prompts the TRP to either transmit or receive using a subset of communications beams available to the TRP during an associated time period, wherein the communications beams used by the TRP and neighboring TRPs of the TRP in each associated time period are selected to prevent mutual interference, and wherein at least one backhaul communications mode of the first cycle prompts the TRP to either transmit or receive using all of the communications beams available to the TRP, determining a backhaul frame configuration for the TRP in accordance with the first cycle, the backhaul frame configuration specifying an arrangement of subframes of a frame used for backhaul communications.

Published:

— *with international search report (Art. 21(3))*

SYSTEM AND METHOD FOR TIME DIVISION DUPLEXED MULTIPLEXING IN TRANSMISSION-RECEPTION POINT TO TRANSMISSION-RECEPTION POINT CONNECTIVITY

[1] This application claims priority to U.S. non-provisional application Serial No. 15/289,638 filed on October 10, 2016 and entitled “System and Method for Time Division Multiplexing in Transmission-Reception Point to Transmission-Reception Point Connectivity”, which in turn claims priority from U.S. Provisional Patent application Serial No. 62/341,877, filed on May 26, 2016 and entitled “System and Method for Time Division Multiplexing in Transmission-Reception Point to Transmission-Reception Point Connectivity”, both of which patent applications are incorporated herein by reference as if reproduced in their entireties.

TECHNICAL FIELD

[2] The present disclosure relates generally to a system and method for digital communications, and, in particular embodiments, to a system and method for time division duplexed (TDD) multiplexing in transmission-reception point (TRP) to TRP connectivity.

BACKGROUND

[3] Future wireless communications systems are operating at ever higher carrier frequencies in a quest to find greater bandwidth and less interference. These wireless communications systems may operate at frequencies of 6 GHz and above. In order to fully utilize the greater bandwidth available in the wireless communications systems, transmission-reception points (TRPs) may require more bandwidth and less latency than what is afforded in existing backhaul and/or fronthaul connections. Furthermore the density of the TRPs is likely to be much higher than current deployments and the cost of laying wireline high capacity backhaul connections to all of these TRPs can be prohibitive. Additionally, in certain situations some TRPs may be temporal in nature or mobile and may not be able to support a wireline connection.

SUMMARY

[4] Example embodiments provide a system and method for TDD multiplexing in TRP to TRP connectivity.

[5] In accordance with an example embodiment, a method for operating a transmission-reception point (TRP) is provided. The method includes determining, by the TRP, a first cycle of backhaul communications modes for the TRP, each backhaul communications mode of the first cycle is associated with a different time period and prompts the TRP to either transmit or receive using a subset of communications beams available to the TRP during an associated time

period, wherein the communications beams used by the TRP and neighboring TRPs of the TRP in each associated time period are selected to prevent mutual interference, and wherein at least one backhaul communications mode of the first cycle prompts the TRP to either transmit or receive using all of the communications beams available to the TRP, determining, by the TRP, a backhaul frame configuration for the TRP in accordance with the first cycle, the backhaul frame configuration specifying an arrangement of subframes of a frame used for backhaul communications, and communicating, by the TRP, with neighboring TRPs of the TRP in accordance with the first cycle and the backhaul frame configuration.

[6] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein determining the first cycle comprises one of retrieving the first cycle from a memory, retrieving the first cycle from a database, receiving the first cycle in a message from a network entity, or receiving the first cycle from a neighboring TRP.

[7] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein determining the backhaul frame configuration comprises one of retrieving the backhaul frame configuration from a memory, retrieving the backhaul frame configuration from a database, receiving the backhaul frame configuration in a message from a network entity, or receiving the backhaul frame configuration from a neighboring TRP.

[8] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the TRP is assigned a starting point in the first cycle in accordance with a TRP type of the TRP.

[9] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein different TRP types are assigned different starting points in the first cycle.

[10] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the first cycle comprises a first backhaul mode specifying the TRP to transmit to all of the neighboring TRPs using all communications beams available to the TRP, a second backhaul mode specifying the TRP to receive from a first subset of the neighboring TRPs using a first subset of all communications beams available to the TRP, and a third backhaul mode specifying the TRP to receive from a second subset of the neighboring TRPs using a second subset of all communications beams available to the TRP, where a

combination of the first subset and the second subset of the neighboring TRPs encompasses all of the neighboring TRPs.

[11] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein there are more than 2 subsets of neighboring TRPs, and wherein the subsets of neighboring TRPs encompass all of the neighboring TRPs.

[12] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the first cycle comprises a fourth backhaul mode specifying the TRP to receive from all of the neighboring TRPs using all communications beams available to the TRP, a fifth backhaul mode specifying the TRP to transmit to a third subset of the neighboring TRPs using a third subset of all communications beams available to the TRP, and a sixth backhaul mode specifying the TRP to transmit to a fourth subset of the neighboring TRPs using a fourth subset of all communications beams available to the TRP, where a combination of the third subset and the fourth subset of the neighboring TRPs encompasses all of the neighboring TRPs.

[13] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein there are more than 2 subsets of neighboring TRPs, and wherein the subsets of neighboring TRPs encompass all of the neighboring TRPs.

[14] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein there is a plurality of cycles of backhaul communications modes, wherein each backhaul communications mode of each cycle specifies an associated TRP to either transmit or receive using a subset of communications beams available to the associated TRP during an associated time period, and wherein each TRP type is assigned one set of backhaul modes.

[15] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein different TRP types are assigned different starting points in associated cycles.

[16] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the cycles have different numbers of backhaul communications modes, wherein the first cycle assigned to the TRP has fewer backhaul modes than a second set of backhaul modes, and wherein the method further comprises remaining idle in at least one time period.

[17] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the communicating with the neighboring TRPs occurs in a first frequency band, and wherein the TRP further communicates with user equipments (UEs) operating within its coverage area using a second frequency band.

[18] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the first frequency band and the second frequency band overlap.

[19] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein a frame used for backhaul communications is inserted in a radio frame used for communicating with UEs.

[20] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein a frame used for backhaul communications is inserted in a common portion of a frame used for serving the UEs.

[21] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein the common portion is a special (S) subframe.

[22] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method wherein a frame used for backhaul communications is inserted between consecutive frames used for serving the UEs.

[23] In accordance with an example embodiment, a method for operating a network entity is provided. The method includes assigning, by the network entity, cycles of backhaul communications modes to TRPs in accordance with an assigned TRP type of each of the TRPs, and assigning, by the network entity, backhaul frame configurations to the TRPs in accordance with the assigned TRP type of each of the TRPs.

[24] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method further comprising assigning, by the network entity, a TRP type to each of the TRPs in accordance with a neighbor list of each of the TRPs and a capability of each of the TRPs.

[25] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the method further comprising saving, the cycles of backhaul communications mode and the backhaul frame configurations to one of a memory or a database.

[26] In accordance with an example embodiment, a TRP is provided. The TRP includes a processor, and a computer readable storage medium storing programming for execution by the

processor. The programming including instructions to configure the TRP to determine a first cycle of backhaul communications modes for the TRP, each backhaul communications mode of the first cycle is associated with a different time period and prompts the TRP to either transmit or receive using a subset of communications beams available to the TRP during an associated time period, wherein the communications beams used by the TRP and neighboring TRPs of the TRP in each associated time period are selected to prevent mutual interference, and wherein at least one backhaul communications mode of the first cycle prompts the TRP to either transmit or receive using all of the communications beams available to the TRP, determine a backhaul frame configuration for the TRP in accordance with the first cycle, the backhaul frame configuration specifying an arrangement of subframes of a frame used for backhaul communications, and communicate with neighboring TRPs of the TRP in accordance with the first cycle and the backhaul frame configuration.

[27] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the TRP wherein the first cycle comprises a first backhaul mode specifying the TRP to transmit to all of the neighboring TRPs using all communications beams available to the TRP, a second backhaul mode specifying the TRP to receive from a first subset of the neighboring TRPs using a first subset of all communications beams available to the TRP, and a third backhaul mode specifying the TRP to receive from a second subset of the neighboring TRPs using a second subset of all communications beams available to the TRP, where a combination of the first subset and the second subset of the neighboring TRPs encompasses all of the neighboring TRPs.

[28] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the TRP wherein the first cycle comprises a fourth backhaul mode specifying the TRP to receive from all of the neighboring TRPs using all communications beams available to the TRP, a fifth backhaul mode specifying the TRP to transmit to a third subset of the neighboring TRPs using a third subset of all communications beams available to the TRP, and a sixth backhaul mode specifying the TRP to transmit to a fourth subset of the neighboring TRPs using a fourth subset of all communications beams available to the TRP, where a combination of the third subset and the fourth subset of the neighboring TRPs encompasses all of the neighboring TRPs.

[29] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the TRP wherein the cycles have different numbers of backhaul communications modes, wherein the first cycle assigned to the TRP has fewer backhaul modes

than a second set of backhaul modes, and wherein programming includes instructions to configure the TRP to remain idle in at least one time period after completing the first cycle.

[30] In accordance with an example embodiment, a network entity is provided. The network entity includes a processor, and a computer readable storage medium storing programming for execution by the processor. The programming including instructions to configure the network entity to assign cycles of backhaul communications modes to TRPs in accordance with an assigned TRP type of each of the TRPs, and assign backhaul frame configurations to the TRPs in accordance with the assigned TRP type of each of the TRPs.

[31] Optionally, in any of the preceding embodiments, another implementation of the embodiment provides the network entity wherein the programming includes instructions to configure the network entity to assign a TRP type to each of the TRPs in accordance with a neighbor list of each of the TRPs and a capability of each of the TRPs.

[32] Practice of the foregoing embodiments enables each TRP to exchange data and/or control information with each of its direct neighbors, enabling full multi-point connectivity between TRPs with minimal overhead.

[33] Practice of the foregoing embodiments avoids cross-interference, e.g., uplink vs downlink, between adjacent sectors.

[34] Practice of the foregoing embodiments integrates into a 5G mmWave TDD frame structure for access and can adaptively change the uplink and/or downlink subframes for the backhaul (or fronthaul) to suit the demands of the respective TRPs. This may be done in a semi-static or dynamic way.

BRIEF DESCRIPTION OF THE DRAWINGS

[35] For a more complete understanding of the present disclosure, and the advantages thereof, reference is now made to the following descriptions taken in conjunction with the accompanying drawings, in which:

[36] Figure 1 illustrates an example wireless communications system according to embodiments presented herein;

[37] Figure 2A illustrates example subframe structures for frames N and N+1 according to embodiments presented herein;

[38] Figure 2B illustrates an example communications system highlighting communications between sectors and Cells (i.e., eNBs) during the S subframes shown in Figure 2A according to embodiments presented herein;

[39] Figure 2C illustrates an example TDD frame format for signaling frame configuration information between eNBs using a dedicated connection according to embodiments presented herein;

[40] Figure 3A illustrates a bandwidth allocation diagram of a frequency band used for a high frequency backhaul link where access uses a different frequency band according to embodiments presented herein;

[41] Figure 3B illustrates bandwidth allocation diagrams of a frequency band used for a high frequency backhaul link where access uses the same frequency band according to embodiments presented herein;

[42] Figures 4A and 4B illustrate prior art techniques for multiplexing beam-formed mmWave fronthaul transmissions/receptions from a legacy base station (4G base stations) to and from a set of 5G small cells that are placed between the 4G base stations according to embodiments presented herein;

[43] Figure 5A illustrates a TRP and coverage area highlighting a first backhaul mode for the TRP where the TRP transmits using its full complement of communications beams according to embodiments presented herein;

[44] Figure 5B illustrates a TRP and coverage area highlighting a second backhaul mode for the TRP where the TRP receives using a first set of communications beams according to embodiments presented herein;

[45] Figure 5C illustrates a TRP and coverage area highlighting a third backhaul mode for the TRP where the TRP receives using a second set of communications beams according to embodiments presented herein;

[46] Figures 6A - 6C illustrate diagrams of a portion of a communications system highlighting TRPs operating in different first example backhaul modes to facilitate a high frequency backhaul link according to embodiments presented herein;

[47] Figure 7A illustrates a TRP and coverage area highlighting a first backhaul mode for the TRP where the TRP receives using its full complement of communications beams according to embodiments presented herein;

[48] Figure 7B illustrates a TRP and coverage area highlighting a second backhaul mode for the TRP where the TRP transmits using a first set of communications beams according to embodiments presented herein;

[49] Figure 7C illustrates a TRP and coverage area highlighting a third backhaul mode for the TRP where the TRP transmits using a second set of communications beams according to embodiments presented herein;

[50] Figures 8A - 8C illustrate diagrams of a portion of a communications system highlighting TRPs operating in different second example backhaul modes to facilitate a high frequency backhaul link according to embodiments presented herein;

[51] Figures 9A - 9C illustrate diagrams of backhaul modes of a first set of backhaul modes for a first TRP type according to embodiments presented herein;

[52] Figures 9D - 9G illustrate diagrams backhaul modes of a second set of backhaul modes for second and third TRP types according to embodiments presented herein;

[53] Figures 10A - 10D illustrate diagrams of a portion of a communications system highlighting TRPs operating in different example sets of backhaul modes to facilitate a high frequency backhaul link according to embodiments presented herein;

[54] Figure 11 illustrates an example frame structure with an extended subframe used to carry the TDD subframes for high frequency backhaul link support according to embodiments presented herein;

[55] Figure 12 illustrates TDD frame configurations for 3GPP LTE-A according to embodiments presented herein;

[56] Figure 13 illustrates an example TDD frame format for supporting the high frequency backhaul link according to embodiments presented herein;

[57] Figure 14 illustrates a generalized communications system according to embodiments presented herein;

[58] Figure 15 illustrates example ways for a TRP to obtain TDD backhaul frame configurations according to embodiments presented herein;

[59] Figures 16A and 16B illustrate example deployments for urban areas according to embodiments presented herein;

[60] Figure 17 illustrates a flow diagram of example operations occurring in a network entity performing backhaul mode to TDD backhaul subframe mapping according to embodiments presented herein;

[61] Figure 18 illustrates a flow diagram of example operations occurring in a TRP communicating using a high frequency backhaul link according to embodiments presented herein;

[62] Figure 19 illustrates a block diagram of an embodiment processing system for performing methods described herein; and

[63] Figure 20 illustrates a block diagram of a transceiver adapted to transmit and receive signaling over a telecommunications network according to embodiments presented herein.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENTS

[64] The making and using of the presently example embodiments are discussed in detail below. It should be appreciated, however, that the present disclosure provides many applicable inventive concepts that can be embodied in a wide variety of specific contexts. The specific embodiments discussed are merely illustrative of specific ways to make and use the embodiments, and do not limit the scope of the disclosure.

[65] Figure 1 illustrates an example wireless communications system 100. Communications system 100 includes an evolved NodeB (eNB) 105 serving a plurality of user equipments (UEs), such as UE 110, UE 112, and UE 114. In a first operating mode, transmissions for UEs as well as transmissions by UEs pass through the eNB. The eNB allocates network resources for the transmissions to or from the UEs. eNBs may also be commonly referred to as base stations, NodeBs, master eNBs (MeNBs), secondary eNBs (SeNBs), remote radio heads, access points, and the like, while UEs may also be commonly referred to as mobiles, mobile stations, terminals, subscribers, users, stations, and the like. A base station (or an eNB, NodeB, remote radio head, access point, transmission point, transmit-receive point and so on) that is serving one or more UEs may be referred to as a serving base station (SBS). A transmission point may be used to refer to any device capable of transmitting. Therefore, transmission-reception points (TRP) commonly refer to eNBs, base stations, NodeBs, remote radio heads, access points but can also include UEs, mobiles, mobile stations, terminals, subscribers, users, and the like.

[66] While it is understood that communications systems may employ multiple eNBs (or TRPs) capable of communicating with a number of UEs, only one eNB, and a number of UEs are illustrated for simplicity.

[67] A cell is a commonly used term that refers to a coverage area of an eNB. Typically, a cell is served by one or more sectors of a sectorized antenna of the eNB. Hence, the coverage area of the eNB includes a cell partitioned into a plurality of sectors. As an illustrative example, in a scenario where an eNB uses a three-sector antenna system, the cell of the eNB may be divided into three sectors, with each sector being covered by a separate antenna (with an example beam width of 120 degrees) or a separate part of the total antenna system. As another illustrative example, in a scenario where an eNB uses a six-sector antenna system (where each antenna may cover a 60 degree sector, for example), the cell of the eNB may be divided into six sectors or three sectors, with each sector being covered by one or two antennas or parts sectors of the antenna system respectively.

[68] In co-assigned U.S. Patent application publication number US 2016/0183232A1, filed November 13, 2015, entitled "System and Method for Interference Coordination in Cellular Millimeter Wave Communications Systems," which is hereby incorporated herein by reference, an example simple time division duplexed (TDD) scheme for fast TRP to TRP communications using a millimeter wave (mmWave) backhaul is presented. A goal of the techniques presented therein was to show that neighboring TRPs may exchange control information on a frame by frame basis (much faster than the present X2 interface) to support features of the example embodiments presented therein, which was for transmission beam blanking to support TDD in mmWave communications systems

[69] Figure 2A illustrates example subframe structures 200 for frames N 205 and N+1 210. In an S subframe 215 of frame N 205, a TRP serving sector C of Cell 1 communicates with a TRP serving sector A of Cell 2 and a TRP serving sector A of Cell 3 (shown as downward pointing arrows), while in an S subframe 220 of frame N+1 210, a TRP serving sector A of Cell 2 and a TRP serving sector A of Cell 3 communicate with a TRP of sector C of Cell 1 (shown as upward pointing arrows). Figure 2B illustrates an example communications system 230 highlighting communications between TRPs serving the different sectors and cell coverage areas during the S subframes shown in Figure 2A. It is noted that the beams used in TRP to TRP communications are at least partially blanked, and are referred to as blanked beams.

[70] Figure 2C illustrates an example TDD frame format 260 for signaling frame configuration information between TRPs using a dedicated connection (as opposed to using the

more conventional X2 link). As shown in Figure 2C, a guard period (GP) 265 in an S subframe 267 may be used in conjunction with the blanked beams to communicate the frame configuration information between TRPs, which may advantageously reuse the beamforming hardware since no data is transmitted at this time. The frame configuration information may include the chosen TDD frame configuration and one or more of the following:

- a set of beam indices used;
- an almost blank flag(s) bit; and
- a reschedule flag(s).

[71] The frame configuration information may be transmitted in a first portion 270 of an overall mmWave band 275 which is allocated for backhaul/fronthaul use, while a second portion 280 is allocated for access, e.g., mmWave access where mmWave devices are able to receive or transmit using cellular-based techniques. The situation where a separate portion of the available bandwidth is dedicated for exchange of frame configuration information will be referred to as out of band signaling. In addition to or as an alternative to the reuse of bandwidth available in the blanked subframes, the backhaul X2 interface may be used to signal this control information.

[72] Figure 2C also illustrates out of band signaling (although still within overall band(s) 275) with any frame format (TDD and/or FDD (as shown in Figure 2C)). Existing beamforming hardware may be reused in the GP of S subframes, such as S subframe 267, of TDD frames. Inband signaling (where a part of the bandwidth dedicated for other communications is used, e.g., using the second portion 280 to exchange frame configuration information) may also be used in the S subframes of TDD frames.

[73] It is noted however, that a TRP to TRP link may operate in a more global cellular basis and not just be considered as a single link. Furthermore, future UE centric (cloud cell and virtual cell concepts) for ultra-dense networks (UDNs), a fast, high capacity, low latency TRP to TRP link may be required (e.g., a fronthaul and/or a backhaul), since user data may need to be transported (e.g., exchanged) from one TRP to another for a variety of reasons, including:

- It is likely that not every TRP in a UE centric cell will have a dedicated connection to a switching gateway (via an S1 bearer). The switching gateway is a higher level network entity responsible for providing connectivity between TRPs. Many UE centric concepts propose that only a master TRP (or a head-node of a UE centric cell) will be connected to the switching gateway (via a wired or wireless connection) and the master TRP will distribute the user data to the other TRPs in the UE centric cell to support different communications modes.

- As the UE moves through a group of TRPs, the set of TRPs for each UE centric cell

will change in a very dynamic way and user data may need to be exchanged between TRPs to ensure that the user data is present for transmissions to the UE.

[74] Figures 2A - 2C are illustrations of techniques presented in co-assigned U.S. Patent application 14/941,243.

[75] According to an example embodiment, a high bandwidth, low latency link replaces or complements the current X2 link. The link may be referred to as either a backhaul or a fronthaul depending on the architecture of the communications system. The term backhaul will be used interchangeably with the term fronthaul although in some definitions they may be different. The link may utilize the spectrum at 6 GHz and above (e.g., the 15GHz, 28 GHz, 38/39 GHz, 70-80 GHz, and so forth, spectrum bands) and the link shall be referred to as an mmWave backhaul of an mmWave communications system. A communications system operating at high frequencies will need to use beamforming to compensate for the high pathloss present at the high carrier frequencies. The backhaul link may be used for a cellular communications system where access (cellular-based connectivity) is operating below 6 GHz (e.g., 3GPP LTE-A compliant communications systems) or when access is also using the high carrier frequencies (at least in part).

[76] Figure 3A illustrates a bandwidth allocation diagram 300 of a frequency band used for a high frequency backhaul link where access uses a different frequency band. As shown in Figure 3A, the entirety of the frequency band used for the high frequency backhaul link is usable by the high frequency backhaul link since access uses a different frequency band. Figure 3B illustrates bandwidth allocation diagrams of a frequency band used for a high frequency backhaul link where access uses the same frequency band as the backhaul link. A first bandwidth allocation diagram 350 illustrates a situation wherein the high frequency band is shared between the backhaul link and access using frequency division multiple access (FDMA) and is partitioned into at least two portions, with a first high frequency portion is allocated to the backhaul link and a second high frequency portion allocated to the access. A second bandwidth allocation diagram 370 illustrates a situation wherein the frequency band is shared between the high frequency backhaul link and access using time division multiple access (TDMA) or spatial division multiple access (SDMA). If TDMA is used, the backhaul link is assigned to use the high frequency band at specific times and the access is assigned to use the high frequency band at other specific times. If SDMA is used, the high frequency backhaul link is assigned to use the frequency band only in specific spatial orientations (or beam directions) and the access

is assigned to use the same frequency band in other specific spatial orientations (or beam directions), where the spatial orientations may change as a function of time.

[77] According to an example embodiment, the high frequency backhaul link has the flexibility to change its data rate in different directions depending on the requirement of each TRP. Since each TRP may be serving UEs with different uplink and downlink ratios for access (by way of different chosen TDD frame structures for access, for example), the high frequency backhaul link may also need to change its own data rate to support the TRPs. As an illustrative example, if the uplink to downlink ratio is very small (i.e., uplink much smaller than downlink), the high frequency backhaul link changes its downlink data rate to allow for the transfer of more downlink data to the TRPs to meet TRP requirements.

[78] According to an example embodiment, TDMA is used to multiplex the usage of the high frequency band between the high frequency backhaul link and access. Although the usage of the high frequency band could be multiplexed for the high frequency backhaul link and access by using FDMA, TDMA may be particularly attractive since the capacity between the high frequency backhaul link and access can be dynamically changed to meet demand, and this is generally easier with TDMA than with FDMA. With SDMA, sufficient isolation between access and the high frequency backhaul link may be difficult to guarantee for all deployments.

[79] Figures 4A and 4B illustrate prior art techniques for multiplexing beamformed mmWave fronthaul transmissions/receptions from a legacy base station (4G base stations) to and from a set of 5G small cells that are placed between the 4G base stations. Figure 4A is presented in R. Taori and A. Sridhanen, "Point-to-Multipoint In-Band mmWave Backhaul for 5G Networks", IEEE Communications Magazine, Jan 2015 and Figure 4B is presented in US Patent publication number 2015/0036571 A1 - "Transmission and scheduling for wireless front haul", both of which are hereby incorporated herein by reference. The 4G base stations have wired backhaul connections (labeled W-BS) and the 5G base stations (labeled U-BS) are placed between the wired 4G base stations. Techniques enabling each wired 4G base station to each 5G base station are presented. The prior art techniques disclose that each unwired 5G base station is connected to each wired 4G base station under certain deployment mixes of 4G and 5G base stations. As such, there is no accommodation for neighboring 5G TRPs (base stations) to have direct connections with each other. If neighboring 5G TRPs want to exchange information (control and/or data), the information would have to be relayed through the W-BS, which would lead to latency and capacity issues. As an example, because each TRP to TRP exchange has to be processed by the W-BS, latency corresponding to multiple frames and/or subframes as well as

W-BS processing is incurred. As another example, each TRP to TRP exchange uses (and therefore are limited to) the capacity of the W-BS to U-BS link. Finally, the prior art techniques are not applicable to all possible deployments.

[80] According to an example embodiment, a multiplexing scheme that supports a high frequency backhaul link from each TRP to all of its neighboring TRPs is provided, where the neighboring TRPs may or may not have connectivity to the switching gateway. At first glance, the problem looks relatively simple. A solution, such as proposed in the co-assigned U.S. Patent application 14/941,243, where TDD transmissions across each cell edge may be used. However, the solution does not address a situation where all TRPs have to communicate with each other instead of just one TRP communicating with other TRPs. Furthermore, a proposed solution should not require adjacent antenna arrays of a single TRP to be in transmit and receive modes at the same time to reduce cross interference.

[81] According to an example embodiment, TDD techniques enabling high frequency backhaul links connecting a TRP to each of its neighbors are presented. The TDD techniques utilize as few subframes as possible to reduce latency.

[82] According to an example embodiment, each TRP has an integer number of backhaul modes of operation for communicating on the high frequency backhaul link. Within each backhaul mode of operation, a TRP performs downlink transmissions or uplink receptions and not both downlink and uplink. Between backhaul modes of operation, a TRP can switch communications mode, e.g., from downlink to uplink or uplink to downlink, or remain in the same communications mode, e.g., downlink to downlink or uplink to uplink. Every TRP uses the same backhaul modes of operation, but different TRP types perform different backhaul modes in a given time period. The assignment of the backhaul modes is made based on TRP type, where TRP type may be assigned manually or algorithmically, for example. The TRPs sequentially cycle through the backhaul modes.

[83] According to an example embodiment, each TRP has 3 backhaul modes of operations for communicating on the high frequency backhaul link. In a first backhaul mode, the TRP communicates (sends or receives) with all of its neighboring TRPs using its full complement of communications beams. In a second backhaul mode, the TRP communicates (receives or sends) with a first set of its neighboring TRPs using a first set of its communications beams, and in a third backhaul mode, the TRP communicates (receives or sends) with a second set of its neighboring TRPs using a second set of its communications beams. A combination of the first set of neighboring TRPs and the second set of neighboring TRPs make up all of the neighboring

TRPs. Additionally, the first set of neighboring TRPs and the second set of neighboring TRPs may be mutually exclusive. A combination of the first set of communications beams and the second set of communications beams make up the full complement of communications beams. Furthermore, the first set of communications beams and the second set of communications beams are mutually exclusive.

[84] The TRP and its neighboring TRPs may switch backhaul modes on a subframe basis. Switching backhaul modes each subframe helps to reduce the latency associated with the high frequency backhaul link. Alternatively, the TRP and its neighboring TRPs may switch backhaul modes following a specified pattern of subframes. As an illustrative example, The TRP and its neighboring TRPs switches backhaul modes every N-th subframe, where N is equal to 1, 2, 3, 4, and so on. As another illustrative example, the TRP and its neighboring TRPs may remain in different backhaul modes for different numbers of subframes. The TRPs start at different backhaul modes, dependent upon each TRP's relationship to a starting TRP. A first TRP may start with the first backhaul mode as its initial mode, while some TRPs that are immediate neighbors of the first TRP (i.e., some first order neighbors) may start with the second backhaul mode as their initial mode, and other TRPs that are also first order neighbors (i.e., other closest neighbors) may start with the third backhaul mode as their initial mode, and so on. A scheduling algorithm may be used to determine initial backhaul modes for the TRPs of a communications system. Alternatively, the initial backhaul modes may be specified manually.

[85] According to an example embodiment, a first backhaul mode comprises the TRP transmitting to all of its neighboring TRPs using its full complement of communications beams, a second backhaul mode comprises the TRP receiving from a first set of its neighboring TRPs using a first set of communications beams, and a third backhaul mode comprises the TRP receiving from a second set of its neighboring TRPs using a second set of communications beams. A combination of the first set of communications beams and the second set of communications beams make up the full complement of communications beams. Furthermore, the first set of communications beams and the second set of communications beams are mutually exclusive.

[86] Figure 5A illustrates a TRP and coverage area 500 highlighting a first backhaul mode for the TRP where the TRP transmits using its full complement of communications beams. Transmitting using the full complement of communications beams, enables the TRP to transmit to all of its closest neighboring TRPs.

[87] Figure 5B illustrates a TRP and coverage area 530 highlighting a second backhaul mode for the TRP where the TRP receives using a first set of communications beams. Receiving using the first set of communications beams, enables the TRP to receive from a first subset of its closest neighboring TRPs. As shown in Figure 5B, the first set of communications beams comprises half of the TRP's full complement of communications beams, therefore, the TRP is able to receive from approximately half of its closest neighboring TRPs.

[88] Figure 5C illustrates a TRP and coverage area 560 highlighting a third backhaul mode for the TRP where the TRP receives using a second set of communications beams. Receiving using the second set of communications beams, enables the TRP to receive from a second subset of its closest neighboring TRPs. The first set of communications beams shown in Figure 5B and the second set of communications beams are mutually exclusive. As shown in Figure 5C, the second set of communications beams comprises half of the TRP's full complement of communications beams, therefore, the TRP is able to receive from approximately half of its closest neighboring TRPs. Because the first set and the second set are mutually exclusive, between the second backhaul mode and the third backhaul mode, the TRP is able to receive from all of the closest neighboring TRPs.

[89] Figures 6A - 6C illustrate diagrams of a portion of a communications system highlighting TRPs operating in different first example backhaul modes to facilitate a high frequency backhaul link. Within any given time period, the backhaul mode of a TRP is determined based on the position of the TRP relative to its neighboring TRPs. A scheduling algorithm may be used to determine the mode of the TRPs of the communications system. Alternatively, the modes of the TRPs of the communications system may be determined from a memory/database, a network entity, neighboring TRPs, or a combination thereof. Diagram 600 (Figure 6A) illustrates the backhaul modes of the TRPs during a first time period. During the first time period, a first TRP 605 (labeled Type C) is set to operate in the second backhaul mode (receive using a first set of communications beams). A first subset of the neighboring TRPs (labeled Type A) of first TRP 605, e.g., second TRP 607, third TRP 609, and fourth TRP 611, are set to operate in the first backhaul mode (transmit using their full complement of communications beams) and a second subset of the neighboring TRPs (which are labeled Type B) of first TRP 605, e.g., fifth TRP 613, sixth TRP 615, and seventh TRP 617, are set to operate in the third backhaul mode (receive using a second set of communications beams). The backhaul modes of the TRPs during the first time period are referred to as the initial backhaul modes of the TRPs. It is noted that the initial backhaul modes of the TRPs shown in Figure 6A are only examples presented for illustration and discussion. The initial backhaul modes may differ if the

communications beams differ, the topology of the communications system differs, different implementation choices are made, different sets of communications beams, and so forth. Other initial backhaul modes are possible, as long as the relations between TRPs shown in Figure 6A are maintained.

[90] Diagram 630 (Figure 6B) illustrates the backhaul modes of the TRPs during a second time period. During the second time period, first TRP 605 is set to operate in the third backhaul mode (receive using the second set of communications beams), while the first subset of neighboring TRPs of first TRP 605 (labeled Type A) , e.g., second TRP 607, third TRP 609, and fourth TRP 611, are set to operate in the second backhaul mode (receive using the first set of communications beams) and a second subset of the neighboring TRPs of first TRP 605 (labeled Type B), e.g., fifth TRP 613, sixth TRP 615, and seventh TRP 617, are set to operate in the first backhaul mode (transmit using their full complement of communications beams). In other words, each TRP sequentially changes to the next backhaul mode. As an example, if a TRP was operating in the first backhaul mode in the first time period, in the second time period the TRP will operate in the second backhaul mode. Similarly, if a TRP was operating in the third backhaul mode in the first time period, in the second time period the TRP will operate in the first backhaul mode. The consistent cycling through of the different backhaul modes enables the TRPs to communicate without causing undue interference.

[91] Diagram 660 (Figure 6C) illustrates the backhaul modes of the TRPs during a third time period. During the third time period, first TRP 605 is set to operate in the first backhaul mode (transmit using their full complement of communications beams), while the first subset of neighboring TRPs of first TRP 605 (labeled Type A), e.g., second TRP 607, third TRP 609, and fourth TRP 611, are set to operate in the third backhaul mode (receive using the second set of communications beams) and a second subset of the neighboring TRPs of first TRP 605 (labeled type B), e.g., fifth TRP 613, sixth TRP 615, and seventh TRP 617, are set to operate in the second backhaul mode (receive using the first set of communications beams).

[92] Table 1 illustrates example backhaul modes for different TRP types, with D representing downlink communications, and U representing uplink communications.

Cell Type	Sub-frame 1	Sub-frame 2	Sub-frame 3
A	D (full)	U (mode 2)	U (mode 3)
B	U (mode 3)	D (full)	U (mode 2)

C	U (mode 2)	U (mode 3)	D (full)
----------	-------------------	-------------------	-----------------

Table 1: Example backhaul modes.

[93] The subframes may be in a different time order, i.e., the information shown in Table 1 is just for discussion purposes. It is important that the backhaul modes are synchronized with TRP types as shown in the discussion. The information shown in Table 1 allows for one complete downlink and uplink transmission set per sector. Multiple downlinks and/or uplinks may be needed and may be dynamically assigned depending upon the chosen TDD frame structure. Further discussion of this is presented below. Unlike TDD for access (eNB to UE communications), the propagation delay between TRPs is known, so S subframes between the downlink and uplink subframes are not needed. The TRP to TRP delays may be incorporated into guard times, for example.

[94] According to an example embodiment, a first backhaul mode comprises the TRP receiving from all of its neighboring TRPs using its full complement of communications beams, a second backhaul mode comprises the TRP transmitting to a first set of its neighboring TRPs using a first set of communications beams, and a third backhaul mode comprises the TRP transmitting to a second set of its neighboring TRPs using a second set of communications beams. A combination of the first set of neighboring TRPs and the second set of neighboring TRPs make up all of the neighboring TRPs. Additionally, the first set of neighboring TRPs and the second set of neighboring TRPs may be mutually exclusive. A combination of the first set of communications beams and the second set of communications beams make up the full complement of communications beams. Furthermore, the first set of communications beams and the second set of communications beams are mutually exclusive. This approach has some advantage over the previous approach as a TRP receiving using its full complement of communications beam and transmitting using only subsets of the full complement of communications beams, requires a lower number of power amplifiers (PAs) at the TRP, than if the TRP is transmitting using the full complement of communications beams.

[95] Figure 7A illustrates a TRP and coverage area 700 highlighting a first backhaul mode for the TRP where the TRP receives using its full complement of communications beams. Receiving using the full complement of communications beams, enables the TRP to receive from all of its closest neighboring TRPs.

[96] Figure 7B illustrates a TRP and coverage area 730 highlighting a second backhaul mode for the TRP where the TRP transmits using a first set of communications beams. Transmitting using the first set of communications beams, enables the TRP to transmit to a first

subset of its closest neighboring TRPs. As shown in Figure 7B, the first set of communications beams comprises half of the TRP's full complement of communications beams, therefore, the TRP is able to transmit to approximately half of its closest neighboring TRPs.

[97] Figure 7C illustrates a TRP and coverage area 760 highlighting a third backhaul mode for the TRP where the TRP transmits using a second set of communications beams. Transmitting using the second set of communications beams, enables the TRP to transmit to a second subset of its closest neighboring TRPs. The first set of communications beams and the second set of communications beams are mutually exclusive. As shown in Figure 7C, the second set of communications beams comprises half of the TRP's full complement of communications beams, therefore, the TRP is able to transmit to half of its closest neighboring TRPs. Because the first set and the second set are mutually exclusive, between the second backhaul mode and the third backhaul mode, the TRP is able to transmit to all of its closest neighboring TRPs.

[98] Figures 8A - 8C illustrate diagrams of a portion of a communications system highlighting TRPs operating in different second example backhaul modes to facilitate a high frequency backhaul link. Within any given time period, the backhaul mode of a TRP may be determined based on the position of the TRP relative to its neighboring TRPs. A scheduling algorithm may be used to determine the mode of the TRPs of the communications system. Diagram 800 (Figure 8A) illustrates the backhaul modes of the TRPs during a first time period. During the first time period, a first TRP 805 is set to operate in the second backhaul mode (transmit using a first set of communications beams). A first subset of the neighboring TRPs of first TRP 805 (labeled type A), e.g., second TRP 807, third TRP 809, and fourth TRP 811, are set to operate in the first backhaul mode (receive using their full complement of communications beams) and a second subset of the neighboring TRPs of first TRP 805 (labeled type B), e.g., fifth TRP 813, sixth TRP 815, and seventh TRP 817, are set to operate in the third backhaul mode (transmit using a second set of communications beams). The backhaul modes of the TRPs during the first time period are referred to as the initial backhaul modes of the TRPs. It is noted that the initial backhaul modes of the TRPs shown in Figure 8A are only examples presented for illustration and discussion. The initial backhaul modes may differ if the communications beams differ, the topology of the communications system differs, different implementation choices are made, different sets of communications beams, and so forth. Other initial backhaul modes are possible, as long as the relations between TRPs shown in Figure 8A are maintained.

[99] Diagram 830 (Figure 8B) illustrates the backhaul modes of the TRPs during a second time period. During the second time period, first TRP 805 is set to operate in the third backhaul

mode (transmit using the second set of communications beams), while the first subset of neighboring TRPs of first TRP 805 (labeled type A), e.g., second TRP 807, third TRP 809, and fourth TRP 811, are set to operate in the second backhaul mode (transmit using the first set of communications beams) and a second subset of the neighboring TRPs of first TRP 805 (labeled Type B), e.g., fifth TRP 813, sixth TRP 815, and seventh TRP 817, are set to operate in the first backhaul mode (receive using their full complement of communications beams). In other words, each TRP sequentially changes to the next backhaul mode. As an example, if a TRP was operating in the first backhaul mode in the first time period, in the second time period the TRP will operate in the second backhaul mode. Similarly, if a TRP was operating in the third backhaul mode in the first time period, in the second time period the TRP will operate in the first backhaul mode. The consistent cycling through of the different backhaul modes enables the TRPs to communicate without causing undue interference.

[100] Diagram 860 (Figure 8C) illustrates the backhaul modes of the TRPs during a third time period. During the third time period, first TRP 805 is set to operate in the first backhaul mode (receive using their full complement of communications beams), while the first subset of neighboring TRPs of first TRP 805 (labeled Type A), e.g., second TRP 807, third TRP 809, and fourth TRP 811, are set to operate in the third backhaul mode (transit using the second set of communications beams) and a second subset of the neighboring TRPs of first TRP 805 (labeled Type B), e.g., fifth TRP 813, sixth TRP 815, and seventh TRP 817, are set to operate in the second backhaul mode (transmit using the first set of communications beams).

[101] Table 2 illustrates example backhaul modes for different TRP types, with D representing downlink communications, and U representing uplink communications.

Cell Type	Sub-frame 1	Sub-frame 2	Sub-frame 3
A	U (full)	D (mode 2)	D (mode 3)
B	D (mode 3)	U (full)	D (mode 2)
C	D (mode 2)	D (mode 3)	U (full)

Table 2: Example backhaul modes for different TRP types.

[102] According to an example embodiment, some TRP types have different backhaul modes that are determined and assigned based on the TRP type as well as their individual

beamforming capabilities, where at least some of the different TRP types cycle through different sets of backhaul modes. If there are differences in the number of modes per different set of backhaul modes, TRPs using the set of backhaul modes with fewer modes may remain idle after they have cycled through their respective set of backhaul modes to permit the other TRPs using the different sets of backhaul modes to complete their cycles. Although there are different sets of backhaul modes, all TRPs of a TRP type assigned to a set of backhaul modes will use the same set of backhaul modes. Furthermore, all TRPs cycle through the backhaul modes at the same rate. The use of different sets of backhaul modes for different TRPs permits the coordination of transmission and reception between TRPs without cross interference and can also enable implementation of the high frequency backhaul link for TRPs with different beamforming capability. As an example, some TRPs have larger numbers of communications beams in their respective complement of communications beams since some TRPs have different limits on the number of simultaneous transmissions or receptions beams that they are capable of performing.

[103] Figures 9A - 9C illustrate diagrams of backhaul modes of a first set of backhaul modes for a first TRP type, e.g., type A TRPs. Type A TRPs are capable of sending and/or receiving on all communications beams simultaneously. Diagram 900 (Figure 9A) illustrate a first backhaul mode of type A TRPs where a TRP transmits using its full complement of communications beams. Diagram 910 (Figure 9B) illustrate a second backhaul mode of type A TRPs where the type A TRPs receive using their full complement of communications beams. Diagram 920 (Figure 9C) illustrate a third backhaul mode of type A TRPs where the type A TRPs are idle, performing neither transmissions nor receptions on any of their communications beams.

[104] Figures 9D - 9G illustrate diagrams backhaul modes of a second set of backhaul modes for second and third TRP types, e.g., types B and C TRPs. Diagram 930 (Figure 9D) illustrate a first backhaul mode of types B and C TRPs where a TRP receives using a first set of its complement of communications beams. Diagram 940 (Figure 9E) illustrate a second backhaul mode of types B and C TRPs where a TRP transmits using a second set of its complement of communications beams. Diagram 950 (Figure 9F) illustrate a third backhaul mode of types B and C TRPs where a TRP receives using a third set of its complement of communications beams. Diagram 960 (Figure 9G) illustrate a fourth backhaul mode of types B and C TRPs where a TRP transmits using a fourth set of its complement of communications beams. It is noted that the configuration of sets of backhaul nodes and TRP types illustrated in Figures 9A - 9G are for illustrative purposes only and are not meant to limit the scope or the spirit of the example embodiments.

[105] The first set and the third set are mutually exclusive and when combined comprise the entirety of the full complement of communications beams. Similarly, the second set and the fourth set are mutually exclusive and when combined comprise the entirety of the full complement of communications beams.

[106] Figures 10A - 10D illustrate diagrams of a portion of a communications system highlighting TRPs operating in different example sets of backhaul modes to facilitate a high frequency backhaul link. Within any given time period, the backhaul mode of a TRP may be determined based on the position of the TRP relative to its neighboring TRPs. A scheduling algorithm may be used to determine the mode of the TRPs of the communications system, for example. The backhaul mode may also be determined based on the capabilities of the TRP. Diagram 1000 (Figure 10A) illustrates the backhaul modes of the TRPs during a first time period. During the first time period, a first TRP 1005 (of Type C) is set to operate in the third backhaul mode of the second set of backhaul modes (receive using a second set of communications beams). A first subset of the neighboring TRPs of first TRP 1005 (Type B TRPs), e.g., second TRP 1007, third TRP 1009, and fourth TRP 1011, are set to operate in the first backhaul mode of the second set of backhaul modes (receive using a first set of communications beams) and a second subset of the neighboring TRPs of first TRP 1005 (Type A TRPs), e.g., fifth TRP 1013, sixth TRP 1015, and seventh TRP 1017, are set to operate in the first backhaul mode of the first set of backhaul modes (transmit using their full complement of communications beams). As discussed previously, the second subset of the neighboring TRPs of first TRP 1005, the Type A TRPs may be assigned different set of backhaul modes due to their capabilities, which may differ from the capabilities of the first subset of the neighboring TRPs of first TRP 1005 (Type B TRPs). It is noted that the configuration of sets of backhaul nodes and TRP types illustrated in Figures 10A - 10D are for illustrative purposes only and are not meant to limit the scope or the spirit of the example embodiments.

[107] Diagram 1030 (Figure 10B) illustrates the backhaul modes of the TRPs during a second time period. During the second time period, first TRP 1005 is set to operate in the first backhaul mode of the second set of backhaul modes (receive using the first set of communications beams). A first subset of neighboring TRPs of first TRP 1005 (Type B TRPs), e.g., second TRP 1007, third TRP 1009, and fourth TRP 1011, are set to operate in the second backhaul mode of the second set of backhaul modes (transmit using the second set of communications beams) and the second subset of the neighboring TRPs of first TRP 1005, e.g., fifth TRP 1013, sixth TRP 1015, and seventh TRP 1017, are set to operate in the third backhaul mode of the first set of backhaul modes (the TRPs go silent, neither transmit nor receive).

[108] Diagram 1050 (Figure 10C) illustrates the backhaul modes of the TRPs during a third time period. During the third time period, first TRP 1005 (Type B TRPs) is set to operate in the fourth backhaul mode of the second set of backhaul modes (transmit using the first set of communications beams). A first subset of neighboring TRPs of first TRP 1005, e.g., second TRP 1007, third TRP 1009, and fourth TRP 1011, are set to operate in the third backhaul mode of the second set of backhaul modes (receive using the second set of communications beams) and the second subset of the neighboring TRPs of first TRP 1005, e.g., fifth TRP 1013, sixth TRP 1015, and seventh TRP 1017, are set to operate in the third backhaul mode of the first set of backhaul modes (the TRPs go silent, neither transmit nor receive).

[109] Diagram 1070 (Figure 10D) illustrates the backhaul modes of the TRPs during a fourth time period. During the fourth time period, first TRP 1005 is set to operate in the second backhaul mode of the second set of backhaul modes (transmit using the second set of communications beams). A first subset of neighboring TRPs of first TRP 1005, e.g., second TRP 1007, third TRP 1009, and fourth TRP 1011, are set to operate in the fourth backhaul mode of the second set of backhaul modes (transmit using the first set of communications beams) and the second subset of the neighboring TRPs of first TRP 1005, e.g., fifth TRP 1013, sixth TRP 1015, and seventh TRP 1017, are set to operate in the second backhaul mode of the first set of backhaul modes (receive using their full complement of communications beams).

[110] Table 3 illustrates example backhaul modes for different TRP types, with X representing no communications, D representing downlink communications, and U representing uplink communications.

Cell Type	Sub-frame 1	Sub-frame 2	Sub-frame 3	Sub-frame 4
A	D full (mode A1)	X (mode A3)	X (mode A3)	U full (mode A2)
B	U partial (mode 1)	D partial (mode 2)	U partial (mode 3)	D partial (mode 4)
C	U partial (mode 3)	U partial (mode 1)	D partial (mode 4)	D partial (mode 2)

Table 3: Example backhaul times for different TRP types.

[111] As with the previously discussed example embodiments, the time ordering of the subframes is unimportant, only the backhaul modes for the TRPs are synchronized with their neighboring TRPs. A different time order of the subframes (e.g., 1, 4, 2, and 3) may allow for

TRP type A to use subframes 2 and 3 for access since no backhaul beamforming is needed in subframes 2 and 3 for TRP type A.

[112] According to an example embodiment, TDD subframes used for the high frequency backhaul link are time multiplexed (using TDMA) with TDD subframes used for access. Even if the spectrum is split using FDMA, the radio frequency (RF) beamforming chains at the TRPs may be time shared between the high frequency backhaul link and the access to reduce complexity and cost. According to an example embodiment, in order to time multiplex the TDD subframes used for the high frequency backhaul link (as generated in accordance with any of the example embodiments regarding backhaul modes presented herein) with the TDD subframes used for access, the common portions of the TDD subframes used for access are used. Table 4 illustrates TDD frame configurations for 3GPP LTE-A. The subframes labeled "S" (subframe 1) are common for all TDD frame configurations. According to an alternative example embodiment, the TDD subframes used for the high frequency backhaul link are inserted between TDD subframes used for access.

UPLINK- DOWNLINK CONFIGURATION	DOWNLINK TO UPLINK SWITCH PERIODICITY	SUBFRAME NUMBER									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4: TDD frame configurations for 3GPP LTE-A.

[113] According to an example embodiment, the duration of a subframe used for access to carry the TDD subframes for high frequency backhaul link support is extended to accommodate TDD subframes used for high frequency backhaul link support. Extending the access subframe may be needed to provide adequate bandwidth. Figure 11 illustrates an example frame structure 1100 with an extended subframe in the access frame which is used to carry the TDD subframes for high frequency backhaul link support. In order to communicate at least one complete downlink and uplink subframe for the high frequency backhaul link, the extended access subframe used to carry these backhaul subframes must be able to carry at least 1 subframe per backhaul mode. Therefore, to support the example embodiments shown in Figures 5A-5C

through 8A-8C, extension to support at least 3 subframes is needed, while to support the example embodiments shown in Figures 9A-9G and 10A-10D, an extension to support at least 4 subframes is needed. It is noted that the extension may be greater than the minimum number of subframes to support additional high frequency backhaul link information. Furthermore, the TDD frame format of the backhaul sub-frames and the duration of the extended subframe may vary dynamically to support dynamically varying data rates in different directions between TRPs. Alternatively, one complete downlink or uplink TDD subframe for high frequency backhaul link may be supported. However, complete high frequency backhaul link information may not be conveyed in its entirety.

[114] It is noted that because the high frequency backhaul link between TRPs will use a fixed communications beam direction (since the TRPs are generally stationary) as opposed to variable communications beam directions used for the access, the beam-width of the communications beams used for the high frequency backhaul link may be substantially narrower than those used for the access, thereby resulting in higher signal to noise ratios (SNRs), which in turn facilitates the use of higher level modulation schemes for the high frequency backhaul link (e.g., 256 QAM) than for the access (e.g., 16 QAM). Additionally, because the TRPs are generally stationary, lower sounding overhead is needed for the high frequency backhaul link than for the access. Hence, on a per subframe basis, the high frequency backhaul link can achieve much higher data rates than the access link, on the order of 2 to 2.5 times faster. The greater data rates means that even when a TRP has selected a TDD frame configuration for the access which has many downlink subframes (D) (e.g., frame format 5) or uplink subframes (U) (e.g., frame format 0), much fewer subframes are needed to support the high frequency backhaul link for all UE data in each frame. Figure 12 illustrates TDD frame configurations 1200 for 3GPP LTE-A, highlighting frame format 0 and frame format 5. As shown in Figure 12, frame format 0 has more U subframes than D subframes (6 U vs 2 D), while frame format 5 has more D subframes than U subframes (8 D vs 1 U). Even with such subframe imbalances, the higher data rates achievable in the high frequency backhaul link results in a requirement of fewer high frequency backhaul link subframes to support the data rates supported in the access link.

[115] In communications systems where the access link and the high frequency backhaul link operate at different frequencies (e.g., the configuration shown in Figure 3A), the difference in the numerologies of the different links (i.e., 3GPP LTE at 3 GHz for the access link and mmWave at 30 GHz for the high frequency backhaul link may result in subframe duration differences on the order of 10 times) and the difference in the operating frequencies may mean that the two frame structures may be entirely independent. It may be advantageous to make the

timing between the two different frame structures consistent to simplify implementation and to make the user data for the access link be available by way of the high frequency backhaul link in a timely manner. As an example, subframes for the high frequency backhaul link should occur with sufficient frequency to ensure that the user data is transferred between TRPs before it is needed.

[116] Figure 13 illustrates an example TDD frame format 1300 for supporting the high frequency backhaul link. Figure 13 provides a detail view of S subframe 1305, which includes a downlink pilot time slot (DwPTS), a GP, and an uplink pilot time slot (UpPTS), of an access frame 1310. Figure 13 also displays a frame 1315 for the high frequency backhaul link. A variety of different TDD frame formats are available and each TRP connection may use a different subframe time period to meet their respective data rate requirements. Furthermore, the exact timing position of frames of the high speed backhaul link is flexible. However, consistency in the timing may make implementation simpler.

[117] Coverage areas with consistent shapes (hexagonal coverage areas) and consistent sizes (all TRPs having the same sized coverage areas) have been used to present the general principle of the different communications beam multiplexing techniques. However, in a real-world deployment, the coverage areas for the TRPs will not all be the same shape and/or size. In general, the coverage area of each TRP will have some arbitrary shape and size that is dependent upon the terrain and propagation conditions. Additionally, each TRP may not have exactly 6 neighbor TRPs.

[118] Figure 14 illustrates a generalized communications system 1400. Communications system 1400 includes a TRP X 1405 with an associated coverage area 1410. The shape of coverage area 1410 may depend upon the terrain (e.g., large structures or geographical features blocking signals, wide open space allowing clear signal propagation, and so on) and propagation conditions. TRP X 1405 has Y_x neighboring TRPs. The number of neighboring TRPs depending upon the location of TRP X 1405 with respect to communications system 1400 (e.g., system center, system edge, and so on), the density of users, the presence or lack of interference, and so forth.

[119] According to an example embodiment, in a generalized communications system, each TRP has an integer number of backhaul modes of operation for communicating on the high frequency backhaul link. Within each backhaul mode of operation, a TRP performs downlink transmissions or uplink receptions and not both downlink and uplink. Between backhaul modes of operation, a TRP can either switch communications mode, e.g., from downlink to uplink or

uplink to downlink, or remain in the same communications mode, e.g., downlink to downlink or uplink to uplink. Every TRP uses the same backhaul modes of operation, but different TRP types perform different backhaul modes in a given time period. The assignment of the backhaul modes is made based on TRP type, where TRP type may be assigned using a scheduling algorithm, for example. The TRPs sequentially cycle through the backhaul modes.

[120] According to an example embodiment, in a generalized communications system, each TRP has 3 backhaul modes of operations for communicating on the high frequency backhaul link. In a first backhaul mode, the TRP communicates (sends or receives) with all of its neighboring TRPs using its full complement of communications beams. In a second backhaul mode, the TRP communicates (receives or sends) with a first set of its neighboring TRPs using a first set of its communications beams, and in a third backhaul mode, the TRP communicates (receives or sends) with its neighboring TRPs using a second set of its communications beams. The second and third backhaul modes may be referred to as partial modes since they involve communications with a portion of the neighboring TRPs. A combination of the first set of communications beams and the second set of communications beams make up the full complement of communications beams. Furthermore, the first set of communications beams and the second set of communications beams may be mutually exclusive. It is noted that there may be more than 3 backhaul modes with more than 2 partial modes. However, the more than 2 partial modes, when combined, will cover all of the neighboring TRPs.

[121] According to an example embodiment, in a generalized communications system, a first backhaul mode comprises a TRP X transmitting to all of its neighboring TRPs using its full complement of communications beams, a second backhaul mode comprises the TRP X receiving from a first set of its neighboring TRPs on a first set of communications beams, and a third backhaul mode comprises the TRP X receiving from a second set of its neighboring TRPs on a second set of communications beams. The first set and the second set of neighboring TRPs make up all of the neighboring TRPs of TRP X and may be mutually exclusive. The first set and the second set of neighboring TRPs may be unequal in size, for example, if there is an odd number of neighboring TRPs. The first set and the second set of communications beams make up the full complement of communications beams of TRP X and may be mutually exclusive. The assignment of the TRPs may be static, semi-static, or dynamical in nature. The corresponding number of subframes required may be dependent on actual deployment.

[122] According to an example embodiment, in a generalized communications system, a first backhaul mode comprises a TRP X receiving from all of its neighboring TRPs using its full

complement of communications beams, a second backhaul mode comprises the TRP X transmitting to a first set of its neighboring TRPs on a first set of communications beams, and a third backhaul mode comprises the TRP X transmitting to a second set of its neighboring TRPs on a second set of communications beams. The first set and the second set of neighboring TRPs make up all of the neighboring TRPs of TRP X and may be mutually exclusive. The first set and the second set of neighboring TRPs may be unequal in size, for example, if there is an odd number of neighboring TRPs or if the neighboring TRPs are not evenly distributed. The first set and the second set of communications beams make up the full complement of communications beams of TRP X and may be mutually exclusive.

[123] According to an example embodiment, in a generalized communications system, some TRP types have different backhaul modes that are determined and assigned based on the TRP type as well as their individual beamforming capabilities, where at least some of the different TRP types cycle through different sets of backhaul modes. If there are differences in the number of modes per different set of backhaul modes, TRPs using the set of backhaul modes with fewer modes may remain idle after they have cycled through their respective set of backhaul modes to permit the other TRPs using the different sets of backhaul modes to complete their cycles. Although there are different sets of backhaul modes, all TRPs of a TRP type assigned to a set of backhaul modes will use the same set of backhaul modes. Furthermore, all TRPs cycle through the backhaul modes at the same rate. The use of different sets of backhaul modes permits the implementation of the high frequency backhaul link for TRPs with different beamforming capability. As an example, some TRPs have larger numbers of communications beams in their respective complement of communications beams. As another example, some TRPs have different limits on the number of simultaneous transmissions or receptions that they are capable of performing.

[124] According to an example embodiment, in a generalized communications system, a first type of TRP is assigned a set of 3 backhaul modes and more than one second types of TRP are assigned a set of 4 backhaul modes. The set of 3 backhaul modes may include a first backhaul mode where a TRP transmits to all of its neighboring TRPs using its full complement of communications beams, a second backhaul mode where the TRP receives from all of its neighboring TRP using its full complement of communications beams, and a third backhaul mode where the TRP remains idle. The set of 4 backhaul modes may include a first backhaul mode where a TRP transmits to a first set of neighboring TRPs using a first set of communications beams, a second backhaul mode where the TRP receives from a first set of neighboring TRPs using a first set of communications beams, a third backhaul mode where the

TRP transmits to a second set of communications beams, and a fourth backhaul mode where the TRP receives from a second set of neighboring TRPs using a second set of communications beams. It is noted that some implementations may include greater numbers of partial modes.

[125] The assignment of which TRPs will be in which backhaul mode for each subframe of the TDD backhaul frame may depend upon the deployment, as well as how the neighboring TRPs are located in space. Examples with regular deployments in a hexagonal communications system are discussed above. The backhaul mode to subframe mapping for each TRP may be performed as part of a TDD backhaul frame configuration.

[126] The mapping may be performed statically during network planning. Each TRP may be assigned a TRP specific TDD backhaul frame configuration with the respective backhaul modes. The configuration may be stored and later retrieved from memory or database.

[127] The mapping may be performed semi-statically. A newly deployed TRP may perform a beam sweep to find all of its neighboring TRPs and their respective identifiers. The newly deployed TRP may report to a TDD backhaul frame configuration entity, the report may include identifiers of the neighboring TRPs (and optionally, beam indices of the newly deployed TRP associated with each of the neighboring TRPs, e.g., beam directions), this is referred to as neighbor list reporting; and beamforming capability of the newly deployed TRP, this is referred to as TRP capability reporting. The newly deployed TRP receives TRP specific TDD backhaul frame configuration with associated backhaul modes from the TDD backhaul frame configuration entity. The TDD backhaul frame configuration entity may be a network entity dedicated to configuration or it may be collocated with an existing network entity.

[128] The mapping may be performed dynamically (i.e., at a greater frequency than semi-static). A network controlling entity may dynamically inform each TRP of its TRP specific TDD backhaul frame structure. The information provided by the network controlling entity may be based upon a chosen TDD frame for the access for each TRP; and/or an updated neighbor list reports from each TRP, which may be useful when the TRPs are turned on or off for special events (concerts, sports, conventions, etc.), turned on or off due to load, or when a TRP is non-stationary (vehicles, buses, trains, etc.).

[129] Communications between the network controlling entity and each TRP to semi-statically or dynamically assign the TDD backhaul frame structure to each TRP may occur over a dedicated TRP to network controlling entity connection (may be either wired or wireless). This connection may be simple to implement when an mmWave backhaul is used to complement a regular X2 interface. It is noted that only low data rates are needed for the connection.

[130] Figure 15 illustrates example ways 1500 for a TRP to obtain TDD backhaul frame configurations. TRP X 1505 may obtain the TDD backhaul frame configuration from a memory 1510, a network entity 1515, or from a neighboring TRP 1520 (such as a master TRP).

[131] As an illustrative example, parameters of the TDD backhaul frame configuration includes at least one of the following:

- TDD frame format index: this option assumes a fixed set of available formats (i.e., 2, 4, 8, 12, 16, and so on) and incurs very low overhead;
- Alternatively, a frame length (in subframes, for example) may be specified for each access frame and mode (1, 2, 3, and so forth) or subframe type (downlink-full, uplink-full, downlink-partial, uplink-partial, and so on) for each subframe in the TDD backhaul frame;
- Indices of the TRPs (or angular directions) for the full subframes;
- Indices of the TRPs (or directions) for the separate partial subframes or modes.

[132] Figures 16A and 16B illustrate example deployments for urban areas. Figure 16A is presented in A. Goldsmith et al, "A Measurement-based Model for Predicting Coverage Areas of Urban Microcells", IEEE Journal on Sel. Areas in Communications, Vol. 11, No. 7, September 1993, pp. 1013-11023, which is hereby incorporated herein by reference and illustrates signal power level of a rectangular urban deployment. Figure 16B is presented in 3GPP RAN 1 WG 1 Meeting #84 - R1 160924, "Diamond Shaped Cell Layouts for Above 6 GHz Channel Modeling", which is hereby incorporated herein by reference and illustrates a diamond shaped urban deployment with 9 sites.

[133] Figure 17 illustrates a flow diagram of example operations 1700 occurring in a network entity performing backhaul mode to TDD backhaul subframe mapping. Operations 1700 may be indicative of operations occurring in a network entity, such as a TDD frame configuration entity or a network controlling entity, as the network entity performs backhaul mode to TDD backhaul subframe mapping.

[134] Operations 1700 begin with the network entity receiving neighbor lists and TRP capability reports from TRPs (block 1705). The neighbor lists and TRP capability reports may be received from all TRPs of the communications system. Alternatively, the neighbor lists and TRP capability reports are received from newly deployed TRPs or TRPs which have changed configuration. As an example, when a TRP determines that its neighboring TRPs have changed, the TRP sends a neighbor list and/or TRP capability report. As another example, when the capability of a TRP changes, the TRP sends a TRP capability report and/or neighbor list. Alternatively, the network entity receives information regarding the TRPs during network

planning. The network entity assigns TRP types to the TRPs (block 1710). The assignment of the TRP types may be performed using a scheduling algorithm based on a topology of the communications system. Alternatively, the assignment of the TRP types may be performed using a scheduling algorithm that also considers the TRP capabilities. The network entity assigns backhaul modes to the TRPs in accordance with the assigned TRP types (block 1715). The network entity assigns TDD backhaul frame configurations to the TRPs in accordance with the assigned TRP types (block 1720). The network entity saves the TDD backhaul frame configuration and backhaul modes (block 1725). The TDD backhaul frame configuration and backhaul modes may be save to memory or database. Alternatively, the TDD backhaul frame configuration and backhaul modes may be provided directly to the TRPs.

[135] Figure 18 illustrates a flow diagram of example operations 1800 occurring in a TRP communicating using a high frequency backhaul link. Operations 1800 may be indicative of operations occurring in a TRP that is communicating using a high frequency backhaul link.

[136] Operations 1800 begin with the TRP determining TDD backhaul frame configuration and backhaul modes (block 1805). The TDD backhaul frame configuration and backhaul modes may be retrieve from memory or database, retrieved from a network entity, or a neighboring TRP (such as a master TRP). Alternatively, the backhaul frame configuration and backhaul modes may be instructed directly in a message received from a network entity that made the assignment. During a time period, the TRP communicates using the high frequency backhaul in a manner commensurate with a backhaul mode corresponding to the time period (block 1810). The TRP performs a check to determine if the time period is over (block 1815). If the time period is not over, the TRP continues communicating as in block 1810. If the time period is over, the TRP switches to a next time period (block 1820) and returns to block 1810 to communicate in accordance with a backhaul mode corresponding to the next time period.

[137] Figure 19 illustrates a block diagram of an embodiment processing system 1900 for performing methods described herein, which may be installed in a host device. As shown, the processing system 1900 includes a processor 1904, a memory 1906, and interfaces 1910-1914, which may (or may not) be arranged as shown in Figure 19. The processor 1904 may be any component or collection of components adapted to perform computations and/or other processing related tasks, and the memory 1906 may be any component or collection of components adapted to store programming and/or instructions for execution by the processor 1904. In an embodiment, the memory 1906 includes a non-transitory computer readable medium. The interfaces 1910, 1912, 1914 may be any component or collection of components

that allow the processing system 1900 to communicate with other devices/components and/or a user. For example, one or more of the interfaces 1910, 1912, 1914 may be adapted to communicate data, control, or management messages from the processor 1904 to applications installed on the host device and/or a remote device. As another example, one or more of the interfaces 1910, 1912, 1914 may be adapted to allow a user or user device (e.g., personal computer (PC), etc.) to interact/communicate with the processing system 1900. The processing system 1900 may include additional components not depicted in Figure 19, such as long term storage (e.g., non-volatile memory, etc.).

[138] In some embodiments, the processing system 1900 is included in a network device that is accessing, or part otherwise of, a telecommunications network. In one example, the processing system 1900 is in a network-side device in a wireless or wireline telecommunications network, such as a base station, a relay station, a scheduler, a controller, a gateway, a router, an applications server, or any other device in the telecommunications network. In other embodiments, the processing system 1900 is in a user-side device accessing a wireless or wireline telecommunications network, such as a mobile station, a user equipment (UE), a personal computer (PC), a tablet, a wearable communications device (e.g., a smartwatch, etc.), or any other device adapted to access a telecommunications network.

[139] In some embodiments, one or more of the interfaces 1910, 1912, 1914 connects the processing system 1900 to a transceiver adapted to transmit and receive signaling over the telecommunications network. Figure 20 illustrates a block diagram of a transceiver 2000 adapted to transmit and receive signaling over a telecommunications network. The transceiver 2000 may be installed in a host device. As shown, the transceiver 2000 comprises a network-side interface 2002, a coupler 2004, a transmitter 2006, a receiver 2008, a signal processor 2010, and a device-side interface 2012. The network-side interface 2002 may include any component or collection of components adapted to transmit or receive signaling over a wireless or wireline telecommunications network. The coupler 2004 may include any component or collection of components adapted to facilitate bi-directional communication over the network-side interface 2002. The transmitter 2006 may include any component or collection of components (e.g., up-converter, power amplifier, etc.) adapted to convert a baseband signal into a modulated carrier signal suitable for transmission over the network-side interface 2002. The receiver 2008 may include any component or collection of components (e.g., down-converter, low noise amplifier, etc.) adapted to convert a carrier signal received over the network-side interface 2002 into a baseband signal. The signal processor 2010 may include any component or collection of components adapted to convert a baseband signal into a data signal suitable for

communication over the device-side interface(s) 2012, or vice-versa. The device-side interface(s) 2012 may include any component or collection of components adapted to communicate data-signals between the signal processor 2010 and components within the host device (e.g., the processing system 1900, local area network (LAN) ports, etc.).

[140] The transceiver 2000 may transmit and receive signaling over any type of communications medium. In some embodiments, the transceiver 2000 transmits and receives signaling over a wireless medium. For example, the transceiver 2000 may be a wireless transceiver adapted to communicate in accordance with a wireless telecommunications protocol, such as a cellular protocol (e.g., long-term evolution (LTE), etc.), a wireless local area network (WLAN) protocol (e.g., Wi-Fi, etc.), or any other type of wireless protocol (e.g., Bluetooth, near field communication (NFC), etc.). In such embodiments, the network-side interface 2002 comprises one or more antenna/radiating elements. For example, the network-side interface 2002 may include a single antenna, multiple separate antennas, or a multi-antenna array configured for multi-layer communication, e.g., single input multiple output (SIMO), multiple input single output (MISO), multiple input multiple output (MIMO), etc. In other embodiments, the transceiver 2000 transmits and receives signaling over a wireline medium, e.g., twisted-pair cable, coaxial cable, optical fiber, etc. Specific processing systems and/or transceivers may utilize all of the components shown, or only a subset of the components, and levels of integration may vary from device to device.

[141] Although the present disclosure and its advantages have been described in detail, it should be understood that various changes, substitutions and alterations can be made herein without departing from the spirit and scope of the disclosure as defined by the appended claims.

WHAT IS CLAIMED IS:

1. A method for operating a transmission-reception point (TRP), the method comprising:
determining, by the TRP, a first cycle of backhaul communications modes for the TRP, each backhaul communications mode of the first cycle is associated with a different time period and prompts the TRP to either transmit or receive using a subset of communications beams available to the TRP during an associated time period, wherein the communications beams used by the TRP and neighboring TRPs of the TRP in each associated time period are selected to prevent mutual interference, and wherein at least one backhaul communications mode of the first cycle prompts the TRP to either transmit or receive using all of the communications beams available to the TRP;
determining, by the TRP, a backhaul frame configuration for the TRP in accordance with the first cycle, the backhaul frame configuration specifying an arrangement of subframes of a frame used for backhaul communications; and
communicating, by the TRP, with neighboring TRPs of the TRP in accordance with the first cycle and the backhaul frame configuration.
2. The method of claim 1, wherein determining the first cycle comprises one of retrieving the first cycle from a memory, retrieving the first cycle from a database, receiving the first cycle in a message from a network entity, or receiving the first cycle from a neighboring TRP.
3. The method of claim 1, wherein determining the backhaul frame configuration comprises one of retrieving the backhaul frame configuration from a memory, retrieving the backhaul frame configuration from a database, receiving the backhaul frame configuration in a message from a network entity, or receiving the backhaul frame configuration from a neighboring TRP.
4. The method of claim 1, wherein the TRP is assigned a starting point in the first cycle in accordance with a TRP type of the TRP.
5. The method of claim 4, wherein different TRP types are assigned different starting points in the first cycle.
6. The method of claim 1, wherein the first cycle comprises a first backhaul mode specifying the TRP to transmit to all of the neighboring TRPs using all communications beams available to the TRP, a second backhaul mode specifying the TRP to receive from a first subset of the neighboring TRPs using a first subset of all communications beams available to the TRP, and a

third backhaul mode specifying the TRP to receive from a second subset of the neighboring TRPs using a second subset of all communications beams available to the TRP, where a combination of the first subset and the second subset of the neighboring TRPs encompasses all of the neighboring TRPs.

7. The method of claim 6, wherein there are more than 2 subsets of neighboring TRPs, and wherein the subsets of neighboring TRPs encompass all of the neighboring TRPs.

8. The method of claim 1, wherein the first cycle comprises a fourth backhaul mode specifying the TRP to receive from all of the neighboring TRPs using all communications beams available to the TRP, a fifth backhaul mode specifying the TRP to transmit to a third subset of the neighboring TRPs using a third subset of all communications beams available to the TRP, and a sixth backhaul mode specifying the TRP to transmit to a fourth subset of the neighboring TRPs using a fourth subset of all communications beams available to the TRP, where a combination of the third subset and the fourth subset of the neighboring TRPs encompasses all of the neighboring TRPs.

9. The method of claim 8, wherein there are more than 2 subsets of neighboring TRPs, and wherein the subsets of neighboring TRPs encompass all of the neighboring TRPs.

10. The method of claim 1, wherein there is a plurality of cycles of backhaul communications modes, wherein each backhaul communications mode of each cycle specifies an associated TRP to either transmit or receive using a subset of communications beams available to the associated TRP during an associated time period, and wherein each TRP type is assigned one set of backhaul modes.

11. The method of claim 10, wherein different TRP types are assigned different starting points in associated cycles.

12. The method of claim 10, wherein the cycles have different numbers of backhaul communications modes, wherein the first cycle assigned to the TRP has fewer backhaul modes than a second set of backhaul modes, and wherein the method further comprises remaining idle in at least one time period.

13. The method of claim 1, wherein the communicating with the neighboring TRPs occurs in a first frequency band, and wherein the TRP further communicates with user equipments (UEs) operating within its coverage area using a second frequency band.
14. The method of claim 13, wherein the first frequency band and the second frequency band overlap.
15. The method of claim 14, wherein a frame used for backhaul communications is inserted in a radio frame used for communicating with UEs.
16. The method of claim 14, wherein a frame used for backhaul communications is inserted in a common portion of a frame used for serving the UEs.
17. The method of claim 16, wherein the common portion is a special (S) subframe.
18. The method of claim 14, wherein a frame used for backhaul communications is inserted between consecutive frames used for serving the UEs.
19. A method for operating a network entity, the method comprising:
 - assigning, by the network entity, cycles of backhaul communications modes to transmission-reception points (TRPs) in accordance with an assigned TRP type of each of the TRPs; and
 - assigning, by the network entity, backhaul frame configurations to the TRPs in accordance with the assigned TRP type of each of the TRPs.
20. The method of claim 19, further comprising assigning, by the network entity, a TRP type to each of the TRPs in accordance with a neighbor list of each of the TRPs and a capability of each of the TRPs.
21. The method of claim 19, further comprising saving, the cycles of backhaul communications mode and the backhaul frame configurations to one of a memory or a database.
22. A transmission-reception point (TRP) comprising:
 - a processor; and
 - a computer readable storage medium storing programming for execution by the

processor, the programming including instructions to configure the TRP to:

determine a first cycle of backhaul communications modes for the TRP, each backhaul communications mode of the first cycle is associated with a different time period and prompts the TRP to either transmit or receive using a subset of communications beams available to the TRP during an associated time period, wherein the communications beams used by the TRP and neighboring TRPs of the TRP in each associated time period are selected to prevent mutual interference, and wherein at least one backhaul communications mode of the first cycle prompts the TRP to either transmit or receive using all of the communications beams available to the TRP,

determine a backhaul frame configuration for the TRP in accordance with the first cycle, the backhaul frame configuration specifying an arrangement of subframes of a frame used for backhaul communications, and

communicate with neighboring TRPs of the TRP in accordance with the first cycle and the backhaul frame configuration.

23. The TRP of claim 22, wherein the first cycle comprises a first backhaul mode specifying the TRP to transmit to all of the neighboring TRPs using all communications beams available to the TRP, a second backhaul mode specifying the TRP to receive from a first subset of the neighboring TRPs using a first subset of all communications beams available to the TRP, and a third backhaul mode specifying the TRP to receive from a second subset of the neighboring TRPs using a second subset of all communications beams available to the TRP, where a combination of the first subset and the second subset of the neighboring TRPs encompasses all of the neighboring TRPs.

24. The TRP of claim 22, wherein the first cycle comprises a fourth backhaul mode specifying the TRP to receive from all of the neighboring TRPs using all communications beams available to the TRP, a fifth backhaul mode specifying the TRP to transmit to a third subset of the neighboring TRPs using a third subset of all communications beams available to the TRP, and a sixth backhaul mode specifying the TRP to transmit to a fourth subset of the neighboring TRPs using a fourth subset of all communications beams available to the TRP, where a combination of the third subset and the fourth subset of the neighboring TRPs encompasses all of the neighboring TRPs.

25. The TRP of claim 22, wherein the cycles have different numbers of backhaul communications modes, wherein the first cycle assigned to the TRP has fewer backhaul modes

than a second set of backhaul modes, and wherein programming includes instructions to configure the TRP to remain idle in at least one time period after completing the first cycle.

26. A network entity comprising:
a processor; and
a computer readable storage medium storing programming for execution by the processor, the programming including instructions to configure the network entity to:
assign cycles of backhaul communications modes to transmission-reception points (TRPs) in accordance with an assigned TRP type of each of the TRPs, and
assign backhaul frame configurations to the TRPs in accordance with the assigned TRP type of each of the TRPs.

27. The network entity of claim 26, wherein the programming includes instructions to configure the network entity to assign a TRP type to each of the TRPs in accordance with a neighbor list of each of the TRPs and a capability of each of the TRPs.


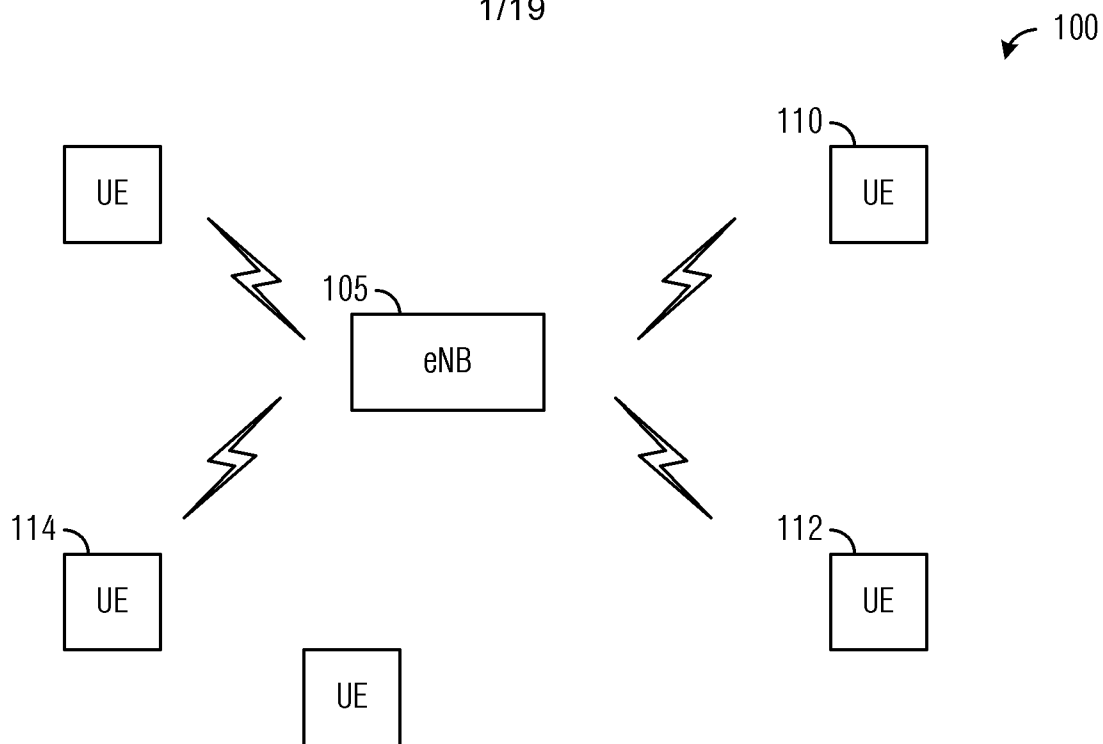


Fig. 1

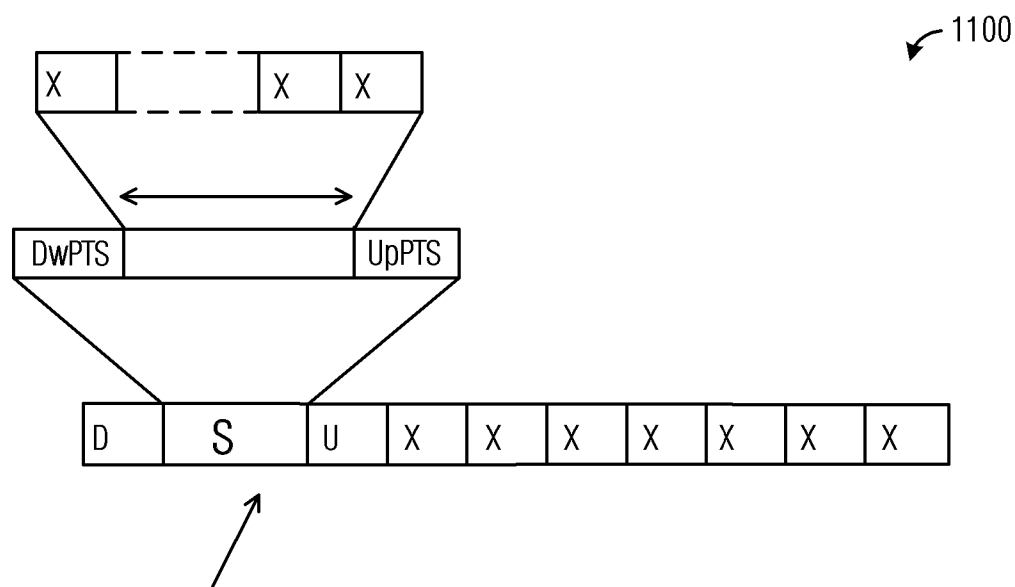

TDD FRAME FORMAT FOR ACCESS
(EXTENDED IN TIME, TO ALLOW LONGER S PORTION)

Fig. 11

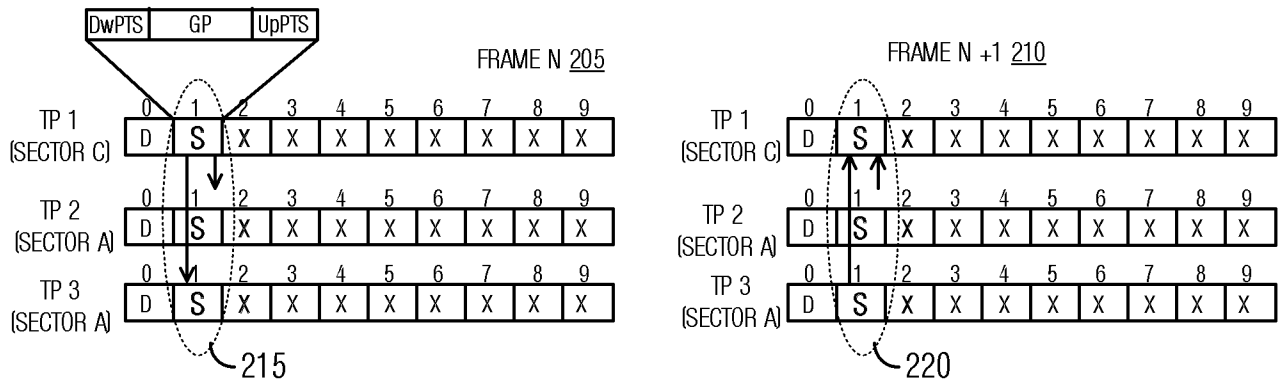


Fig. 2A

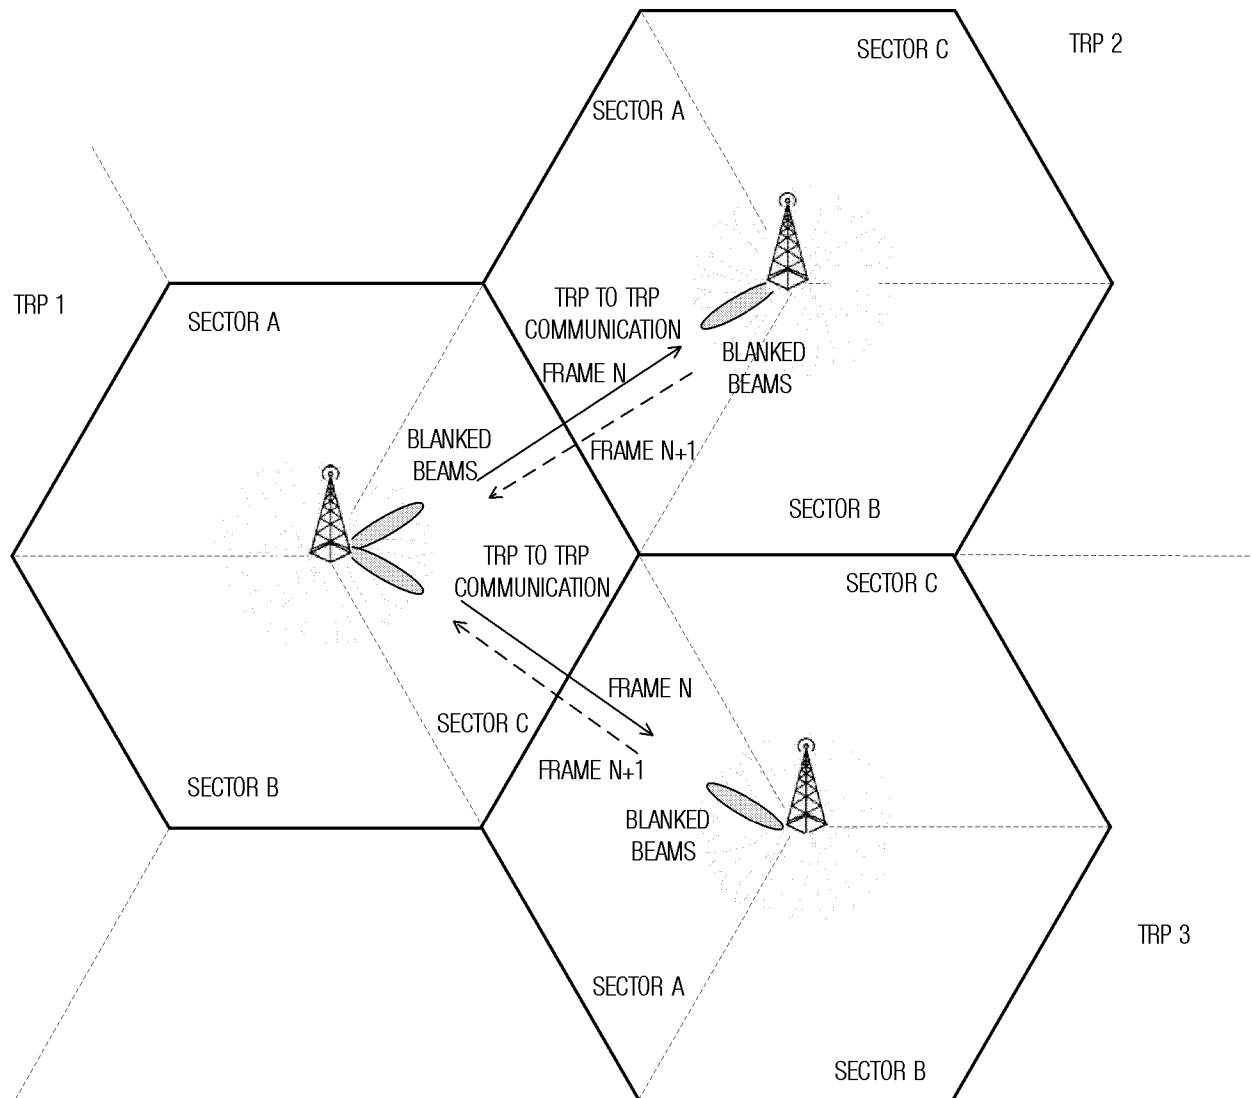
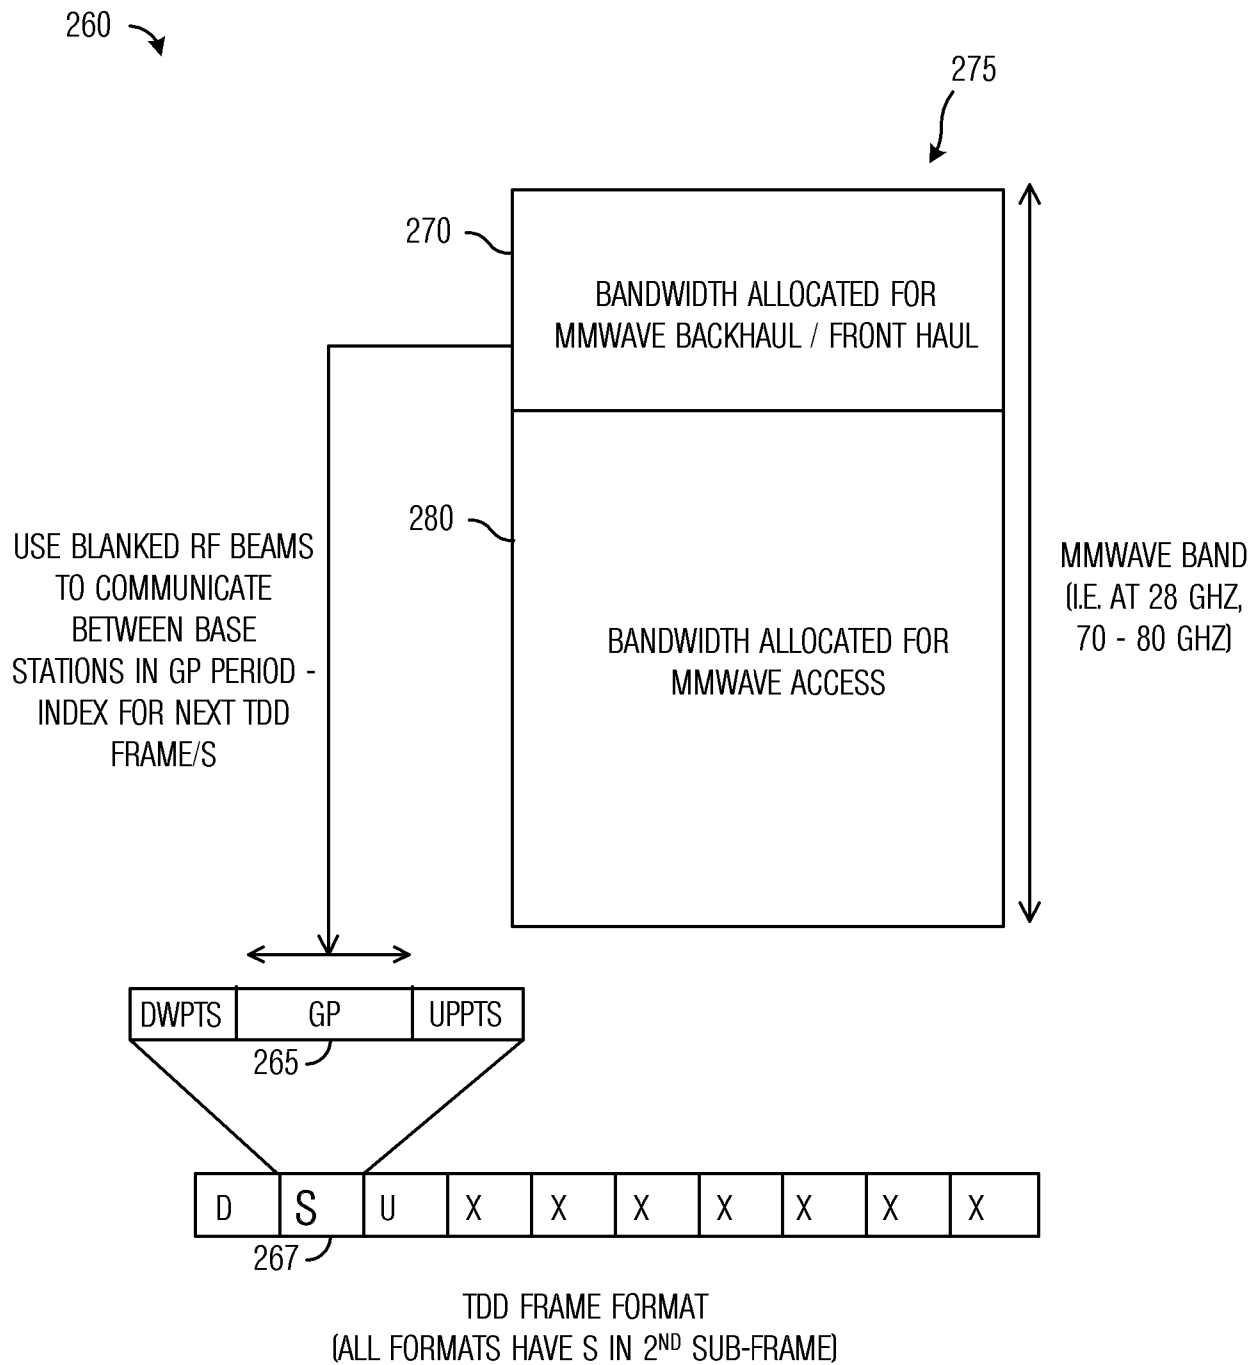
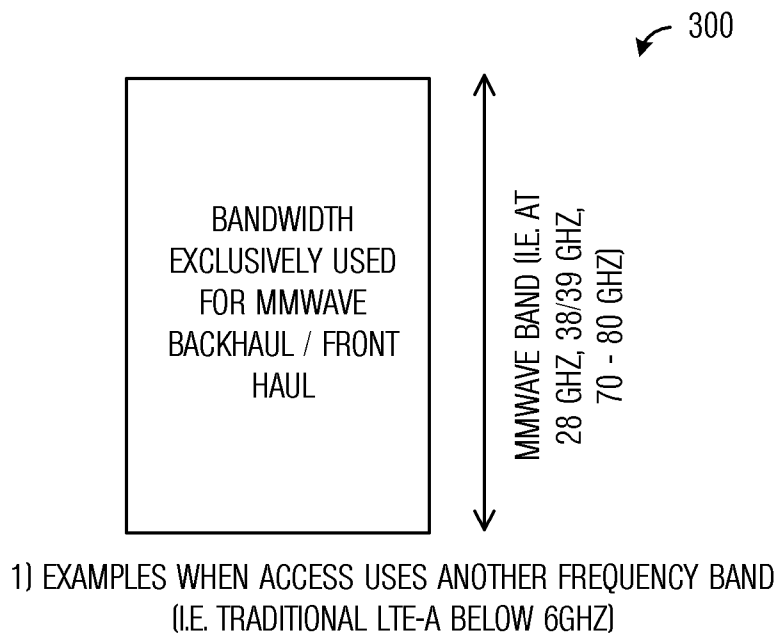
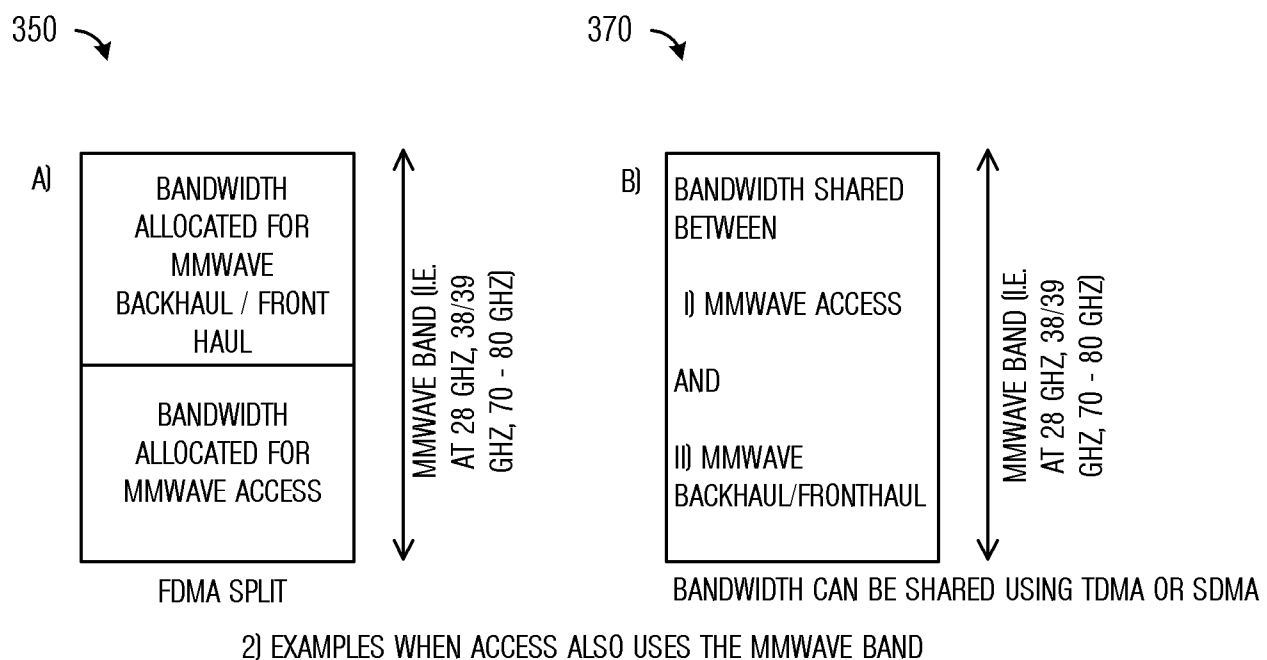


Fig. 2B

**Fig. 2C**

*Fig. 3A**Fig. 3B*

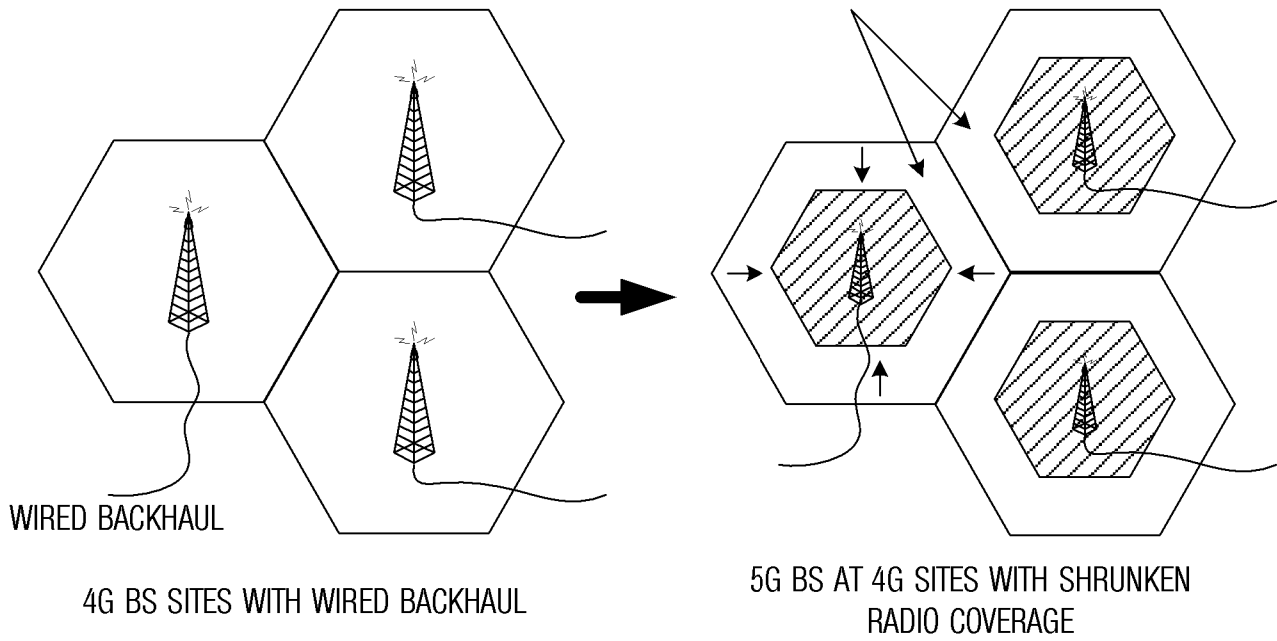


Fig. 4A
(Prior Art)

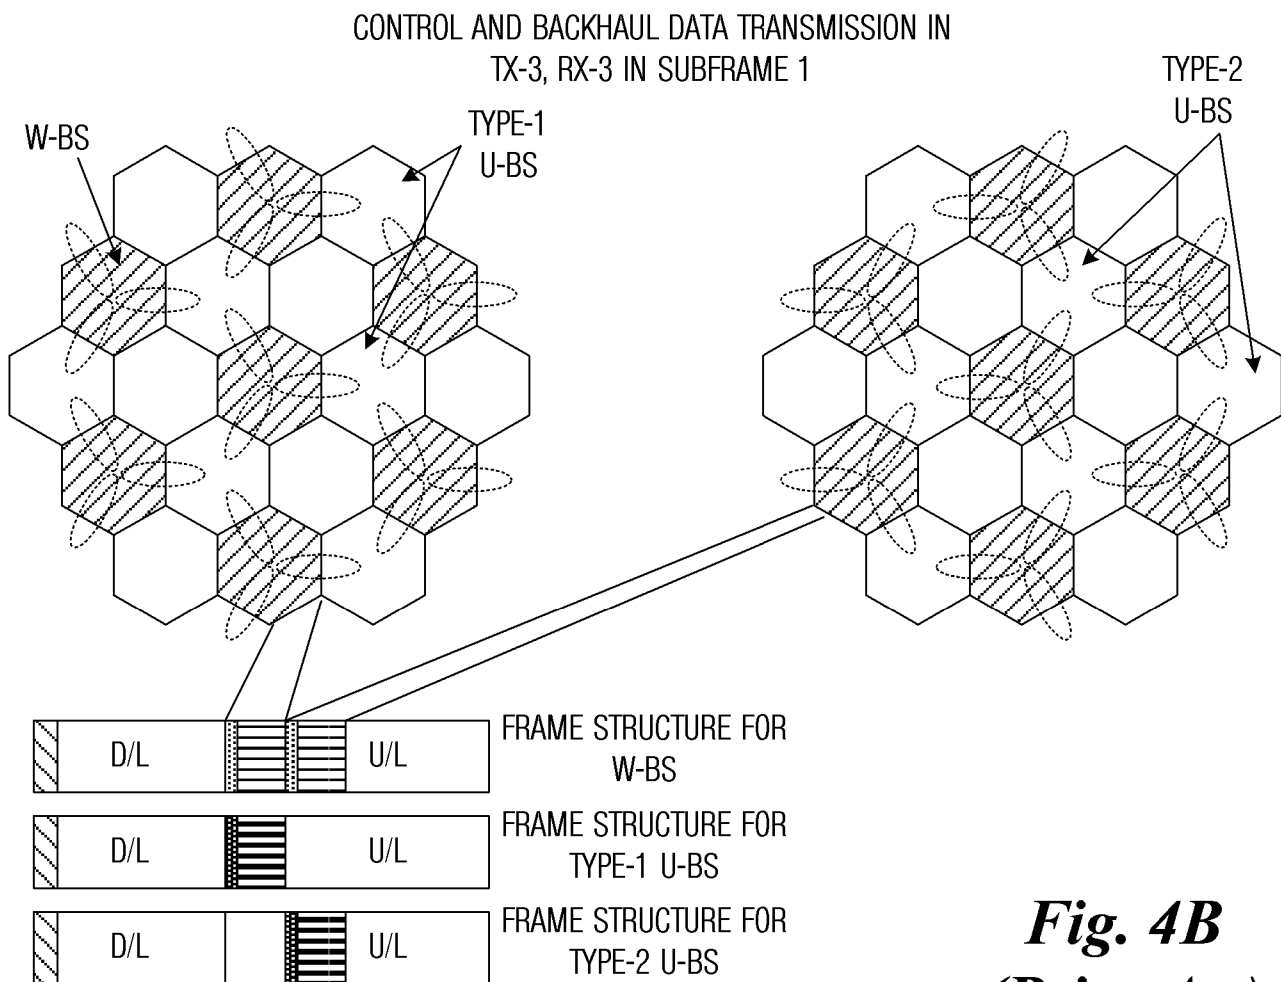


Fig. 4B
(Prior Art)

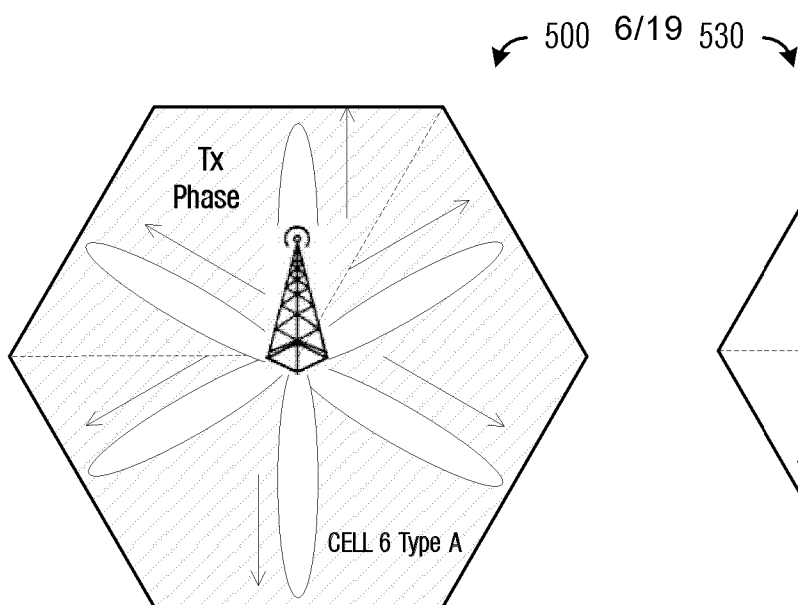


Fig. 5A

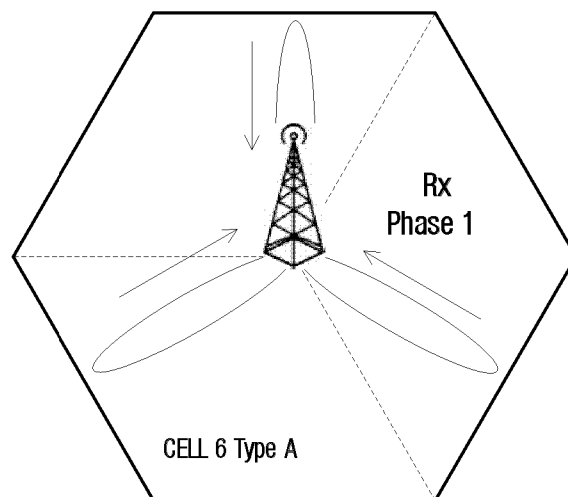


Fig. 5B

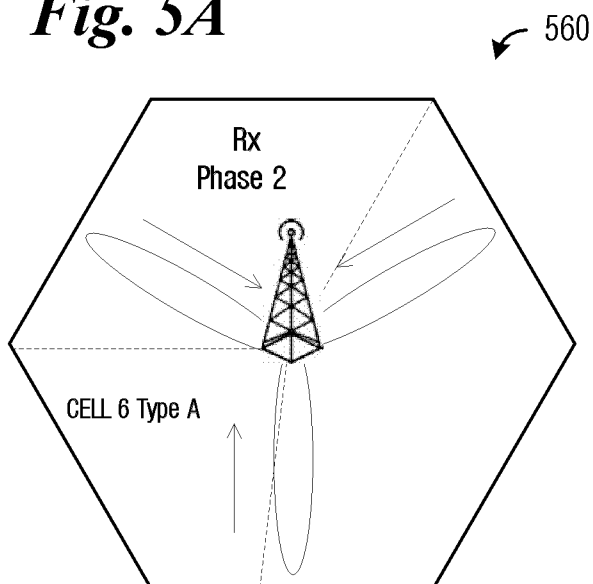


Fig. 5C

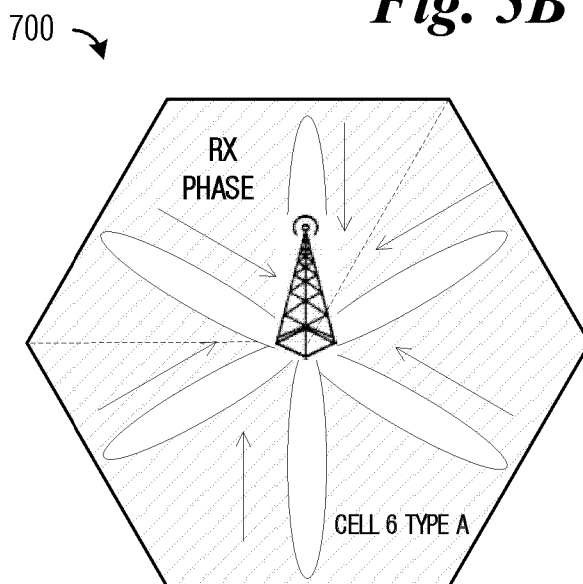


Fig. 7A

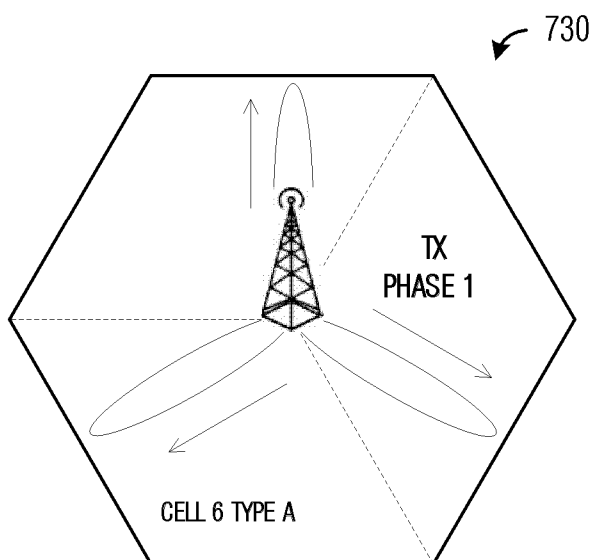


Fig. 7B

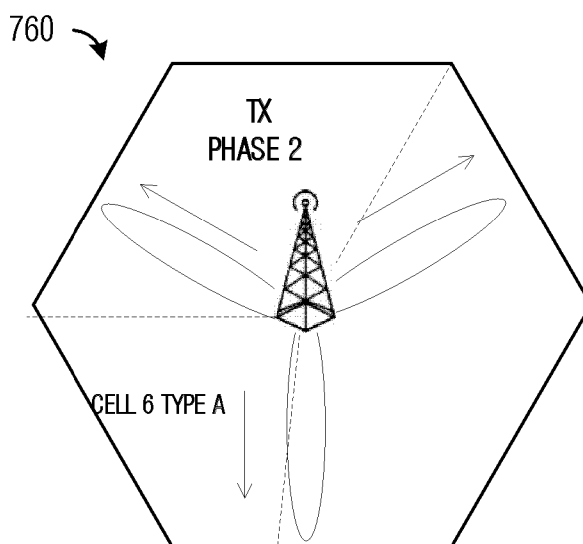


Fig. 7C

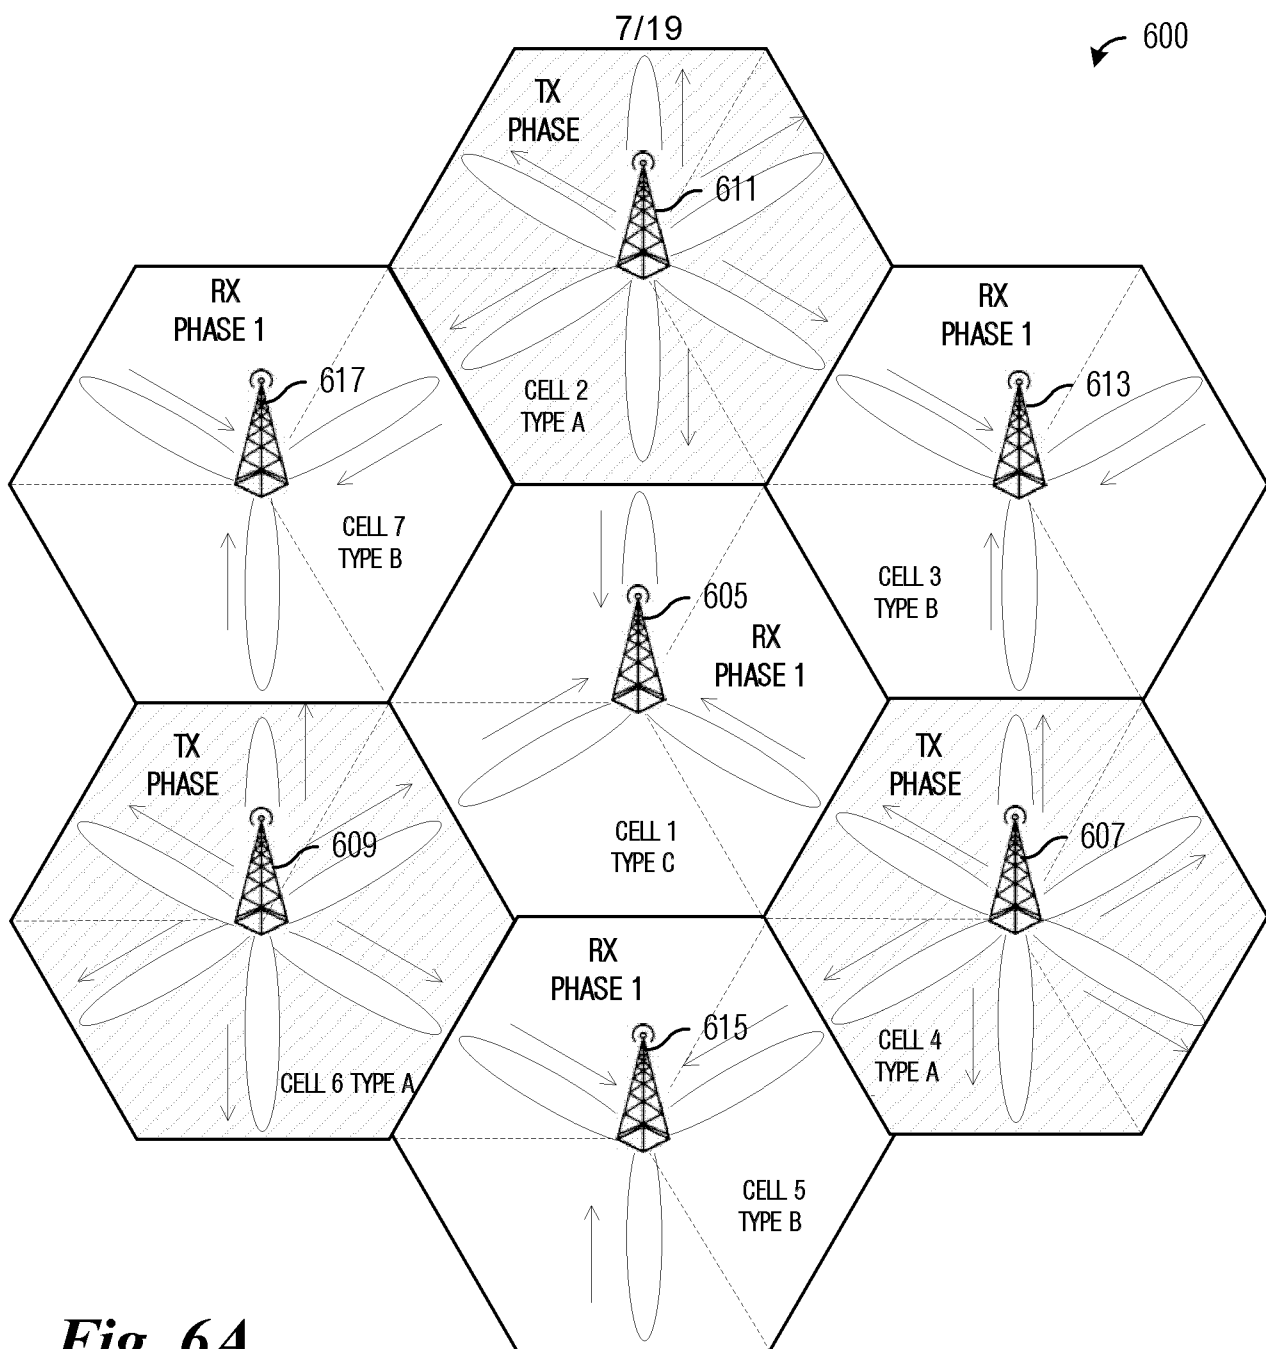


Fig. 6A

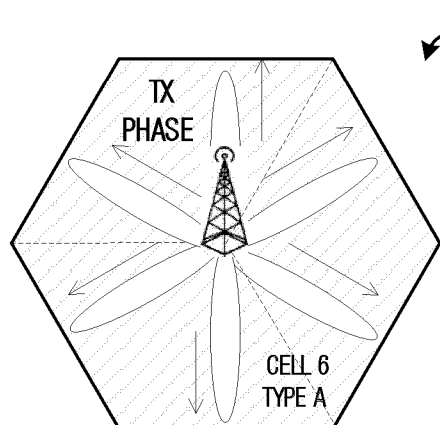


Fig. 9A

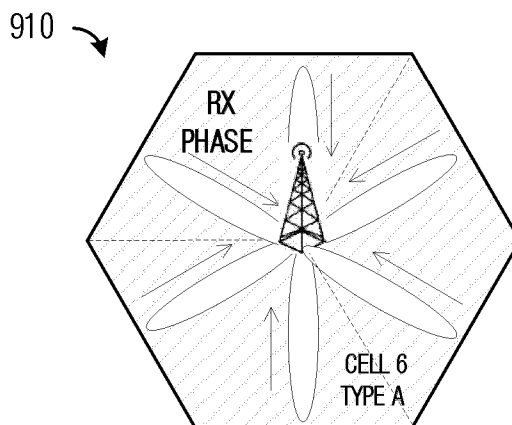


Fig. 9B

8/19

630

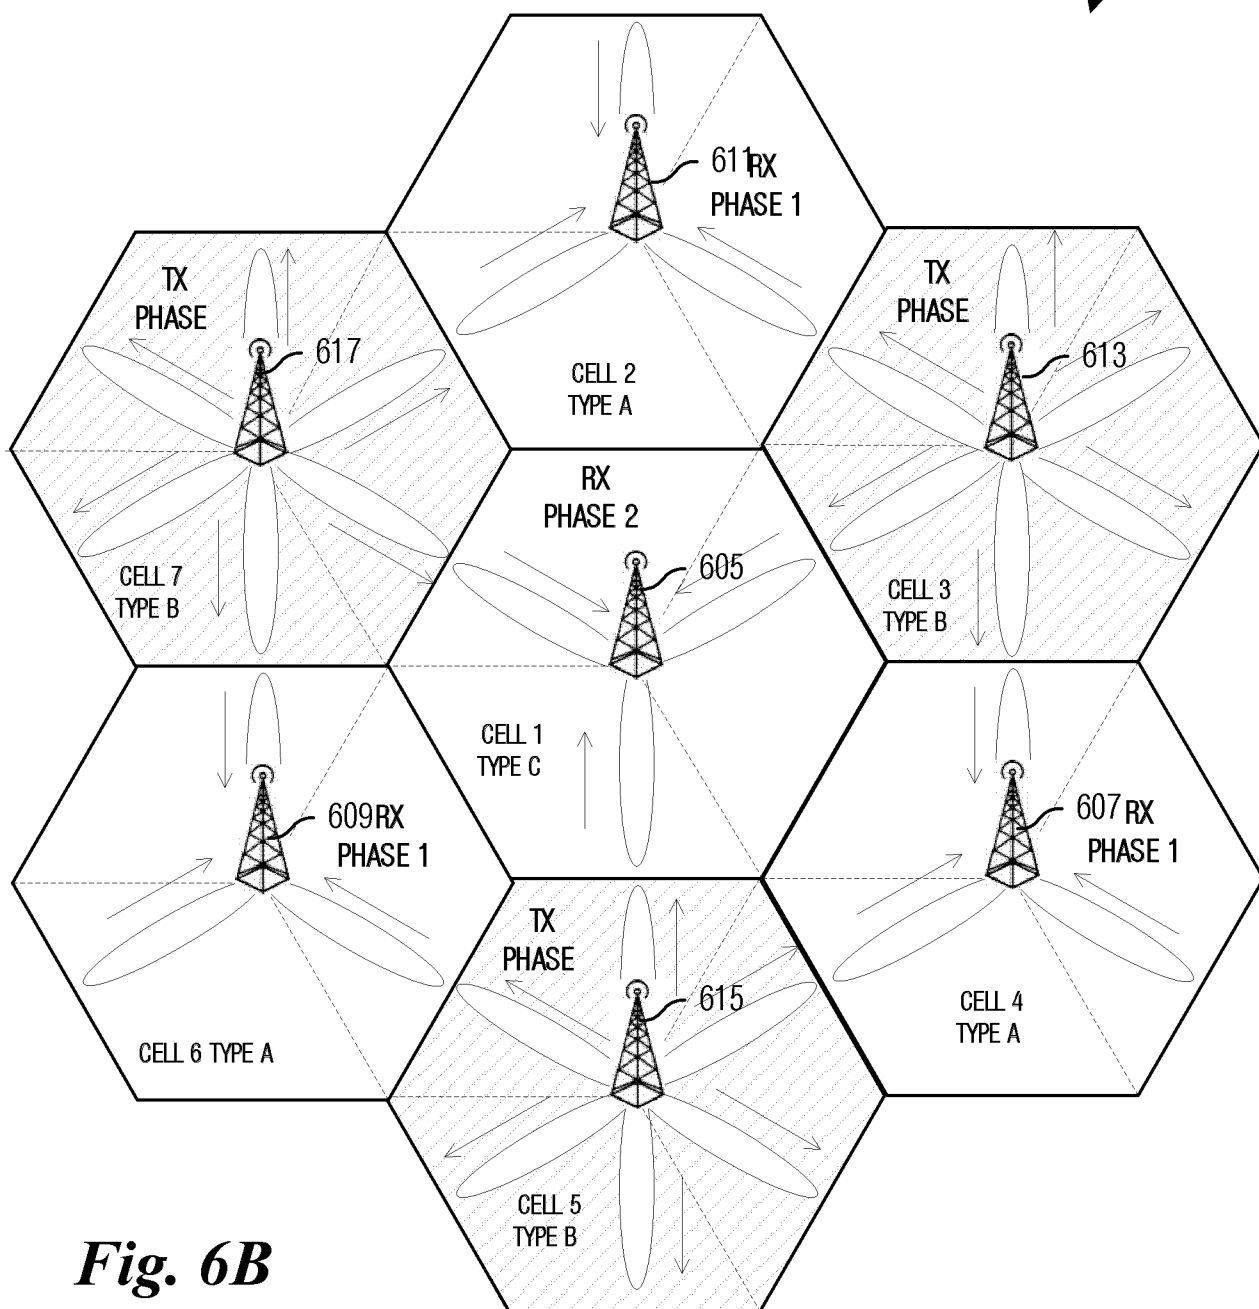


Fig. 6B

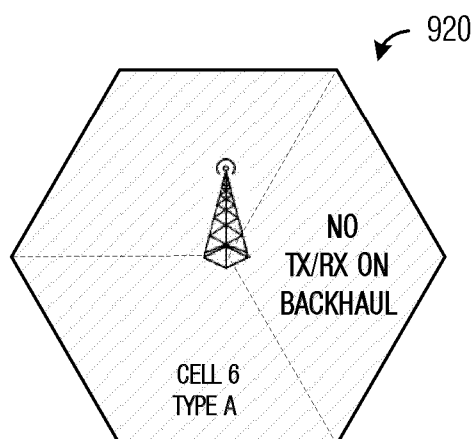


Fig. 9C

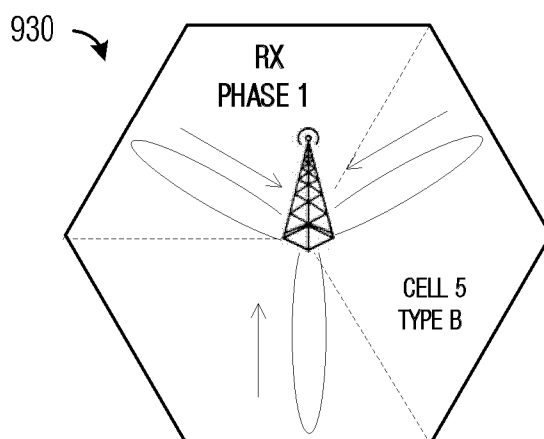


Fig. 9D

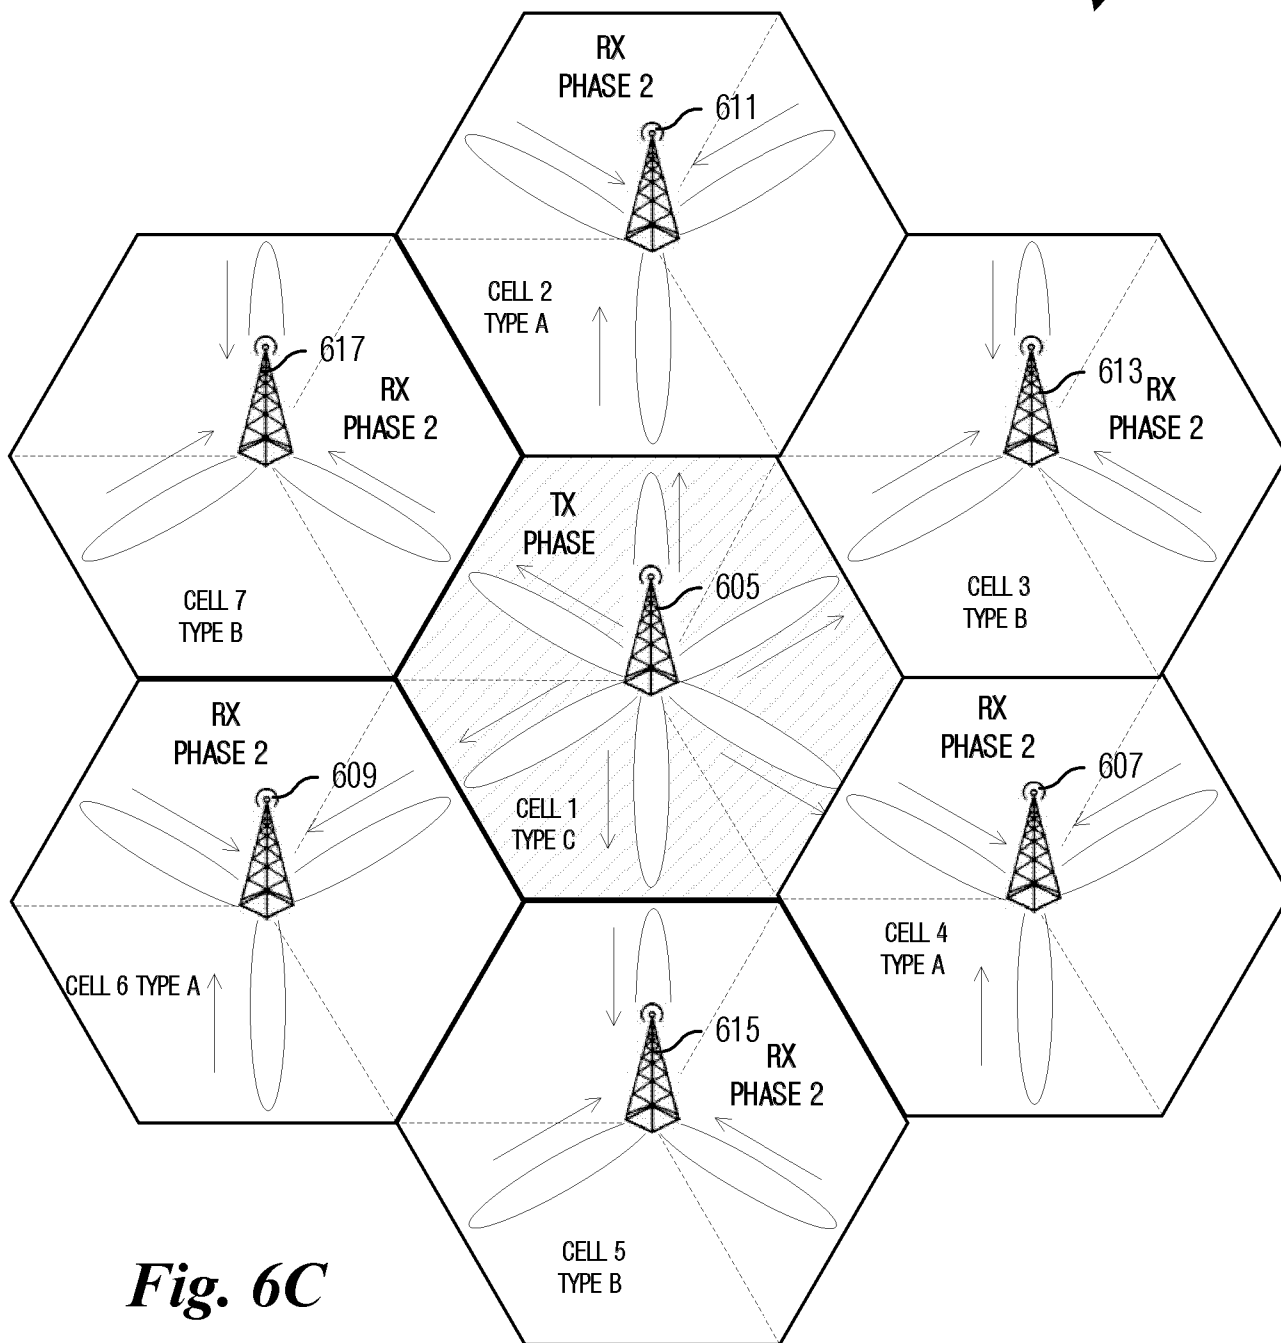


Fig. 6C

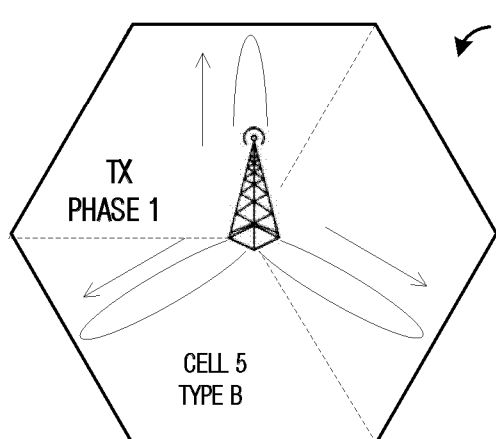


Fig. 9E

940

950

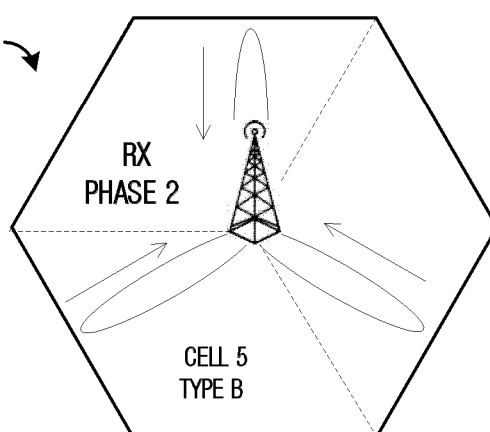
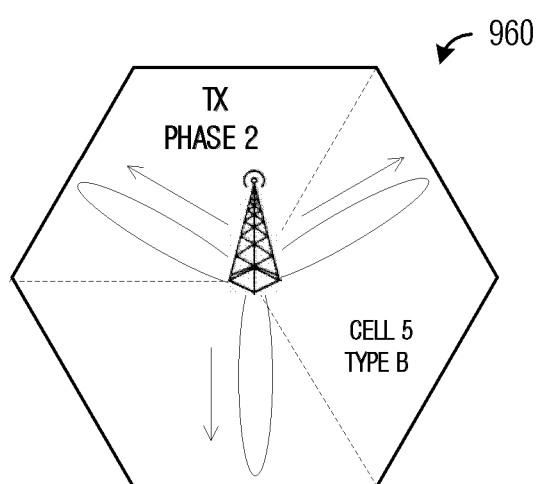
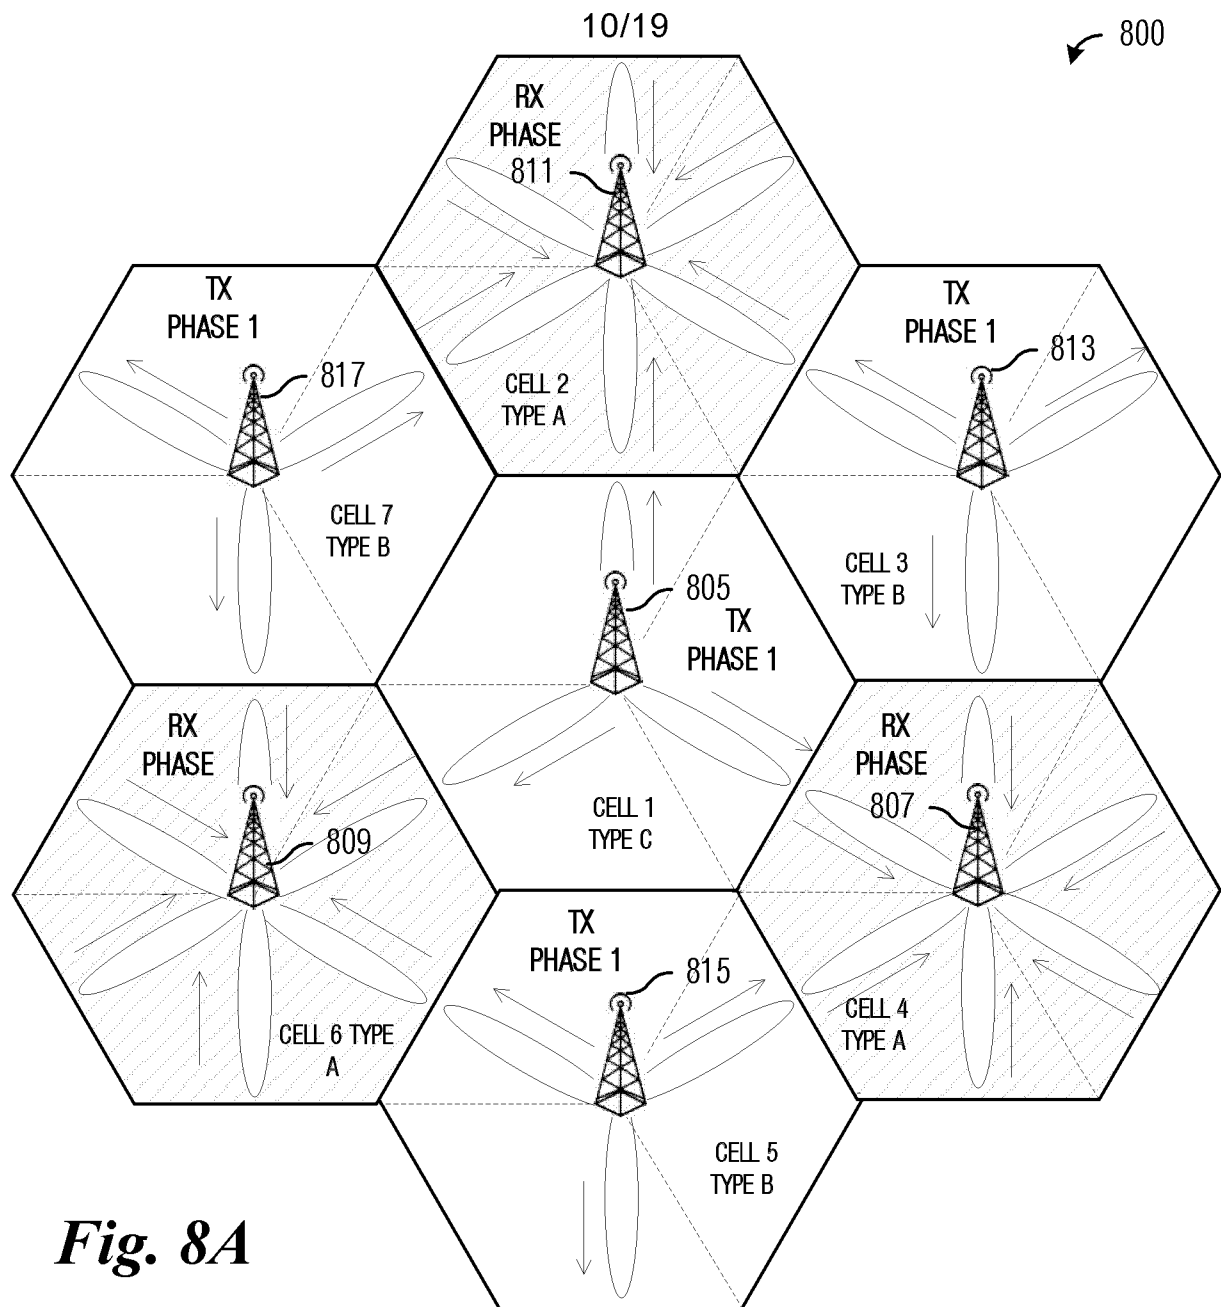


Fig. 9F



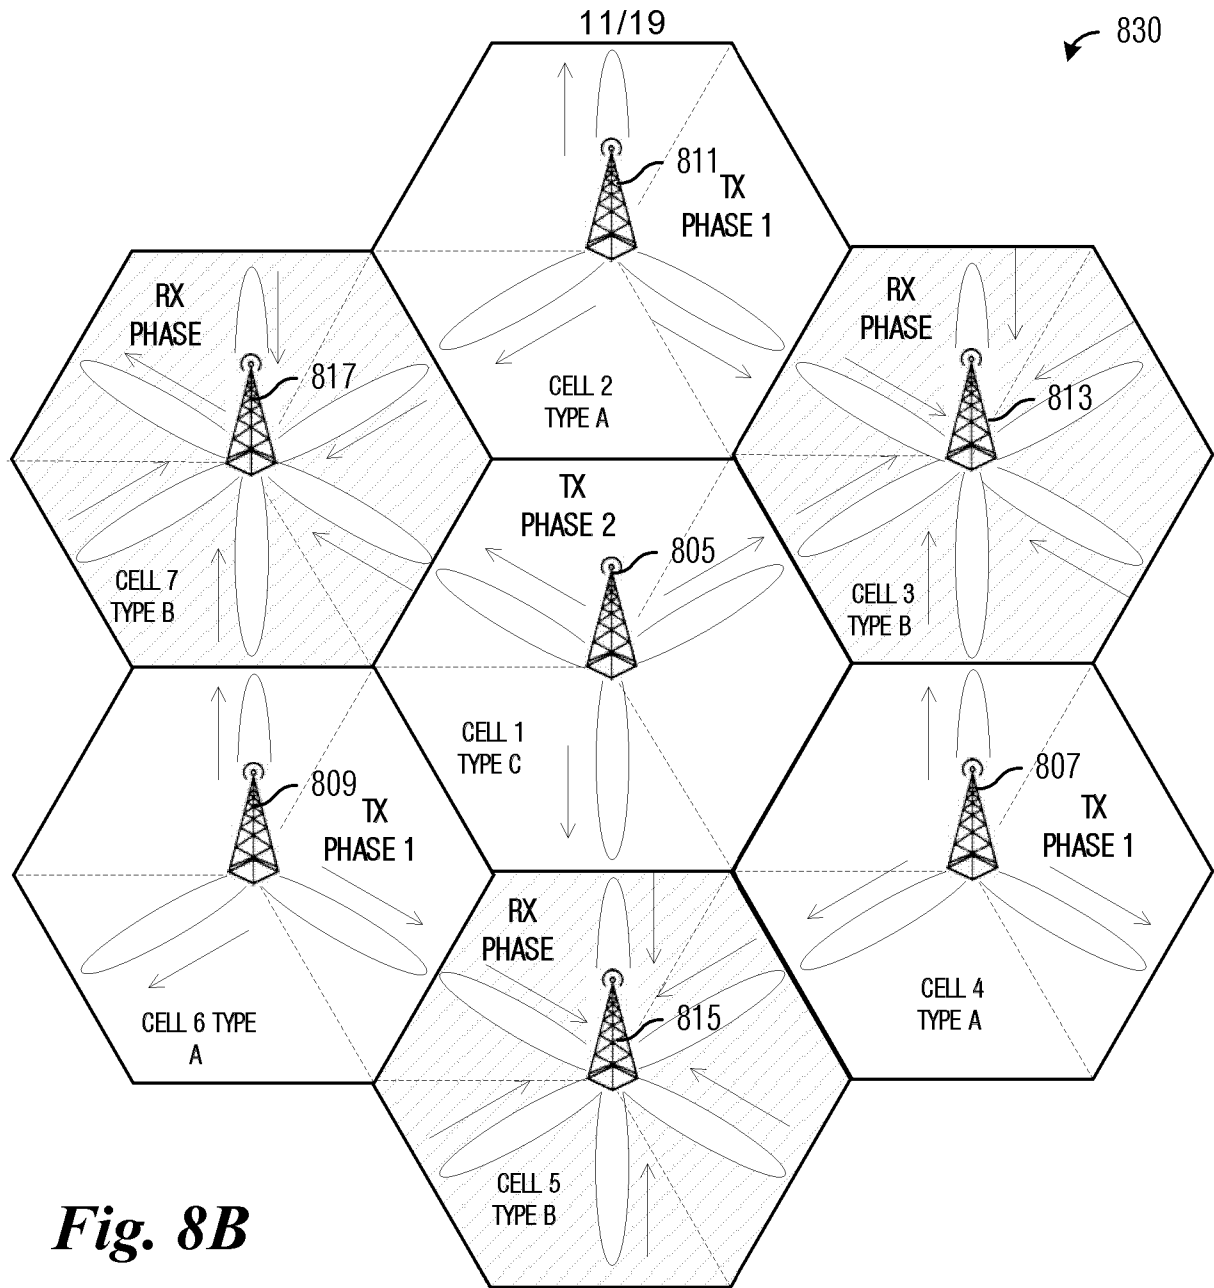


Fig. 8B



UPLINK-DOWNLINK CONFIGURATION	DOWNLINK TO UPLINK SWITCH PERIODICITY	SUBFRAME NUMBER									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

1200

6 U SUB-FRAMES FOR ACCESS
(LESS THAN 3 SUB-FRAMES IN THE BACKHAUL TDD FRAME COULD BE NEEDED TO BACKHAUL ALL THE UE DATA)

8 D SUB-FRAMES FOR ACCESS
(LESS THAN 4 SUB-FRAMES IN THE BACKHAUL TDD FRAME COULD BE NEEDED TO BACKHAUL ALL THE UE DATA)

Fig. 12

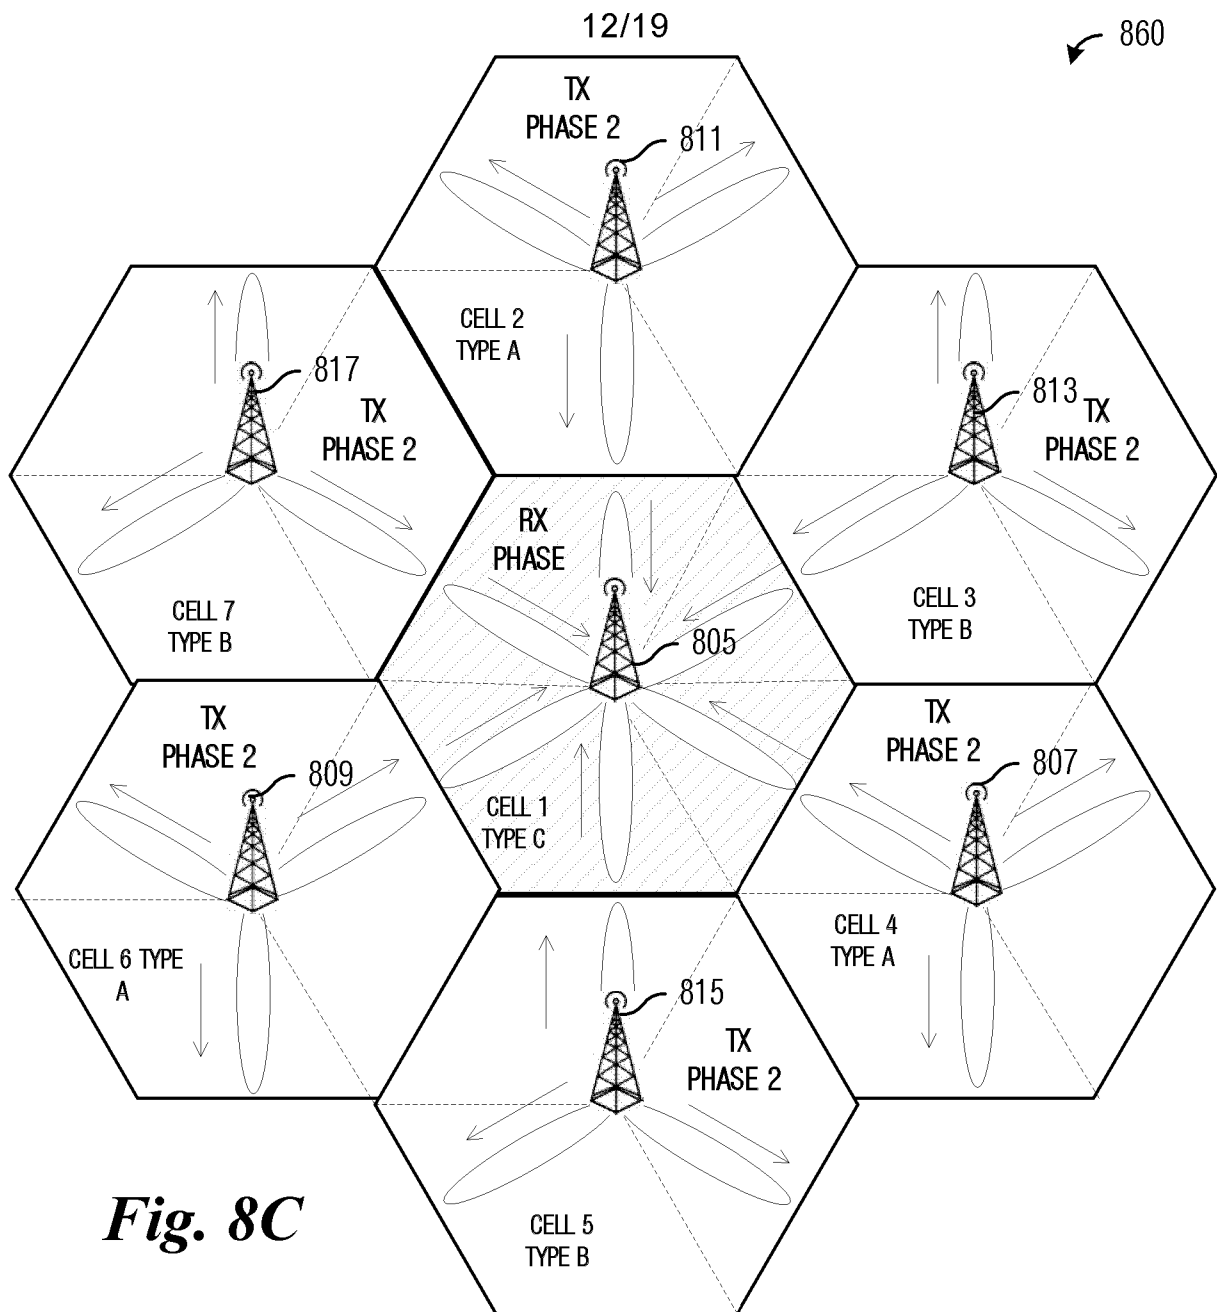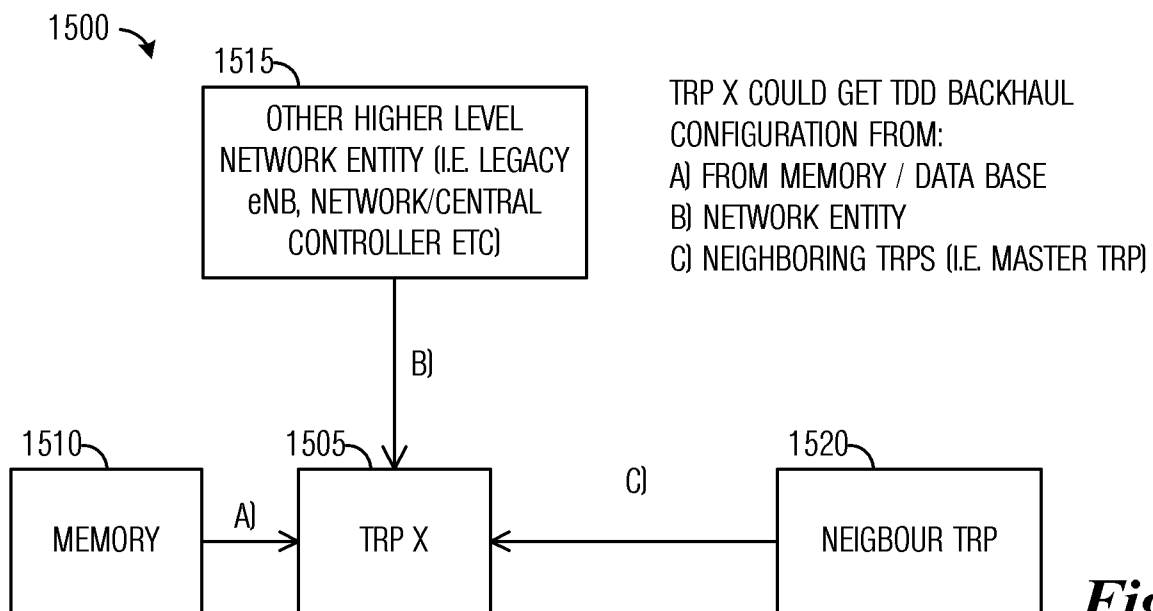**Fig. 8C****Fig. 15**

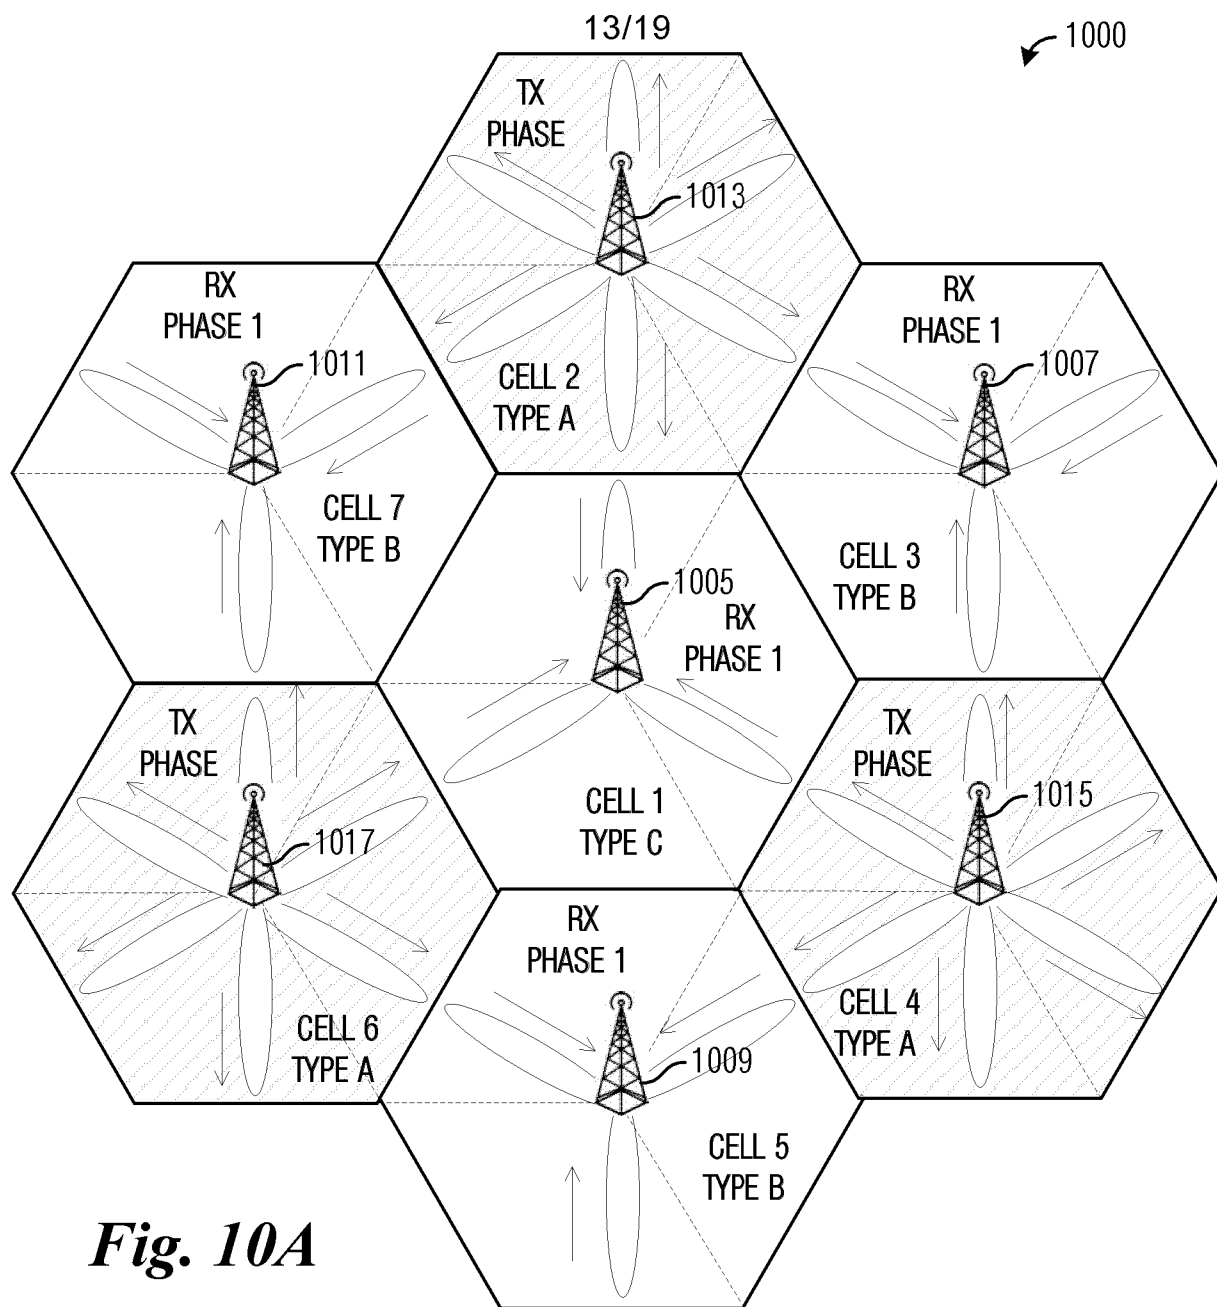


Fig. 10A

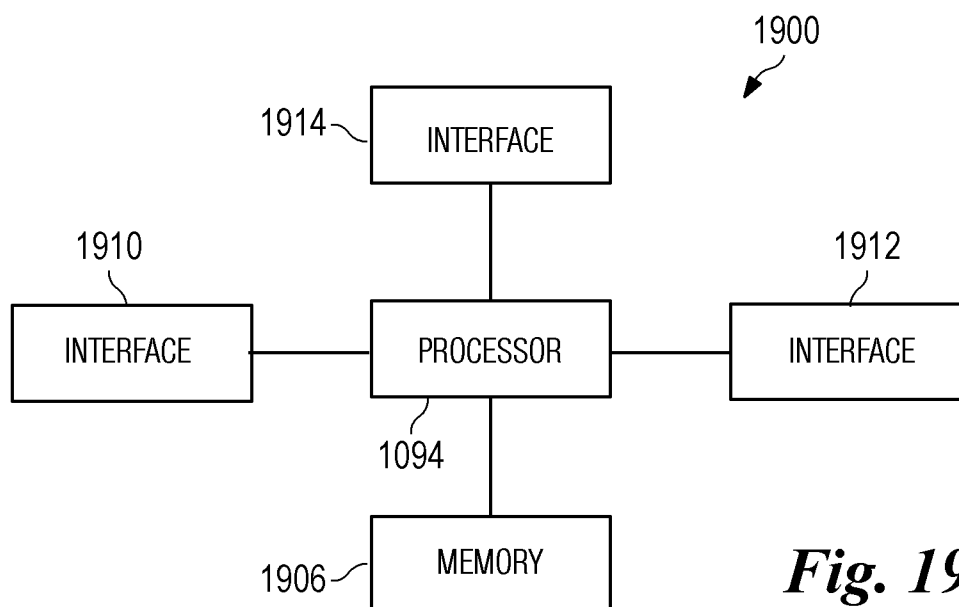


Fig. 19

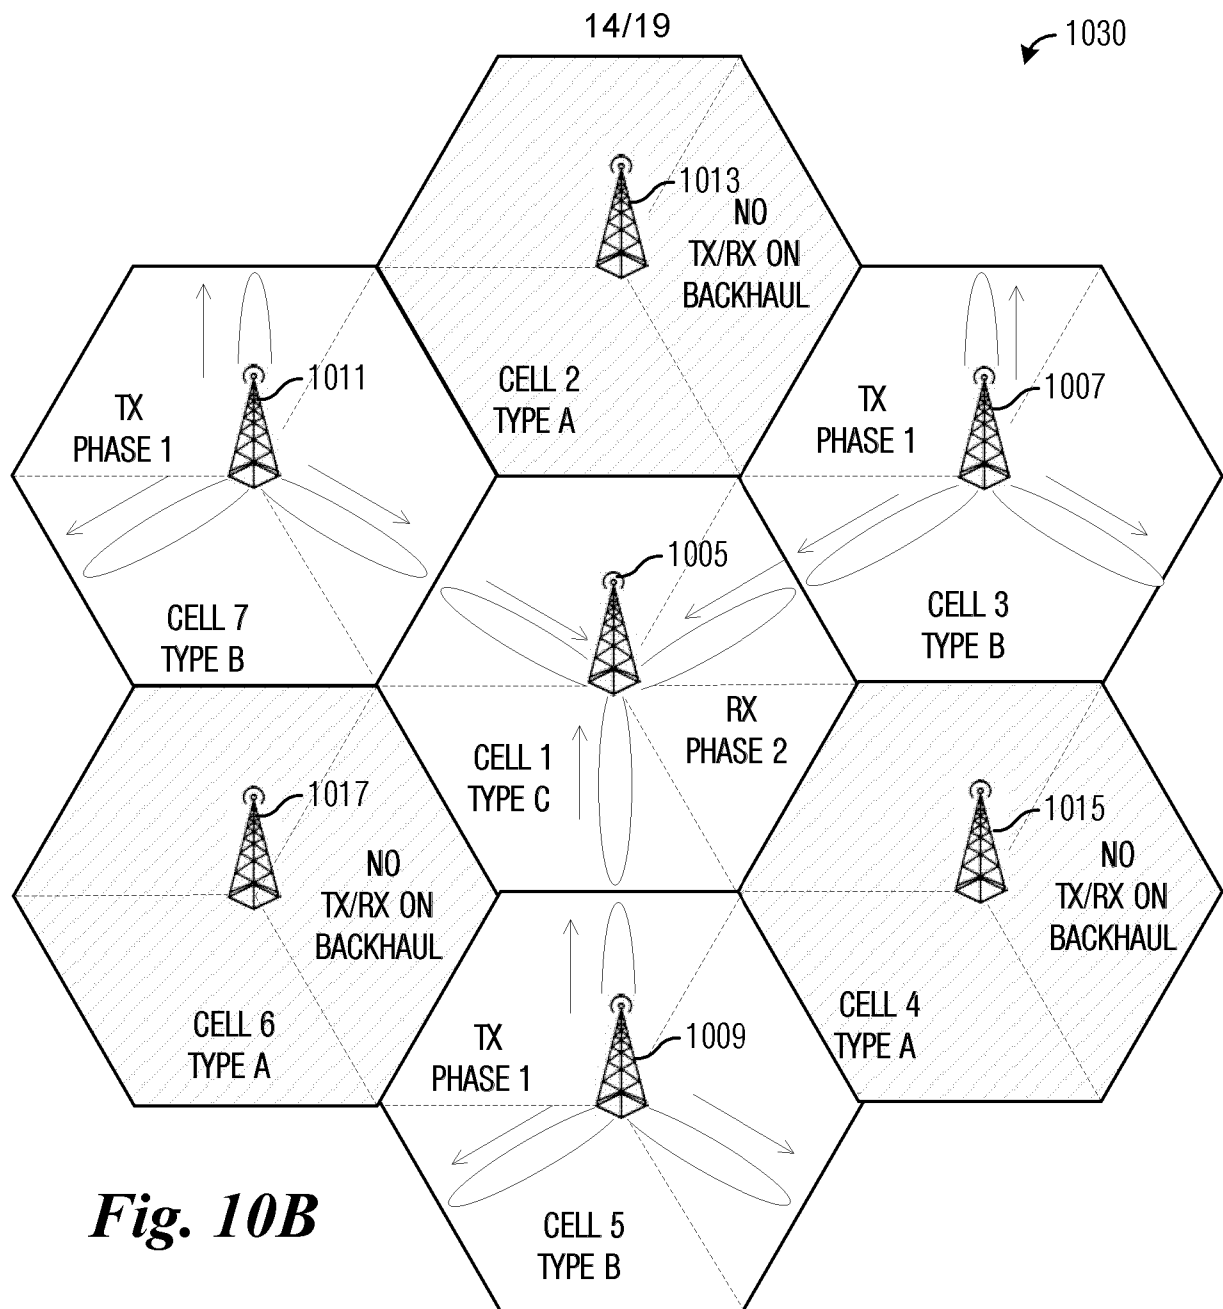


Fig. 10B

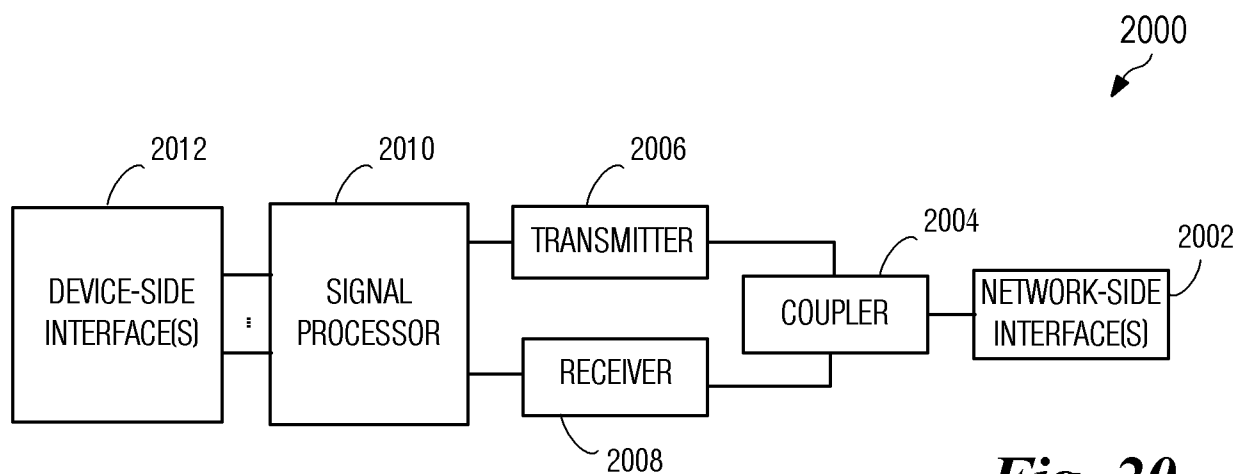
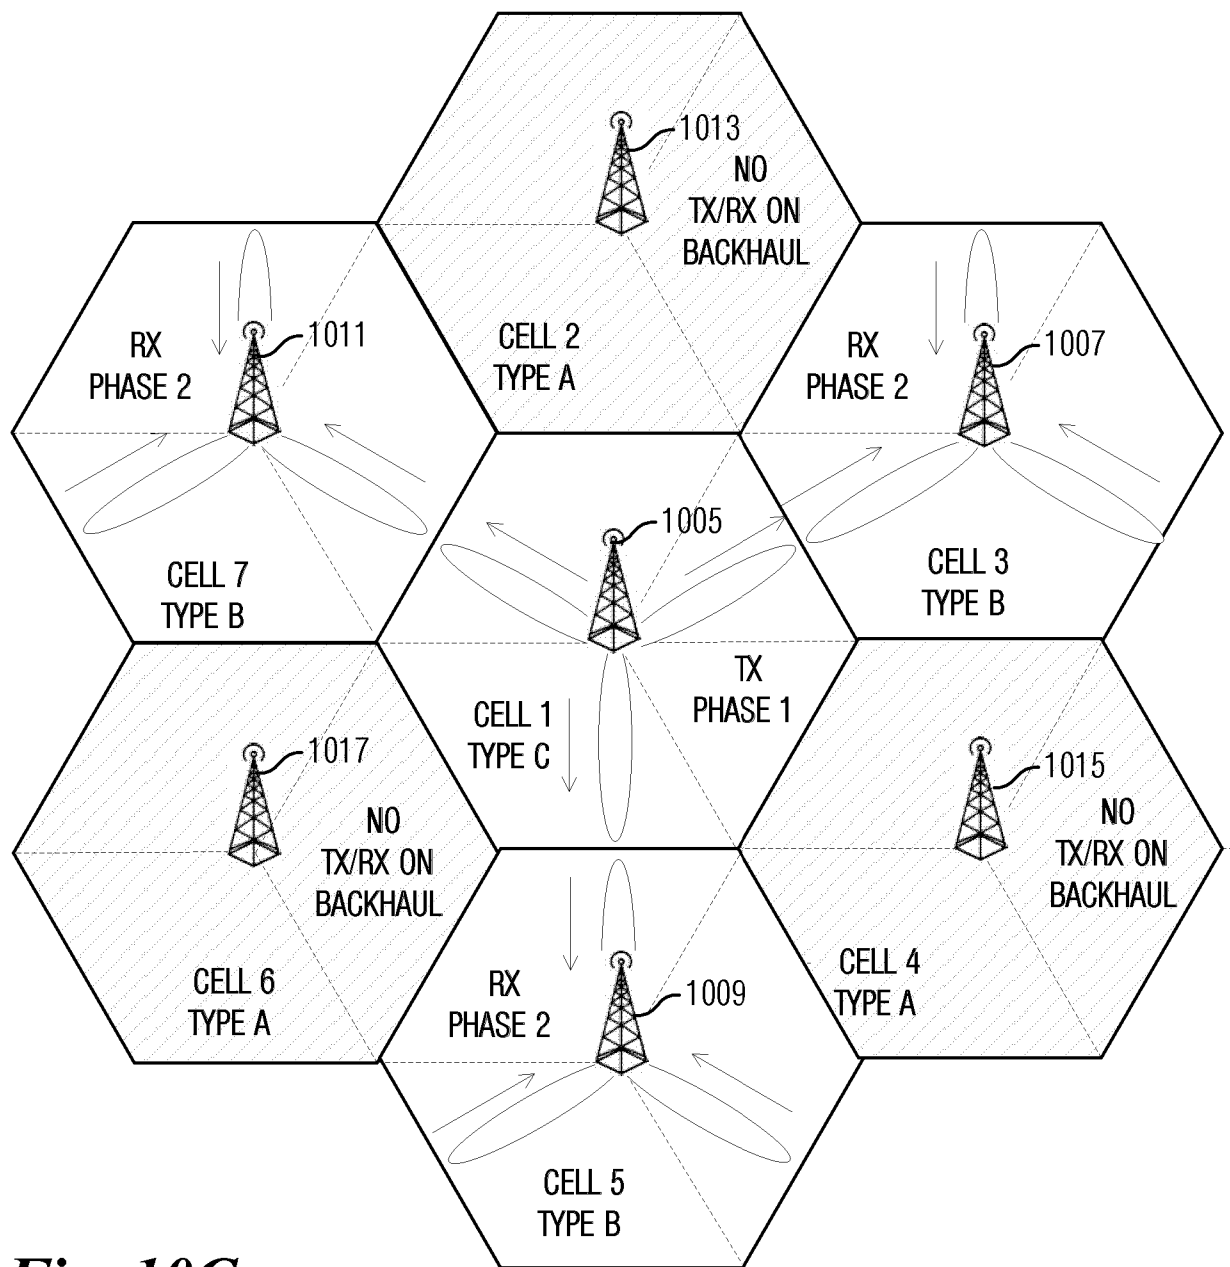
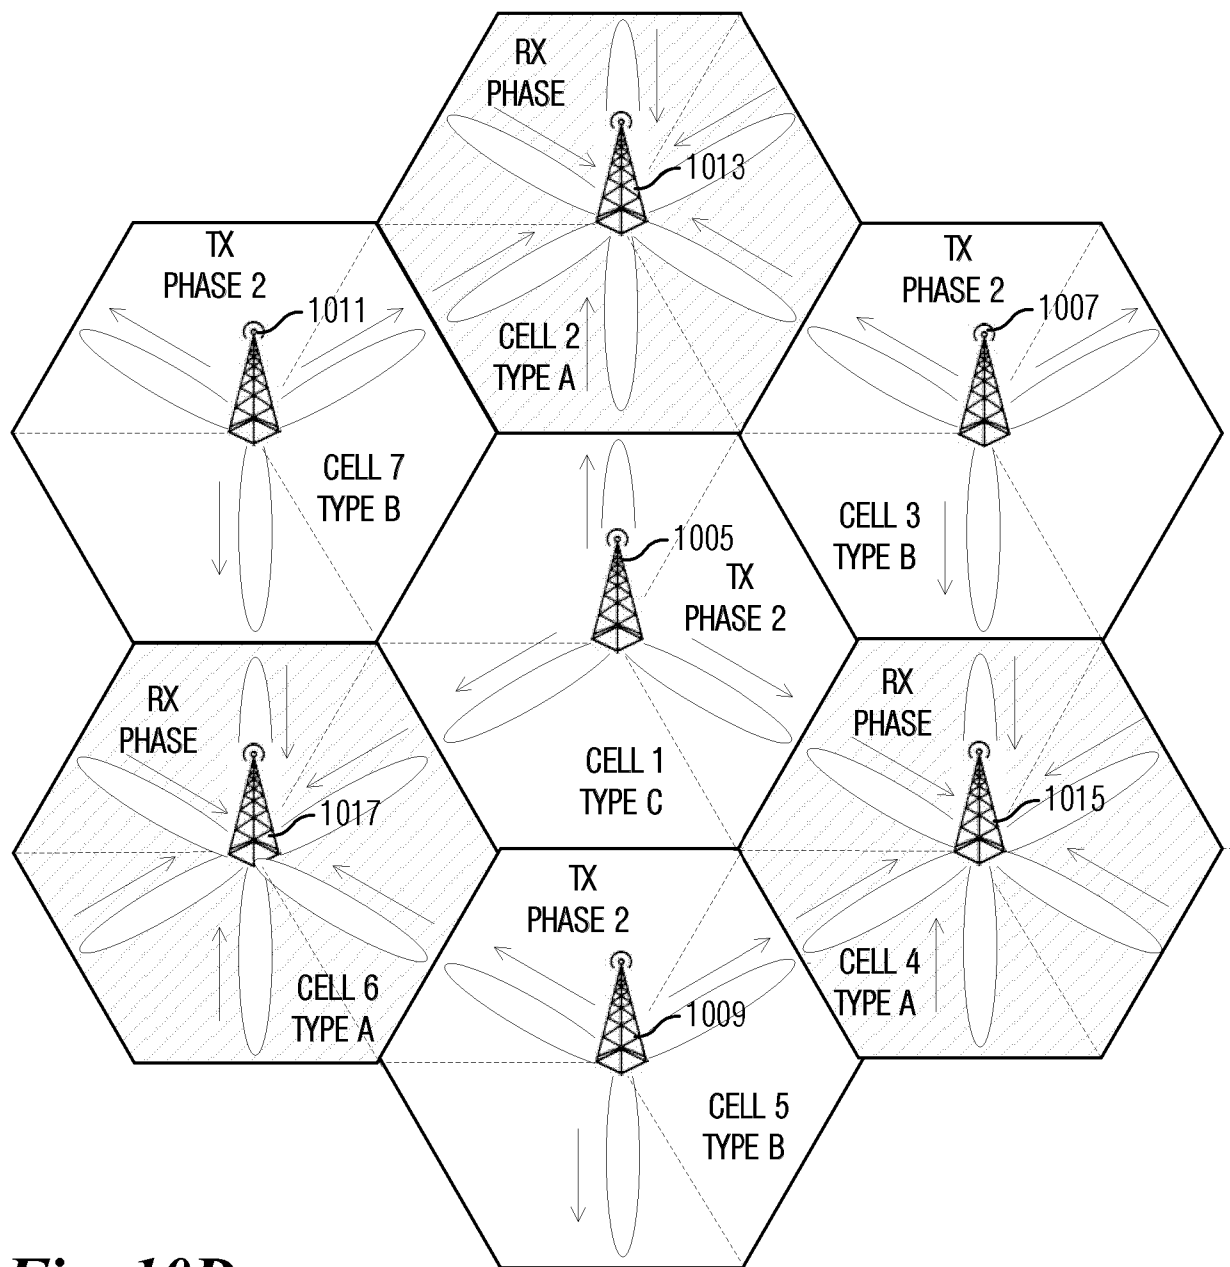
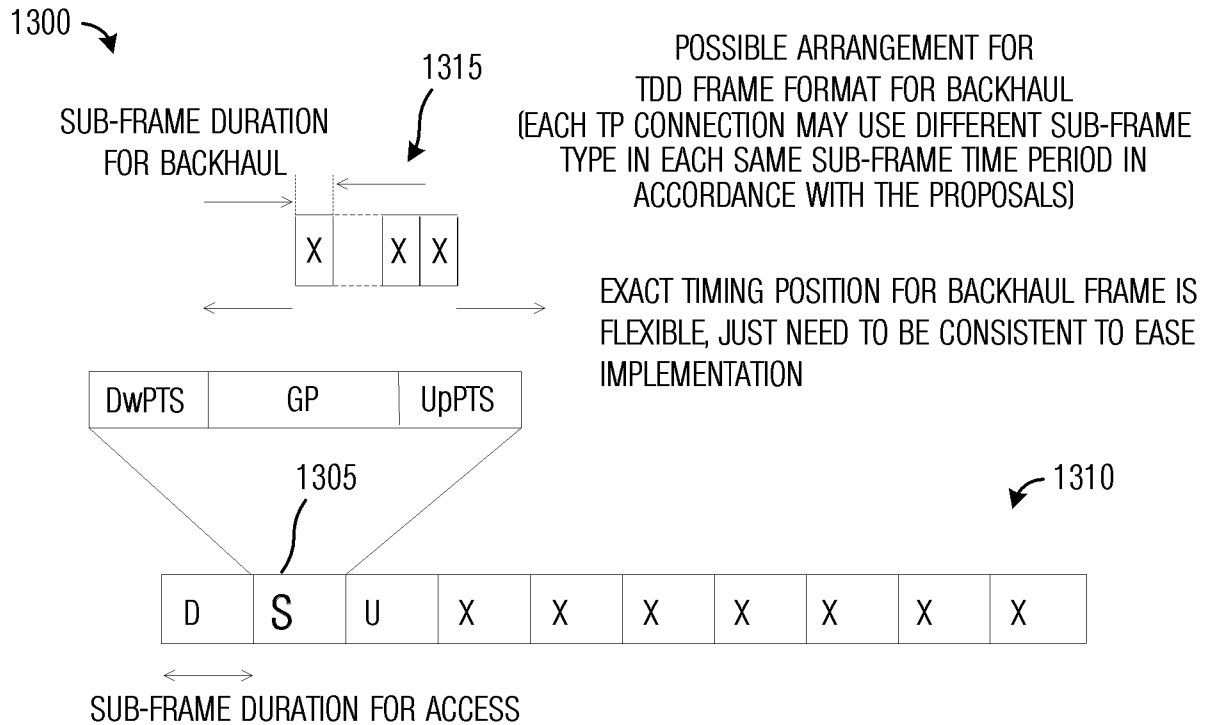
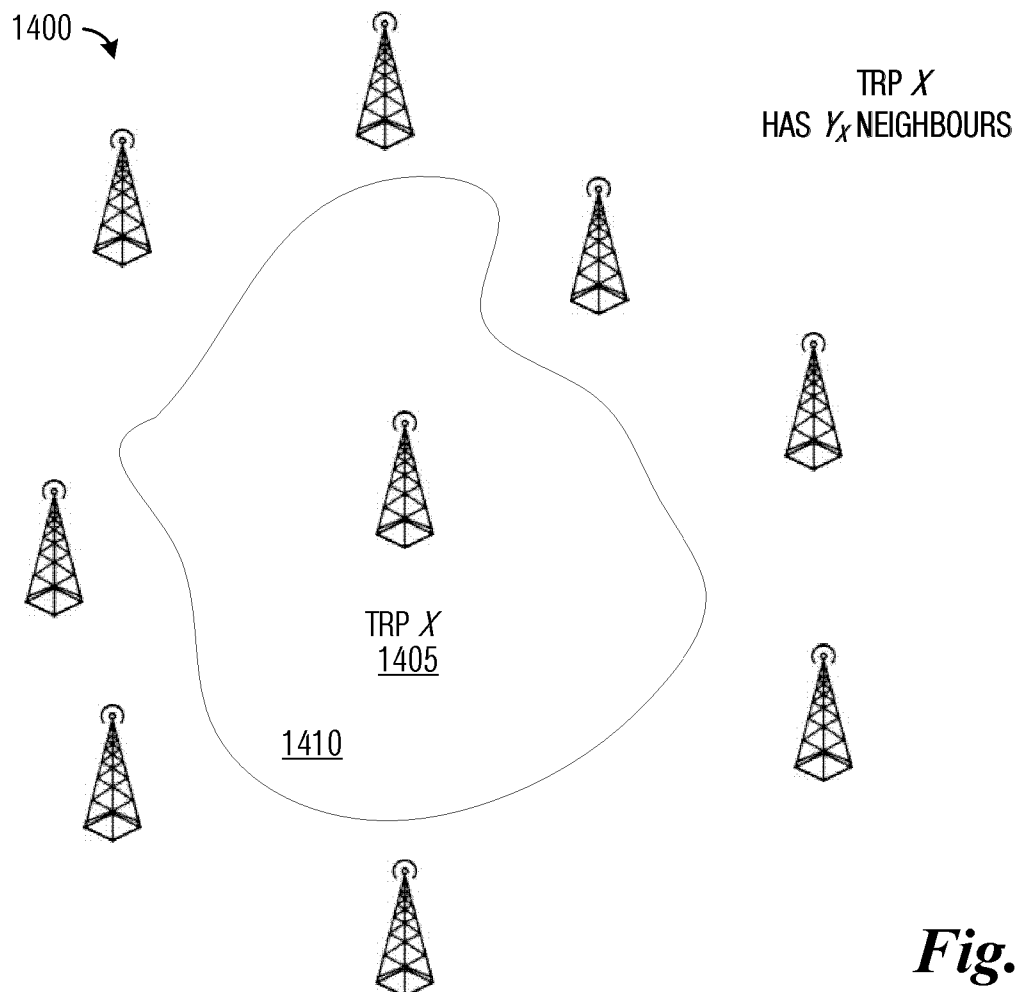
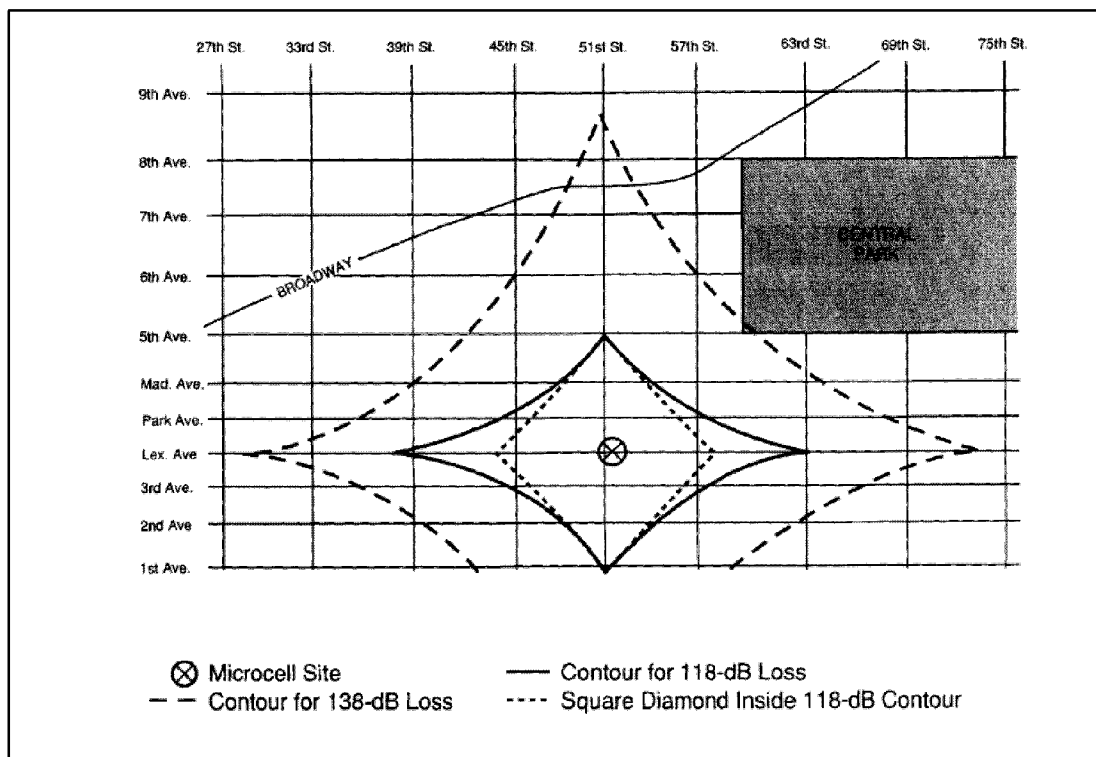
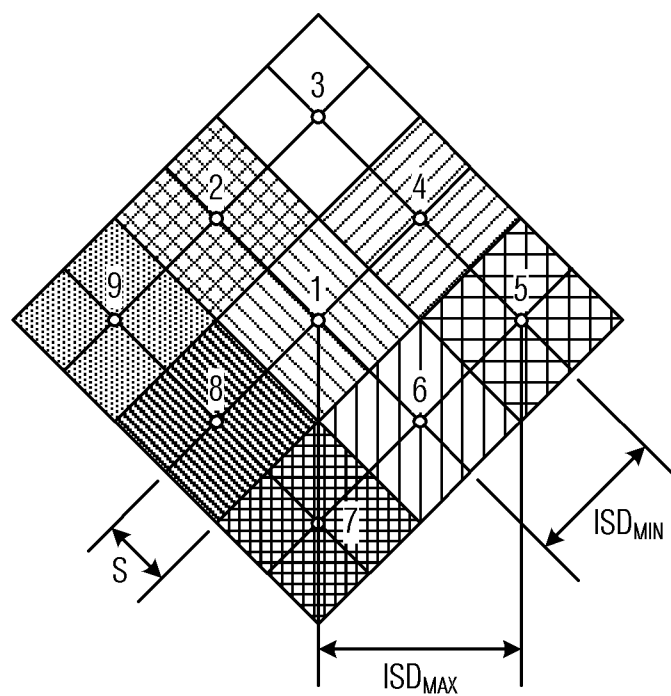




Fig. 20

**Fig. 10C**

**Fig. 10D**

**Fig. 13****Fig. 14**

*Fig. 16A*9-SITE DIAMOND
CLUSTER*Fig. 16B*

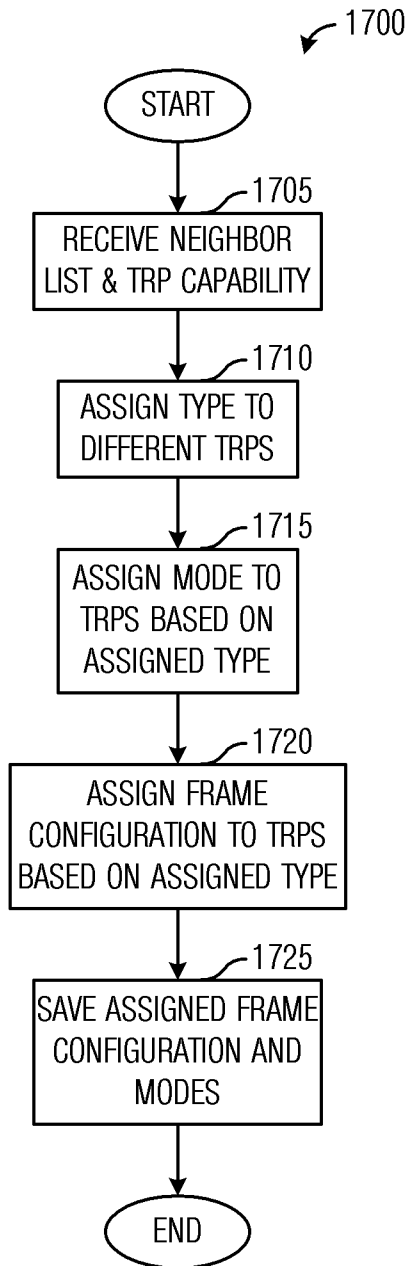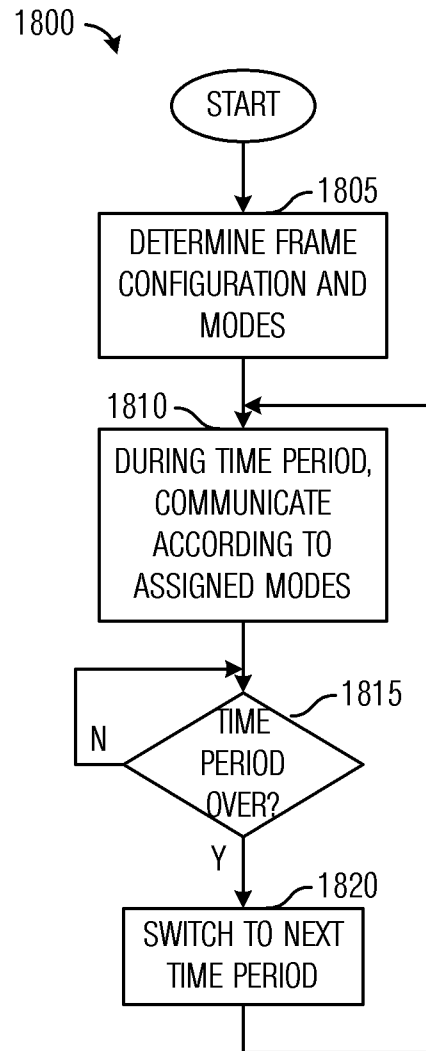**Fig. 17****Fig. 18**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2017/084614

A. CLASSIFICATION OF SUBJECT MATTER

H04W 72/04(2009.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNABS, CNPAT, WPI, EPODOC, 3GPP, IEEE: transmission, reception, cycle, time period, backhaul, mode, beam, interference, frame, sub frame, configuration, type, TRP, TDD, Time Division Multiplex

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011018722 A1 (NOKIA CORPORATION) 17 February 2011 (2011-02-17) description, paragraphs [0021]-[0067], claims 1-13	19-21, 26-27
A	US 2012002591 A1 (ELECTRONICS AND TELECOMMUNICATIONS RESEARCH INSTITUTE) 05 January 2012 (2012-01-05) the whole document	1-27
A	CN 102468904 A (ZTE CORPORATION) 23 May 2012 (2012-05-23) the whole document	1-27
A	CN 101877856 A (NEW POST COMMUNICATION EQUIPMENT CO., LTD.) 03 November 2010 (2010-11-03) the whole document	1-27
A	CN 102196581 A (ZTE CORPORATION) 21 September 2011 (2011-09-21) the whole document	1-27

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

19 July 2017

Date of mailing of the international search report

27 July 2017

Name and mailing address of the ISA/CN

STATE INTELLECTUAL PROPERTY OFFICE OF THE
P.R.CHINA
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Facsimile No. (86-10)62019451

Authorized officer

LI, Yan

Telephone No. (86-10)61648550

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2017/084614

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
WO	2011018722	A1	17 February 2011	RU	2012108961	A	20 September 2013
				US	2012147810	A1	14 June 2012
				BR	112012003360	A2	14 February 2017
				ZA	201201782	B	25 September 2013
				EP	2465313	A1	20 June 2012
				CN	102598818	A	18 July 2012
US	2012002591	A1	05 January 2012	EP	2660995	A1	06 November 2013
				KR	20130028955	A	20 March 2013
				WO	2010107234	A2	23 September 2010
				EP	2410668	A2	25 January 2012
				CN	102428660	A	25 April 2012
				KR	20100105451	A	29 September 2010
CN	102468904	A	23 May 2012	None			
CN	101877856	A	03 November 2010	None			
CN	102196581	A	21 September 2011	None			