



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**
(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/01/16 (87) Date publication PCT/PCT Publication Date: 2017/07/20 (85) Entrée phase nationale/National Entry: 2018/07/16 (86) N° demande PCT/PCT Application No.: CN 2017/071258 (87) N° publication PCT/PCT Publication No.: 2017/121404 (30) Priorités/Priorities: 2016/01/14 (US62/278,437); 2016/07/18 (US62/363,344)	(51) Cl.Int./Int.Cl. <i>H04W 28/18</i> (2009.01) (71) Demandeur/Applicant: HUAWEI TECHNOLOGIES CO., LTD., CN (72) Inventeurs/Inventors: ZHANG, JIAYIN, CN; MA, CHIXIANG, CN; LUO, JUN, CN (74) Agent: GOWLING WLG (CANADA) LLP
---	---

(54) Titre : APPAREIL ET METHODE DE TRANSMISSION DE DONNEES DANS UN RESEAU LOCAL SANS FIL
(54) Title: DATA TRANSMISSION METHOD AND APPARATUS IN WLAN

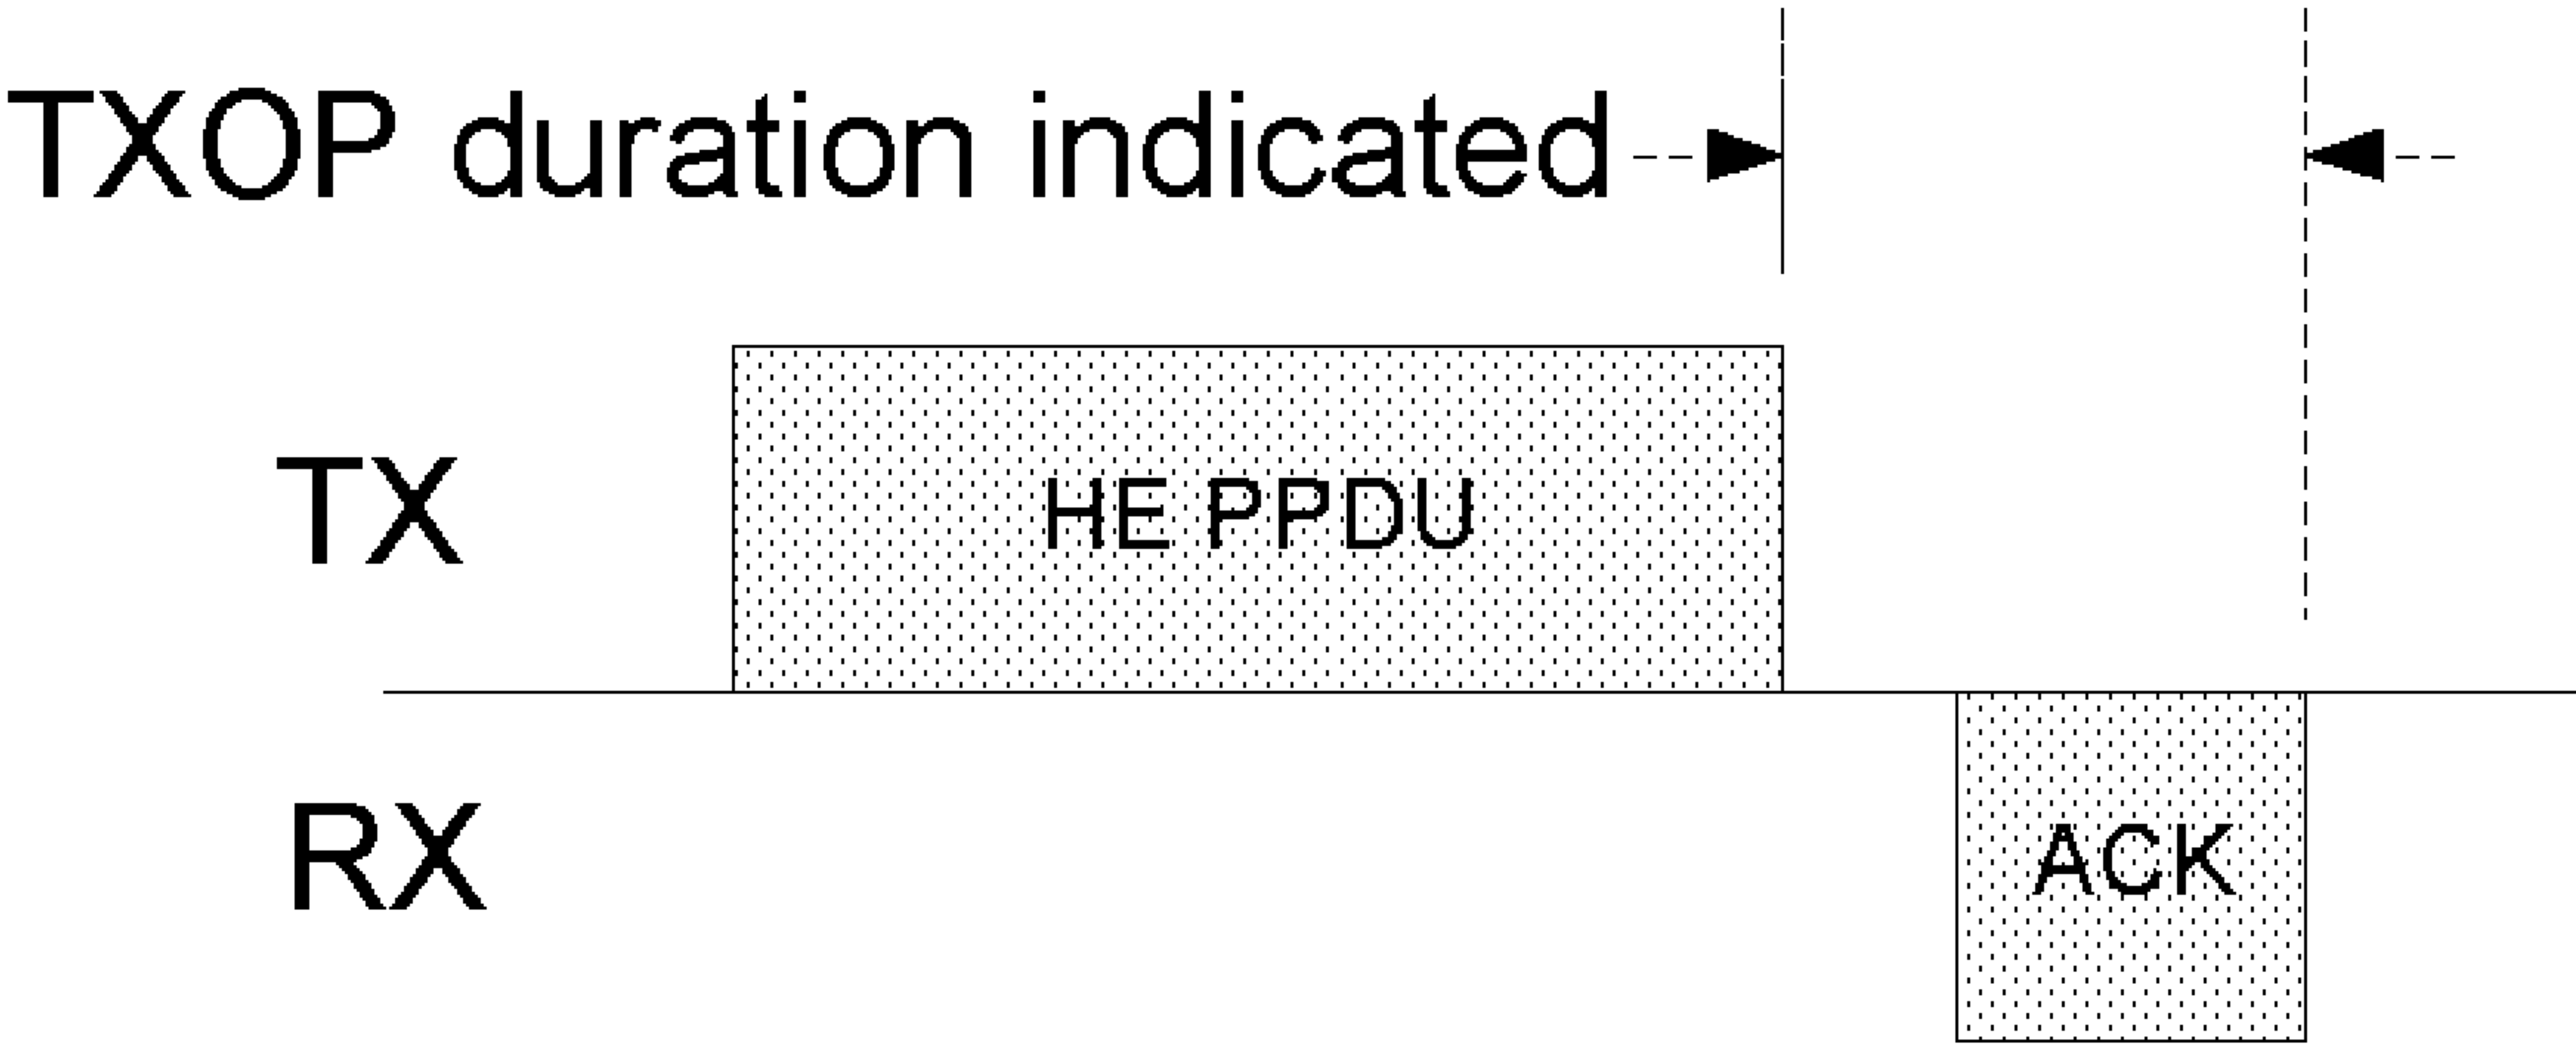


Figure 3

(57) **Abrégé/Abstract:**
A method for indicating TXOP duration in a wireless communication system, comprising: generating, by a TXOP holder, a physical layer protocol data unit (PPDU), the High Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the TXOP duration field is used to indicate the remaining time for using the channel by the station to other stations; wherein the TXOP duration field includes a first part which is used to indicate the granularity used, and a second part which is used to indicate the TXOP duration using the granularity indicated by the first part; so as that different granularities are able to be used to indicate different TXOP duration in the system; sending, the generated PPDU.

- (51) International Patent Classification:
H04W 28/18 (2009.01)

(21) International Application Number:
PCT/CN2017/071258

(22) International Filing Date:
16 January 2017 (16.01.2017)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/278,437 14 January 2016 (14.01.2016) US
62/363,344 18 July 2016 (18.07.2016) US

(71) Applicant: **HUAWEI TECHNOLOGIES CO., LTD.**
[CN/CN]; Huawei Administration Building, Bantian,
Longgang District, Shenzhen, Guangdong 518129 (CN).

(72) Inventors: **ZHANG, Jiayin**; Huawei Administration
Building, Bantian, Longgang District, Shenzhen, Guang-
dong 518129 (CN). **MA, Chixiang**; Huawei Administra-
tion Building, Bantian, Longgang District, Shenzhen,
Guangdong 518129 (CN). **LUO, Jun**; Huawei Administra-
tion Building, Bantian, Longgang District, Shenzhen,
Guangdong 518129 (CN).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,
KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA,
MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG,
NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS,
RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY,
TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:
— with international search report (Art. 21(3))

(54) Title: DATA TRANSMISSION METHOD AND APPARATUS IN WLAN

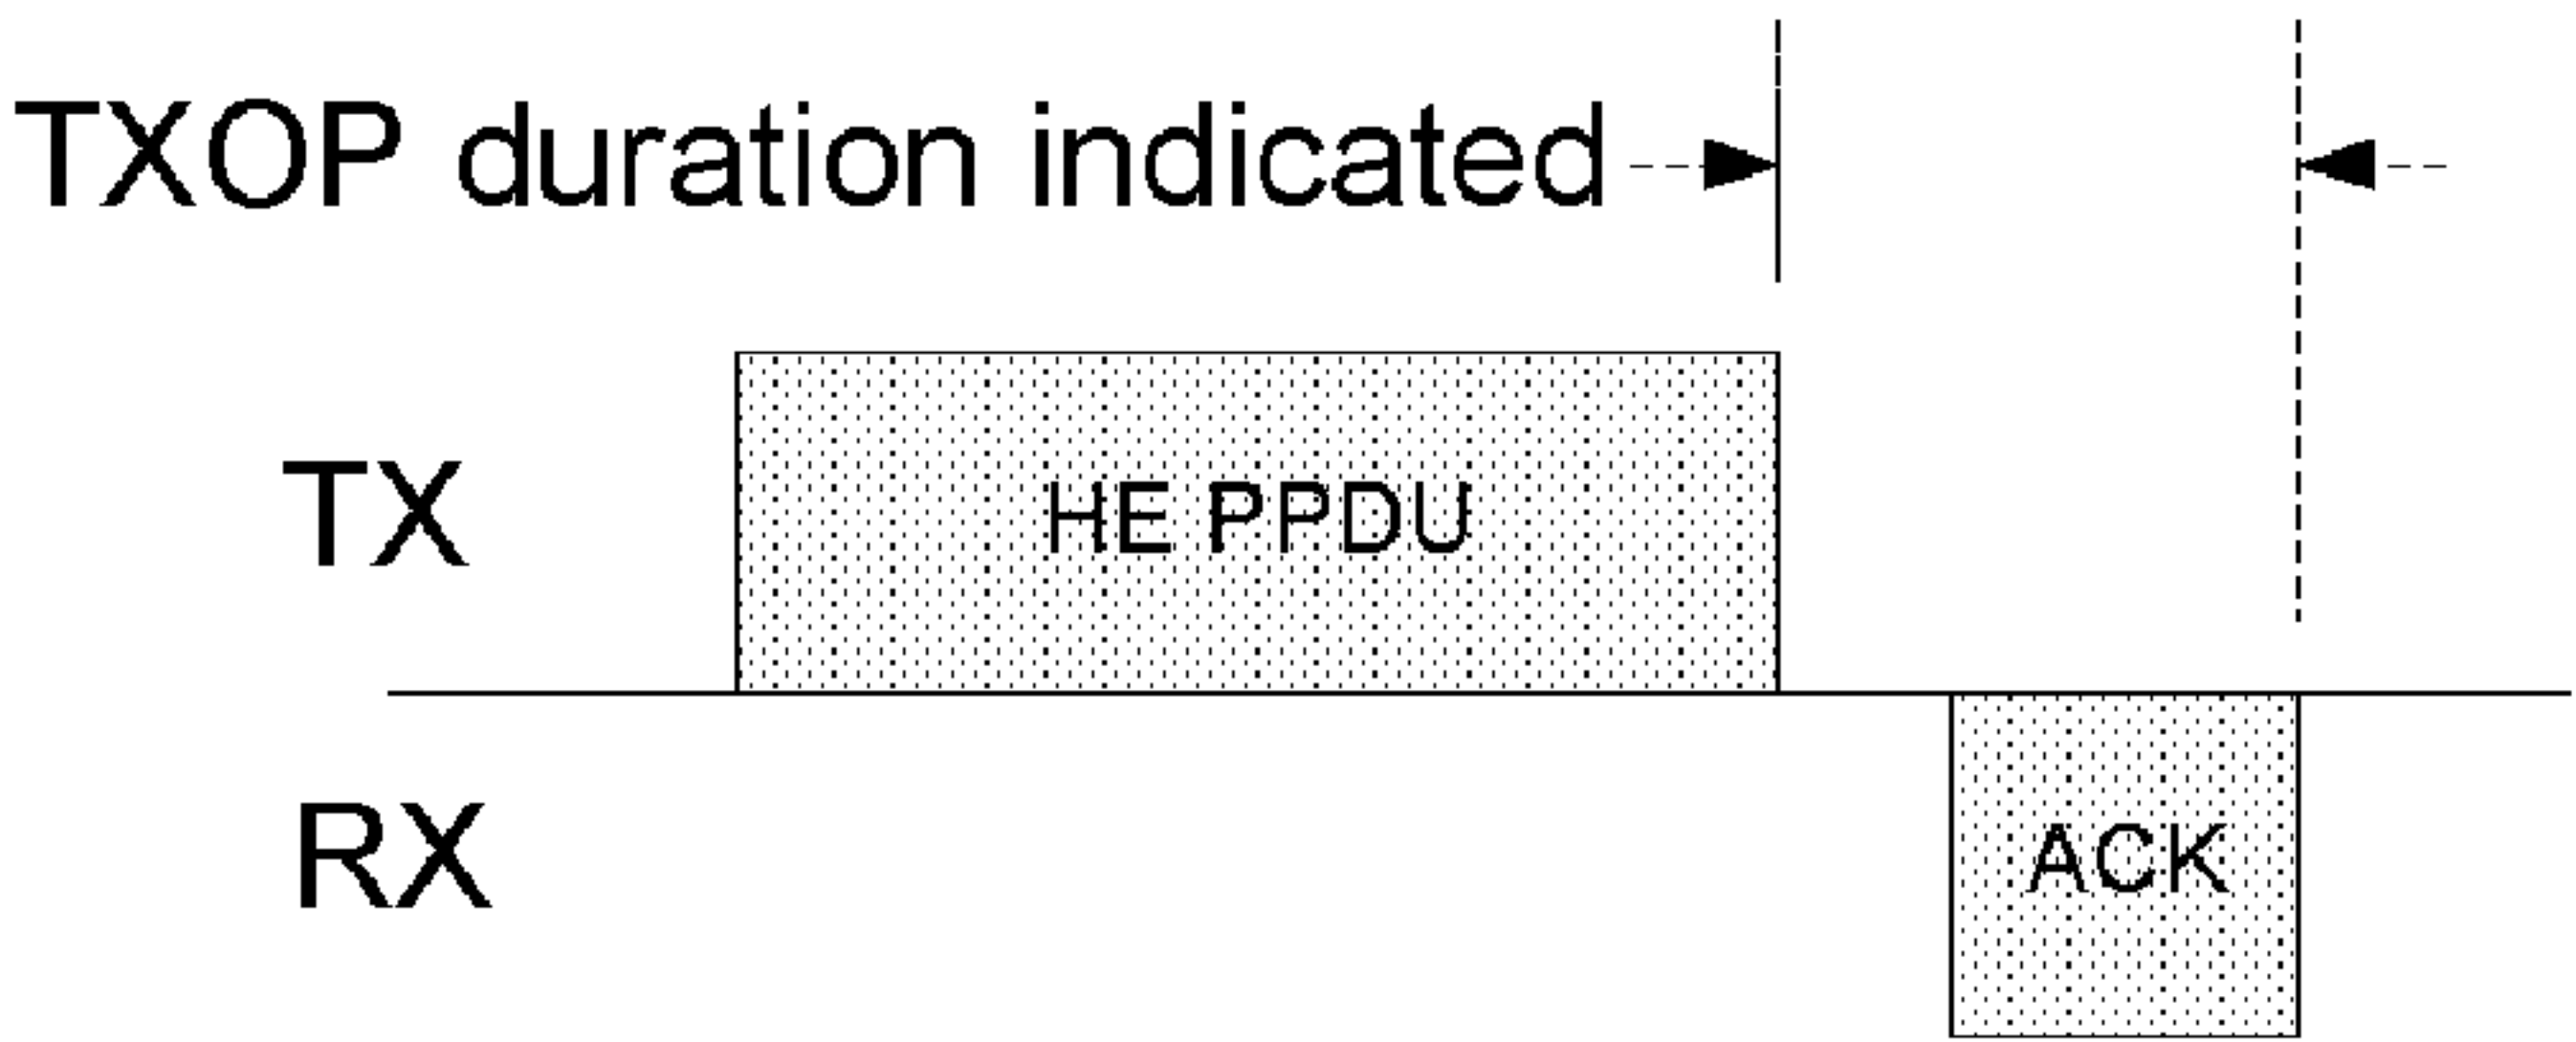


Figure 3

(57) **Abstract:** A method for indicating TXOP duration in a wireless communication system, comprising: generating, by a TXOP holder, a physical layer protocol data unit (PPDU), the High Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the TXOP duration field is used to indicate the remaining time for using the channel by the station to other stations; wherein the TXOP duration field includes a first part which is used to indicate the granularity used, and a second part which is used to indicate the TXOP duration using the granularity indicated by the first part; so as that different granularities are able to be used to indicate different TXOP duration in the system; sending, the generated PPDU.

Data Transmission Method and Apparatus in WLAN

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 62/278,437, filed
 5 on January 14, 2016, and priority to U.S. Provisional Application No. 62/363,344, filed on July
 18, 2016. All of the afore-mentioned patent applications are hereby incorporated by reference
 in their entireties.

DEFINITION OF ABBREVIATIONS

10 HE: high efficiency
 HE-SIGA: High Efficiency Signal field A
 SU: single user
 MU: multiple user
 PPDU: physical layer protocol data unit
 15 PHY: physical layer
 MAC: medium access control layer
 EDCA: enhanced distributed channel access
 QoS: quality of service
 SR: spatial reuse
 20 DL: downlink
 UL: uplink
 NAV: network allocation vector
 ACK: acknowledge
 LGI: long guard interval
 25 STF: short training field
 LTF: long training field
 SIG: signal field
 RTS: request to send
 L-SIG: non-HT signal field
 30 L-STF: non-HT short training field
 L-LTF: non-HT long training field
 RL-SIG: repeated non-HT signal field

SIFS: short interframe space
 TXOP: transmission opportunity
 SS: simulation scenario
 SLS: system level simulation
 5 CF: contention free
 CF-Poll: contention free poll
 CF-END: contention free end

FIELD OF THE INVENTION

10 The present invention relates to the field of communications technologies, and more specifically, to a method for transceiving in a WLAN and an apparatus.

BACKGROUND OF THE INVENTION

Wireless Local Area Networks (WLAN) is a data transmission system. It uses radio
 15 frequency (RF) technology to replace the old twisted-pair copper wire formed by the local area network, making the wireless local area network can use a simple access architecture allows users through it, to achieve the purpose of information transmission. The development and application of WLAN technology has deeply changed people's communication way and working way, and brought people unprecedented convenience. With the wide application of
 20 intelligent terminals, the demand for data network traffic is increasing day by day.

WLAN development is inseparable from the development and application of its standards, including IEEE802.11 series is the main standard, there are 802.11, 802.11b / g / a, 802.11n, 802.11ac. In addition to 802.11 and 802.11b other standards are used Orthogonal Frequency
 25 Division Multiplexing, OFDM technology as the physical layer of the core technology.

SUMMARY OF THE INVENTION

In 802.11ax, the field of transmission opportunity (TXOP) duration was included in HE-SIGA of SU PPDU, DL MU PPDU or UL MU PPDU, in order to replace the Duration in MAC header in former standards. However the number of bit is still TBD.

30 The TXOP duration is the time remaining for a station (STA) to use a channel. For example, a STA sends a packet of 1ms, which is not counted in the remaining time of using the channel by the STA, because the 1 ms has already been used. TXOP duration indicates the

remaining time during which a channel is available for using by the station, such as 3ms. There is a limit to the value of the remaining time.

Duration field in a MAC header has 16 bits (15 valid bits) in the units of 1 μ s. It can indicate the maximum time duration of 32.767ms.

5 In this application, we further discuss a solution which increases the efficiency of the indication of TXOP duration. In the method, the station generates a PPDU, which carries a TXOP field (TXOP duration) in the HE-SIGA of the PPDU, which is used for notifying the other station of the remaining time of using the channel by the station, wherein the TXOP field can be indicated in different granularities (units). The PPDU is sent by the station. In a example,
10 the TXOP field occupies 7 bitts, being indicated by two different granularities. For example, the two different granularities include 8 μ s and 256 μ s.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 illustrates an embodiment of indication of TXOP duration;
15 Figure 2 illustrates the performance degradation of the opt1, 2, 3 and fixed 64 μ s;
Figure 3 illustrates an embodiment of indication of TXOP duration;
Figure 4 illustrates an embodiment of indication of TXOP duration;
Figure 5 illustrates an embodiment of indication of TXOP duration;
Figure 6 illustrates an embodiment of indication of TXOP duration;
20 Figure 7 illustrates an system of indication of TXOP duration;
Figure 8 illustrates an apparatus of indication of TXOP duration.

DESCRIPTION OF EMBODIMENTS

25 TXOP limits in EDCA

AP can set the policy of channel access with the EDCA Parameter Set element, where a TXOP limit is defined.

A TXOP limit has 16 bits in the unit of 32 μ s. The default EDCA parameter of TXOP for each access category is as Table 1:

AC	CW _{min}	CW _{max}	AIFSN	TXOP limit		
				For PHYs defined in Clause 16 and Clause 17	For PHYs defined in Clause 18, Clause 19, and Clause 20, and Clause 22	Other PHYs
AC_BK	aCW _{min}	aCW _{max}	7	0	0	0
AC_BE	aCW _{min}	aCW _{max}	3	0	0	0
AC_VI	(aCW _{min} +1)/2 - 1	aCW _{min}	2	6.016 ms	3.008 ms	0
AC_VO	(aCW _{min} +1)/4 - 1	(aCW _{min} +1)/2 - 1	2	3.264 ms	1.504 ms	0

Table 1

A STA can also be granted a TXOP with QoS data frames of subtypes that include CF-Poll.

5 The time duration of the TXOP is carried in the 8-bit TXOP limit subfield of QoS field in MAC header. The range of time values is 32 μs to 8160 μs.

There are also different regulations for TXOP in different countries, such as 4 ms in Japan.

10 It is provided that 4.08ms~16.32ms is a reasonable range for TXOP limit for 802.11ax considering the efficiency and fairness among different BSS in the dense environment.

16.32 ms can support at least one pair of DL and UL PPDU in a cascading structure.

TXOP unit

The smaller TXOP unit cost large number of bits in HE-SIGA.

15 There are only 13or 14 bits in total left in the HE-SIGA of SU PPDU or DL MU PPDU. Around 7~9 bits can be used for TXOP duration considering the field of spatial reuse and other potential new fields, e.g. non-contiguous channel bonding.

3~4 bits for SR.

2 bits for non contiguous channel bonding in DL MU PPDU.

20 The larger TXOP unit cost performance degradation due to NAV extension at 3rd party STA.

As shown in figure 1 (SLS evaluation), we observed that the NAV extension will not exceed 2 times of the TXOP unit, no matter the length of TXOP and how many packet exchanged within the TXOP.

25 IEEE SS2 (can be seen in TGax simulation scenarios document (11-14-0980)), 32 BSSs; ~64 STAs/BSS (totally 2048 STAs in 32 BSSs, that is, about 64 STAs per BSS); Frequency Reuse factor =4;

20MHz @ 5 GHz (in 5 GHz unlicensed band, the bandwidth is 20MHz.); 2Tx2R, wherein

the T is short for Transmission antenna number, the R is short for Receiving antenna number.

Full buffer, 2ms TXOP, RTS off.

CF-END Off

Unit (μs)	Throughput (Mbps)	Loss
1024	247.648	49.99%
512	331.483	33.05%
256	394.352	20.36%
128	439.931	11.15%
64	466.632	5.76%
32	481.309	2.80%
16	489.537	1.13%
1 (original)	495.153	0.00%

5

Table 2

CF-END On

unit (μs)	Throughput (Mbps)	Loss
1024	464.871	6.08%
512	466.109	5.83%
256	465.743	5.91%
128	464.396	6.18%
64	465.582	5.94%
32	479.736	3.08%
16	488.327	1.34%
1 (original)	494.983	0.00%

Table 3

10 Considering the current numerology in 802.11ax, 4μs ~ 32μs is suitable for the minimum TXOP unit.

Maximum symbol duration of 16μs Data symbol+LGI.

Maximum symbol duration of 8μs for HE-STF, 16μs for HE-LTF+LGI.

32μs fixed preamble overhead of 802.11ax.

PPDU(L-STF+L-LTF+L-SIG+RL-SIG+HE-SIGA)

Multi-level TXOP indication

Smaller TXOP unit for shorter TXOP, larger unit for longer TXOP, in order to keep the similar relative loss.

E.g. 4 μ s TXOP unit for TXOP length shorter than 128 μ s, while 256 μ s TXOP unit for TXOP length larger than 896 μ s

The NAV extension can be alleviated by sending CF-end if the remaining time is larger than 68 μ s (CF-END+SIFS).

In this application, a method to indicate TXOP duration in HE-SIGA is disclosed.

In order to achieve tradeoff between performance and overhead, 6 or 7 bits are used with multi-level indication.

Example 1 (opt 1) shown in Table 4:

7 bits in total

2 bits indicate the TXOP unit: 4 μ s/8 μ s/16 μ s/256 μ s.

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0 μ s ~ 124 μ s	4 μ s
01	00000~111 11	128 μ s ~ 376 μ s	8 μ s
10	00000~111 11	384 μ s ~ 880 μ s	16 μ s
11	00000~111 11	896 μ s ~ 8832 μ s	256 μ s

Table 4

Example 2 (opt 2) shown in Table 5:

7 bits in total, wherein 2 bits indicate the TXOP unit: 8 μ s/16 μ s/32 μ s/512 μ s.

B1B2	B3~B7	TXOP range	Unit
00	00000~11111 1	0μs ~ 248μs	8 μs
01	00000~11111 1	256μs ~ 752μs	16 μs
10	00000~11111 1	768μs ~ 1760μs	32 μs
11	00000~11111 1	1792μs ~ 17664μs	512 μs

Table 5

Simplified solutions

- 5
- Example 3 (opt 3), shown in Table 6:
6 bits in total, wherein 1 bit indicate the TXOP unit: 16μs/512μs.

B1	B2~B6	TXOP range	Unit
0	00000~11111	0μs ~ 496μs	16 μs
1	00000~11111	512μs ~ 16384μs	512 μs

Table 6

Comparison of the performance of the former three examples (opt):

- 10
- Another example of 6 bits in total, shown in Table 7:
Wherein 2 bits indicate the TXOP unit: 8μs/16μs/32μs/512μs.

B1B2	B3~B6	TXOP range	Unit
00	0000~1111	0μs ~ 120μs	8μs
01	0000~1111	128μs ~ 368μs	16μs
10	0000~1111	384μs ~ 864μs	32μs
11	0000~1111	896μs ~ 8576μs	512μs

Table 7

Another example of 6 bits in total, shown in Table 8:

Wherein 2 bits indicate the TXOP unit: 16μs/16μs/32μs/512μs.

5

B1B2	B3~B6	TXOP range	Unit
00	0000~1111	0μs ~240μs	16 μs
01	0000~1111	256μs ~ 496μs	16 μs
10	0000~1111	512μs ~ 992μs	32 μs
11	0000~1111	1024μs ~ 8704μs	512 μs

Table 8

Another example of 6 bits in total, shown in Table 9:

Wherein 2 bits indicate the TXOP unit: 16μs/16μs/16μs/512μs.

10

B1B2	B3~B6	TXOP range	Unit
00	0000~1111	0 μs ~240 μs	16 μs
01	0000~1111	256 μs ~ 496 μs	16 μs
10	0000~1111	512 μs ~ 752 μs	16 μs
11	0000~1111	768 μs ~ 8448 μs	512 μs

Table 9

Example 4, shown in Table 10:

Fixed 64μs granularity with 7 bit in total.

B1~B7	TXOP range	Unit
0000000~1111111	0μs ~ 8128 μs	64 μs

15

Table 10

Example 5, shown in Table 11:

7 bits in total
2 bits indicate the TXOP unit: 4μs/16μs/64μs/256μs.

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 124μs	4 μs
01	00000~111 11	128μs ~ 624μs	16 μs
10	00000~111 11	640μs ~ 2624μs	64 μs
11	00000~111 11	2688μs ~ 10624μs	256 μs

Table 11

5

Example 6, shown in Table 12:

7 bits in total
2 bits indicate the TXOP unit: 8μs/16μs/32μs/256μs

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 248μs	8 μs
01	00000~111 11	256μs ~ 752μs	16 μs
10	00000~111 11	768μs ~ 1760μs	32 μs
11	00000~111 11	1792μs ~ 9728μs	256 μs

Table 12

10

Example 7, shown in Table 13:

7 bits in total
2 bits indicate the TXOP unit: 8μs/16μs/64μs/256μs

15

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 248μs	8 μs
01	00000~111 11	256μs ~ 752μs	16 μs
10	00000~111 11	768μs ~ 2752μs	64 μs
11	00000~111 11	2816μs ~ 10752μs	256 μs

Table 13

- 5
- Example 8, shown in Table 14:
7 bits in total
2 bits indicate the TXOP unit: 8μs/16μs/64μs/512μs

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 248μs	8 μs
01	00000~111 11	256μs ~ 752μs	16 μs
10	00000~111 11	768μs ~ 2752μs	64 μs
11	00000~111 11	2816μs ~ 18688μs	512 μs

Table 14

10

- Example 9, shown in Table 15:
7 bits in total
2 bits indicate the TXOP unit: 8μs/32μs/128μs/512μs.

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 248μs	8 μs
01	00000~111 11	256μs ~ 1248μs	32 μs
10	00000~111 11	1280μs ~ 5248μs	128 μs
11	00000~111 11	5376μs ~ 21248μs	512 μs

Table 15

Example 10, shown in Table 16:

- 5
- 7 bits in total
- 2 bits indicate the TXOP unit: 8μs/32μs/64μs/512μs

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	0μs ~ 248μs	8 μs
01	00000~111 11	256μs ~ 1248μs	32 μs
10	00000~111 11	1280μs ~ 3264μs	64 μs
11	00000~111 11	3328μs ~ 19200μs	512 μs

Table 16

- 10
- Example 11, shown in Table 17
- 7 bits in total
- 2 bits indicate the TXOP unit: 8μs/8μs/8μs/256μs

B1B2	B3~B7	TXOP range	Unit
00	00000~11111	0μs ~ 248μs	8 μs
01	00000~11111	256μs ~ 504μs	8 μs
10	00000~11111	512μs ~ 760μs	8 μs
11	00000~11111	768μs ~ 8704μs	256 μs

Table 17

TXOP duration for ACK/BA/MBA

5 The TXOP duration field in HE-SIGA can also indicate the time duration for the ACK/BA/MBA immediately following the data PPDU. Shown in Figure 3.

 We can use 7 bits to indicate 1ms with the unit of 8μs, which can cover most of the ACK/BA/MBA frames with low MCS.

B1~B7	TXOP range	Unit
0000000~1111111	0μs ~ 1016μs	8μs

Table 18

Or, in another example,

B1~B7	TXOP range	Unit
0000000~1111111	0μs ~2032μs	16μs

Table 19

Example 12

 As shown in Table 20, example 12 is has been disclosed by example 11, which excludes the entry 11111 in Table 17. TXOP in HE-SIGA can use 7 bits with 2 granularities, one is

small and one is large granularity. For example, small granularity uses $8\mu\text{s}$ to indicate the TXOP range from $0\sim 760\mu\text{s}$ with 96 entries, and large granularity uses $256\mu\text{s}$ to indicate the TXOP range from $768\sim 8448\mu\text{s}$ with 31 entries.

2 bits indicate the TXOP unit: $8\mu\text{s}/8\mu\text{s}/8\mu\text{s}/256\mu\text{s}$

5

B1B2	B3~B7	TXOP range	Unit
00	00000~111 11	$0\mu\text{s} \sim 248\mu\text{s}$	$8\mu\text{s}$
01	00000~111 11	$256\mu\text{s} \sim 504\mu\text{s}$	$8\mu\text{s}$
10	00000~111 11	$512\mu\text{s} \sim 760\mu\text{s}$	$8\mu\text{s}$
11	00000~111 10	$768\mu\text{s} \sim 8448\mu\text{s}$	$256\mu\text{s}$

Table 20

As the duration field in MAC header is in $1\mu\text{s}$ unit, there will be accuracy difference between duration in MAC header and TXOP in HE-SIGA. To avoid the over-protection issue that TXOP in HE-SIGA is large than duration in MAC header, the valid duration information indicated by the TXOP field in HE-SIGA shall be the largest feasible duration information that is smaller than or equal to the duration information indicated by the Duration field in a MAC header in the HE PPDU. Then TXOP in HE-SIGA is always less than the exact duration in MAC header with a ΔT , shown in Figure 4, which relies on the granularity used. This cause a under-protection issue that TXOP in HE-SIGA can't cover the exact duration in MAC header.

To avoid the under-protection issue, we add the following rules:

(1) Assuming TXOP holder sends a soliciting frame(e.g. frame 0) with TXOP in HE-SIGA to be the value PHT_0. TXOP responder should transmit a responding frame(e.g. frame 1) no longer than $\text{PHT}_0 - \text{SIFS_time}$, to avoid that the reception of responding frame at TXOP holder is interfered by OBSS STA which only decodes TXOP field in soliciting frame from TXOP holder and set NAV with PHT_0. Show in figure 5.

(2) Assuming TXOP holder receives a responding frame from TXOP responder with TXOP in HE-SIGA to be the value PHT_1. If TXOP holder transmits to the same TXOP responder, it

should transmit another soliciting frame(e.g. frame 2) no longer than $PHT_1 - SIFS_time$, to avoid that the reception of the soliciting frame(frame 2) at TXOP responder is interfered by OBSS STA which only decodes TXOP field in responding frame from TXOP responder and set NAV with PHT1. Shown in figure 6.

5 Note: These two rules apply to all example for TXOP encoding tables above.

The scheme of the embodiments is applicable to a WLAN network system. The following is a schematic diagram of an applicable scenario of the method in a wireless local area network provided by embodiments. As shown in FIG. 7 below, the WLAN network system may include
10 an access station 101 and at least a station 102. In the WLAN network system, some stations (non-AP station or AP) may work as a TXOP holder, others may work as a responder, like shown in figure 4, 5, or 6.

An access point (AP, Access Point) may also be referred to as a wireless access point, a bridge, a hotspot, or the like, and may be an access server or a communications network.

15 A station (STA, Station) may be further referred to as a user, and may be a wireless sensor, a wireless communications terminal, or a mobile terminal, for example, a mobile telephone (or referred to as a "cellular" phone) that supports a WiFi communication function and a computer that has a wireless communication function. For example, the station may be a portable, pocket-sized, handheld, computer built-in, wearable, or in-vehicle wireless communications
20 apparatus that supports the WiFi communication function, and exchanges communication data such as voice and data with a wireless access network.

A person skilled in the art knows, some communication equipment may include the both functions of the above STA and AP. It's not limited in the embodiments.

Figure 8 is a schematic diagram of a data transmission apparatus (such as an access point,
25 a station, a chip, or the like) provided in the embodiment s. As shown in FIG. 8 below, the data transfer apparatus 1200 may be implemented as general bus architecture for the bus 1201. Depending on the particular application of the data transfer apparatus 1200 and the overall design constraints, the bus 1201 may include any number of interconnect buses and bridges. The bus 1201 couples various circuits, including a processor 1202, storage medium 1203, and a
30 bus interface 1204. The bus 1201, the data transfer apparatus 1200 uses the bus interface 1204 to connect the network adapter 1205 and the like via the bus 1201. As shown in FIG. The network adapter 1205 may be used to implement the signal processing functions of the physical layer in the wireless local area network and transmit and receive the radio frequency signals via the antenna 1207. The user interface 1206 may connect a user terminal, such as a keyboard, a

display, a mouse, a joystick, or the like. The bus 1201 may also be connected to various other circuits such as timing sources, peripherals, voltage regulators, power management circuits, etc., which are well known in the art and will not be described in detail.

The data transfer apparatus 1200 may also be configured as a general processing system that includes one or more microprocessors that provide processor functionality, and an external memory that provides at least a portion of the storage medium 1203, all of which are communicated via an external bus system. The structure is connected with other supporting circuits.

Alternatively, the data transfer apparatus 1200 may be implemented using an ASIC (application-specific integrated circuit) having a processor 1202, a bus interface 1204, a user interface 1206, and at least a portion of a storage medium 1203 integrated in a single chip, or, The data transmission device 1200 may be implemented using one or more of an FPGA (Field Programmable Gate Array), a PLD (Programmable Logic Device), a controller, a state machine, gate logic, discrete hardware components, any other suitable Circuits, or any combination of circuits capable of performing the various functions described throughout this disclosure.

The processor 1202 is responsible for managing the bus and general processing (including executing the software stored on the storage medium 1203). The processor 1202 may be implemented using one or more general purpose processors and / or dedicated processors. Examples of processors include microprocessors, microcontrollers, DSP processors, and other circuits capable of executing software. Software should be broadly construed to mean instructions, data, or any combination thereof, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise. The storage medium 1203 is shown as being separate from the processor 1202, however, it will be readily apparent to those skilled in the art that the storage medium 1203 or any portion thereof may be located outside of the data transmission device 1200. For example, the storage medium 1203 may include a transmission line, a carrier waveform modulated with data, and / or a computer article separated from the wireless node, all of which may be accessed by the processor 1202 via the bus interface 1204. Alternatively, the storage medium 1203 or any portion thereof may be integrated into the processor 1202, which may be, for example, a cache and / or general purpose register.

The processor 1202 may perform the above-described embodiments, and will not be described herein.

It will be appreciated by those of ordinary skill in the art that all or part of the steps of implementing the method embodiments described above may be accomplished by program

related hardware which may be stored in a computer-readable storage medium which, when executed, including the steps of the above-described method embodiment, and the aforementioned storage medium includes various kinds of media, such as a ROM, a RAM, a magnetic disk, or an optical disk, on which program codes can be stored.

5 The embodiments can be applied to wireless local area networks, including, but not limited to, Wi-Fi systems represented by 802.11a, 802.11b, 802.11g, 802.11n, and 802.11ac and also to next-generation Wi-Fi systems, Wireless LAN systems.

Of course, it may be applied to other possible wireless networks.

10 The following provides a number of embodiments provided by a simple language description:

1. An information transmission method for radio communication, generating, by a sending site, a PPDU carrying a TXOP field in the HE-SIGA of the PPDU, the TXOP field is used for notifying the other stations of the remaining time of the station usage channel, wherein the TXOP field can be indicated by different granularity; sending the PPDU.

2. An information receiving method for radio communication, receiving, a PPDU sent by a sending site, the HEOPA of the PPDU carrying a TXOP field for informing other stations of the remaining time of the station usage channel, wherein the TXOP field may be carried out at different granularity Instructions; sending, a TXOP response frame according to the received PPDU.

3. The method according to embodiment 1 or 2, the TXOP field is indicated using two different granularity.

4. The method of embodiment 3, the TXOP field is indicated by two granularities of 8 μ s and 256 μ s.

25 5. The method of embodiment 4, wherein the TXOP field is 7 bits in length and includes 128 values; wherein 96 values are indicated by a granularity of 8 μ s, the indicated TXOP range is 0 to 760 microseconds; 31 The number is indicated with a granularity of 256 μ s and the indicated TXOP range is 768 to 8448 μ s.

6. The method according to embodiment 2, further comprising: the TXOP length of the TXOP response frame should be less than or equal to the length remaining after subtracting the SIFS time from the value represented by the TXOP field in the initiation frame of the station (TXOP origination station).

7. The method of embodiment 1, wherein the station sends a new TXOP initiation frame if the destination address of the new TXOP transmit frame matches the transmit address of the

station that sent the previous TXOP response frame, the new TXOP transmission frame should be less than or equal to the length remaining after the SIFS time minus the value represented by the TXOP field in the TXOP response frame.

5 8. The method of embodiment 2, after receiving a PPDU sent by the sending site, replies to an ACK or BA, the ACK or BA comprising a duration field in the granularity representation, the duration field being represented by The time at which the other stations will be notified of the channel to be used.

9. A communication device comprising a memory and a processor, operable to perform methods such as 1, 3-5, 7.

10 10. A communication device comprising a memory and a processor, operable to perform methods such as 2, 3-5, 8.

15

20

25

30

CLAIMS

What is claimed is,

1. A method for indicating TXOP duration in a wireless communication system, comprising:
generating, by a TXOP holder, a physical layer protocol data unit (PPDU), the High
5 Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the
TXOP duration field is used to indicate the remaining time for using the channel by the station
to other stations; wherein the TXOP duration field includes a first part which is used to indicate
the granularity used, and a second part which is used to indicate the TXOP duration using the
granularity indicated by the first part; so as that different granularities are able to be used to
10 indicate different TXOP duration in the system;
sending, by the TXOP holder, the generated PPDU.
2. The method according to the claim 1, two granularities is used to indicate different TXOP
duration in the system.
3. The method according to the claim 2, the two granularities includes a granularity of $8\mu\text{s}$.
- 15 4. The method according to the claim 1 or 2, the TXOP duration field is 7 bits in total.
5. The method according to the claim 1 or 2, the first part of the TXOP duration field is 1 or
2 bits.
6. A method for indicating TXOP duration in a wireless communication system, comprising:
receiving, by a TXOP responder, a physical layer protocol data unit (PPDU), the High
20 Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the
TXOP duration field is used to indicate the remaining time for using the channel by the station
to other stations; wherein the TXOP duration field includes a first part which is used to indicate
the granularity used, and a second part which is used to indicate the TXOP duration using the
granularity indicated by the first part; so as that different granularities are able to be used to
25 indicate different TXOP duration in the system;
sending, by the TXOP responder, a responding frame in response to the received PPDU.
7. The method according to the claim 6, two granularities is used to indicate different
TXOP duration in the system.
8. The method according to the claim 7, the two granularities includes a granularity of $8\mu\text{s}$.
- 30 9. The method according to the claim 6 or 7, the TXOP duration field is 7 bits in total.
10. The method according to the claim 6 or 7, the first part of the TXOP duration field is 1 or
2 bits.
11. A communication apparatus comprising a processor and in a computer-readable storage
medium, wherein the storage medium stores instructions, when executed by the processor,

including the steps:

generating, a physical layer protocol data unit (PPDU), the High Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the TXOP duration field is used to indicate the remaining time for using the channel by the station to other stations;
 5 wherein the TXOP duration field includes a first part which is used to indicate the granularity used, and a second part which is used to indicate the TXOP duration using the granularity indicated by the first part; so as that different granularities are able to be used to indicate different TXOP duration in the system;

sending, the generated PPDU.

10 12. The apparatus according to the claim 11, two granularities is used to indicate different TXOP duration in the system.

13. The apparatus according to the claim 12, the two granularities includes a granularity of $8\mu\text{s}$.

14. The apparatus according to the claim 11 or 12, the TXOP duration field is 7 bits in total.

15 15. The apparatus according to the claim 11 or 12, the first part of the TXOP duration field is 1 or 2 bits.

16. A communication apparatus comprising a processor and in a computer-readable storage medium, wherein the storage medium stores instructions, when executed by the processor, including the steps:

20 receiving, a physical layer protocol data unit (PPDU), the High Efficiency Signal field A (HE-SIGA) in the PPDU carries a TXOP duration field, wherein the TXOP duration field is used to indicate the remaining time for using the channel by the station to other stations; wherein the TXOP duration field includes a first part which is used to indicate the granularity used, and a second part which is used to indicate the TXOP duration using the granularity
 25 indicated by the first part; so as that different granularities are able to be used to indicate different TXOP duration in the system;

sending, a responding frame in response to the received PPDU.

17. The apparatus according to the claim 16, two granularities is used to indicate different TXOP duration in the system.

30 18. The apparatus according to the claim 16, the two granularities includes a granularity of $8\mu\text{s}$.

19. The apparatus according to the claim 16 or 17, the TXOP duration field is 7 bits in total.

20. The apparatus according to the claim 16 or 17, the first part of the TXOP duration field is 1 or 2 bits.

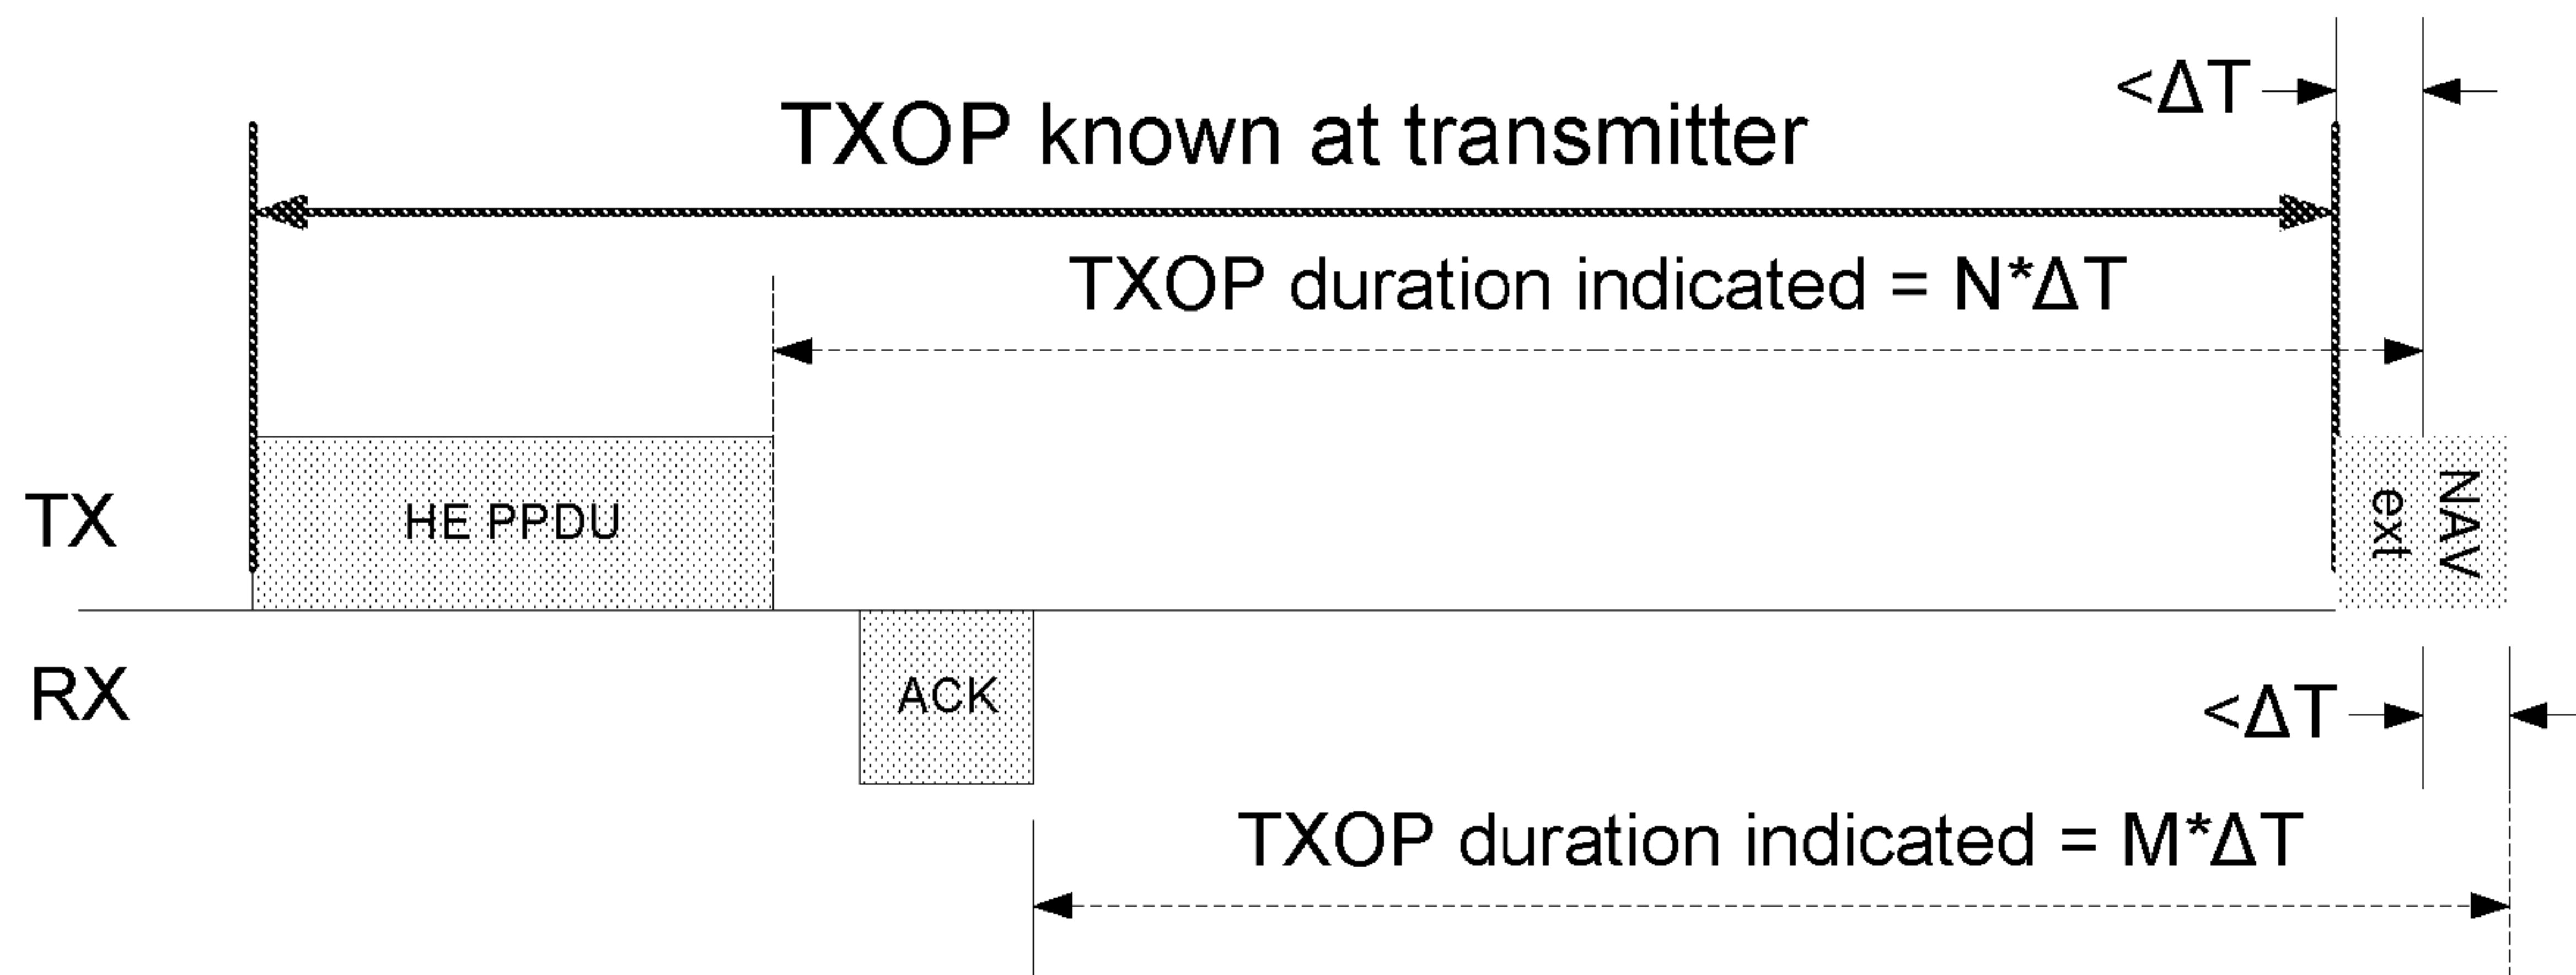


Figure 1

- The performance degradation occurs when TXOP duration is small.

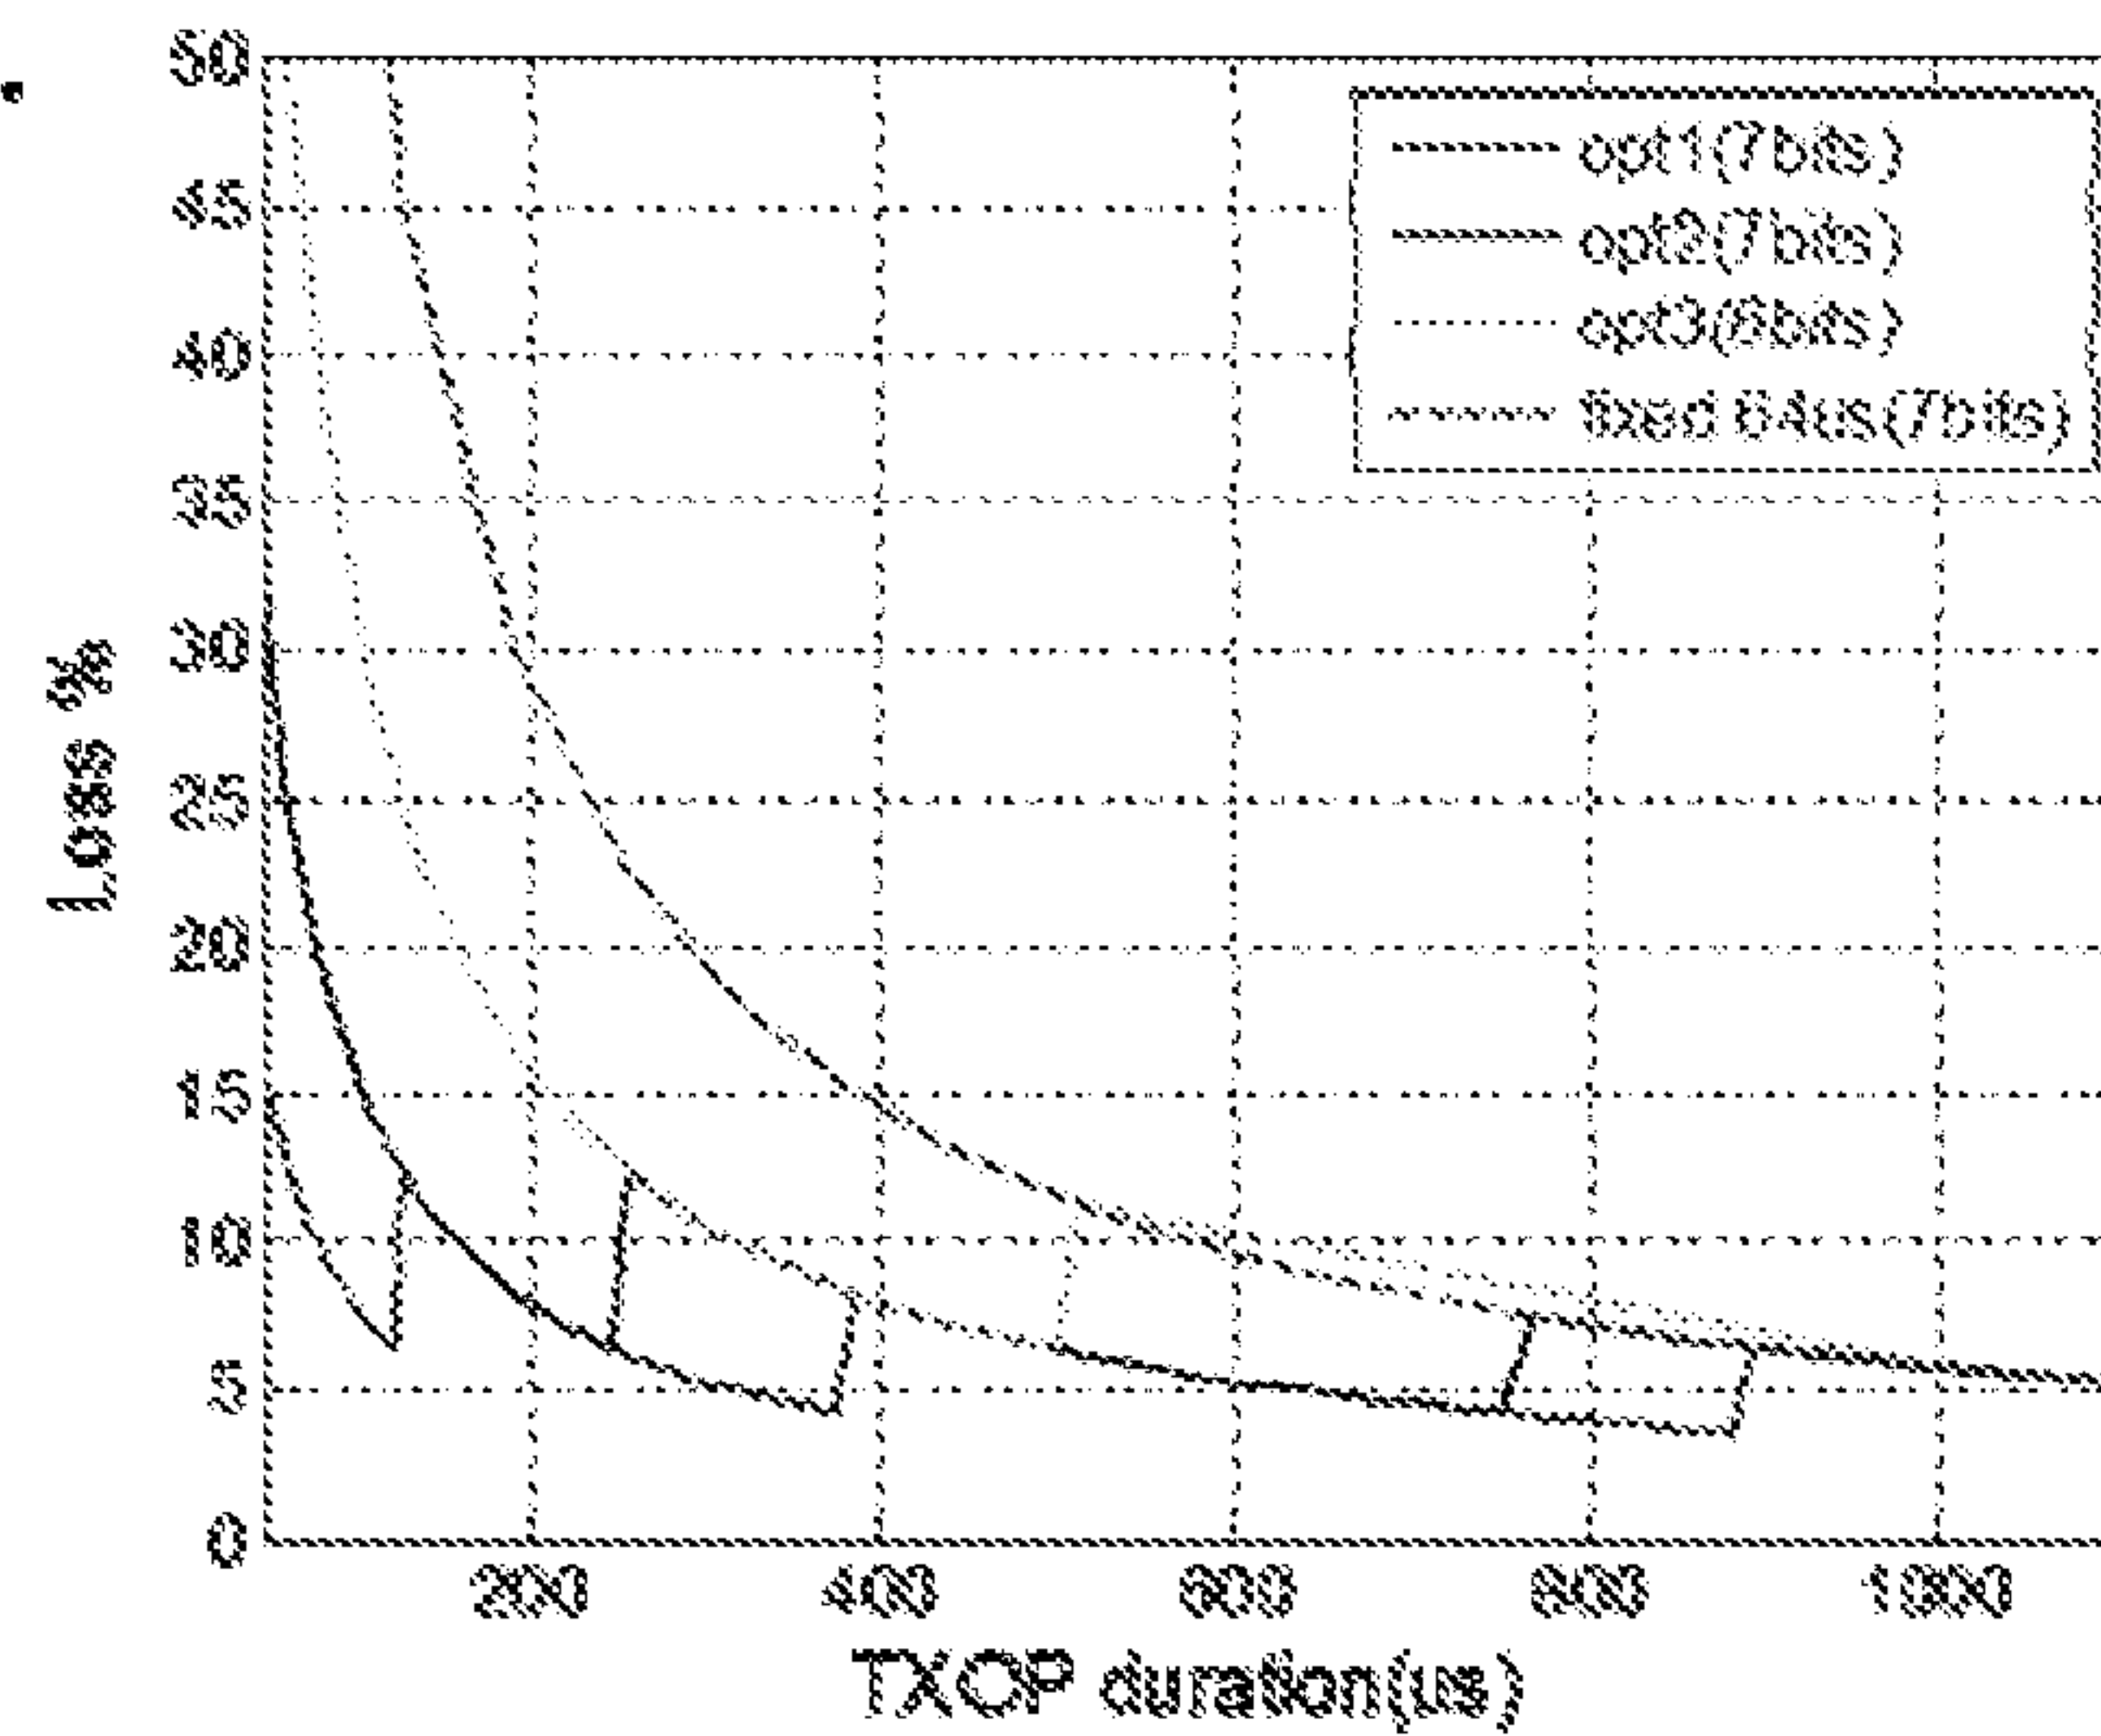


Figure 2

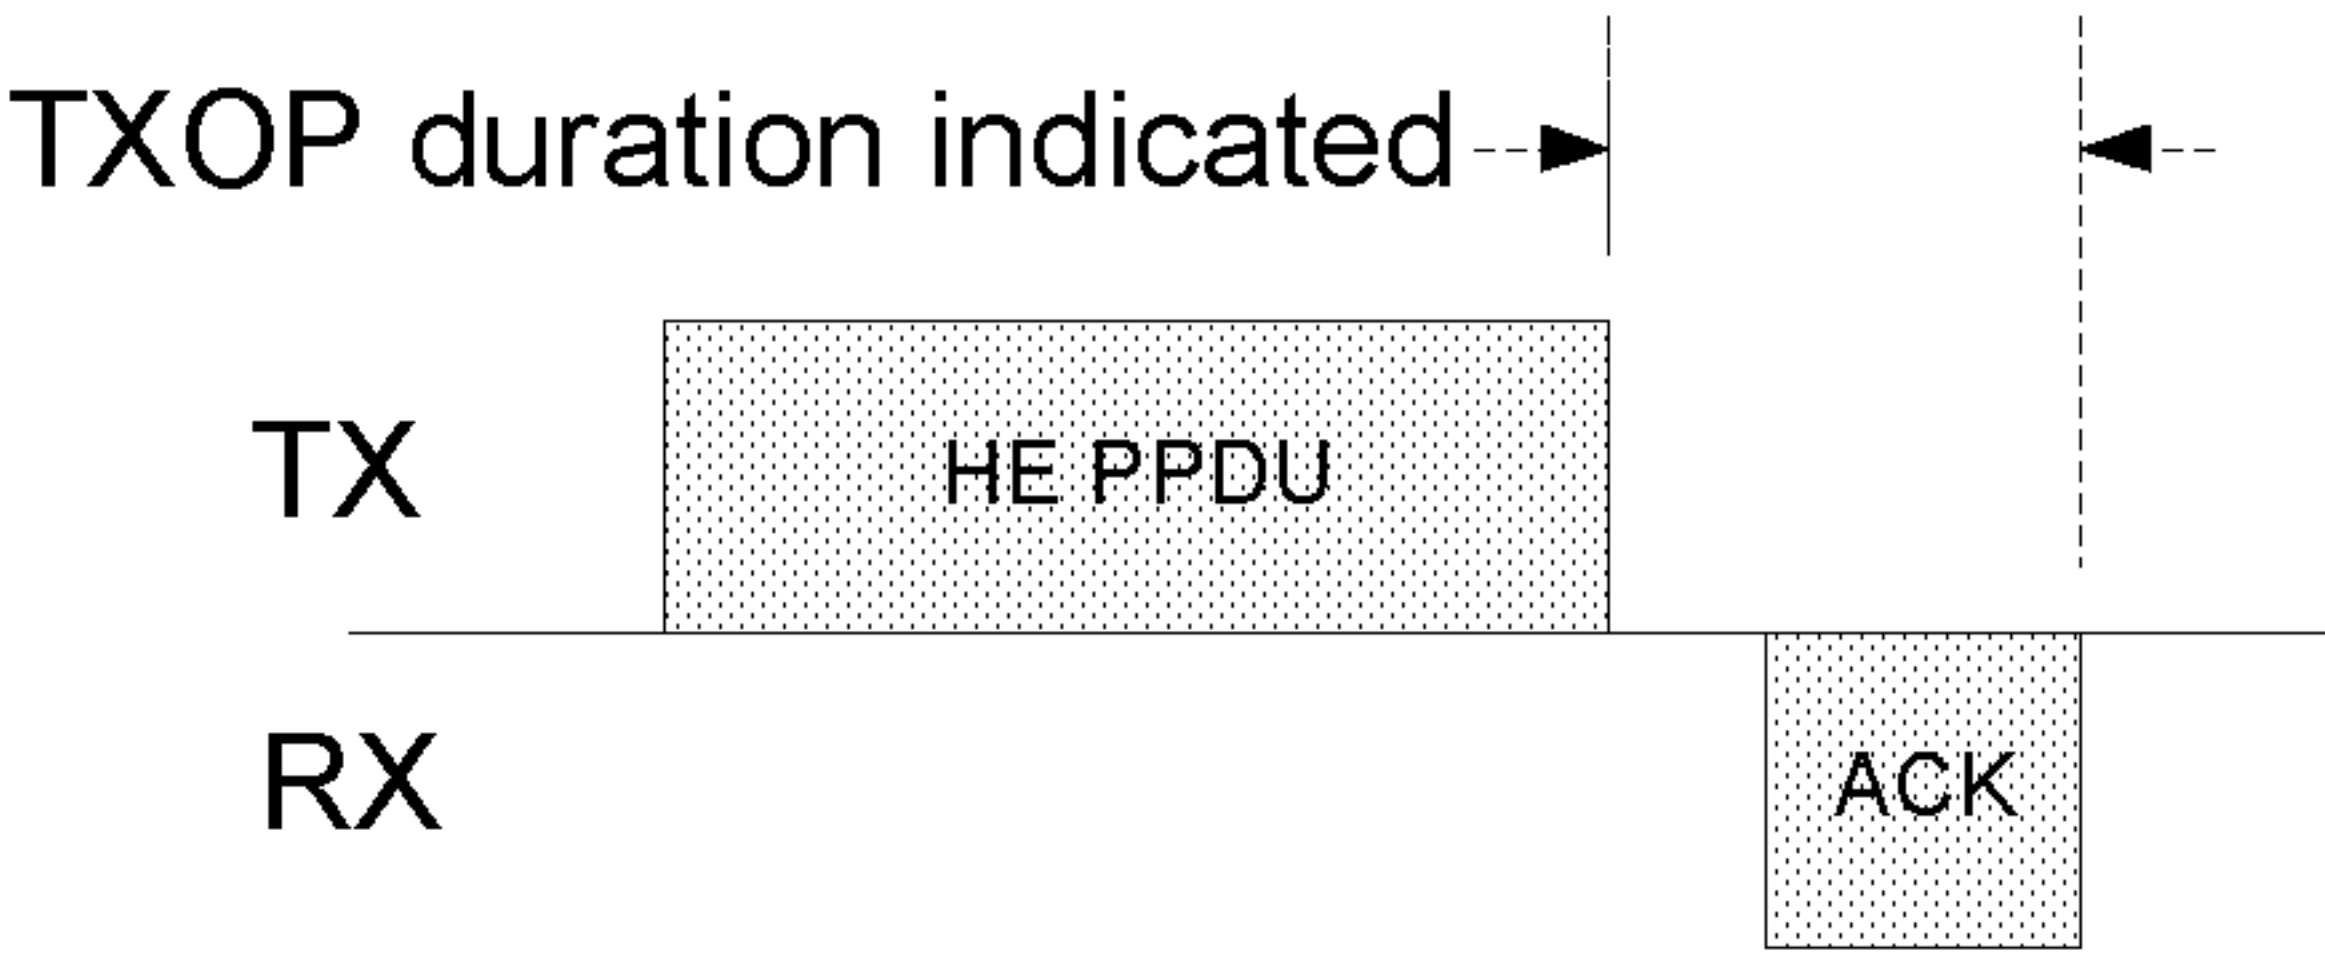


Figure 3

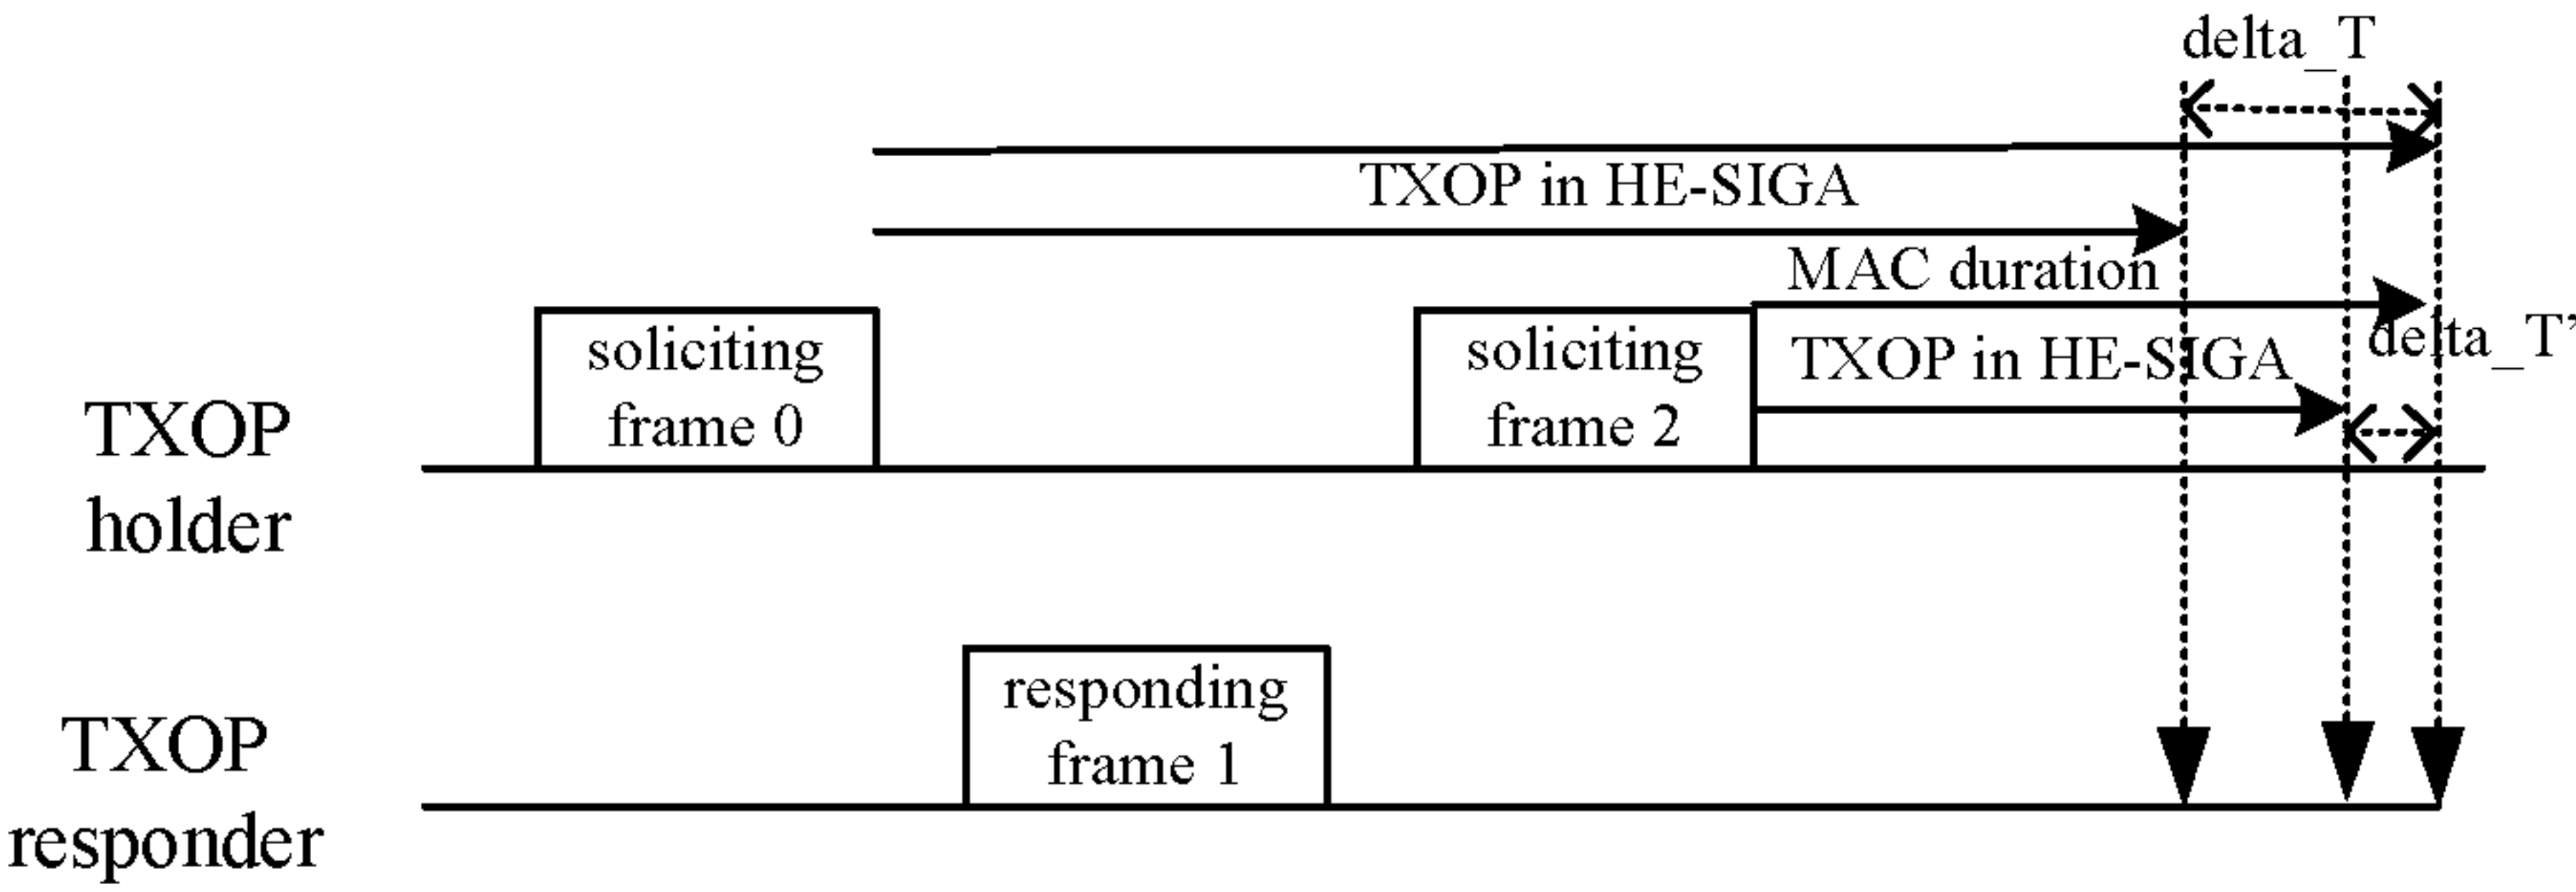


Figure 4

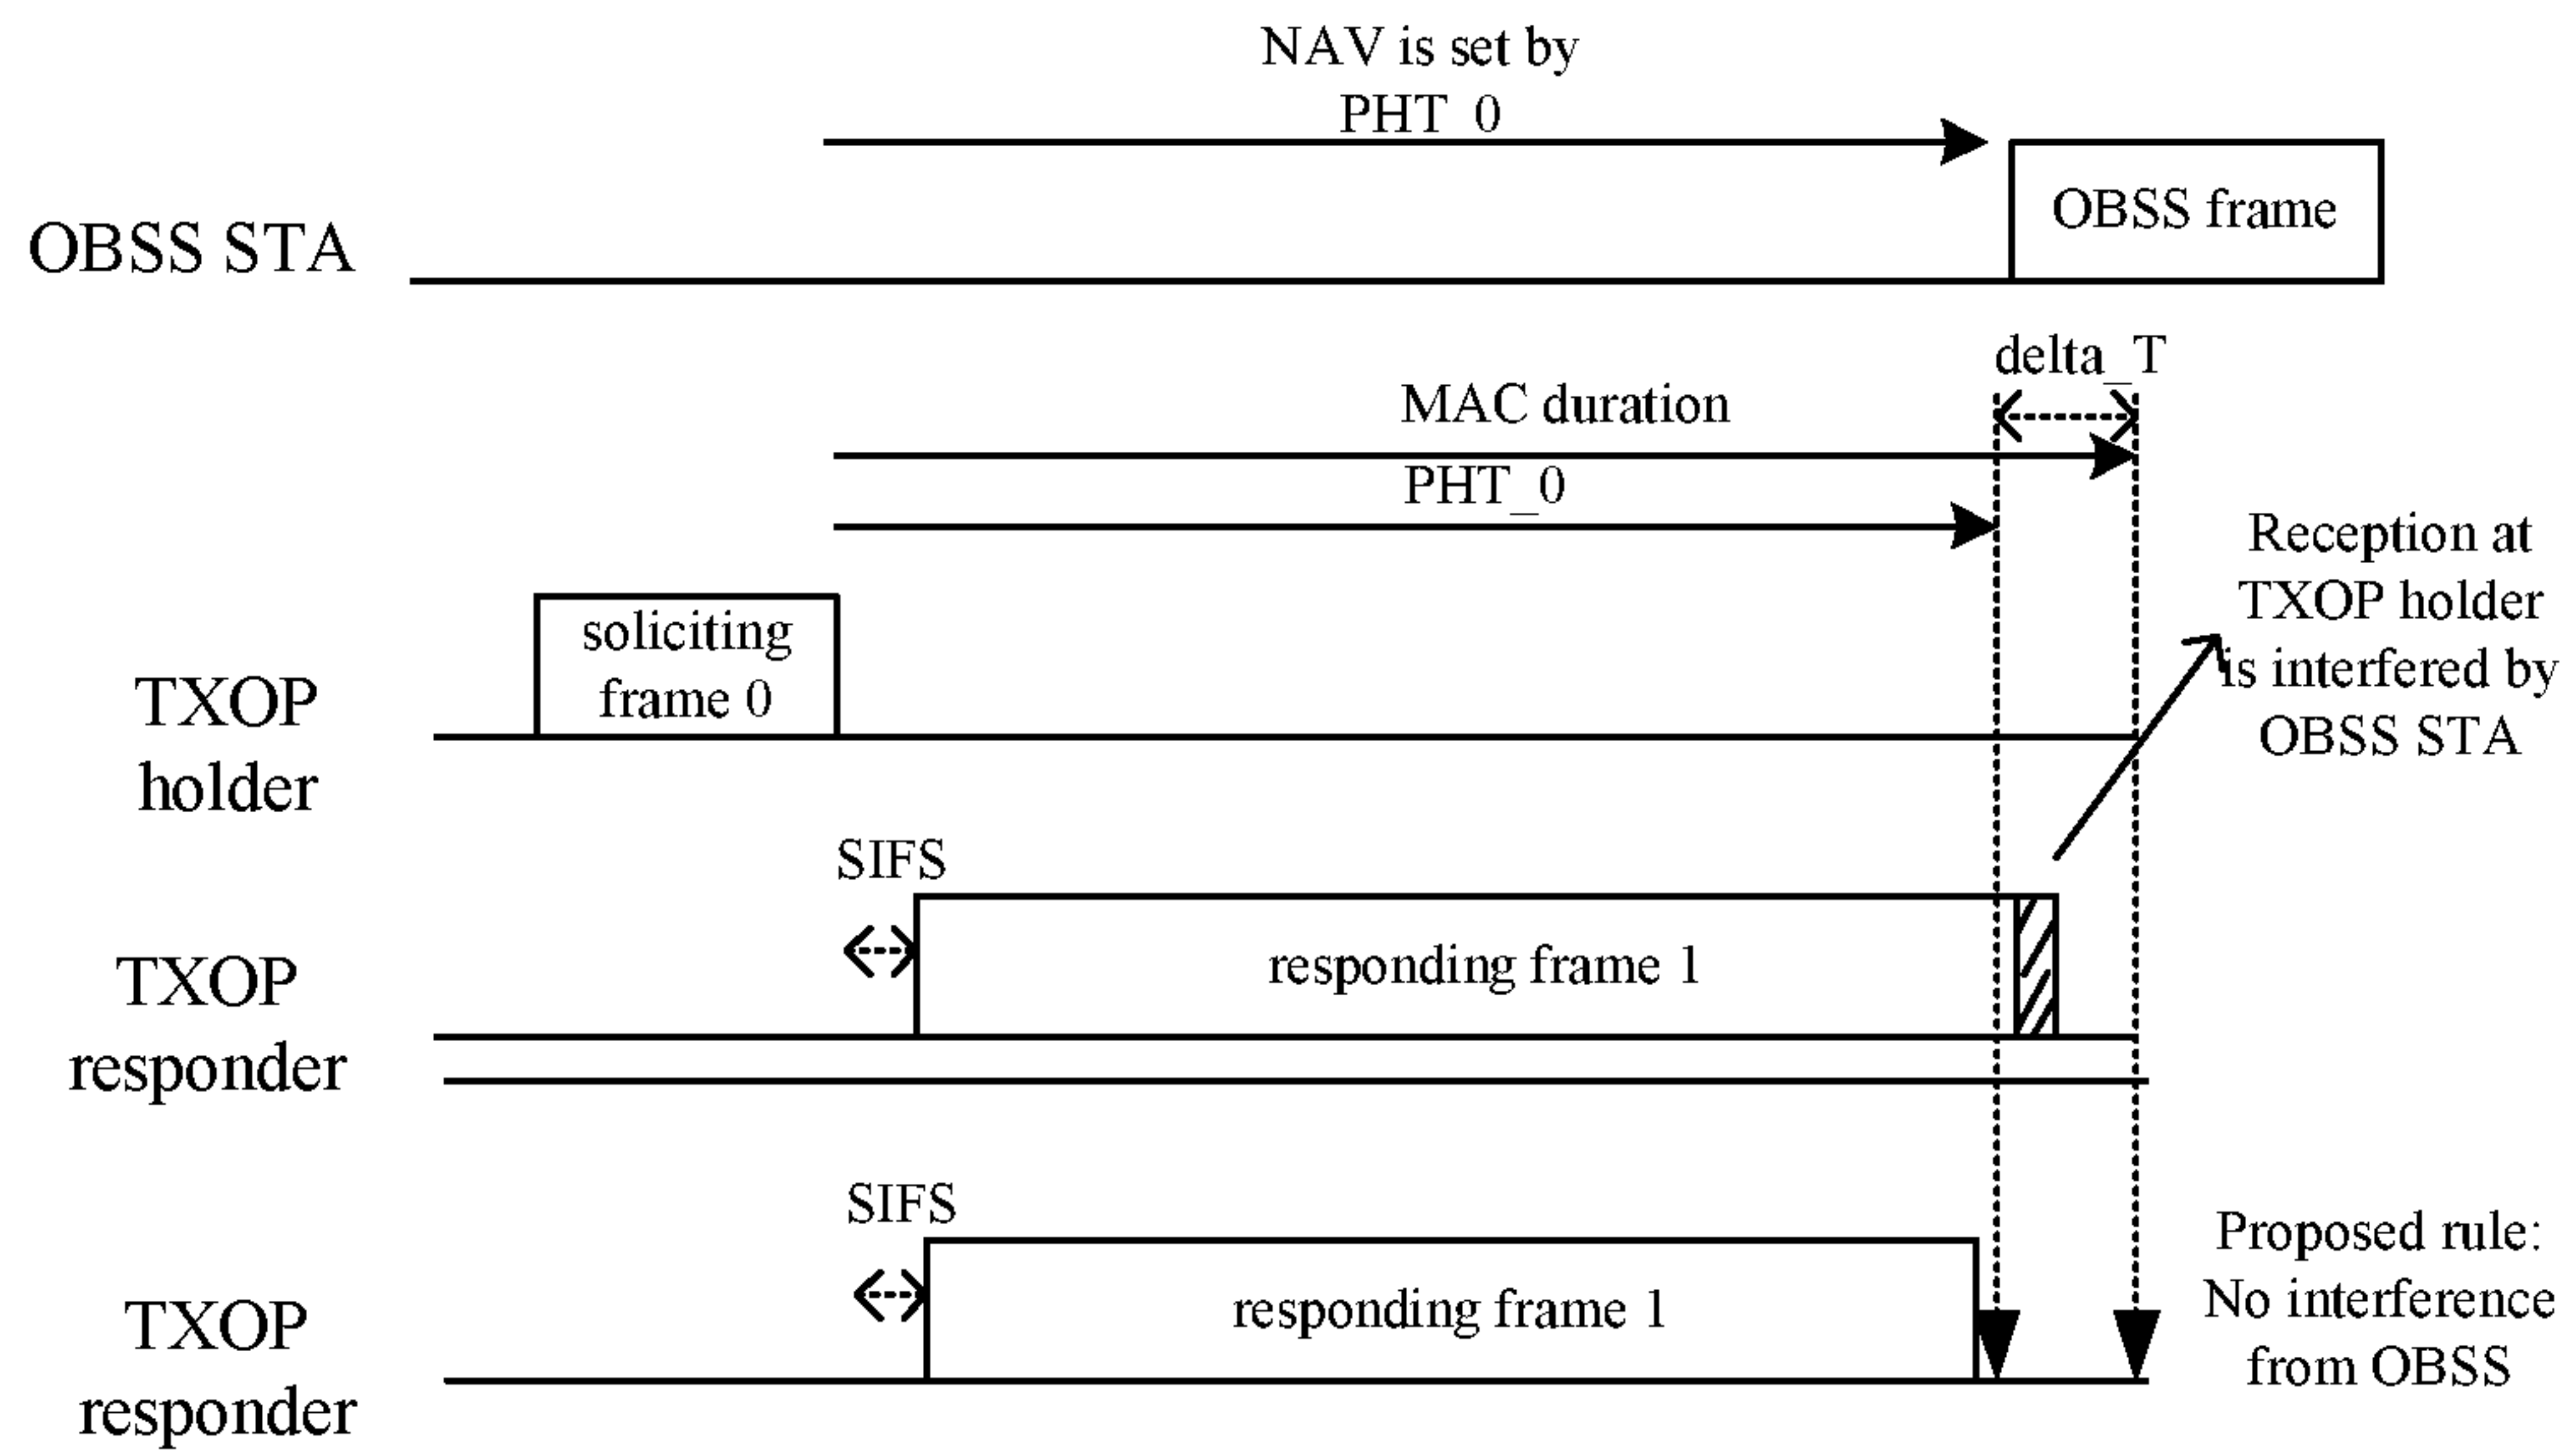


Figure 5

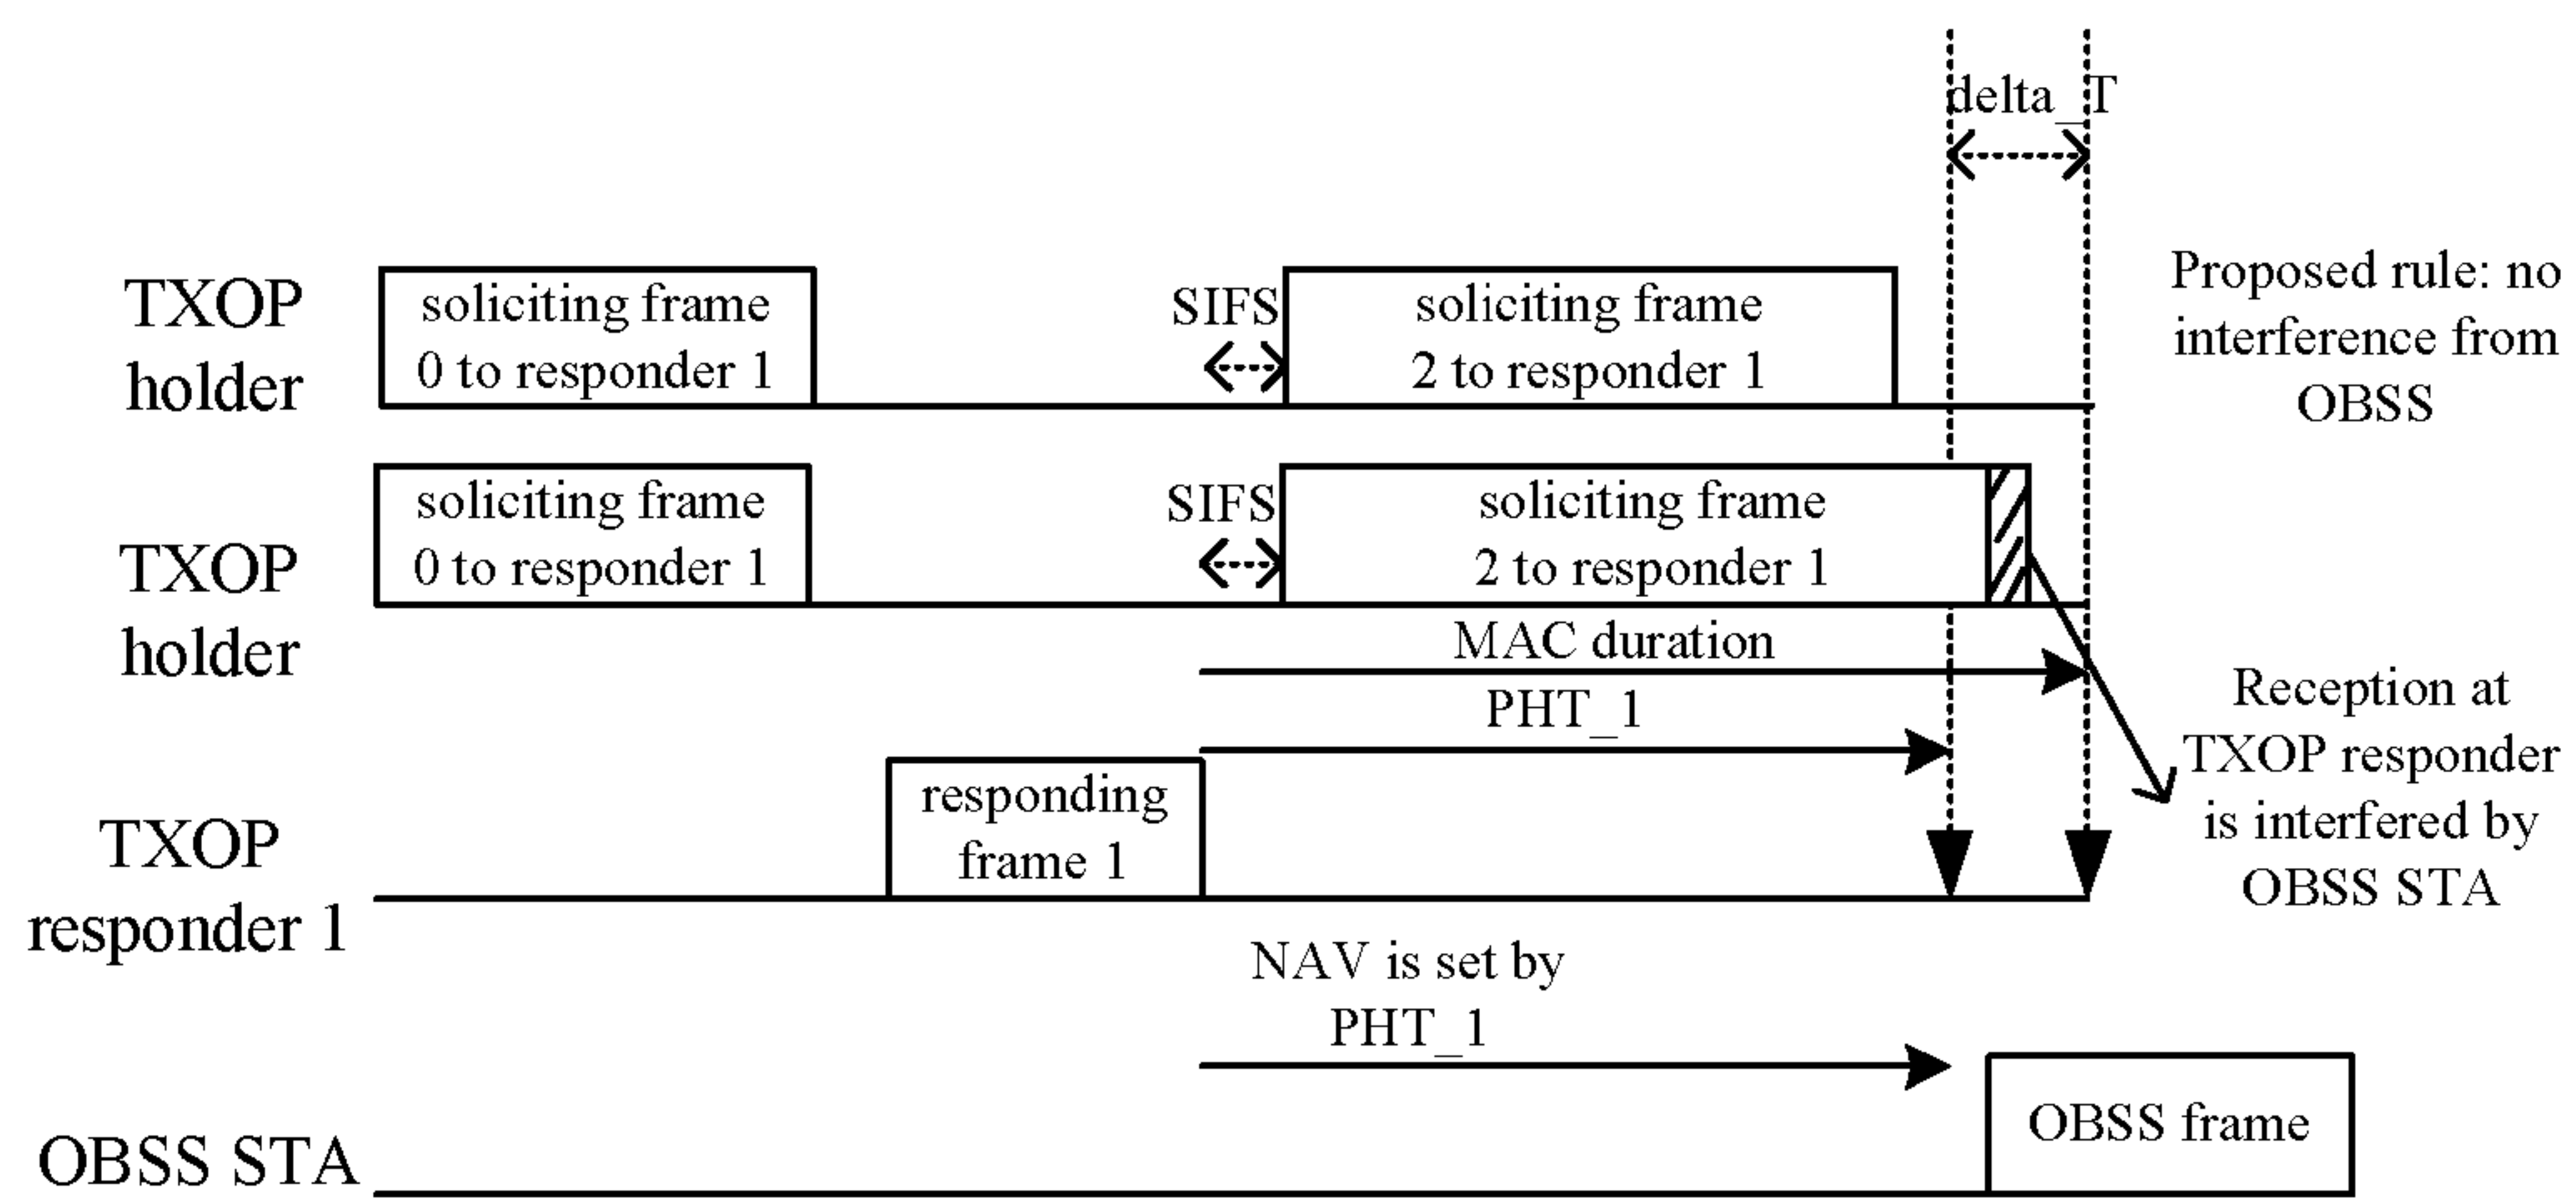


Figure 6

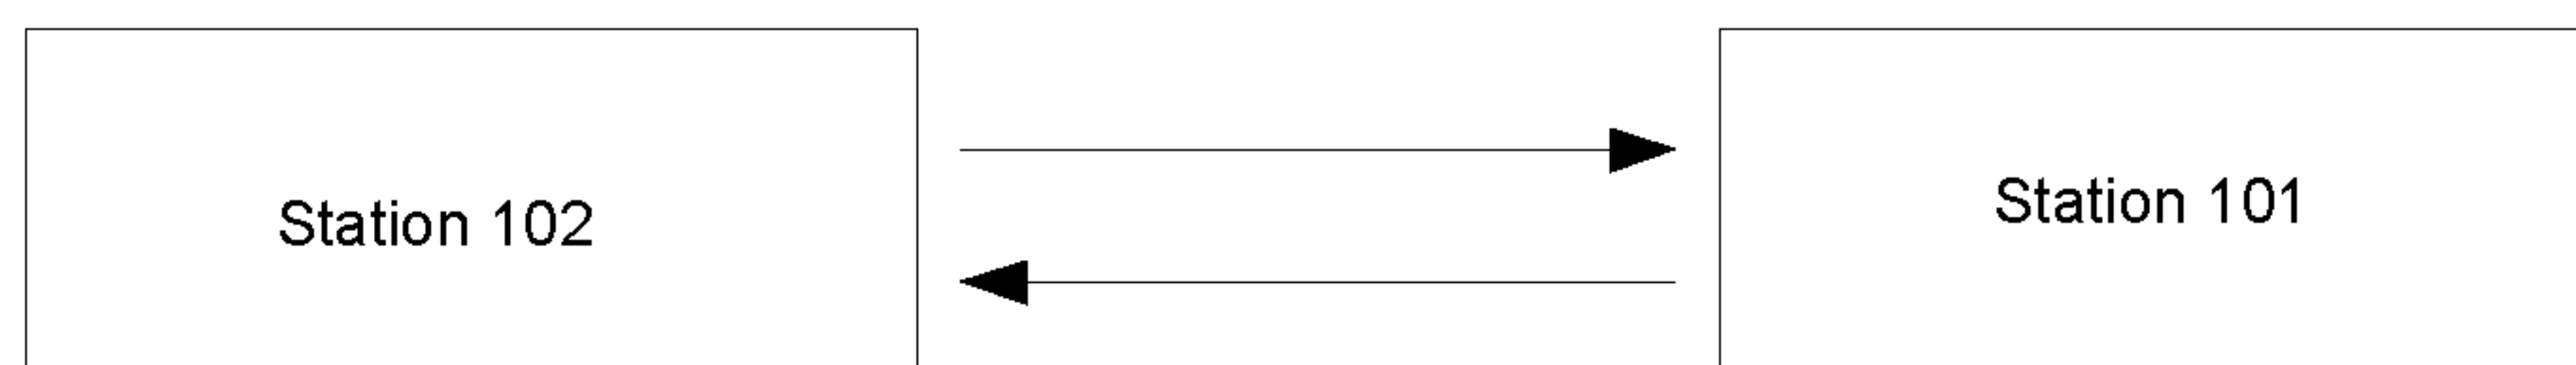


Figure 7

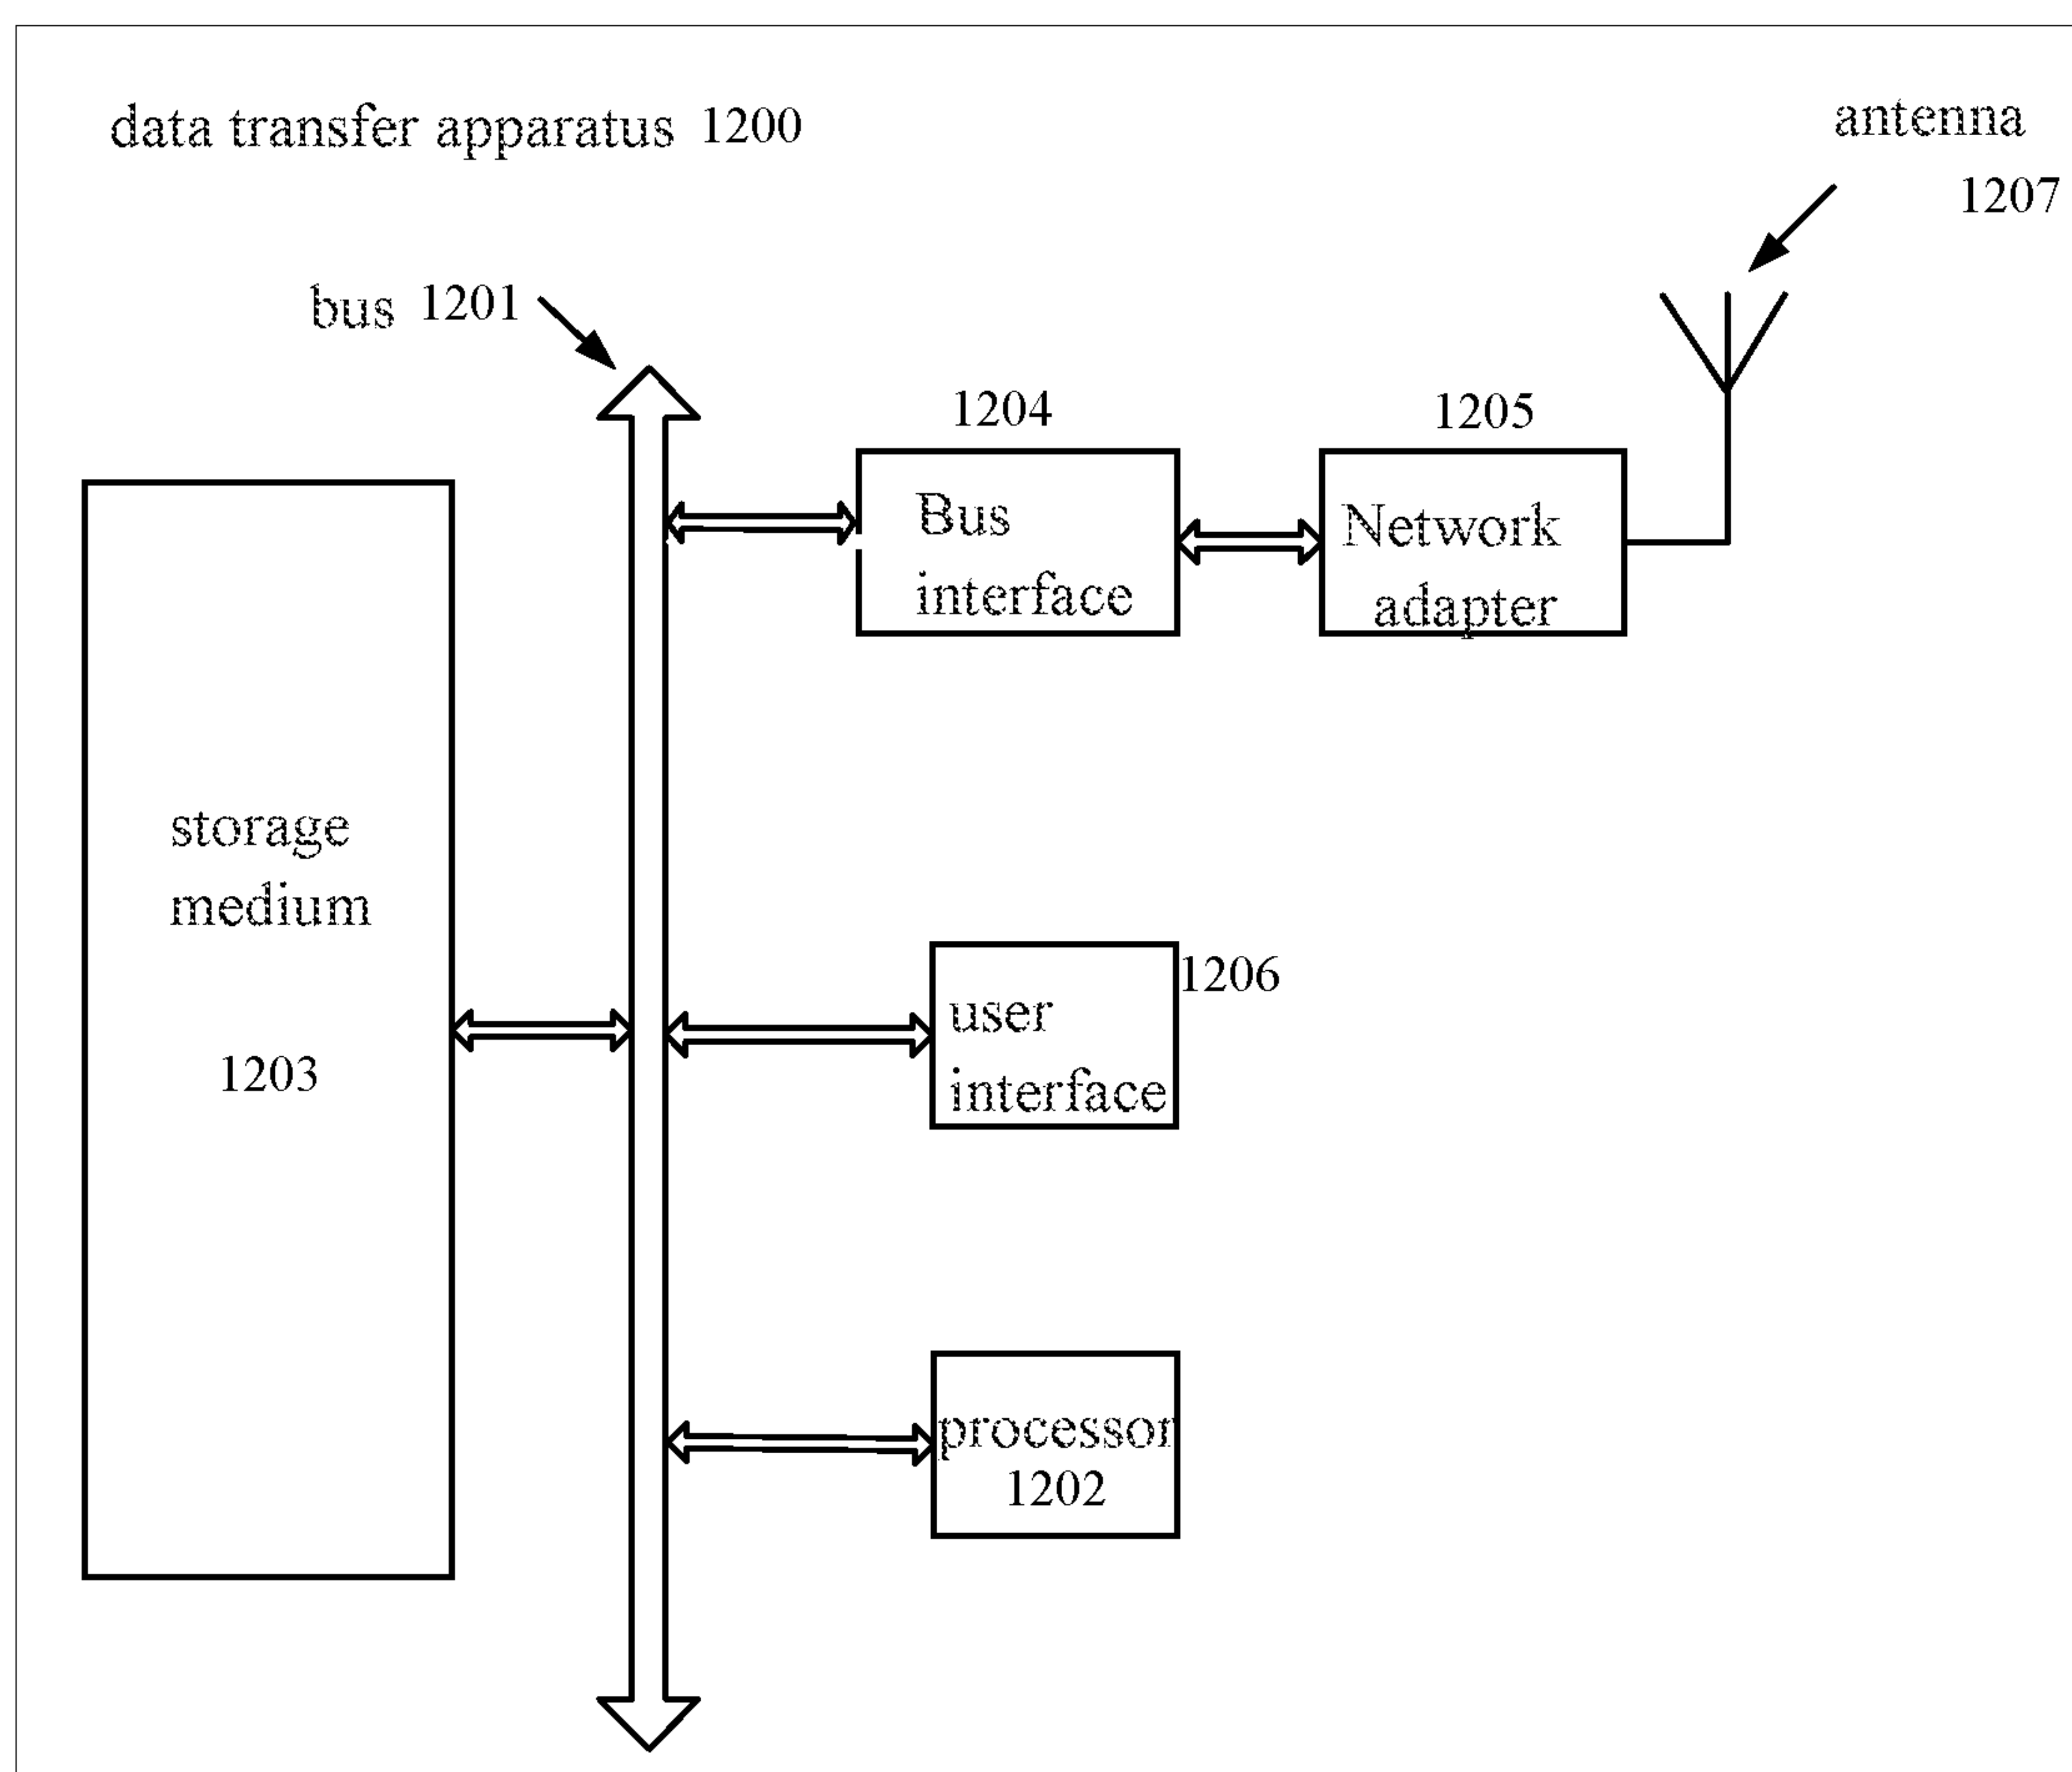


Figure 8

TXOP duration indicated →

TX

HE PPDU

RX

ACK

Figure 3

