



- (51) **International Patent Classification:**
H04L 1/00 (2006.01) *H03M 13/00* (2006.01)
- (21) **International Application Number:**
PCT/US2013/035109
- (22) **International Filing Date:**
3 April 2013 (03.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/619,907 3 April 2012 (03.04.2012) US
61/625,063 16 April 2012 (16.04.2012) US
- (71) **Applicant:** NEVION USA, INC. [US/US]; 1600 Emerson Avenue, Oxnard, CA 93033 (US).
- (72) **Inventor:** RAYNER, Andrew; 31 Gainsborough Road, Felixstowe Suffolk IP11 7HT (GB).
- (74) **Agent:** CHANCELLOR, Paul, D.; Ocean Law, 3463 Red Bluff Court, Simi Valley, CA 93063 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,

KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))
- of inventorship (Rule 4.17(iv))

Published:

- with international search report (Art. 21(3))

WO 2013/152097 A1

(54) **Title:** SIGNAL PROTECTION

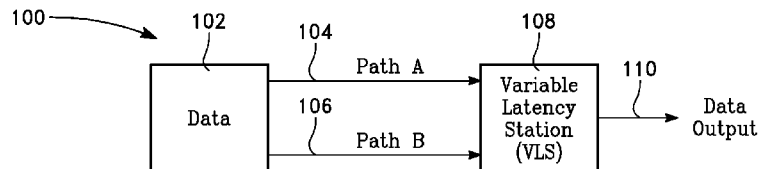


FIG. 1

(57) **Abstract:** A signal protector utilizes a variable latency station to provide error correction.

TITLE: SIGNAL PROTECTION

PRIORITY CLAIM

[001] This application claims the benefit of U.S. Prov. Pat. App. No. 61/619,907 filed April 3, 2012 entitled DYNAMIC BUFFER SIGNAL PROTECTION and U.S. Prov. Pat. App. No. 61/625,063 filed April 16, 2012 entitled SIGNAL PROTECTION.

BACKGROUND OF THE INVENTION

[002] Known signal protection schemes include error correction using multiple channels and/or large static buffers. Such systems utilize excessive bandwidth and/or introduce relatively long latency. Although signal protection innovations are not a focus area of the telecommunications industry, improvements that are adopted by the industry have the potential to benefit large groups of consumers.

Field of Invention

[003] This invention relates to the electrical arts. In particular, a signal is protected through the use of a dynamic buffer.

Discussion of the Related Art

[004] Some signal protection systems are known. For example, some signal protection systems using dual paths that allow for switching between a failed/failing path and an alternate path are known. These dual path systems consume identical bandwidth on two paths because both paths carry the active feed; one path provides a main signal and one path provides an identical standby signal. Further, some forward error correction schemes are known. Their development has not generally been a focus area of the telecommunications industry, perhaps due to the use of the dual path protection systems mentioned above. But, known systems generally suffer from one or more of hardware

complexity, software complexity, high initial cost, high operating costs, large additions to required bandwidth, and signal degradation. Selected embodiments of the present invention provide solutions to one or more of these problems.

SUMMARY OF THE INVENTION

[005] The present invention provides a signal protector. Embodiments utilize a variable latency station. In various embodiments, a signal protector allows one or more of transparent, seamless, and uninterrupted protection of a feed across a dual network while consuming bandwidth on a single connection at any point in time. And, in various embodiments, a signal protector allows one or more of transparent, seamless, and uninterrupted protection of a feed across a dual network while consuming bandwidth principally on a single connection.

[006] In an embodiment, the invention provides means and methods for transparent and/or seamless protection of a feed across a dual network while limiting bandwidth consumption to a single connection while there are no communications errors.

[007] And, in an embodiment, a signal protector comprises: first and second buffers in signal communication via path A and path B; the buffers having first and second buffer lengths (seconds of data); the first and second buffer lengths being a function of two times the path time of the longer of paths A and B; the signal protector operative to use one of the paths before there is a signal loss event on that path; the signal protector operative to use the other of the paths after the signal loss; and, the buffer sizes being selected to allow for seamless data throughput.

[008] In an embodiment, a data protection method comprises the steps of: providing data path A and data path B; each of the data paths extending between first and second stations; the first station providing data to path A; the second station receiving data initially from data path A; and, providing an

uninterrupted second station output following a data fault via utilizing a buffer of the second station to maintain an unfaulted second station output after the data fault is detected, the first station providing data to data path B, the data including resend data from a first station buffer, the resend data including the faulted data, and the data from data path B bypassing at least a portion of the second station buffer to merge the resent data with the data remaining in the second station buffer.

[009] Some embodiments further comprise the steps of: sizing the buffer of the second station such that the time required for a bit to traverse the second station buffer equals or exceeds t ; where $t = t_1 + t_2$; where t_1 equals the time required for one bit of data to traverse path A; and, where t_2 equals the time required for one bit of data to traverse path B.

[010] Some embodiments further comprise the steps of: sizing the buffer of the first station such that the time required for a bit to traverse the first station buffer equals or exceeds t .

[011] Some embodiments further comprise the steps of: sizing the buffer of the second station such that the time required for a bit to traverse the second station buffer equals or exceeds $t + r_1 + r_2 + r_3$; where $t = t_1 + t_2$; where t_1 equals the time required for one bit of data to traverse path A; where t_2 equals the time required for one bit of data to traverse path B; where r_1 equals the time required by the second station to detect the fault; where r_2 equals the time required by the first station to respond to a received request to resend data including data replacing the faulty data; and, where r_3 equals the time required by the second station to merge resent data with data remaining in the second station buffer.

[012] Some embodiments further comprise the steps of sizing the buffer of the first station such that the time required for one bit of data to traverse the first station buffer equals or exceeds $t + r_1 + r_2$.

[013] Some embodiments further comprise the step of the second station

sending a request to resend data replacing the faulty data and the first station receiving the request during a time period substantially equal to t_1 .

[014] Some embodiments further comprise the step of the first station beginning to send resend data and the second station beginning to receive resend data during a time period substantially equal to t_2 .

[015] Some embodiments further comprise the step of rebuilding the second station buffer wherein rebuild operations include operating path B at a data rate higher than a nominal data rate for path B, utilizing some of the path B data to maintain a second station buffer output at its nominal data rate, utilizing some of the path B data to rebuild the second station buffer, and returning the path B data rate to its nominal data rate after the second station buffer has been rebuilt.

[016] Some embodiments further comprise the step of the second station relying on path B to maintain the second station buffer.

[017] Some embodiments further comprise the step of relying on path A to rebuild and maintain the second station buffer following a transmission fault detected while path B is active.

BRIEF DESCRIPTION OF THE DRAWINGS

[018] The present invention is described with reference to the accompanying figures. The figures, incorporated herein and forming part of the specification, illustrate the present invention and, together with the description, further serve to explain the principles of the invention and to enable a person skilled in the relevant art to make and use the invention.

[019] Figure 1 a protection system in accordance with the present invention.

[020] Figure 2 shows exemplary operation of the protection system of Figure 1.

[021] Figure 3 shows another embodiment of the protection system of Figure 1.

[022] Figure 4 shows exemplary operation of the protection system of Figure 3.

[023] Figure 5 shows exemplary operation of the protection system of Figure 4.

[024] Figure 6 shows another embodiment of the protection system of Figure 1.

[025] Figure 7 shows an exemplary timing diagram of the protection system of Figure 6.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[026] The disclosure provided in the following pages describes examples of some embodiments of the invention. The designs, figures, and descriptions are non-limiting examples of certain embodiments of the invention. For example, other embodiments of the disclosed device may or may not include the features described herein. Moreover, disclosed advantages and benefits may apply to only certain embodiments of the invention and should not be used to limit the disclosed inventions.

[027] Where parts are connected, descriptions herein include the term “coupled” which refers to either direct or indirect connections. Direct connections provide for a first part connected directly to a second part, for example A connected directly to B. Indirect connections provide for a first part connected indirectly to a second part, for example A connected indirectly to C via B.

[028] Figure 1 shows a signal protection system in accordance with the present invention 100. A variable latency station “VLS” 108 and a source of data 102 are in signal communications via communications paths A 104 and B 106. In various embodiments, the VLS is operable to correct faulty data before it reaches a VLS output 110.

[029] Figure 2 shows an exemplary operation of the signal protection system of

Figure 1 200. A VLS for receiving data and for outputting data is provided 204. VLS data output is initially supported via a first data path, such as Path A, that transports data to the station 208. After a data fault is detected, such as a fault detected in the VLS, unfaulted corrective data is transported to the VLS via a second data path, such as Path B 212. Error correction with uninterrupted VLS data output includes reducing VLS latency, for example bypassing at least a portion of a VLS buffer, and switching VLS data output support from the first path to the second path 216.

[030] Figure 3 shows a signal protection system embodiment with transmit and receive buffers 300. An encoder 302 with a data input 340 and a decoder 322 with a data output are in signal communications via communications paths A 312 and B 314. As is further described below, decoder variable latency enables correction of faulty data before it reaches the decoder output.

[031] The encoder 302 incorporates a transmit buffer 304 for receiving data from a transmit buffer data input 340 and a transmitter 306 for transmitting transmit buffer data to the decoder 322. In various embodiments, the transmitter includes a Path A transmitter 308 and a Path B transmitter 310 coupled between transmit buffer outputs 307, 309 and respective data paths Path A and Path B.

[032] The decoder 322 incorporates a receiver 326 coupled between Paths A and B and a receive buffer 324. The receive buffer is coupled to a decoder data output 342. In various embodiments, the receiver includes a Path A receiver 328 and a Path B receiver 330 coupled between receiver buffer inputs 329, 331 and respective data paths Path A and Path B.

[033] Figure 4 shows exemplary operation of the signal protection system of Figure 3 400. An encoder and a decoder are provided with data paths A and B therebetween 402. Initially, a data stream is transported from the encoder to the decoder over Path A to support decoder data output 404. After a data fault, unfaulted data in the decoder buffer is used to support uninterrupted decoder data output 406. Correction includes transporting corrective data and rebuilding

the data stream in the decoder. Corrective data stored in the encoder transmit buffer is transported to the decoder 408. An uninterrupted data stream is recreated from data including corrective data and new data transported over Path B 410. Transport of new data over Path B continues and maintains uninterrupted decoder data output 420.

[034] Figure 5 shows another example of operation of the signal protection system of Figure 3 500. An encoder and a decoder are provided with data paths A and B therebetween 502. Initially, a data stream is transported from the encoder to the decoder over Path A to support decoder data output 504. After a data fault, unfaulted data in the decoder buffer is used to support uninterrupted decoder data output 506. Correction includes transporting corrective data and rebuilding the data stream in the decoder. Corrective data stored in the encoder transmit buffer is transported to the decoder 508. An uninterrupted data stream is recreated from data including corrective data and new data transported over Path B 510. Transport of new data over Path B continues and maintains uninterrupted decoder data output 520.

[035] Recreation of the uninterrupted data stream 510 includes: receiving Path B corrective data at the decoder and bypassing some part of the receive buffer to eliminate gap between corrective data and unfaulted data 512; receiving Path A simultaneous data arriving at the decoder simultaneously with corrective data and merging this data with the corrective data 514; and, receiving new Path B data arriving at the decoder and merging this data with the simultaneous data 516.

[036] Persons of ordinary skill in the art will recognize the decoder receive buffer 324 is not filled after the correction process described above. The buffer can be refilled by increasing the data rate between the encoder and the decoder such that it exceeds the data rate required to support the decoder output. For example, the data rate of Path B can be increased, Paths A and B can be used simultaneously, or both of these techniques can be used.

[037] Figure 6 shows a signal protection system embodiment with return control paths A and B 600. A transmit buffer 604 with an incoming feed 602 and a receive buffer 614 with an output 616 are in signal communication via Network Paths A 606 and B 612. Each of the network paths has a corresponding return control path 608, 610.

[038] The transmit buffer 604 includes pre and post launch buffering 634, 636. The pre-launch buffering receives an incoming feed 602 and supports a main stream output 640. The post-launch buffering 636 maintains a corrective copy of launched data that is transported as a protection stream 638. In the event of a data fault, a data path other than the main network data path is used to transport the protection stream. For example, transport of the main stream over Network Path A immediately prior to a data fault would result in transport of the protective stream over Network Path B immediately after the data fault.

[039] The receive buffer 614 includes receive buffering 654 and protection merge 656. Main stream data 660 is delivered to the receive buffering and protection data 658 is delivered to the protection merge. When there is no data fault, the receive buffering data is not manipulated by the protection merge and the data is delivered to the receive buffer output 616. Alternatively, a data error results in operation of the protection merge which merges unfaulted data from the receive buffering with the protective stream 638.

[040] In an exemplary operating mode, buffer sizing is illustrated.

- a. For example, the path time 't' is approximately 10 ms which is equivalent to approximately 2,000 km (and therefore a return trip time is ~20ms).(t is the value of the longest of the 2 paths). 'r' is a value that allows for response times at each end plus a small margin – typically 5ms
- b. A keep-alive 'OAM' packet flow is maintained on both paths - sending approximately 1 packet-per-second (on same IP address as

- media flow but different port number) from the encoder to decoder
- c. The round trip time is continually monitored with the use of a return packet OAM from decoder to encoder
 - d. Encoder sends actual traffic on only path A (for example)
 - e. Encoder fills transmit buffer to a level of $3t$ (30ms) – this is r (5ms) pre-send and $2t+r$ (25ms) post-send (i.e., the transmit buffer always contains the last 25ms of data already transmitted) (this value is varied according to the measured round-trip time)
 - f. Upon receiving the stream, the decoder fills receive buffer to $2t+r$ (25ms) before starting to output i.e. there is a 25ms worth of data held in output buffer
 - g. If the path A signal is lost at the decoder, the decoder signals to the encoder to indicate a lost feed
Time taken = loss detection time plus t (10ms). The decoder continues to output data from its buffer
 - h. At this point the encoder commences transmission of the feed on path B, but from the end of the buffer – i.e., it is re-transmitting the last 25 ms that has already been sent
 - i. Upon receipt of the stream on the B feed, the decoder takes this stream (discarding any duplicate packets) to maintain a continual output flow
 - j. Once this process is complete, the decoder indicates to the encoder the amount of buffer fill it currently now has and how much it needs to be re-filled to be ready for another protection event
 - k. The encoder then enters a ‘nominal bit rate plus a bit’ transmission period to get the decoder buffer back to normal operating point (the

alternative technique that could be used here is two also use path A when it recovers – i.e. both paths in use for a fraction of a second)

1. Once the OAM on path A indicates it has been restored, the system is ready to protect again, the other way

[041] As persons of ordinary skill in the art will appreciate, round-trip path length is approximated above as two times the length of the longer path. Where the paths are of substantially different lengths, the round-trip path length can be more accurately represented as t_1 and t_2 . Similarly, encoder/decoder reaction times can be represented as the time to detect a fault in the encoder r_1 , the time for the encoder to assemble and launch a message requesting corrective data from the decoder r_2 , and the time for the decoder to interpret this message and launch the corrective data r_3 .

[042] Figure 7 shows a timing table illustrative of an exemplary operating mode of the protection system of Figure 6 700.

- a. At index 1, the protection system is sending via Path A
- b. At index 2, the protection system is sending via Path A, discovers an error and requests a resend (r_1)
- c. At index 3, the protection system is sending via Path A and the resend message is being transported over Network Path A return (t_1)
- d. At index 4, the protection system is sending over path A and the protection system receives the resend request and prepares to resend (r_2)
- e. At index 5, the protection system is sending over path A and the protection system is sending the post-launch/corrective data over path B (t_2)

- f. At index 6, the protection system begins to receive the corrective data and begins merging data to maintain an uninterrupted output (r3)
- g. At index 7, the protection system is sending data over Path B

[043] While various embodiments of the present invention have been described above, it should be understood that they have been presented by way of example only, and not limitation. It will be apparent to those skilled in the art that various changes in the form and details can be made without departing from the spirit and scope of the invention. As such, the breadth and scope of the present invention should not be limited by the above-described exemplary embodiments, but should be defined only in accordance with the following claims and equivalents thereof.

CLAIMS

What is claimed is

1. A data protection method comprising the steps of:
providing data path A and data path B;
each of the data paths extending between first and second stations;
the first station providing data to path A;
the second station receiving data initially from data path A; and,
providing an uninterrupted second station output following a data fault

via

utilizing a buffer of the second station to maintain an unfaulted second station output after the data fault is detected,

the first station providing data to data path B, the data including resend data from a first station buffer, the resend data including the faulted data, and

the data from data path B bypassing at least a portion of the second station buffer to merge the resent data with the data remaining in the second station buffer.

2. The data protection method of claim 1 further comprising the steps of:

sizing the buffer of the second station such that the time required for a bit to traverse the second station buffer equals or exceeds t ;

where $t = t_1 + t_2$;

where t_1 equals the time required for one bit of data to traverse path A;
and,

where t_2 equals the time required for one bit of data to traverse path B.

3. The data protection method of claim 2 further comprising the step of sizing the buffer of the first station such that the time required for a bit to traverse the first station buffer equals or exceeds t .

4. The data protection method of claim 1 further comprising the steps of:

sizing the buffer of the second station such that the time required for a bit to traverse the second station buffer equals or exceeds $t + r_1 + r_2 + r_3$;

where $t = t_1 + t_2$;

where t_1 equals the time required for one bit of data to traverse path A;

where t_2 equals the time required for one bit of data to traverse path B;

where r_1 equals the time required by the second station to detect the fault;

where r_2 equals the time required by the first station to respond to a received request to resend data including data replacing the faulty data; and,

where r_3 equals the time required by the second station to merge resent data with data remaining in the second station buffer.

5. The data protection method of claim 4 further comprising the step of sizing the buffer of the first station such that the time required for one bit of data to traverse the first station buffer equals or exceeds $t + r_1 + r_2$.

6. The data protection method of claim 5 further comprising the step of the second station sending a request to resend data replacing the faulty data and the first station receiving the request during a time period substantially equal to t_1 .

7. The data protection method of claim 6 further comprising the step of the first station beginning to send resend data and the second station beginning to receive resend data during a time period substantially equal to t_2 .

8. The data protection method of claim 1 further comprising the step of rebuilding the second station buffer wherein rebuild operations include
operating path B at a data rate higher than a nominal data rate for path B,
utilizing some of the path B data to maintain a second station buffer output at its nominal data rate,
utilizing some of the path B data to rebuild the second station buffer, and
returning the path B data rate to its nominal data rate after the second station buffer has been rebuilt.

9. The data protection method of claim 8 further comprising the step of the second station relying on path B to maintain the second station buffer.

10. The data protection method of claim 9 further comprising the step of relying on path A to rebuild and maintain the second station buffer following a transmission fault detected while path B is active.

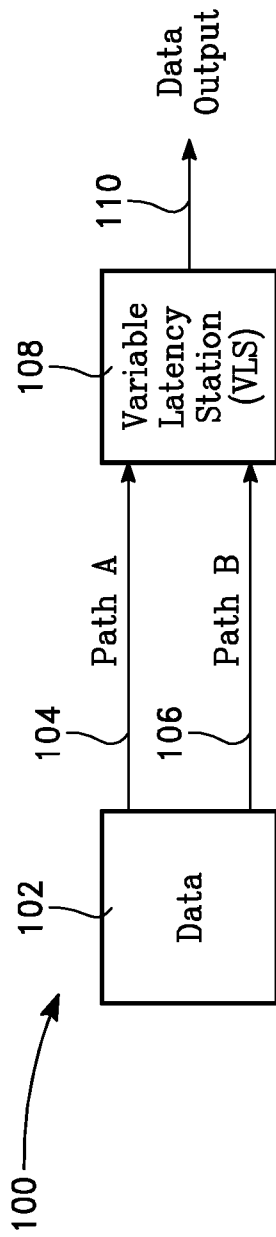


FIG. 1

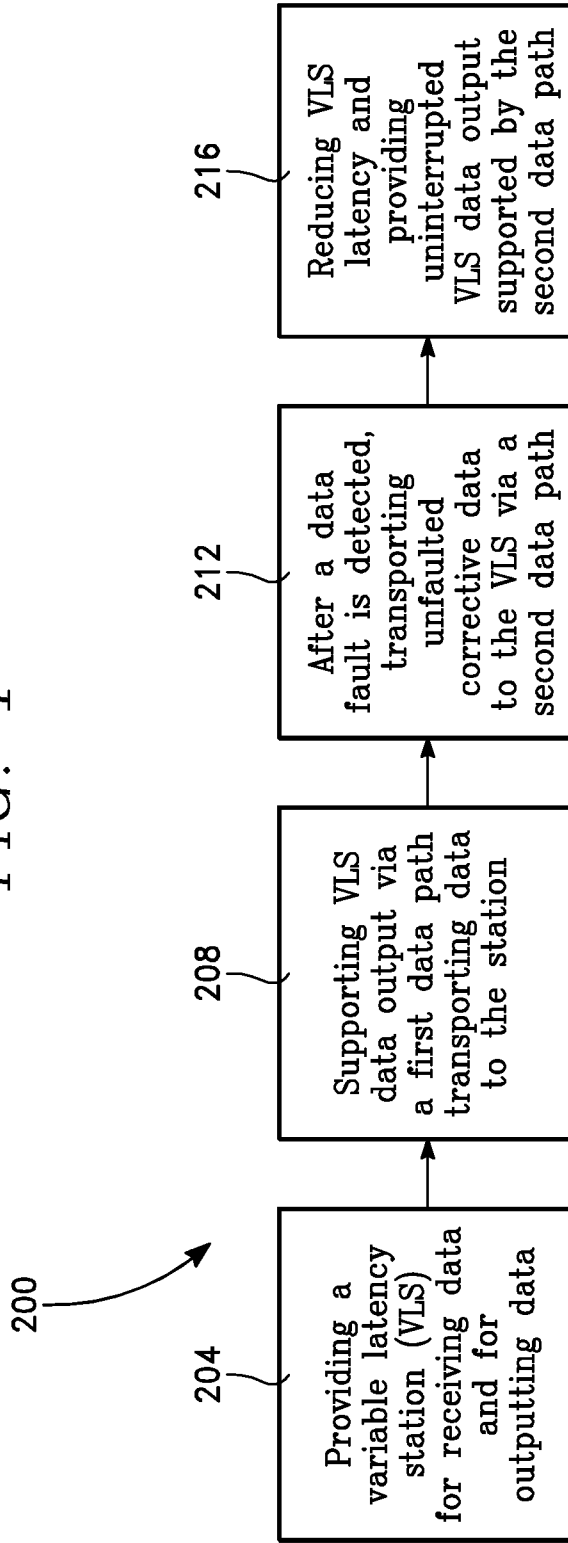


FIG. 2

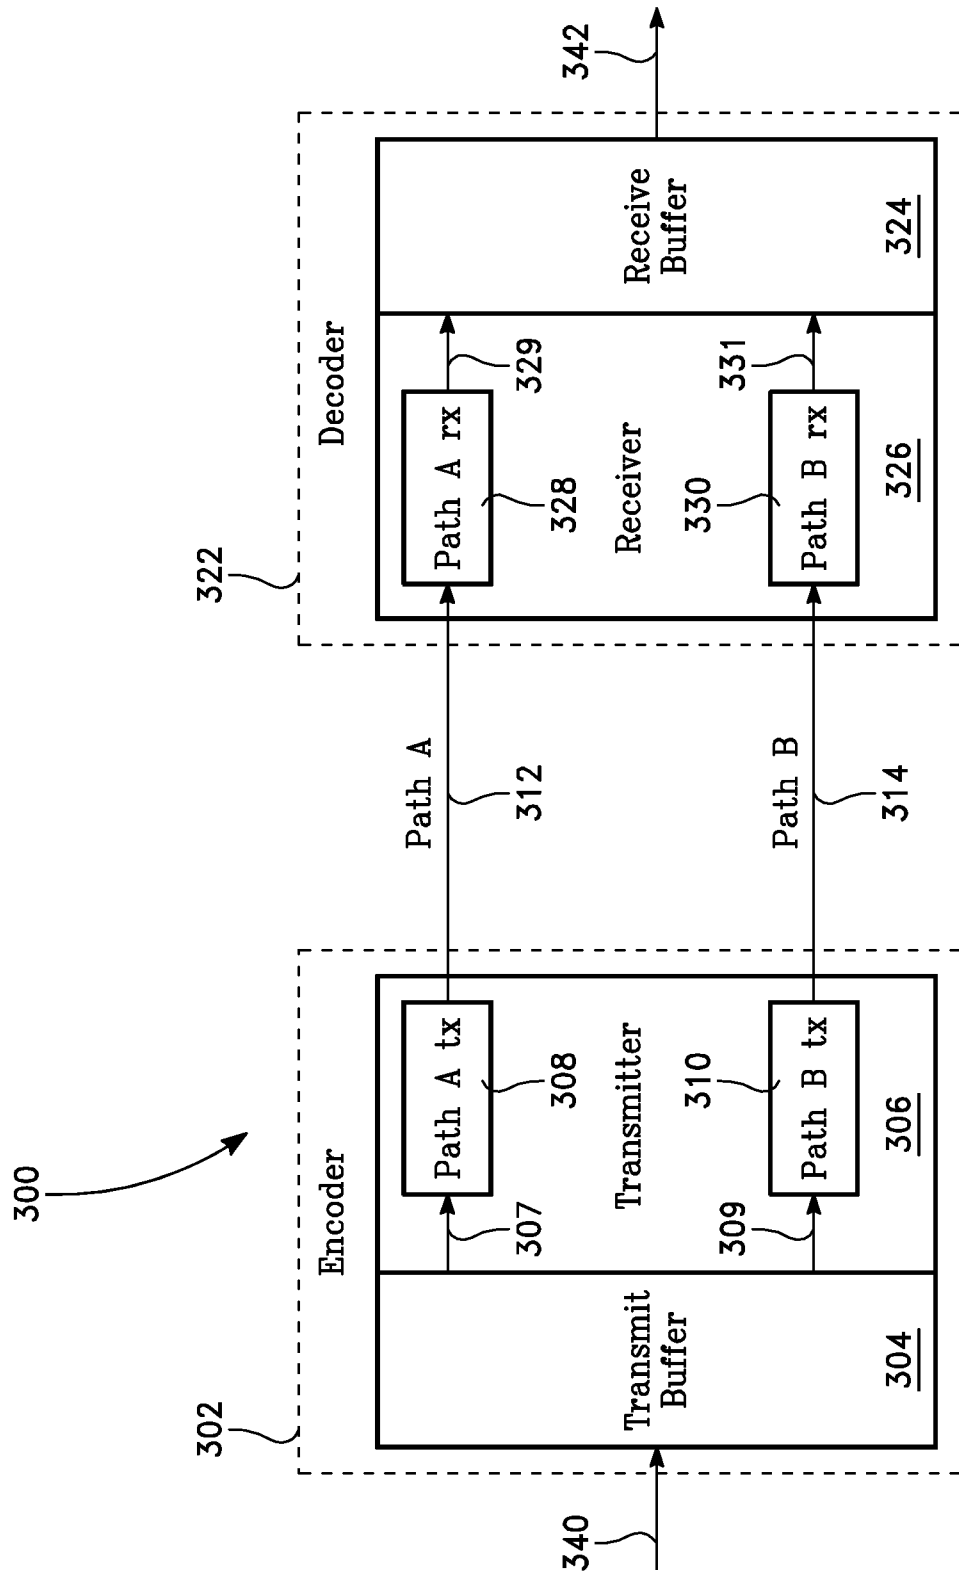


FIG. 3

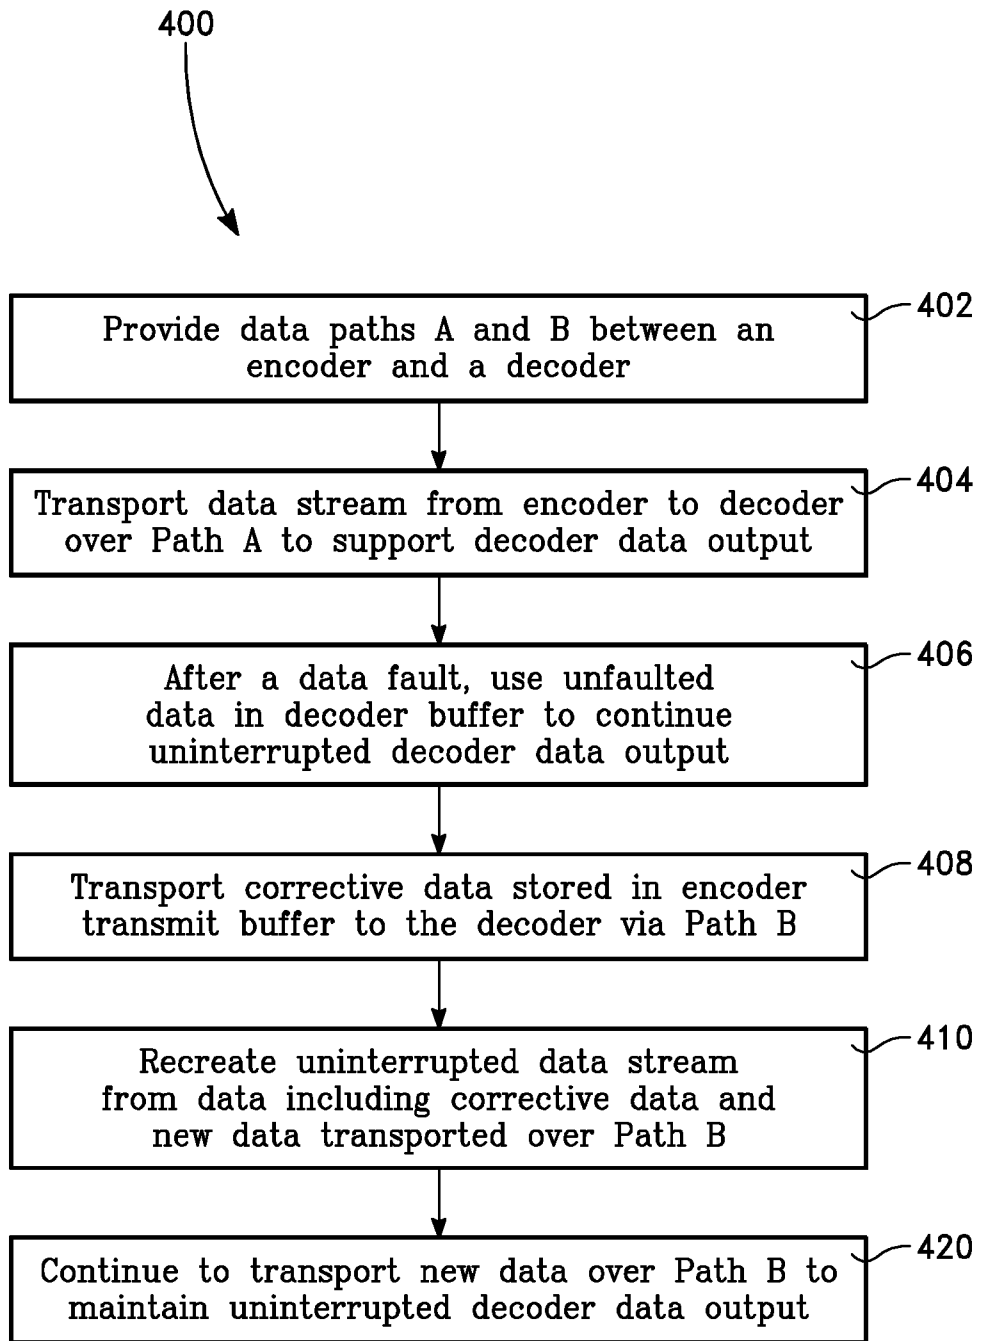


FIG. 4

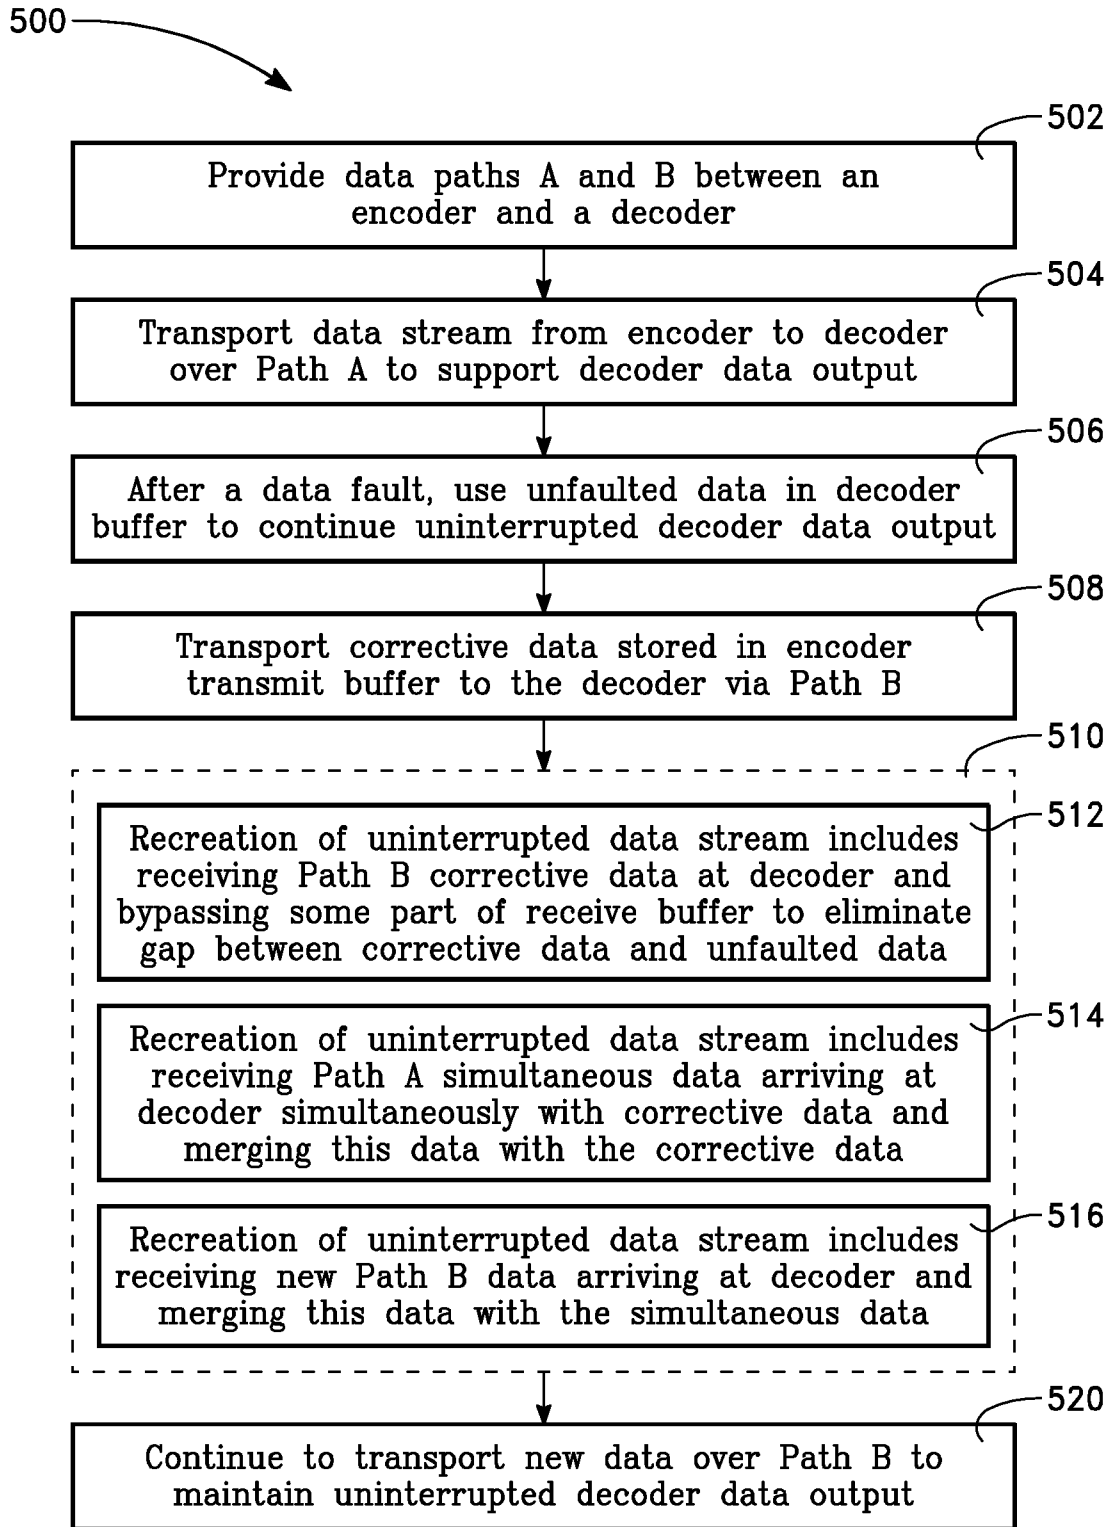


FIG. 5

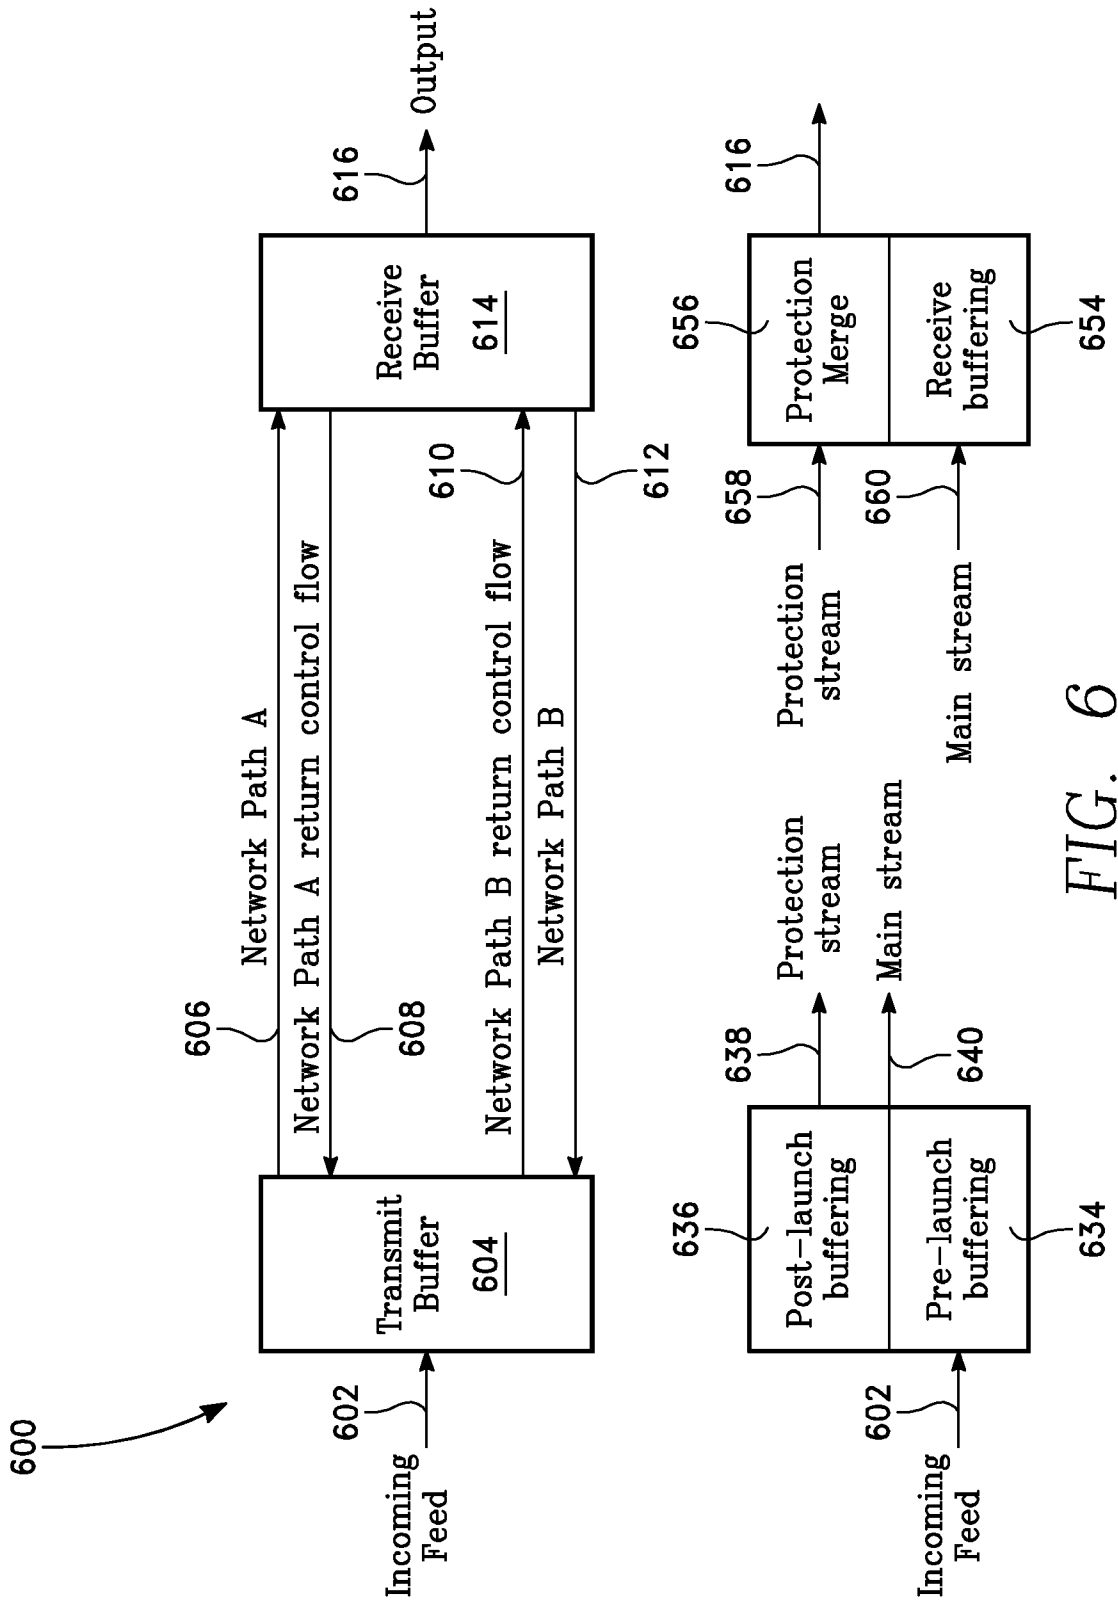


FIG. 6

700 

Index	Transmit Buffer	Network Path A		Network Path B		Receive Buffer	Time					
		Feed	Return	Feed	Return		r1	t1	r2	t2	r3	
1	Sending to A	Active				Receiving from A						
2		Active				Discover Error, Request Resend	XXXX					
3		Active	Active					XXXX				
4	Receive Request, Prepare To Resend	Active							XXXX			
5	Resending Postlaunch Data on B	Active		Active						XXXX		
6				Active		Begin To Receive Resend, Merging					XXXX	
7	Sending to B			Active		Receiving from B						XXXX

FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/035109**A. CLASSIFICATION OF SUBJECT MATTER****H04L 1/00(2006.01)i, H03M 13/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04L 1/00; H04B 7/26; H04J 3/14; H03M 13/00; H04L 1/16; H04L 12/28; H04L 12/56; G06F 13/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: data protection, error correction, data path, interrupt, fault, buffer, bypass, variable latency station(VLS)**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009-0185479 A1 (MICHAEL JOHN BEEMS HART et al.) 23 July 2009 See paras. 22, 23, 41-48; claims 1, 7-10; and figs. 1a, 1c.	1-10
A	WO 03-005629 A1 (NOKIA INC.) 16 January 2003 See abstract; page 2, line 24 - page 3, line 5; claim 1; and fig. 2.	1-10
A	KR 10-2005-0033418 A (SAMSUNG ELECTRONICS CO., LTD.) 12 April 2005 See abstract; page 2, line 24 - page 3, line 5; claim 1; and fig. 2.	1-10
A	US 6463472 B1 (WILLIAM C. VAN LOO) 08 October 2002 See column 21, line 61 - column 22, line 67; and figs. 39-60.	1-10
A	US 5828677 A (ZULFIQUAR SAYEED et al.) 27 October 1998 See column 2, line 55 - column 3, line 7; claim 1; and figs. 3-5.	1-10

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

17 July 2013 (17.07.2013)

Date of mailing of the international search report

18 July 2013 (18.07.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KANG Hee Gok

Telephone No. +82-42-481-8264



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/035109

Patent document cited in search report	Publication date	Patent family member(s)	Publication date		
US 2009-0185479 A1	23/07/2009	CN 101473584 A	01/07/2009		
		EP 2070243 A1	17/06/2009		
		EP 2070243 B1	25/07/2012		
		GB 0619455 D0	08/11/2006		
		JP 2010-506447 A	25/02/2010		
		KR 10-1049607 B1	15/07/2011		
		KR 10-2009-0037394 A	15/04/2009		
		US 7983151 B2	19/07/2011		
		WO 2008-040930 A1	10/04/2008		
		WO 03-005629 A1	16/01/2003	AU 2002-311547 B2	27/04/2006
CA 2449532 A1	16/01/2003				
CN 1541466 A	27/10/2004				
CN 1541466 C0	13/08/2008				
EP 1415424 A1	06/05/2004				
EP 1415424 A4	07/06/2006				
JP 04392033 B2	24/12/2009				
JP 2004-537206 A	09/12/2004				
JP 2007-251991 A	27/09/2007				
MX PA03010849 A	22/11/2004				
RU 2003134626 A	27/04/2005				
RU 2298289 C2	27/04/2007				
KR 10-2005-0033418 A	12/04/2005			US 2005-0073985 A1	07/04/2005
US 6463472 B1	08/10/2002			EP 0836299 A2	15/04/1998
		EP 0836299 A3	20/07/2005		
		JP 10-164140 A	19/06/1998		
		US 2002-0059442 A1	16/05/2002		
		US 6065052 A	16/05/2000		
		US 6233615 B1	15/05/2001		
US 5828677 A	27/10/1998	CA 2197131 C	30/05/2000		
		EP 0797327 A2	24/09/1997		
		EP 0797327 A3	04/10/2000		
		JP 10-022984 A	23/01/1998		