



(86) Date de dépôt PCT/PCT Filing Date: 2016/03/04
(87) Date publication PCT/PCT Publication Date: 2016/09/22
(85) Entrée phase nationale/National Entry: 2017/08/28
(86) N° demande PCT/PCT Application No.: US 2016/020806
(87) N° publication PCT/PCT Publication No.: 2016/148937
(30) Priorité/Priority: 2015/03/13 (US62/132,810)

(51) Cl.Int./Int.Cl. *B05C 17/005* (2006.01),
B05D 1/26 (2006.01)
(71) Demandeur/Applicant:
3M INNOVATIVE PROPERTIES COMPANY, US
(72) Inventeurs/Inventors:
DOMENIGHI, ALVARO S., US;
GUSTAFSON, KIM L., US;
ZIMMERMAN, PATRICK G., US
(74) Agent: SMART & BIGGAR

(54) Titre : EMBOUT DE BUSE ET PROCEDE DE DISTRIBUTION SUR UN PANNEAU A DECOUPE PARTIELLE
(54) Title: NOZZLE TIP AND METHOD FOR DISPENSING ONTO A PARTIAL CUT PANEL

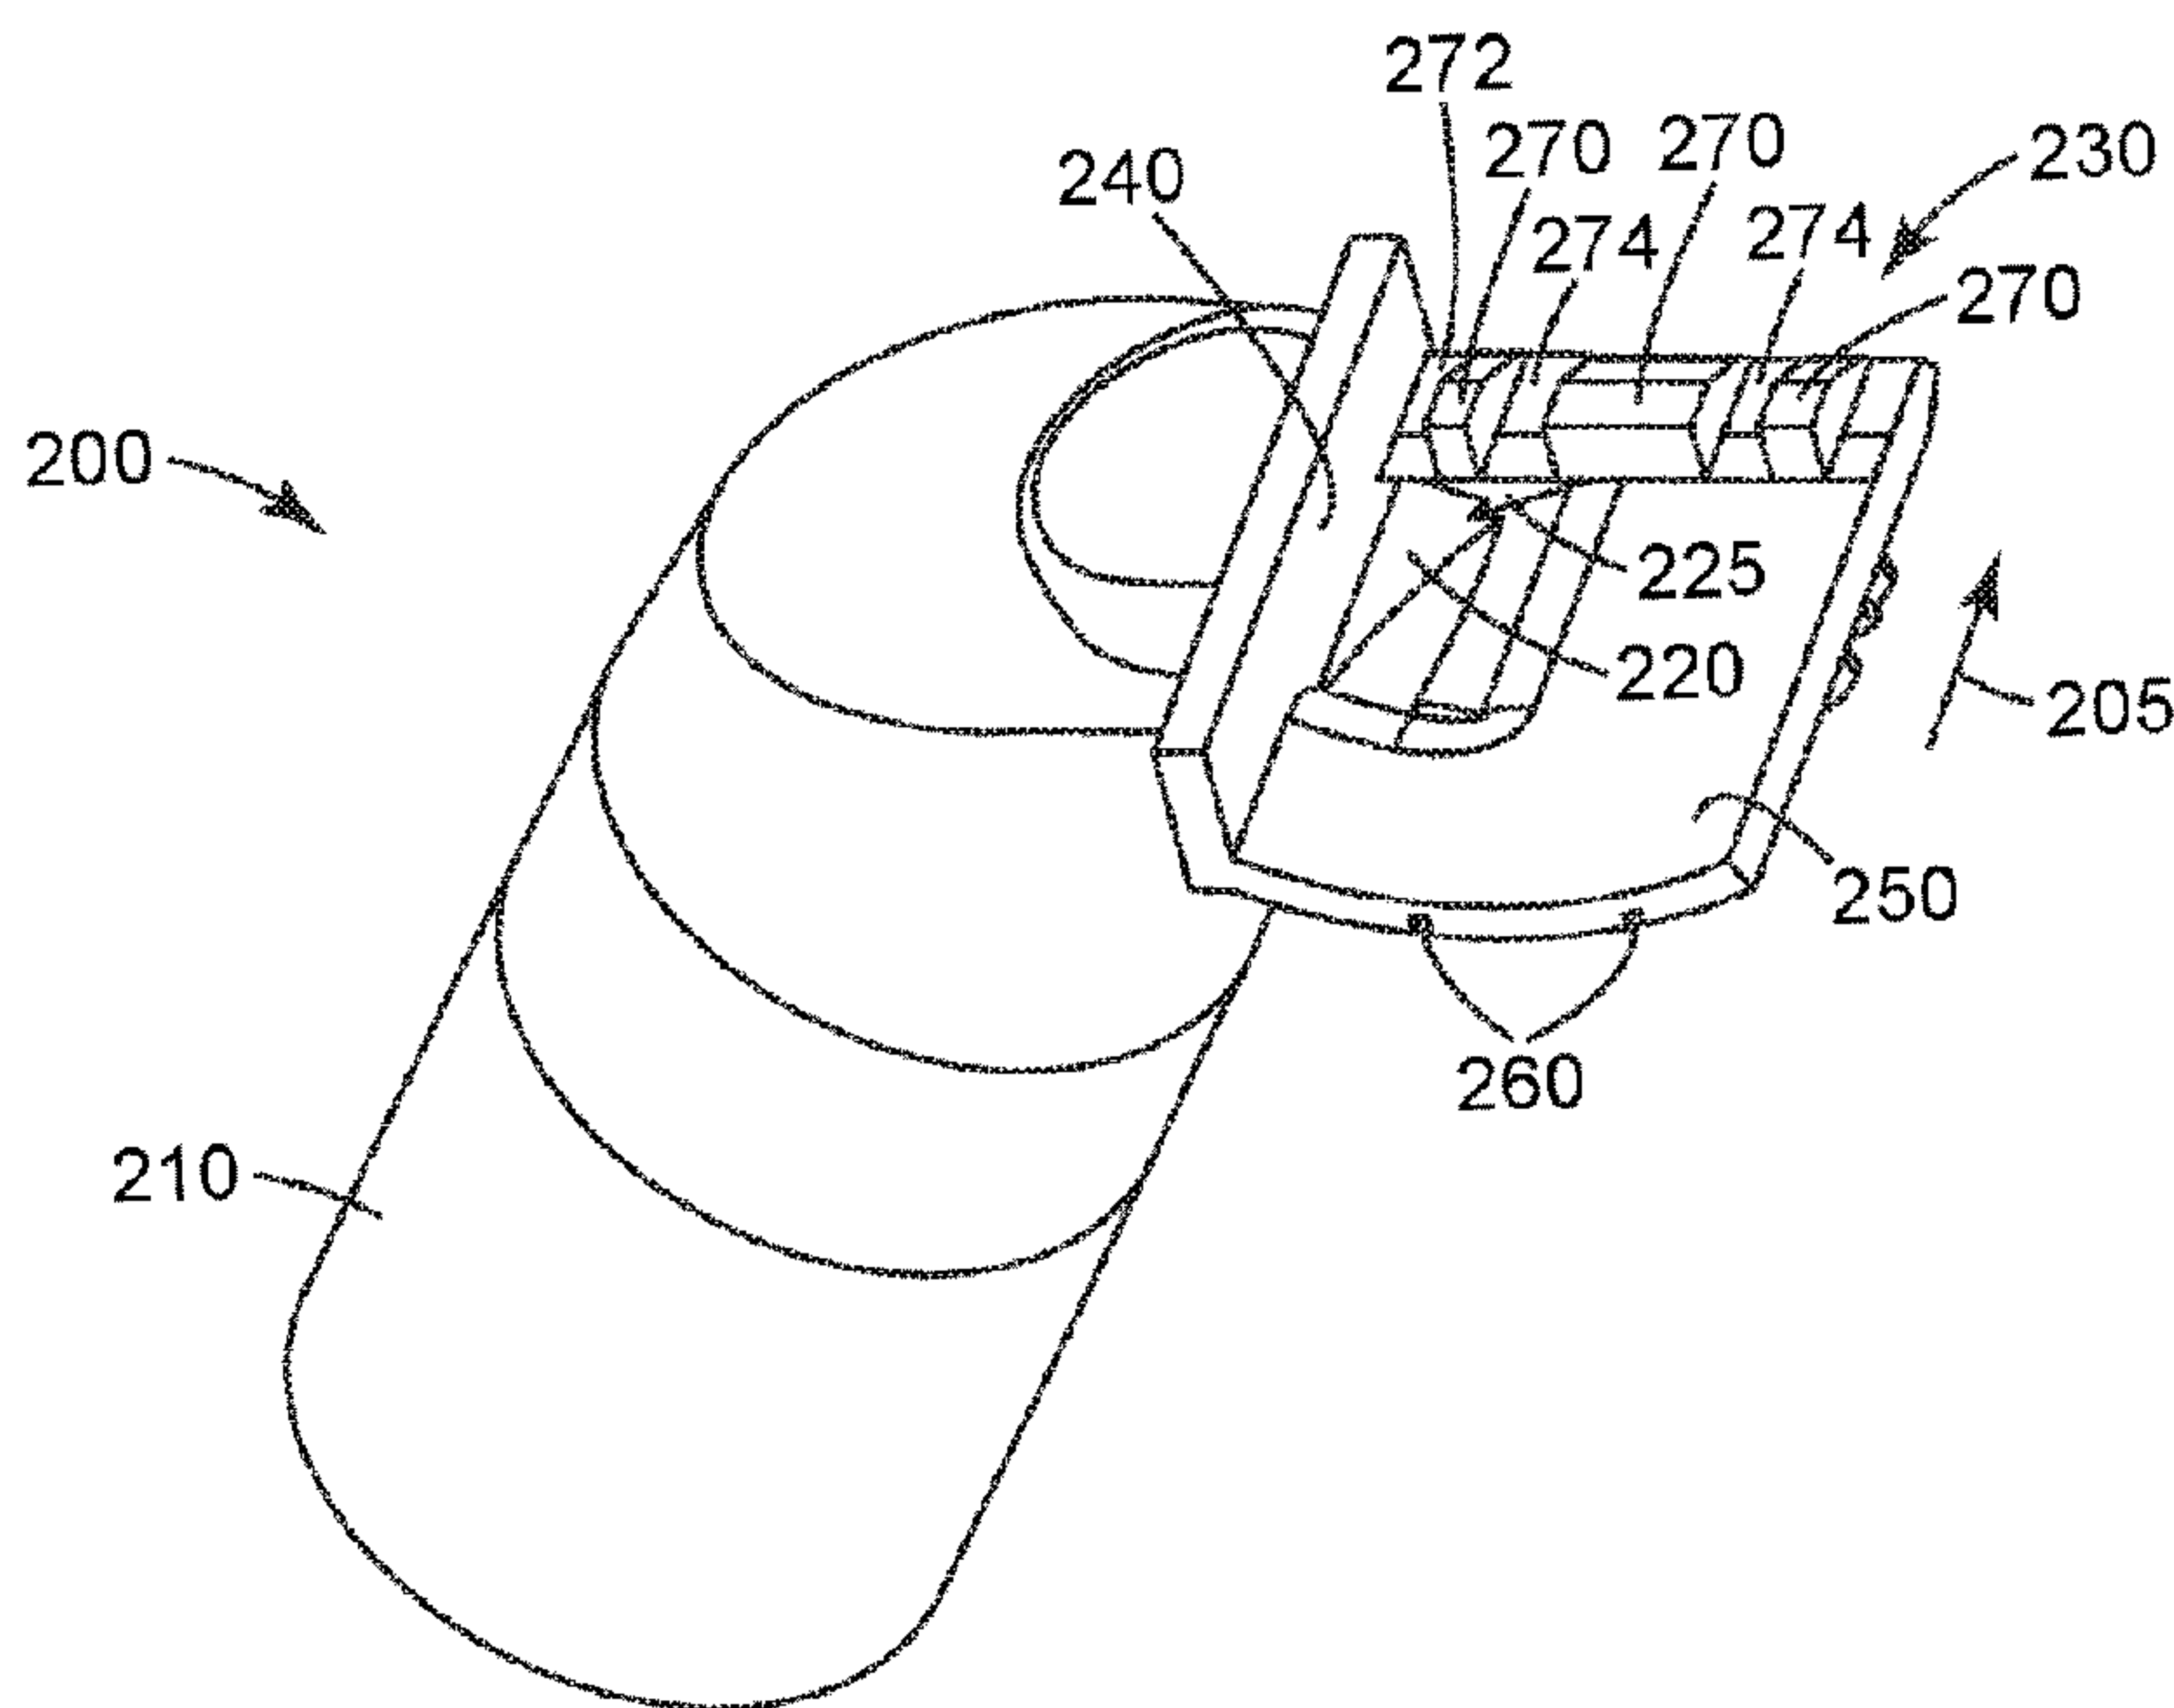


Fig. 1A

(57) **Abrégé/Abstract:**

Nozzles are provided, for applying setting resins onto the edge of a partial cut in a panel, in some embodiments a honeycomb panel. The nozzle comprises a connector portion and an application head, wherein the application head comprises: a) a supporting wall, and b) a finish wall joining the supporting wall along an edge at an angle of 90 degrees or greater and less than 120 degrees. In some embodiments, the finish wall has a trailing edge which has a curved profile wherein the curve radius remains between 1.0 and 7.0 cm throughout the curve. In some embodiments, the finish wall has a leading edge which comprises a block wall which at least partially blocks movement of applied resin beyond the leading edge of the finish wall. In addition, methods of applying a setting resin onto the edge of a partial cut in a panel are provided.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property

Organization

International Bureau

(43) International Publication Date

22 September 2016 (22.09.2016)



WIPO/PCT



(10) International Publication Number

WO 2016/148937 A1

(51) International Patent Classification:

B05C 17/005 (2006.01)

(21) International Application Number:

PCT/US2016/020806

(22) International Filing Date:

4 March 2016 (04.03.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/132,810

13 March 2015 (13.03.2015)

US

(71) Applicant: 3M INNOVATIVE PROPERTIES COMPANY [US/US]; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(72) Inventors: DOMENIGHI, Alvaro S.; 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **GUSTAFSON, Kim L.;** 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US). **ZIMMERMAN, Patrick G.;** 3M Center, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(74) **Agents: SOO, Philip P.** et al.; 3M Center, Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, Minnesota 55133-3427 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report (Art. 21(3))*

(54) Title: NOZZLE TIP AND METHOD FOR DISPENSING ONTO A PARTIAL CUT PANEL

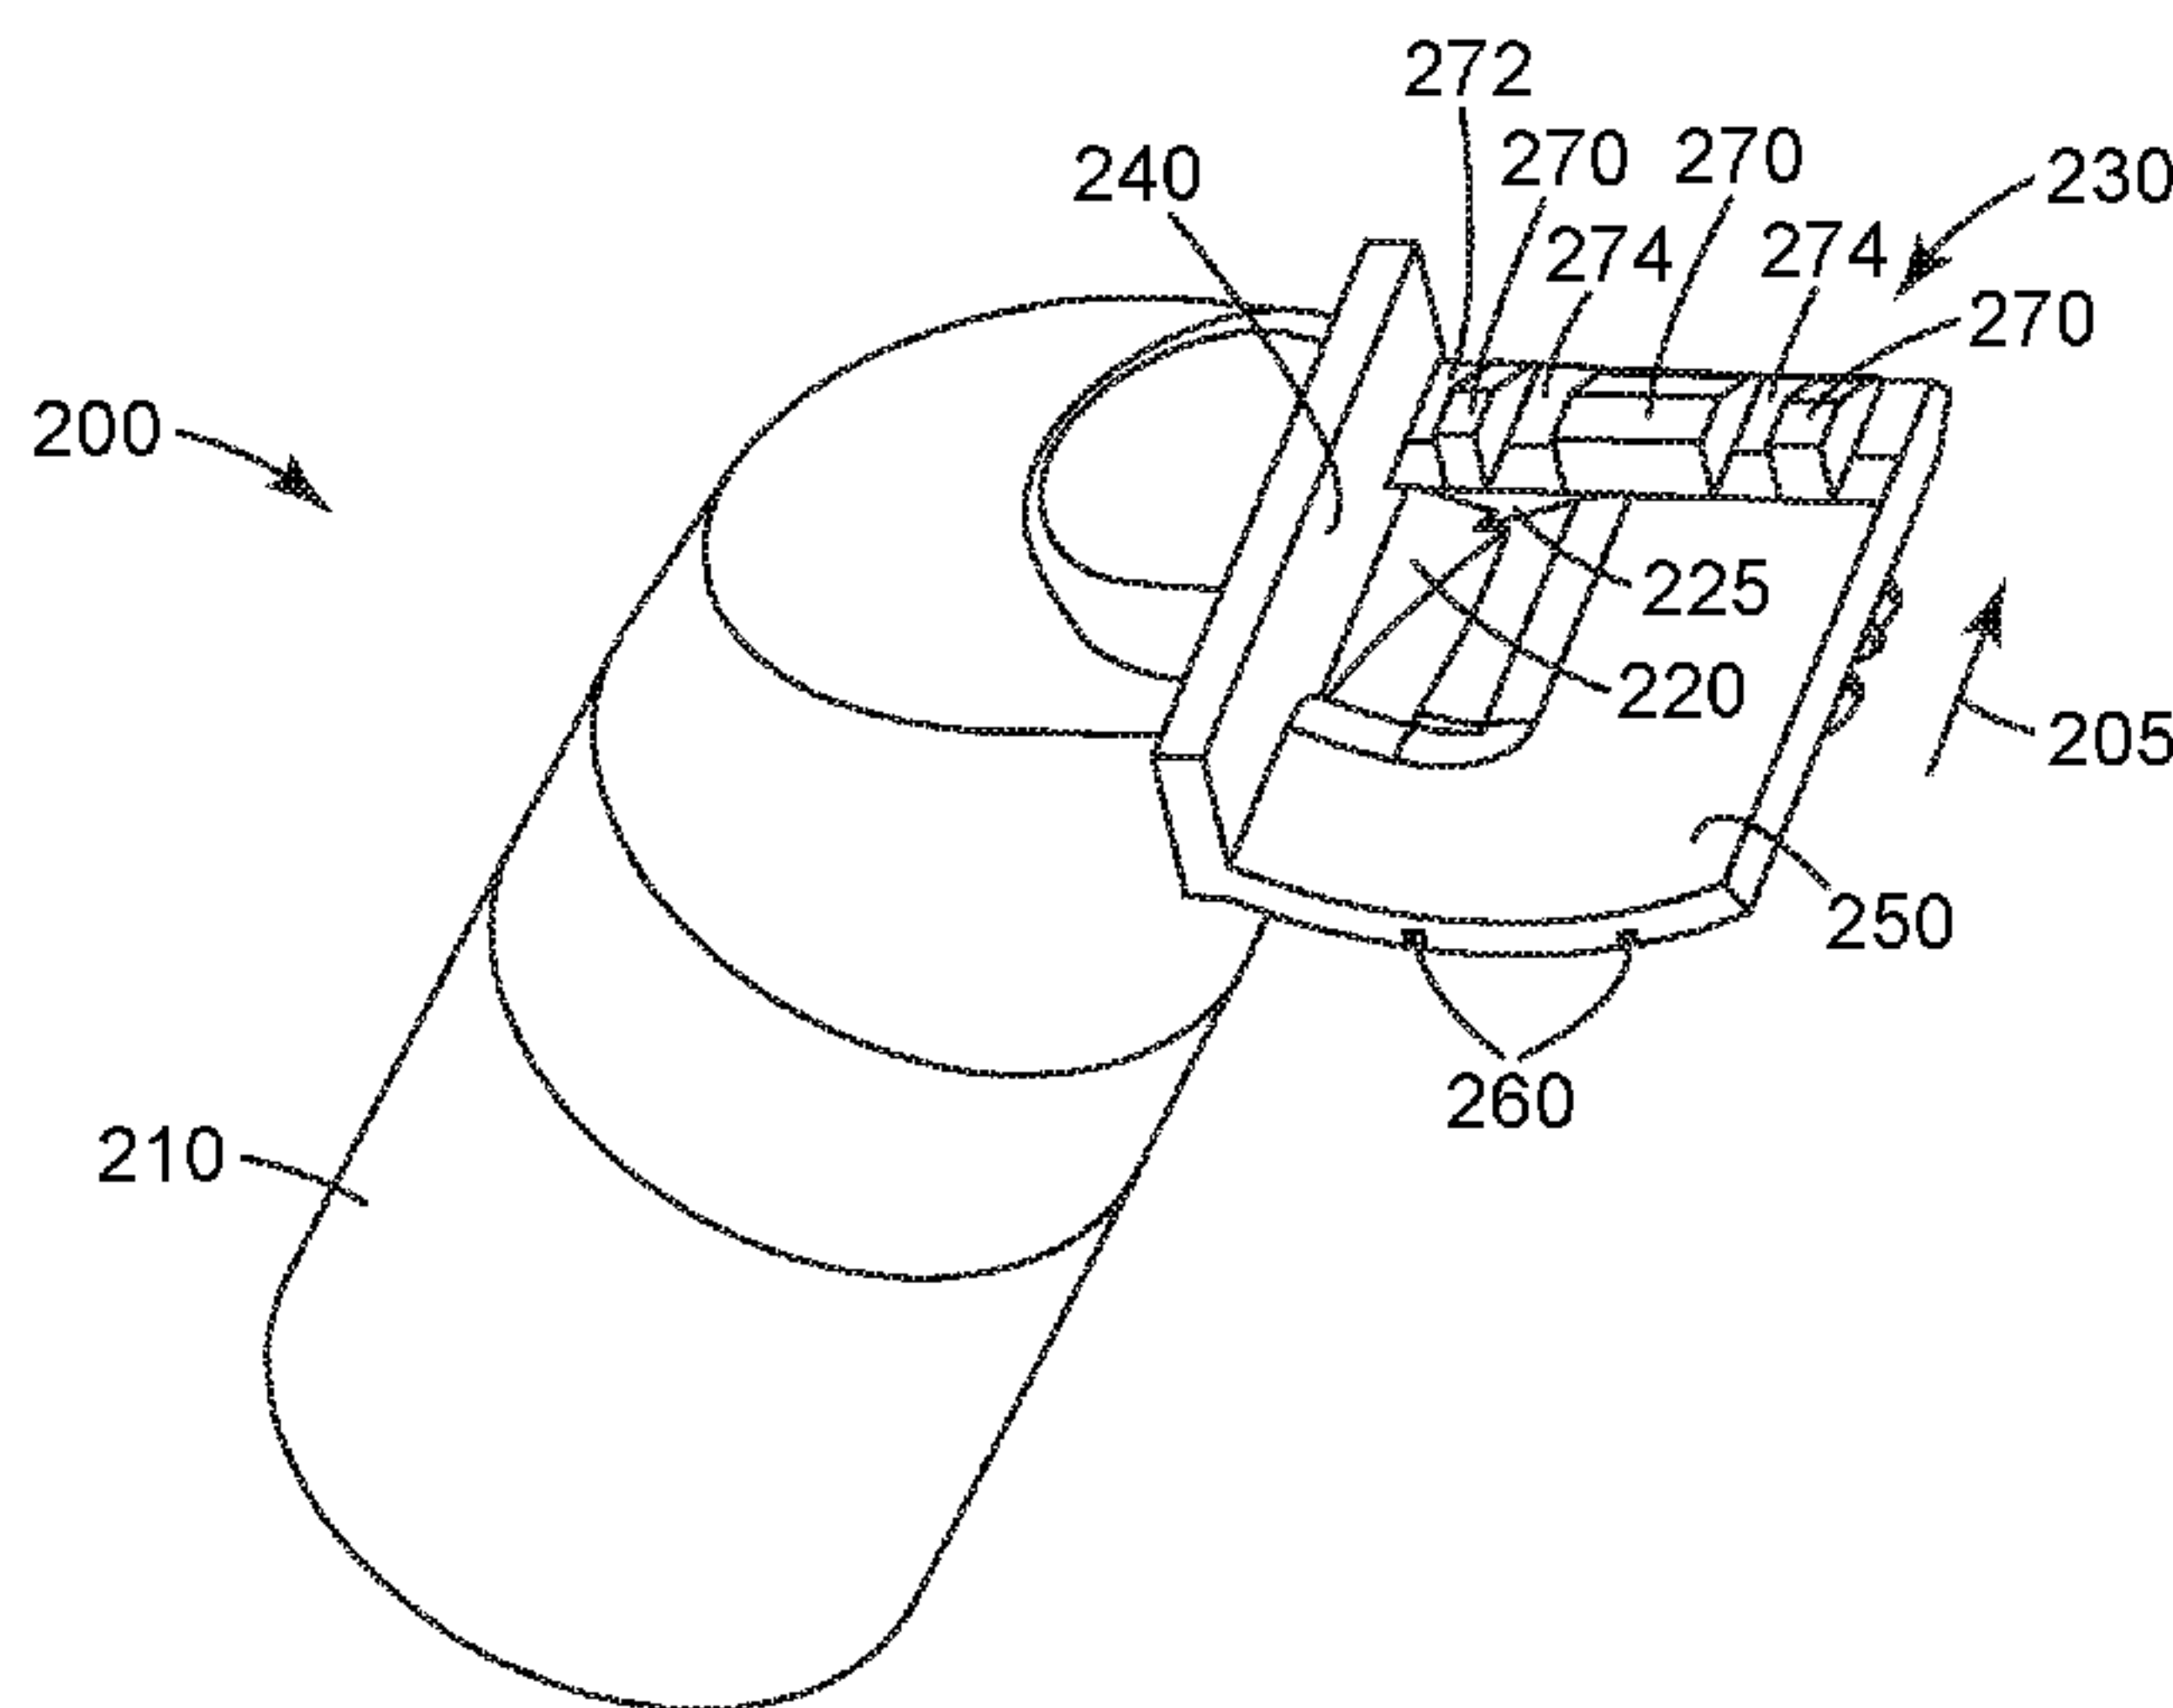


Fig. 1A

(57) Abstract: Nozzles are provided, for applying setting resins onto the edge of a partial cut in a panel, in some embodiments a honeycomb panel. The nozzle comprises a connector portion and an application head, wherein the application head comprises: a) a supporting wall, and b) a finish wall joining the supporting wall along an edge at an angle of 90 degrees or greater and less than 120 degrees. In some embodiments, the finish wall has a trailing edge which has a curved profile wherein the curve radius remains between 1.0 and 7.0 cm throughout the curve. In some embodiments, the finish wall has a leading edge which comprises a block wall which at least partially blocks movement of applied resin beyond the leading edge of the finish wall. In addition, methods of applying a setting resin onto the edge of a partial cut in a panel are provided.

WO 2016/148937 A1

NOZZLE TIP AND METHOD FOR DISPENSING ONTO A PARTIAL CUT PANEL

5 Field of the Disclosure

This disclosure relates to nozzles for applying setting resins onto the edge of a partial cut in a panel and methods of applying setting resins onto the edge of a partial cut in a panel.

10 Background of the Disclosure

The following references may be relevant to the general field of technology of the present disclosure: US 5,250,145, US 6,276,858, US 2009/0294489 A1, and US2012/0091172 A1.

15 Summary of the Disclosure

Briefly, the present disclosure provides nozzles for applying setting resins onto the edge of a partial cut in a panel. The nozzle comprises a connector portion and an application head, wherein the connector portion is adapted to receive setting resin from a resin dispensing device and deliver the setting resin to the application head. The application head comprises: a) a supporting wall, and b) a finish wall joining the supporting wall along an edge at an angle of 90 degrees or greater and less than 120 degrees. The connector portion is adapted to deliver the setting resin to the application head in the interior of the angle formed between the supporting wall and the finishing wall. In some embodiments, the nozzle comprises a single supporting wall. In some
20 embodiments, the nozzle comprises no component which makes contact with the panel other than the supporting wall and the finish wall during application of a setting resin onto the edge of a panel. In some embodiments, the finish wall has a trailing edge which has a curved profile wherein the curve radius remains between 1.0 and 7.0 cm throughout the curve. In some embodiments, the finish wall has a leading edge which
25 comprises a block wall which at least partially blocks movement of applied resin beyond the leading edge of the finish wall. In some embodiments, the finish wall comprises one or more scores enabling reduction in the length of the finish wall by
30

breaking at a score. In some embodiments, the nozzle is a one-piece, integrally formed article. In some embodiments, the nozzle is optically translucent or transparent.

In another aspect, the present disclosure provides methods of applying a setting resin onto the edge of a partial cut in a panel, comprising the steps of: a) bringing the connector portion of a nozzle according to the present disclosure into connection with an output of a resin dispensing device; b) bringing the application head of the nozzle into contact with the edge of a partial cut in a panel; and c) dispensing the setting resin through the nozzle to the partial cut edge of the panel while the nozzle is moved in a lateral direction relative to the panel so as to apply resin to the partial cut edge. In some embodiments, the step of bringing the application head of the nozzle into contact with the edge of a partial cut in a panel comprises positioning the supporting wall of the nozzle plane parallel to and in contact with a top surface layer of the panel. In some embodiments, the step of bringing the application head of the nozzle into contact with the edge of a partial cut in a panel comprises positioning the nozzle such that the angle formed between the supporting wall and the finish wall rides on an outer edge of a top surface layer of the panel. In some embodiments, the panel is a honeycomb panel. In some embodiments, the setting resin is an adhesive. In some embodiments, the setting resin is a low density void filler.

Brief Description of the Drawing

FIGS. 1A, 1B, 1C and 1D are views of a nozzle according to the present disclosure.

FIGS. 2A, 2B, and 2C are cross sections of nozzles according to the present disclosure positioned for use with three different sizes of partial cut panels.

FIG. 3 is a photograph of a partial cut honeycomb panel bearing low density void filler on one cut surface which was applied from a nozzle according to the present disclosure, by a method according to the present disclosure.

Detailed Description

This disclosure relates to nozzles for applying setting resins onto the edge of a partial cut in a panel and methods of applying setting resins onto the edge of a partial cut in a panel. Partial cuts may include channel cuts, router cuts, plunge cuts, or any cut

that exposes a panel edge without cutting through the entire width of the panel. In some embodiments, a partial cut removes a top surface layer and substantially all of one or more interior layers of the panel, in the area of the cut, while leaving a bottom surface layer intact. In some embodiments, interior layers of the panel are undercut relative to the top surface layer.

Any suitable panels may be used in the practice of the present disclosure. Typically, the panel comprises a top surface layer, at least one core layer, and a bottom surface layer. In some embodiments, the panel comprises a core material which presents voids or ragged or uneven surfaces when cut. In some embodiments, the panel is a honeycomb panel comprising a core layer of honeycomb support material. The honeycomb support material may be of any suitable geometry or material, including standard honeycomb and overexpanded honeycomb. Suitable materials may include metal or alloys, paper or card, plastic resins, fiber, or combinations thereof such as fiberglass or NOMEX® aramid resin-treated paper. In some embodiments, the panel is a foam core panel comprising a core comprising one or more layers of foam material. The surface layers may be single layers or may be comprised of two or more plies. The surface layers may be of any suitable material, which may include one or more of aluminum or other metals or alloys, plastic resins, such as phenolic resin, optionally incorporating glass fibers, aramid fabrics such as KEVLAR®, paper, resin, or veneer.

FIG. 3 is a photograph of a honeycomb core panel **100** comprising a top surface layer **110**. Partial cut **120** exposes bottom surface layer **140** and honeycomb core **130**. A setting resin, in this case a low density void filling resin, has been applied to one edge of the partial cut using a nozzle and method of the present disclosure. The resin was allowed to cure in place to form edge fill **150**. Partial cut **120** includes undercut **125**, where honeycomb core **130** is undercut relative to top surface layer **110**.

Any suitable setting resins may be used in the practice of the present disclosure. Suitable materials may include adhesives, including one-part or two-part adhesives, and void filler materials, including low density void fillers.

FIGS. 1A-D and FIGS. 2A-C depict certain embodiments of nozzles **200** according to the present disclosure. Arrows **205** represent the direction of movement of the nozzle in use, herein the “lateral axis.” In FIGS. 2A-C, the direction of movement of the nozzle in use (the lateral axis) is orthogonal to the page, toward the viewer. The

“vertical axis,” as used herein, is the axis orthogonal to the panel when the nozzle is positioned next to the panel for use, as depicted in FIGS. 2A-C. FIG. 2A depicts an embodiment of a nozzle **200** according to the present disclosure positioned for use with a partial cut panel **160** 1/4” (.64 cm) in thickness. FIG. 2B depicts an embodiment of a nozzle **200** according to the present disclosure positioned for use with a partial cut panel **170** 1/2” (1.27 cm) in thickness. FIG. 2C depicts an embodiment of a nozzle **200** according to the present disclosure positioned for use with a partial cut panel **180** 5/8” (1.59 cm) in thickness. Panels **160**, **170** and **180** each comprise top surface layer **110**, bottom surface layer **140** and honeycomb core **130**. In each of FIGS. 2A-C, honeycomb core **130** has been undercut relative to top surface layer **110**, leaving gap **190**, and bottom surface layer **140** is not cut at the site of the partial cut.

With reference to FIGS. 1A-D and FIGS. 2A-C, nozzles **200** according to the present disclosure comprise connector portion **210** adapted to engage with a setting resin dispensing apparatus (not shown) so as to receive setting resin (not shown). Connector portion **210** may be adapted to engage any suitable setting resin dispensing apparatus. Suitable setting resin dispensing apparatus may include the output of a pump, tube, or gun, or the output of a mixing head. In some embodiments, the mixing head has an outer diameter of 10 or 13 mm, and thus connector portion **210** may have an inner diameter of 10 or 13 mm adapted for friction fit to such an apparatus. In some embodiments, the mixing head has a polygonal profile, and thus connector portion **210** may have a corresponding polygonal profile. In various embodiments, connector portion **210** may be adapted to engage a setting resin dispensing apparatus by friction fit, threaded connection, bayonet mount, or similar mechanism.

Passage **220** allows setting resin (not depicted) to enter application head **230**. In some embodiments passage **220** is elongated in the lateral direction to allow for increased resin flow. In some embodiments passage **220** includes curved exit ridge **225** which directs resin entering application head **230** in a direction opposite to the direction of motion of nozzle **200** during use. In some embodiments, passage **220** passes through finish wall **250** of application head **230**.

Connector portion **210** may engage application head **230** at any suitable angle. In some embodiments, such as depicted in FIGS. 1A-D and FIGS. 2A-C, connector

portion **210** may engage application head **230** at approximately 45 degrees from vertical (relative to the vertical axis) and 90 degrees from lateral (relative to the lateral axis). In some embodiments, connector portion **210** may engage application head **230** at angles of from 0 degrees to 90 degrees from vertical and from 0 degrees to 180 degrees from lateral. In some embodiments adapted to hand application, connector portion **210** engages application head **230** at angles of from 15 degrees to 75 degrees from vertical and from 15 degrees to 165 degrees from lateral. In some embodiments adapted to automated application, connector portion **210** engages application head **230** at angles of from 0 degrees to 45 degrees from vertical and from 45 degrees to 135 degrees from lateral.

Application head **230** comprises supporting wall **240**. In use, supporting wall **240** is plane parallel to and rides on top surface layer **110** to provide contact, alignment and support of nozzle **200**. Supporting wall **240** joins with finish wall **250** along an edge to form an angle which rides on the outer edge of top surface layer **110** to provide additional contact, alignment and support of nozzle **200**. In typical embodiments, “supporting wall” means a nozzle component which, when the nozzle is in use to apply resin to a panel, may be in contact with and plane parallel to a portion of the panel. In some embodiments, “supporting wall” may mean a nozzle component which, when the nozzle is in use to apply resin to a panel, may form an angle with finish wall **250** which angle rides on an outer edge of the panel. In some embodiments, application head **230** comprises a single supporting wall **240**; i.e., no more than one supporting wall **240**. In some embodiments, application head **230** comprises no component other than finish wall **250** which, during use, makes contact with the bottom surface layer. In some embodiments, application head **230** comprises no component which, during use, makes contact with the panel other than supporting wall **240** and finish wall **250**.

In some embodiments, such as depicted FIGS. 1A-D and FIGS. 2A-C, the trailing edge of finish wall **250** is smoothly curved toward the panel so as to provide a smoothly curved finish in the applied resin (not shown) after application. In some embodiments, the curve radius of the trailing edge of finish wall **250** is constant, while in other embodiments the curve radius of the trailing edge of finish wall **250** varies over the length of the trailing edge. In some embodiments, the curve radius of the smoothly curving trailing edge of finish wall **250** remains between 1.0 and 7.0 cm

throughout the curve, in some embodiments between 1.5 and 7.0 cm, in some
embodiments between 1.5 and 5.0 cm, and in some embodiments between 1.5 and 3.0
cm. As used herein, “curve radius” refers to the inner face of curved finish wall **250**
and is measured for a curve existing in a plane orthogonal to the lateral axis. In some
5 embodiments, supporting wall **240** joins finish wall **250** along an edge at a right angle.
In other embodiments (not shown), the trailing edge of finish wall **250** may be straight,
so as to provide a flat finish in the applied resin (not shown) after application. In some
embodiments, such as depicted FIGS. 1A-D and FIGS. 2A-C, supporting wall **240** joins
finish wall **250** along an edge at an angle of 90 degrees or greater, in some
10 embodiments greater than 92 degrees, and in some embodiments greater than 94
degrees. In some embodiments, supporting wall **240** joins finish wall **250** along an edge
at an angle of 90 degrees or greater and less than 120 degrees; in some embodiments
greater than 92 degrees and less than 120 degrees, and in some embodiments greater
than 94 degrees and less than 120 degrees. In some embodiments, finish wall **250**
15 includes scoring **260** enabling the user to break off distal portions of finish wall **250** so
as to use nozzle **200** with thinner panels. In the embodiment depicted in FIGS. 1A-D
and FIGS. 2A-C, nozzles **200** are scored for use with 1/4” (.64 cm) panels, as depicted
in FIG. 2A, or 1/2” (1.27 cm) panels, as depicted in FIG. 2B, or may be used as is with
5/8” (1.59 cm) panels, as depicted in FIG. 2C. The length of finish wall **250**, measured
20 along the vertical axis from the angle formed between finish wall **250** and supporting
wall **240** to the end of finish wall **250**, is approximately the same as the combined
width of the top surfaced layer and the core of the panel.

In some embodiments, such as depicted in FIGS. 1A-D and FIGS. 2A-C, the
leading edge of finish wall **250** includes block wall **270** to discourage movement of
25 applied resin beyond the leading edge of finish wall **250**. In some embodiments, the
leading side of block wall **270** is angled to minimize interference with core material
such as honeycomb core **130**. In some embodiments, the height of block wall **270** is
less than the undercut of core material such as honeycomb core **130** to avoid contact
with core material. Block wall **270** contains gap **272** to provide room for top surface
30 layer **110**. In some embodiments block wall **270** also contain gaps **274** corresponding to
scoring **260**.

The nozzles according to the present disclosure may be made of any suitable material. Suitable materials may include ceramics, metals or plastic resins, such resins potentially including ABS, acrylics, polyetheramides such as ULTEM™, and optionally incorporating fibers or fillers. In some embodiments the nozzle material is optically clear or translucent so as to allow observation of the setting resin within the nozzle during preparation, use, and cleaning. The nozzles according to the present disclosure may be made by any suitable process. Suitable processes may include machining, additive processes such as 3D printing, molding processes such as injection molding. In some embodiments, the nozzles according to the present disclosure are one-piece, integrally formed articles. In some embodiments, the nozzles according to the present disclosure are integrally formed with or permanently attached to setting resin dispensing apparatus.

With reference to FIGS. 2A-C, in a method according to the present disclosure, connector portion **210** of a nozzle **200** according to the present disclosure is brought into connection with the output of a resin dispensing device (not shown). Application head **230** of nozzle **200** is brought into contact with the edge of a partial cut in panel **160**, **170**, or **180** such that supporting wall **240** is plane parallel to and rides on top surface layer **110** to provide contact, alignment and support of nozzle **200**, or such that the angle formed between supporting wall **240** and finish wall **250** rides on the outer edge of top surface layer **110** to provide contact, alignment and support of nozzle **200**, or both. Setting resin (not shown) is dispensed from the resin dispensing device through nozzle **200** to the partial cut edge of panel **160**, **170**, or **180** while the nozzle is moved in the lateral direction relative to the panel so as to apply resin to the partial cut edge. It is to be understood that motion of the nozzle relative to the panel may be achieved by motion of the nozzle, motion of the panel, or both. The setting resin is allowed or caused to set. Dispensing of the resin may be motivated by any suitable method, including manual and mechanical methods, and controlled by any suitable methods, including human or automated methods. Support and motion of the panel and nozzle may be accomplished by any suitable methods, including manual and mechanical methods, and controlled by any suitable methods, including human or automated methods.

Various modifications and alterations of this disclosure will become apparent to those skilled in the art without departing from the scope and principles of this disclosure, and it should be understood that this disclosure is not to be unduly limited to the illustrative embodiments set forth hereinabove.

We claim:

1. A nozzle for application of a setting resin onto the edge of a partial cut in a panel, the nozzle comprising a connector portion and an application head, wherein the connector portion is adapted to receive setting resin from a resin dispensing device and
5 deliver the setting resin to the application head, and wherein the application head comprises:

a) a supporting wall, and

b) a finish wall joining the supporting wall along an edge at an angle of 90 degrees or greater and less than 120 degrees.

10 wherein the connector portion is adapted to deliver the setting resin to the application head in the interior of the angle formed between the supporting wall and the finishing wall.

2. The nozzle according to claim 1 which comprises a single supporting wall.

15

3. The nozzle according to any of claims 1-2 wherein, during application of a setting resin onto the edge of a partial cut in a panel, the nozzle comprises no component which makes contact with the panel other than the supporting wall and the finish wall.

20

4. The nozzle according to any of claims 1-3 wherein the finish wall has a trailing edge which has a curved profile wherein the curve radius remains between 1.0 and 7.0 cm throughout the curve.

25 5. The nozzle according to any of claims 1-4 wherein the finish wall has a leading edge which comprises a block wall which at least partially blocks movement of applied resin beyond the leading edge of the finish wall.

6. The nozzle according to any of claims 1-5 wherein the finish wall comprises
30 one or more scores enabling reduction in the length of the finish wall by breaking at a score.

7. The nozzle according to any of claims 1-6 which is a one-piece, integrally formed article.

8. The nozzle according to any of claims 1-7 which is optically translucent or
5 transparent.

9. A method of applying a setting resin onto the edge of a partial cut in a panel, comprising the steps of:

a) bringing the connector portion of a nozzle according to any of claims 1-8 into
10 connection with an output of a resin dispensing device;

b) bringing the application head of said nozzle into contact with the edge of a partial cut in a panel; and

c) dispensing the setting resin through the nozzle to the partial cut edge of the panel while the nozzle is moved in a lateral direction relative to the panel so as to apply
15 resin to the partial cut edge.

10. The method according to claim 9 wherein the step of bringing the application head of said nozzle into contact with the edge of a partial cut in a panel comprises positioning the supporting wall of the nozzle plane parallel to and in contact with a top
20 surface layer of the panel.

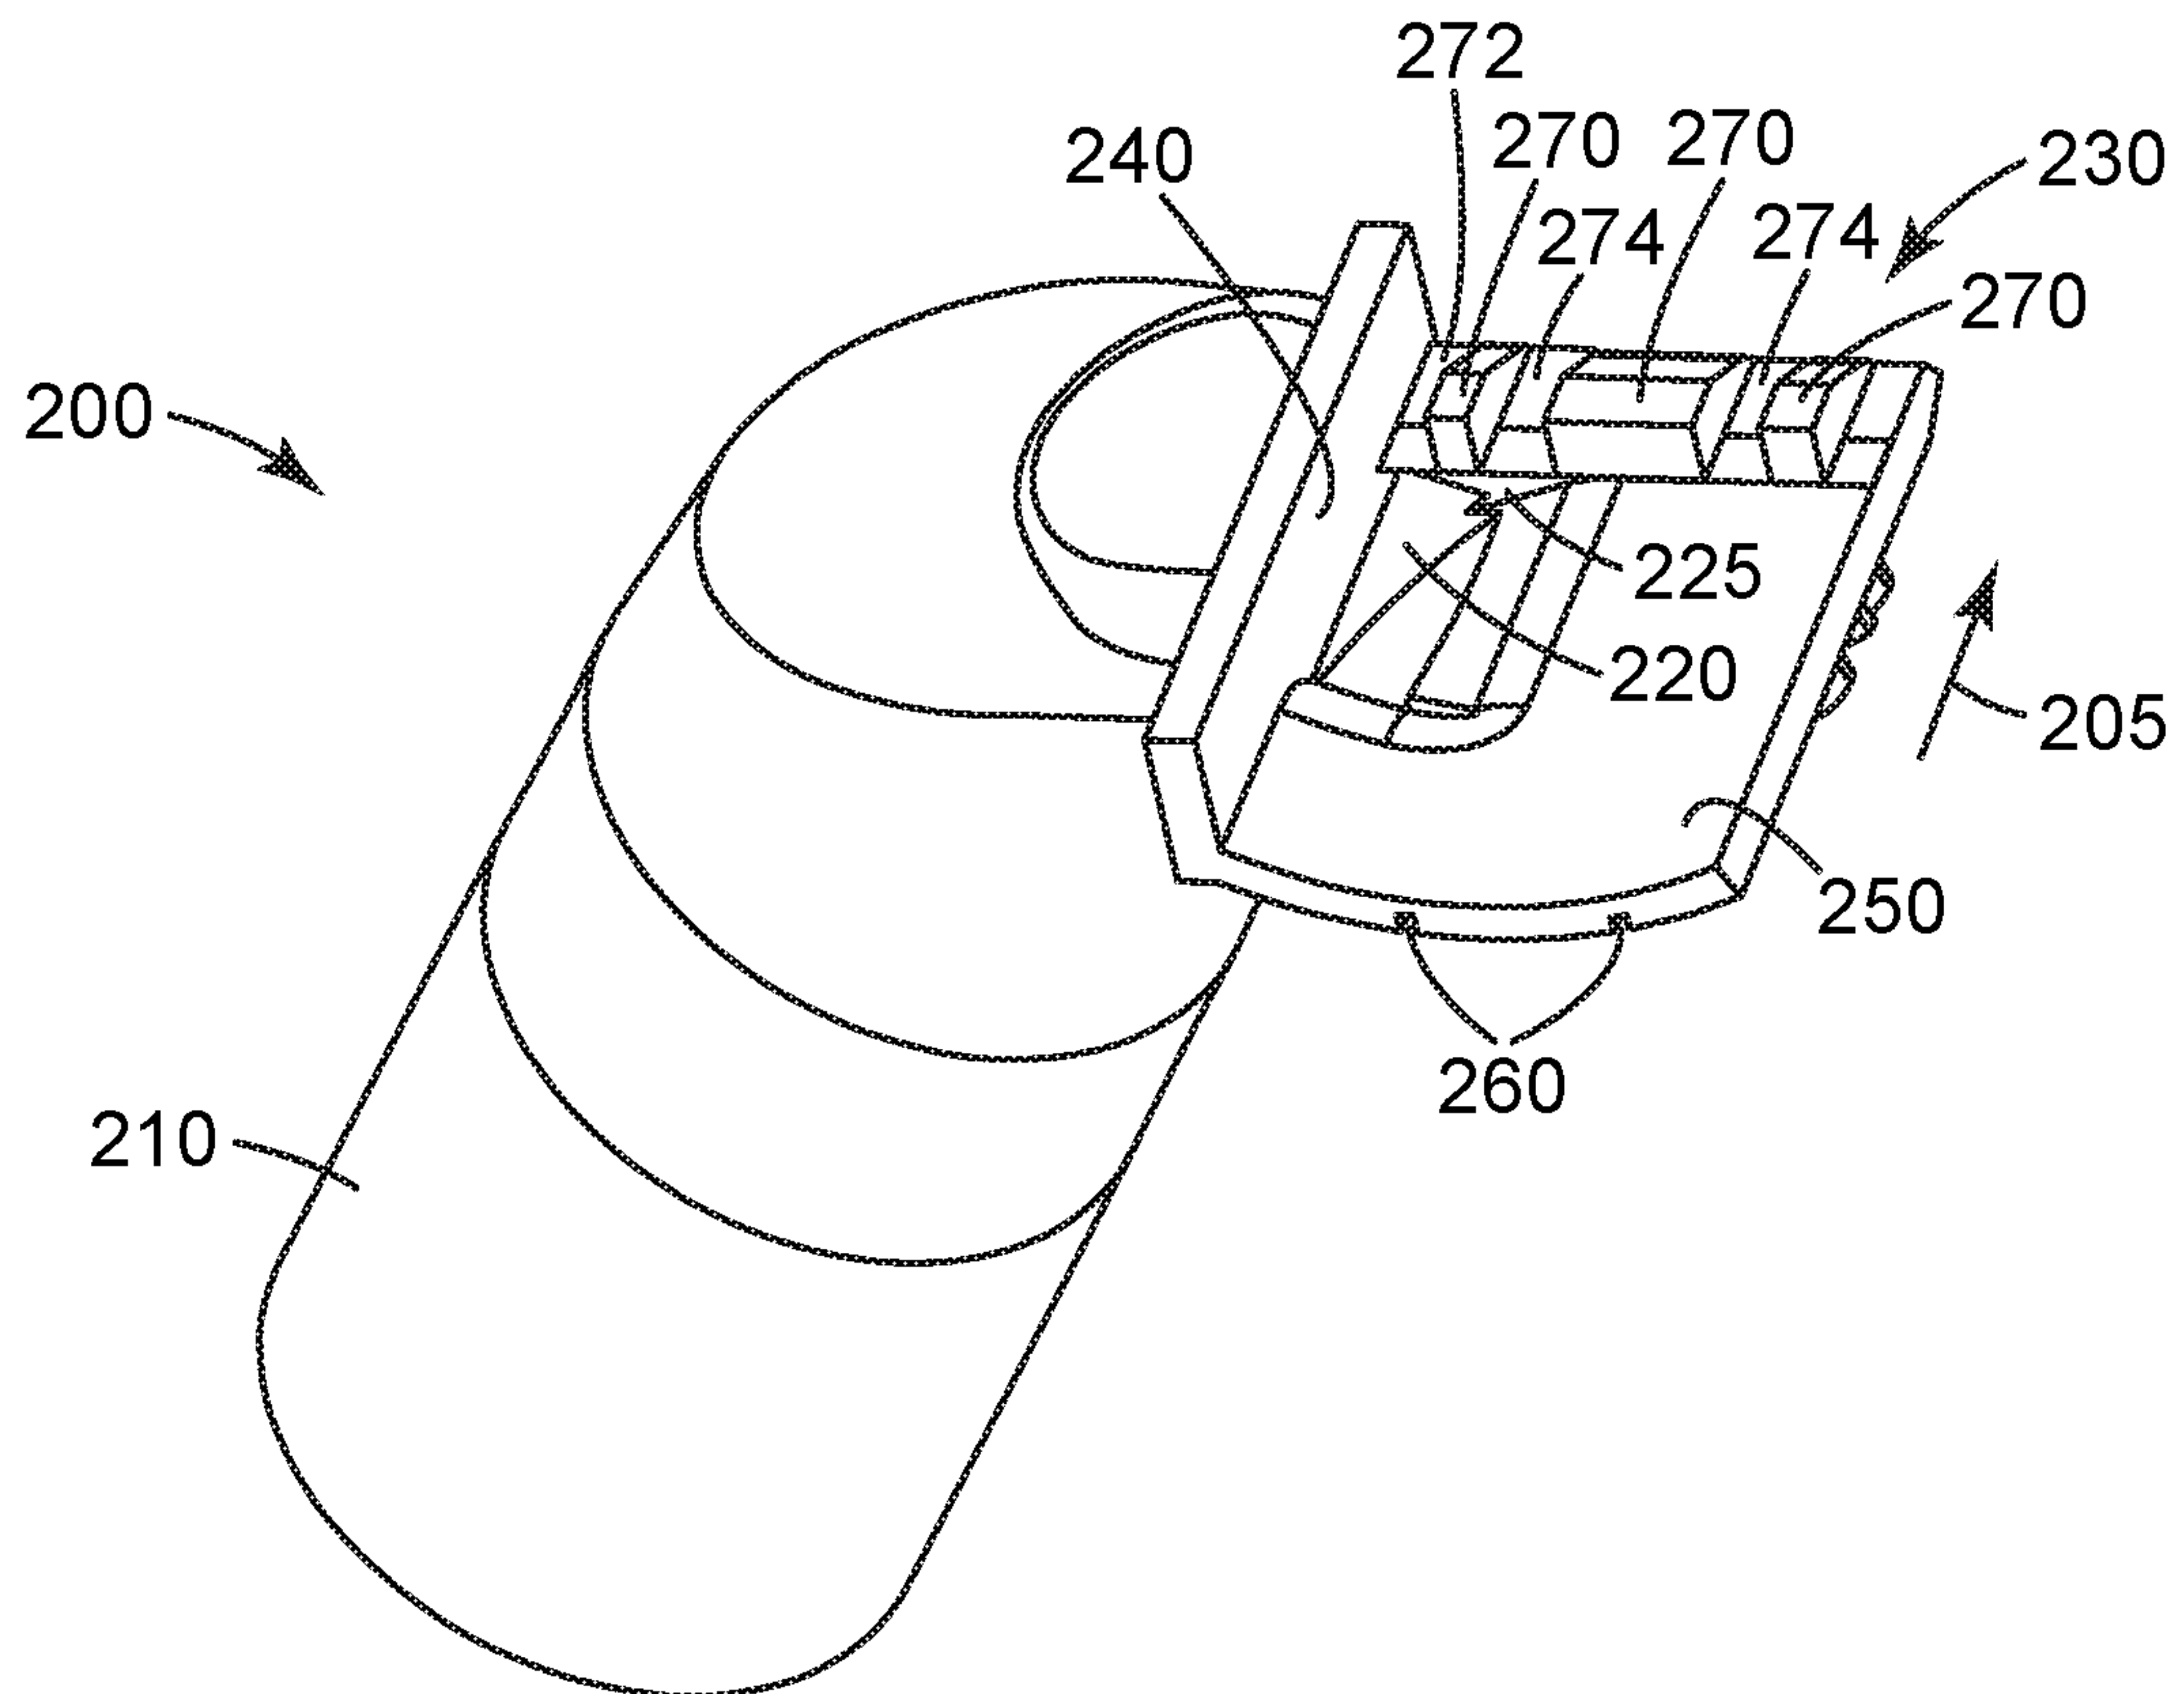
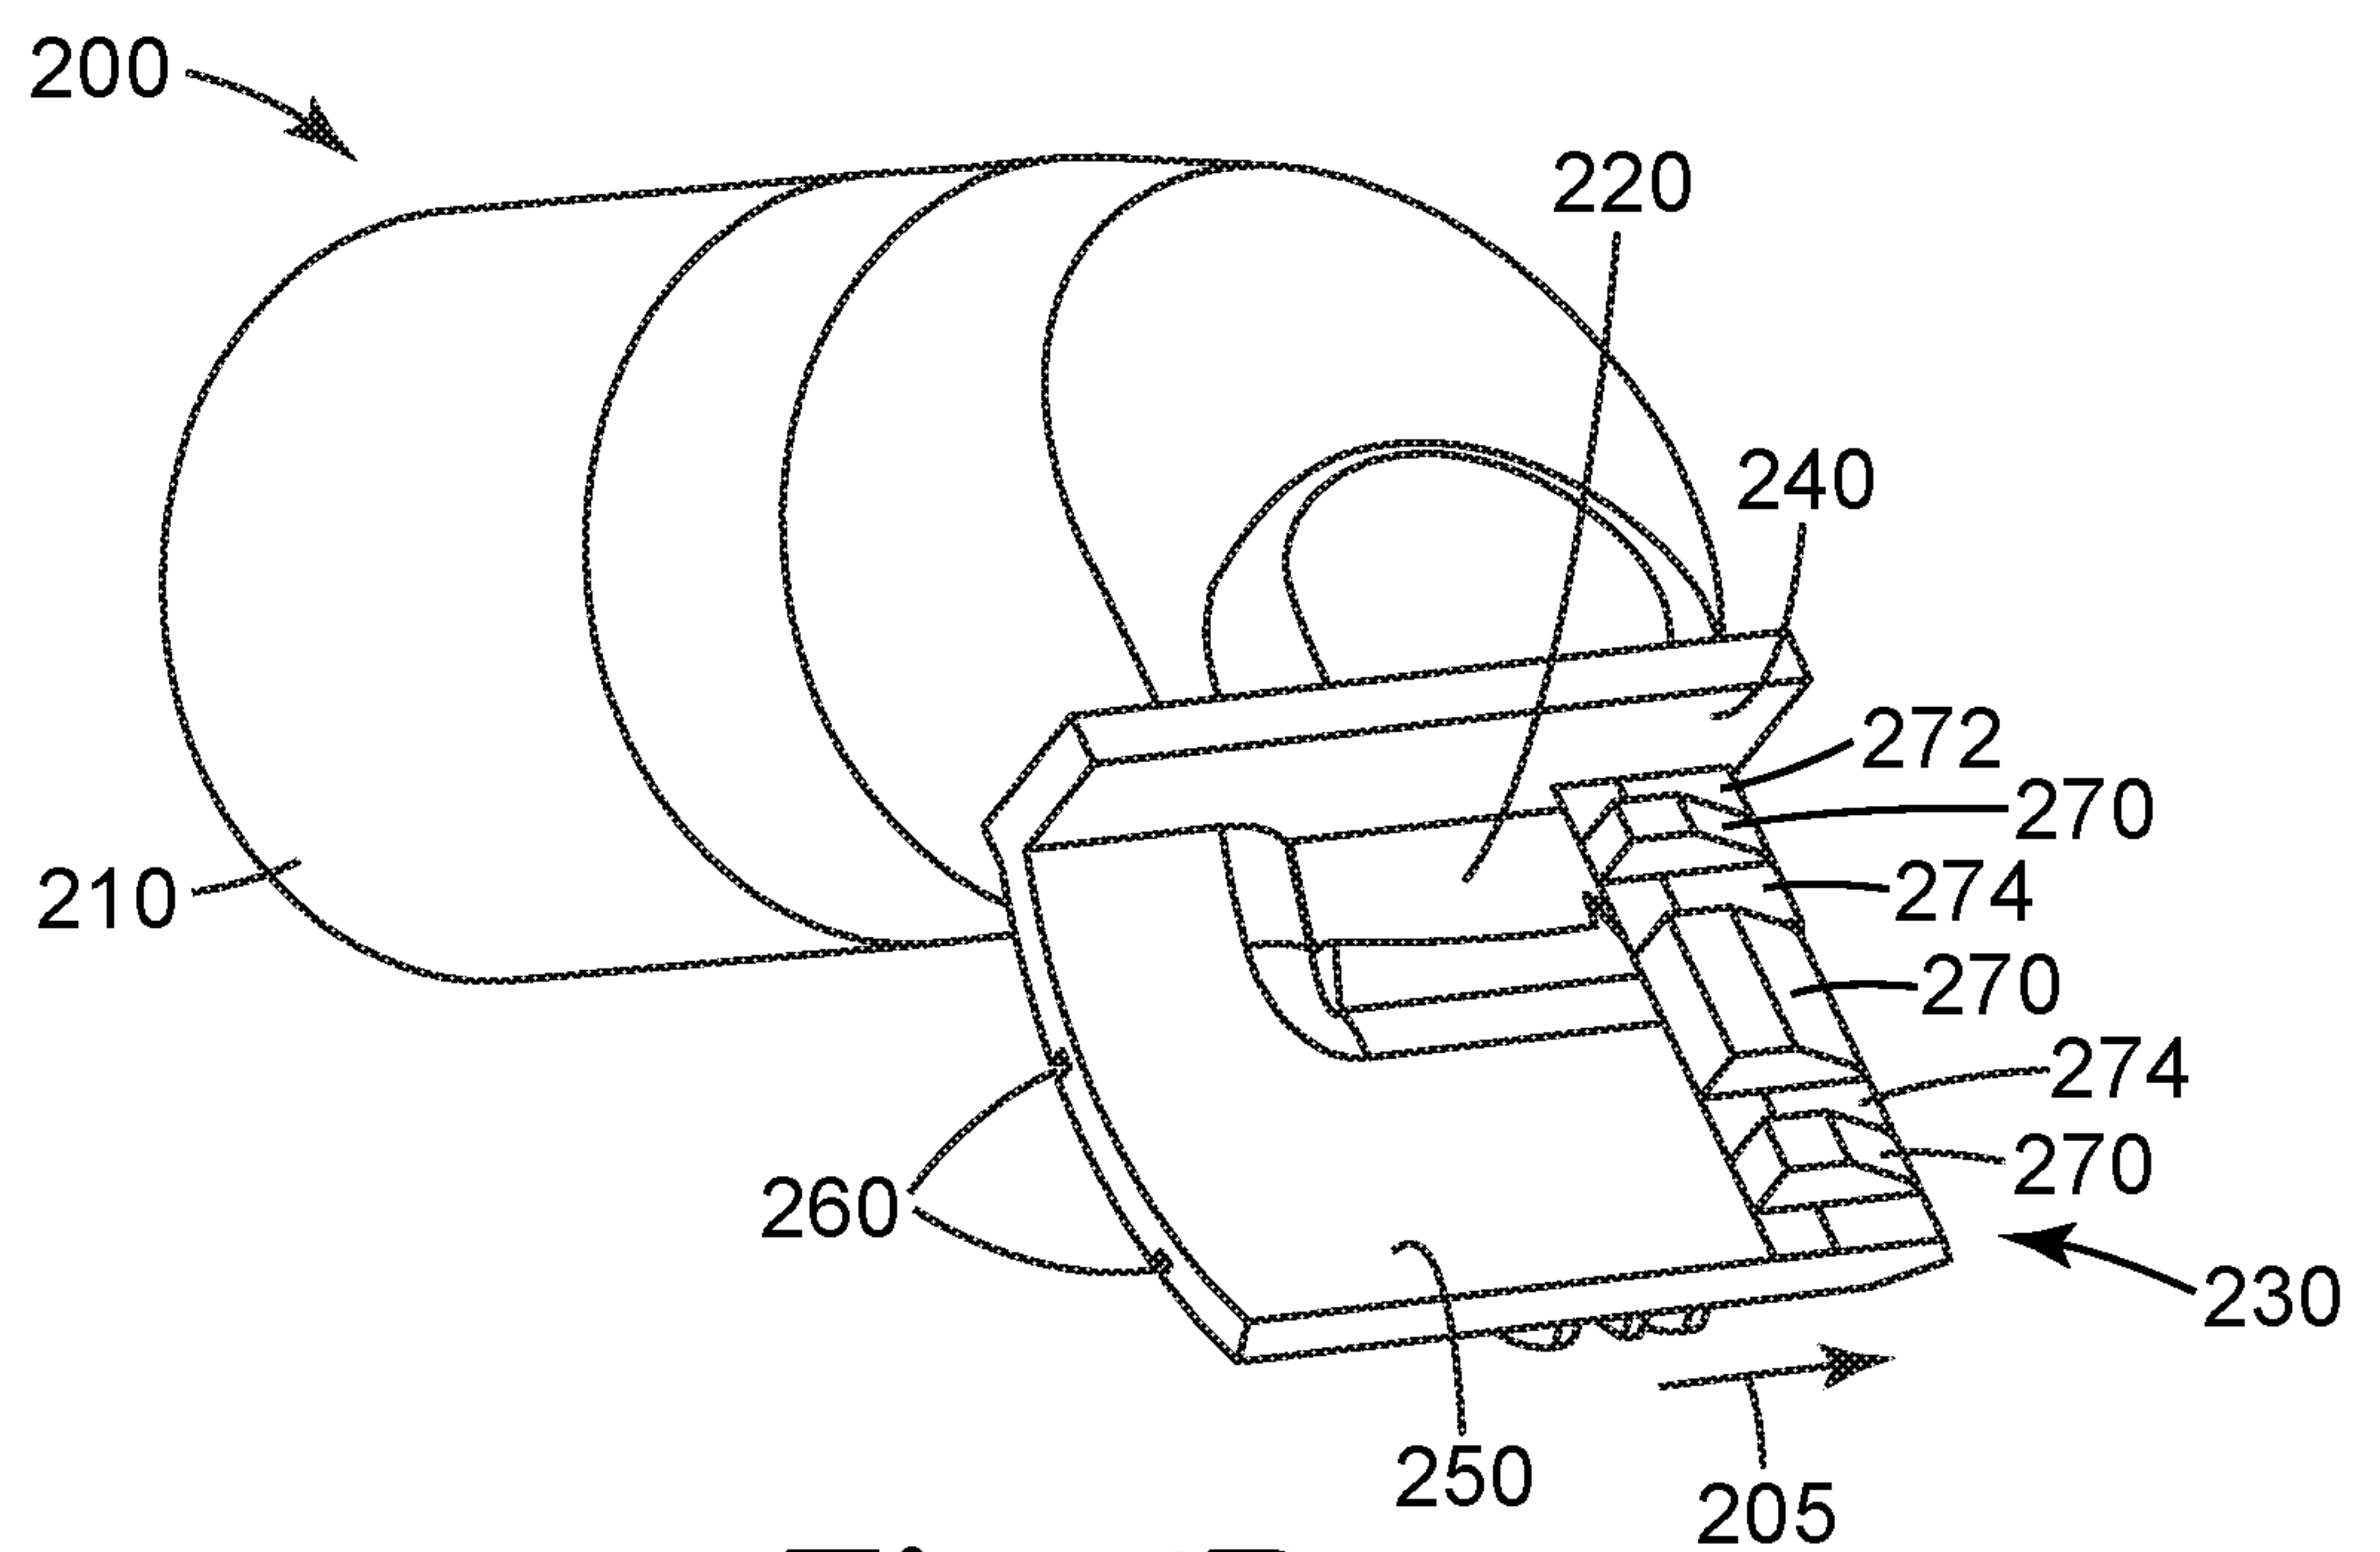
11. The method according to claim 9 wherein the step of bringing the application head of said nozzle into contact with the edge of a partial cut in a panel comprises positioning the nozzle such that the angle formed between the supporting wall and the
25 finish wall rides on an outer edge of a top surface layer of the panel.

12. The method according to any of claims 9-11 wherein the panel is a honeycomb panel.

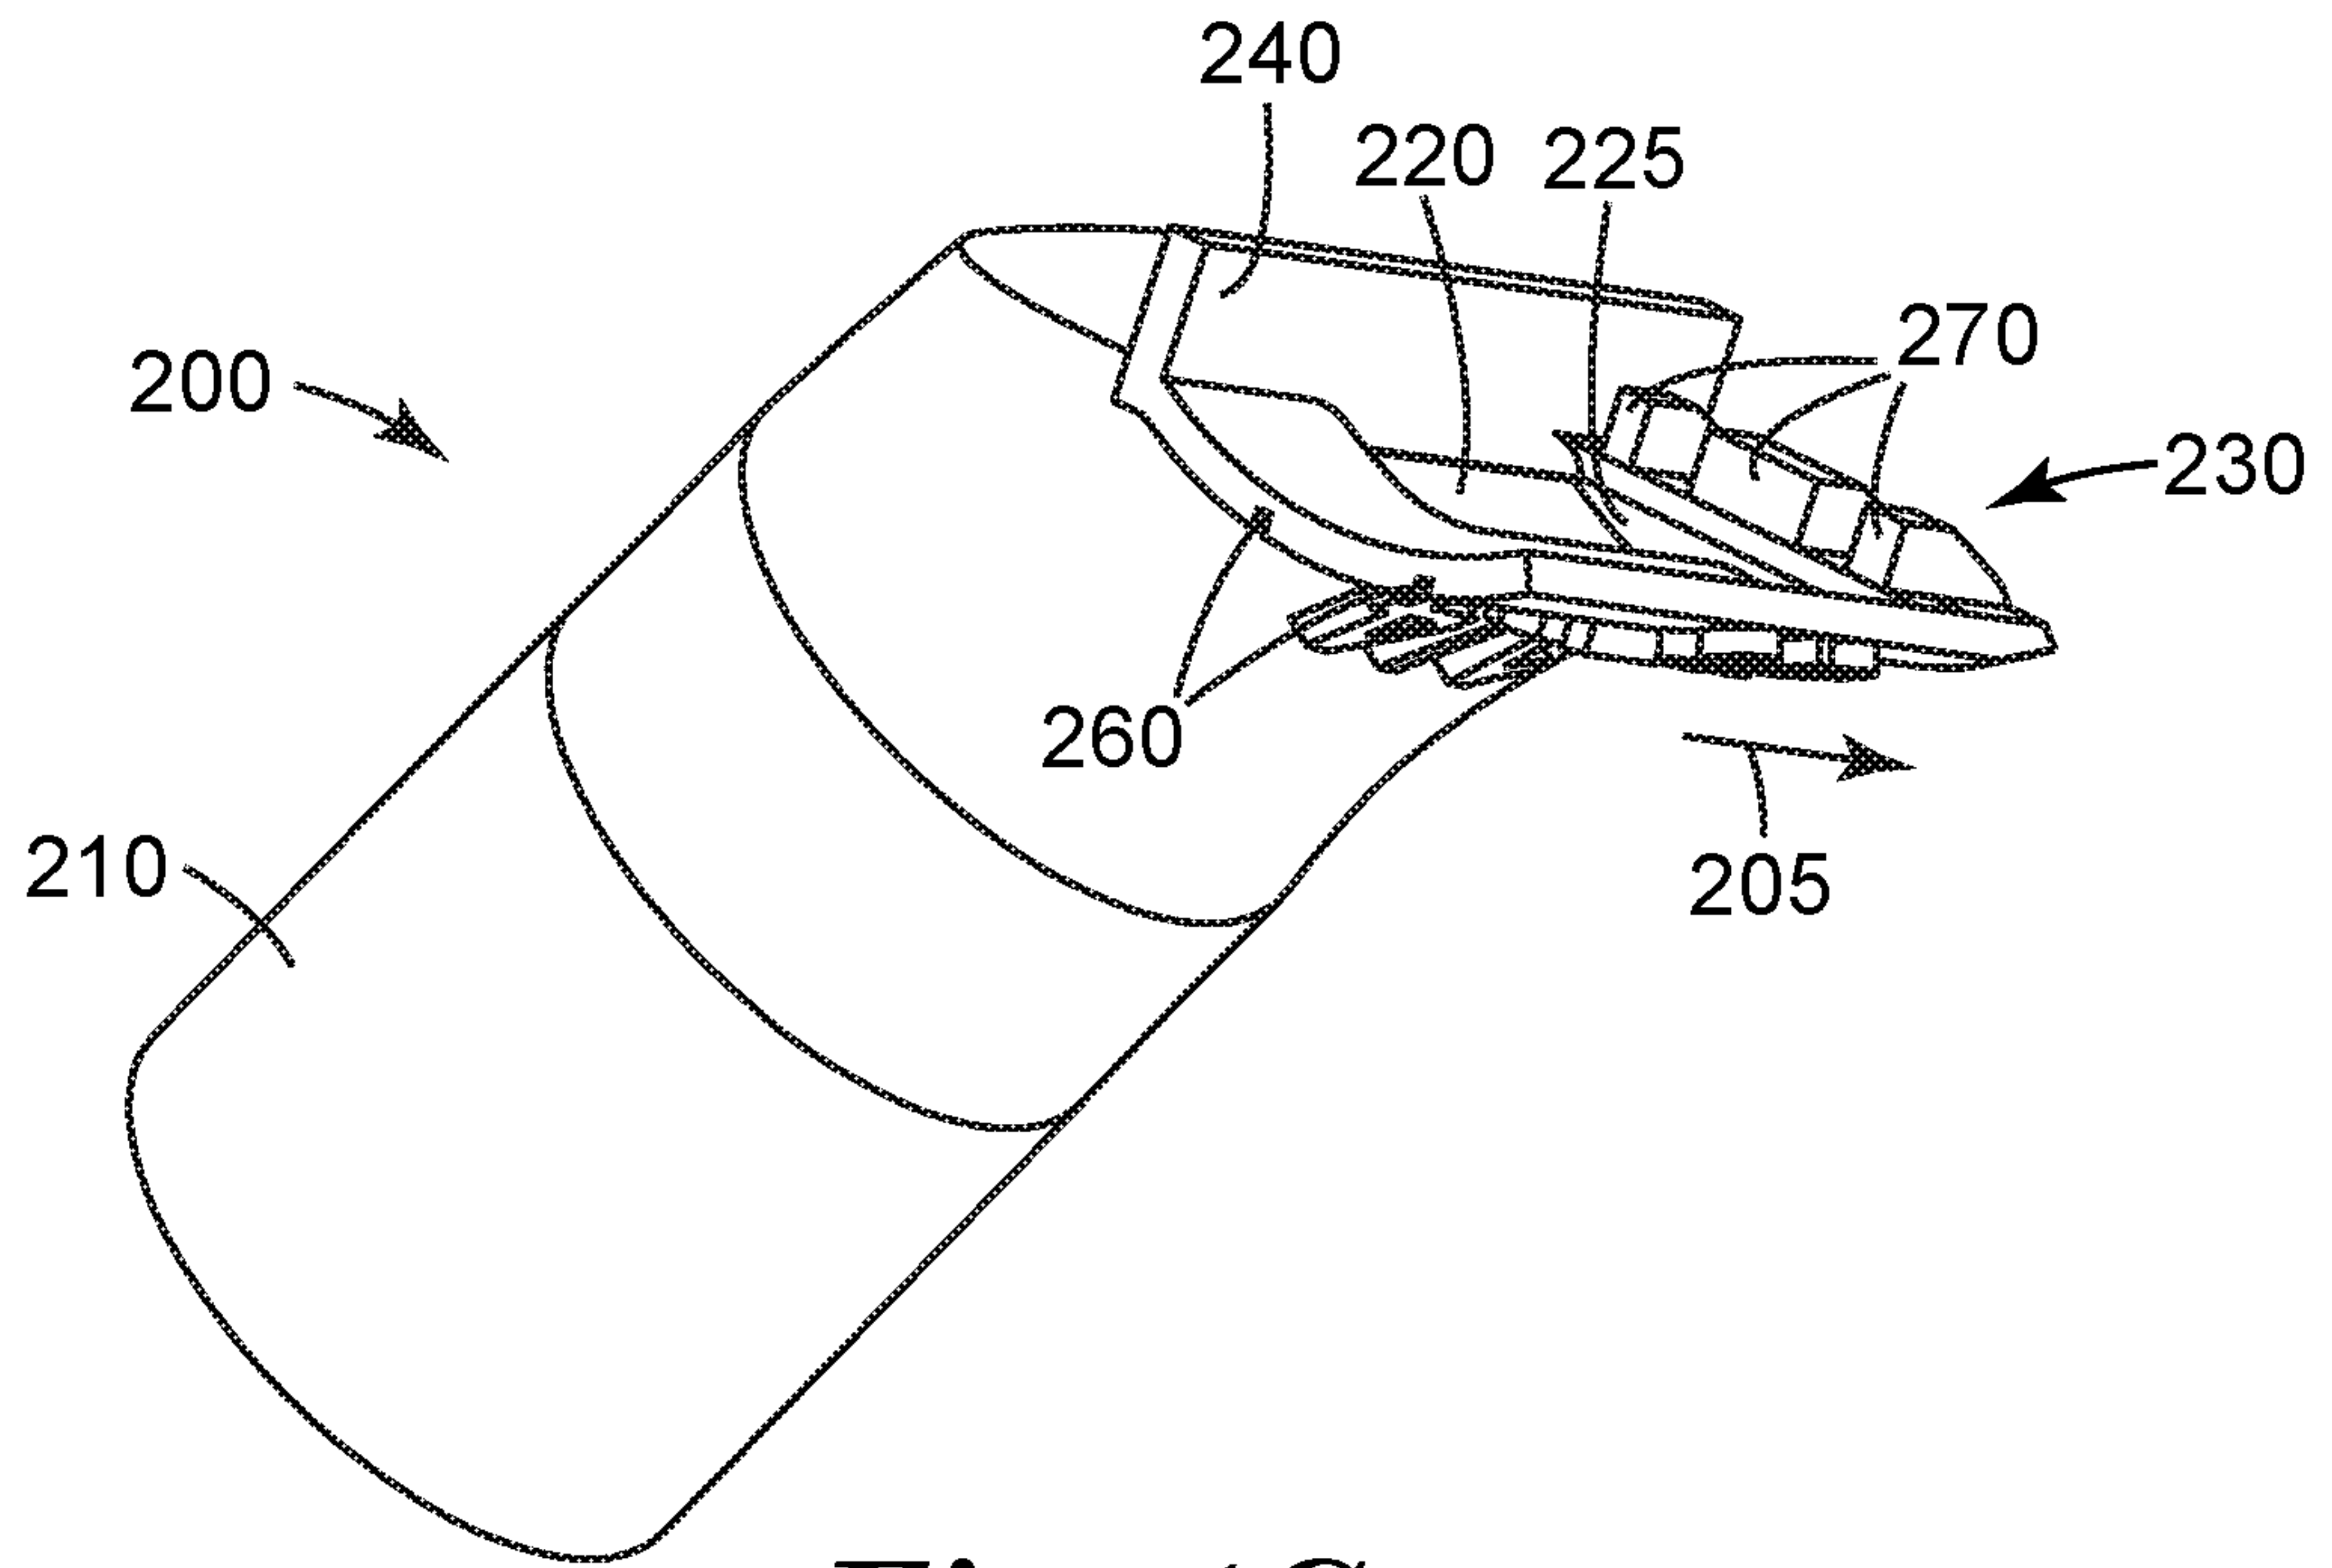
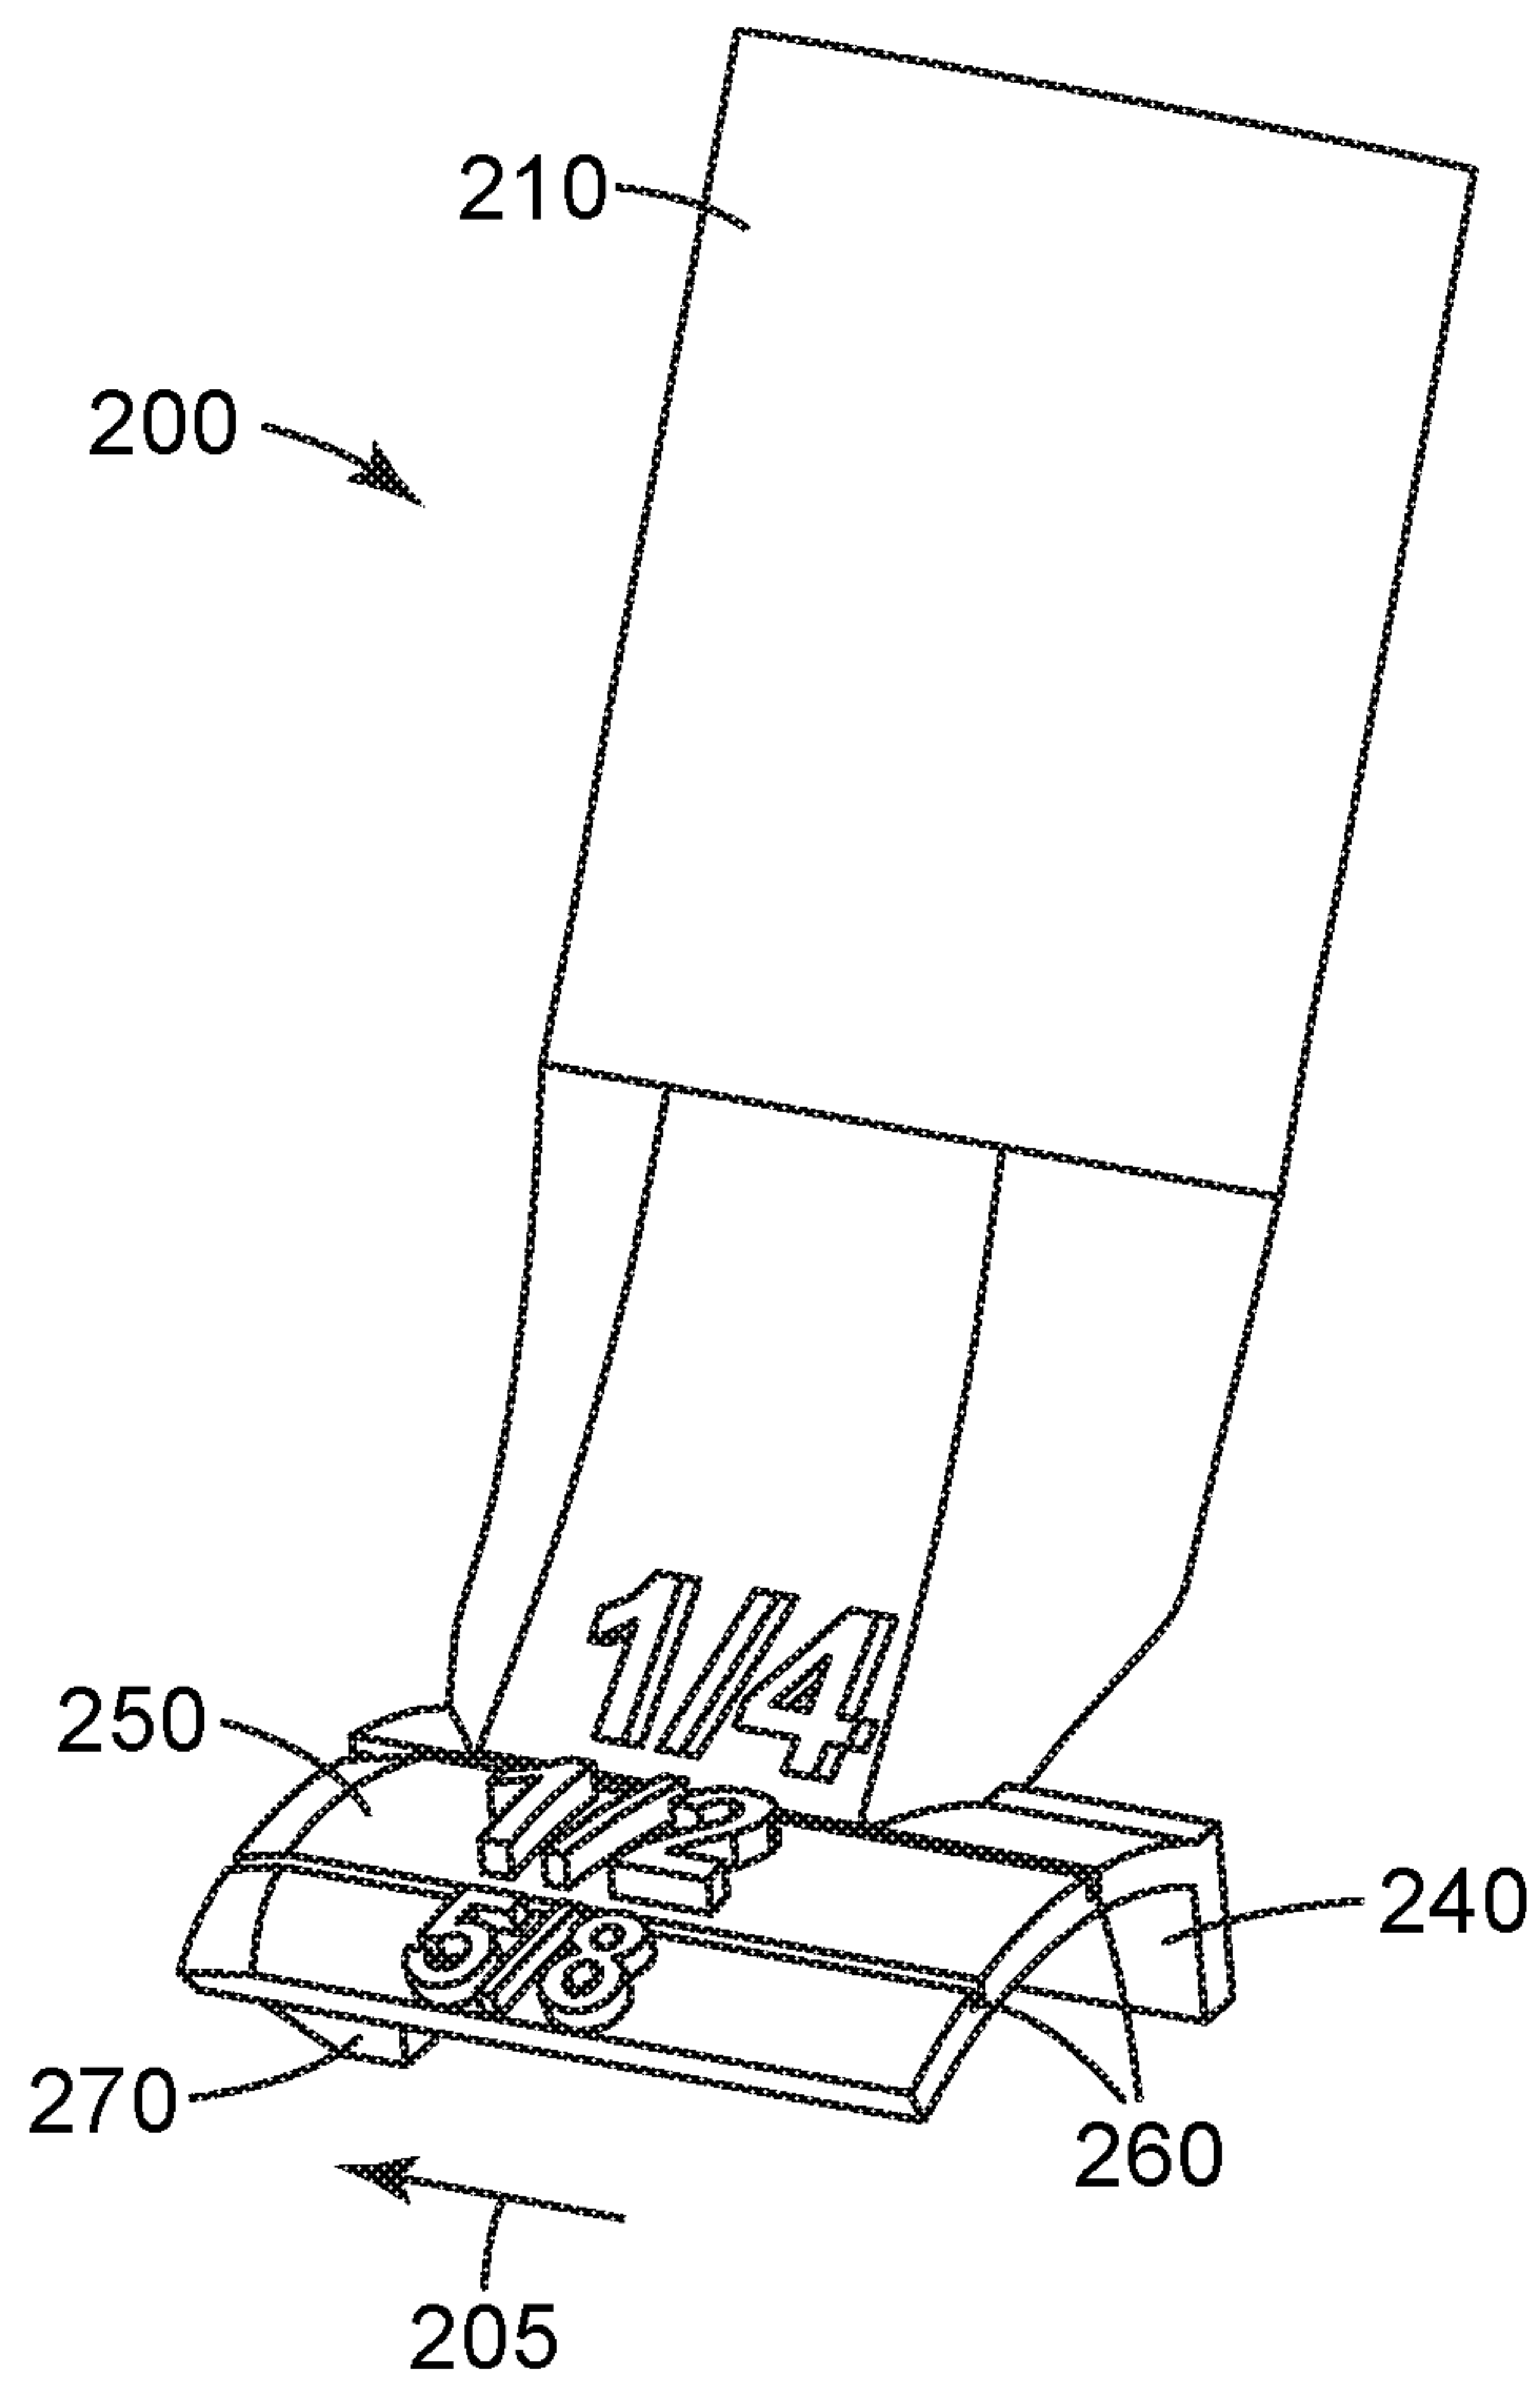
30 13. The method according to any of claims 9-12 wherein the setting resin is an adhesive.

14. The method according to any of claims 9-12 wherein the setting resin is a low density void filler.

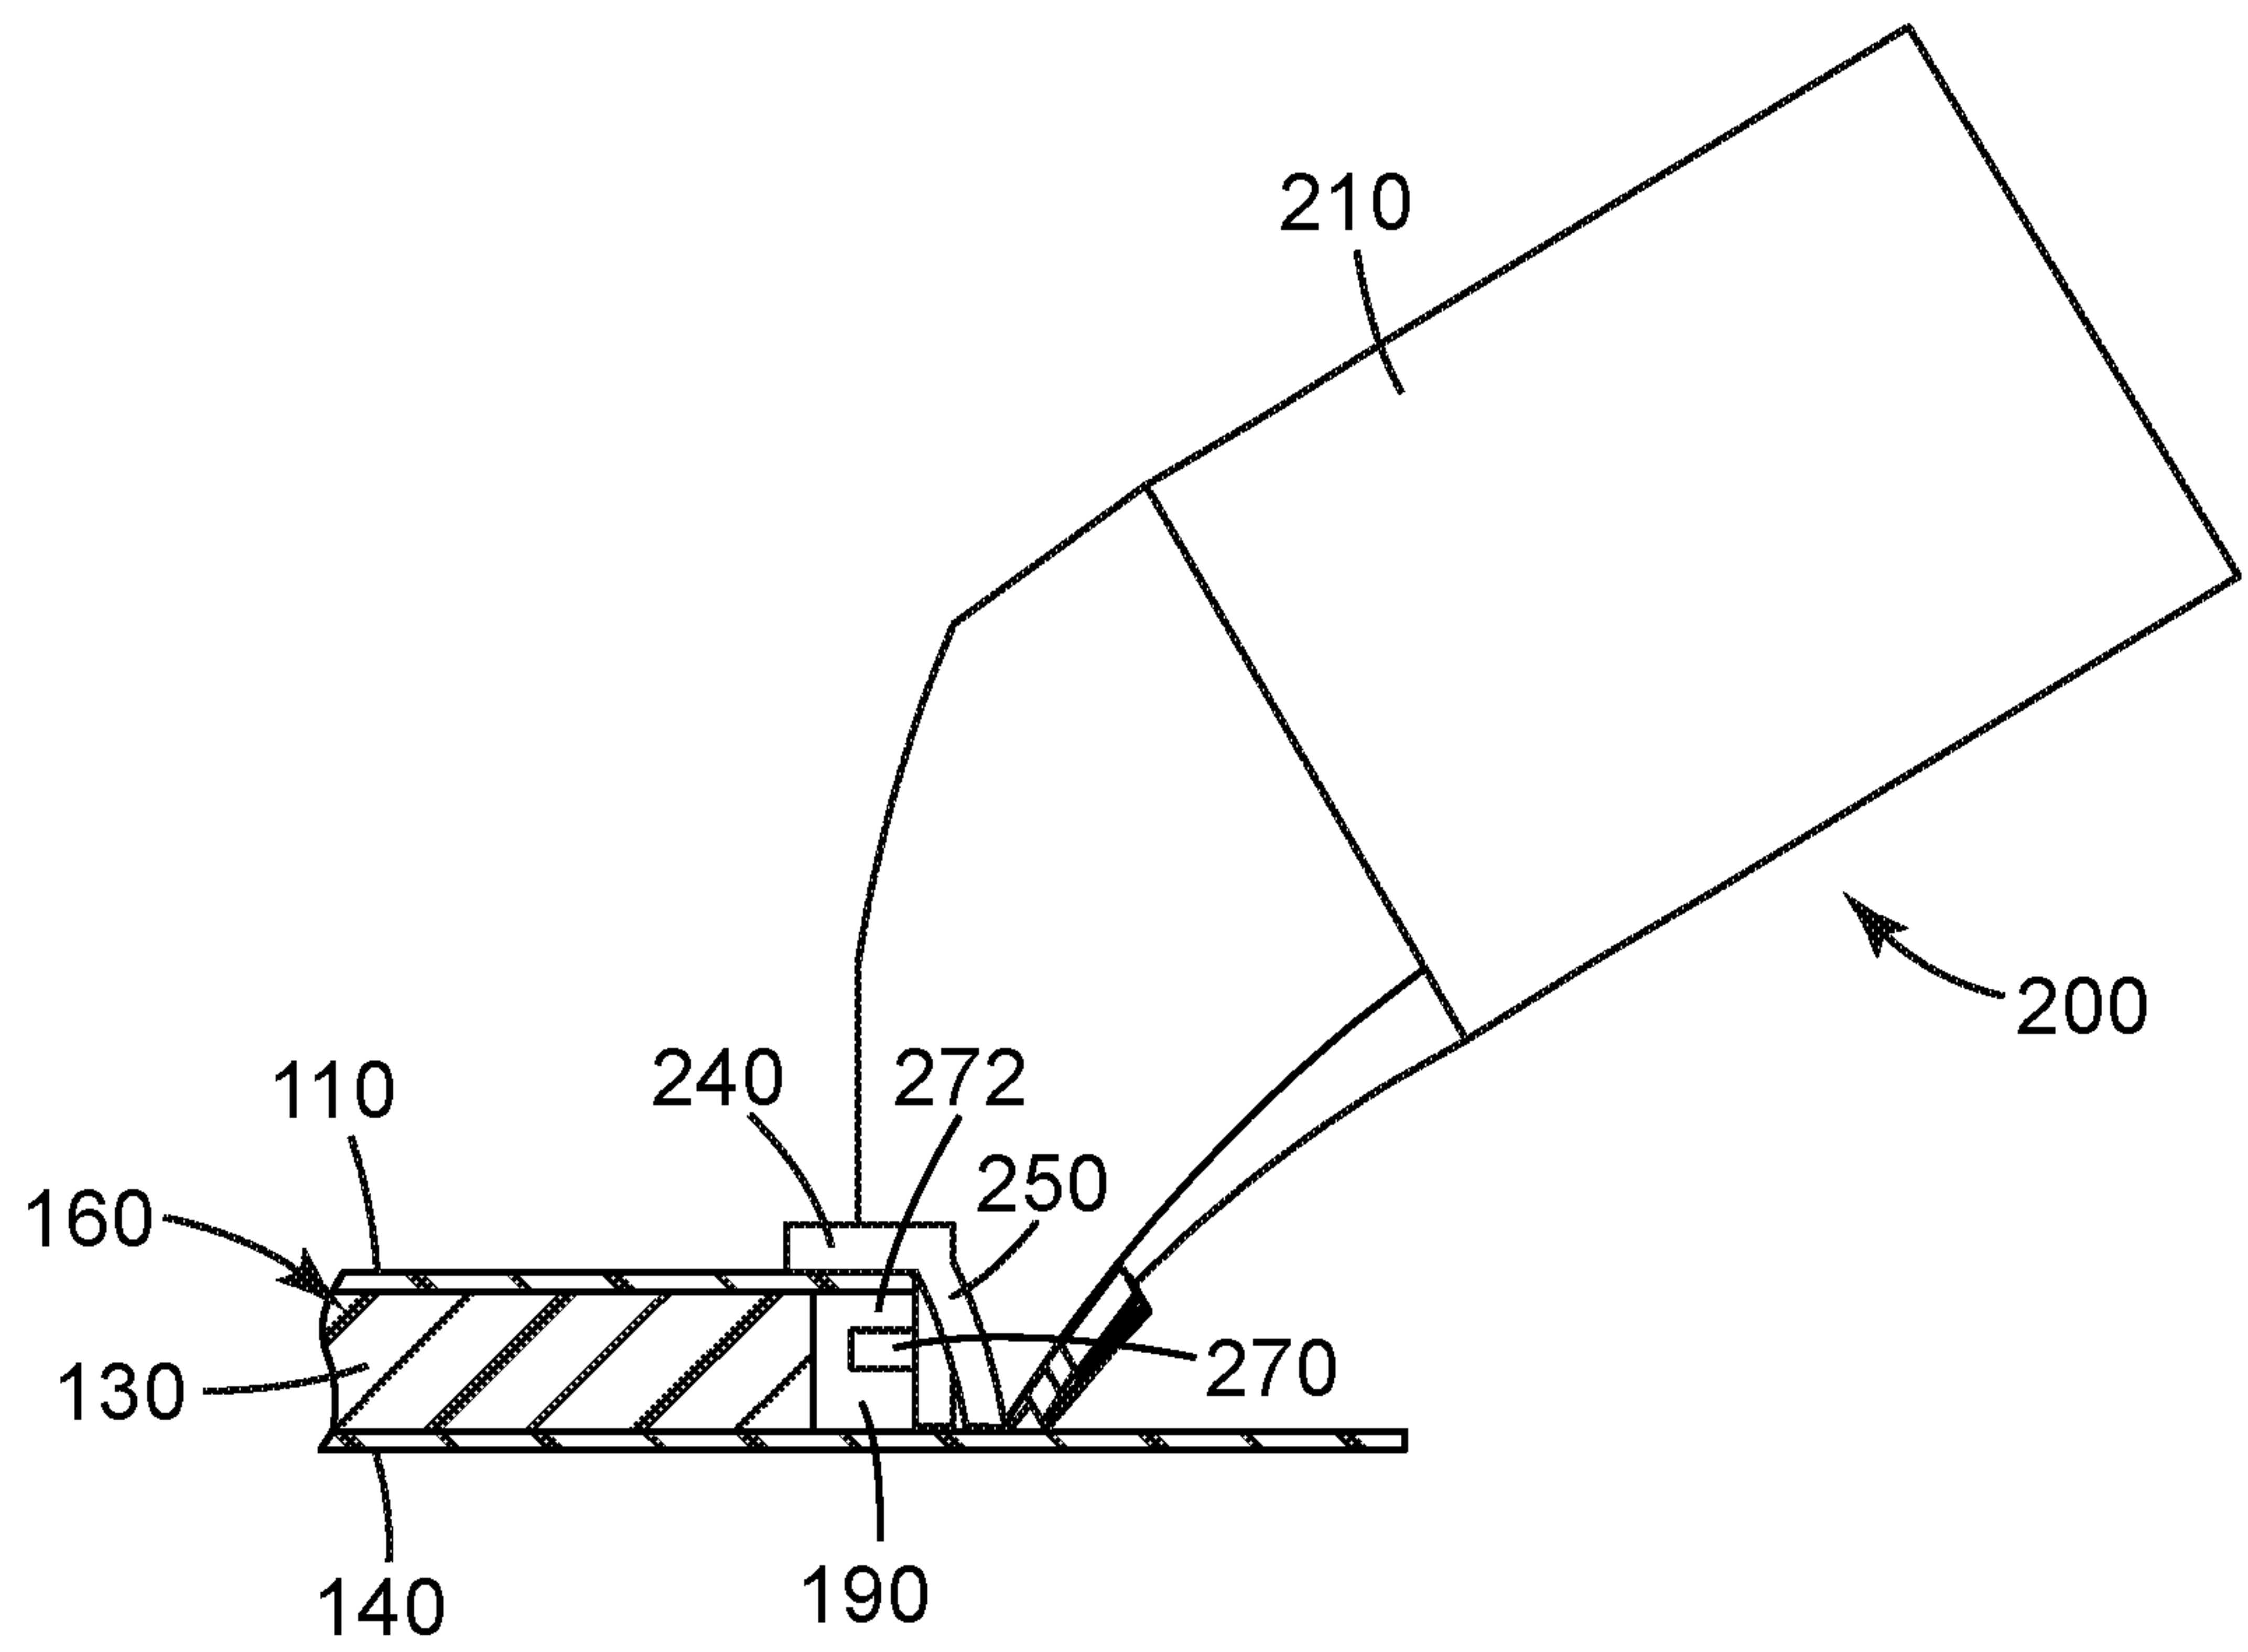
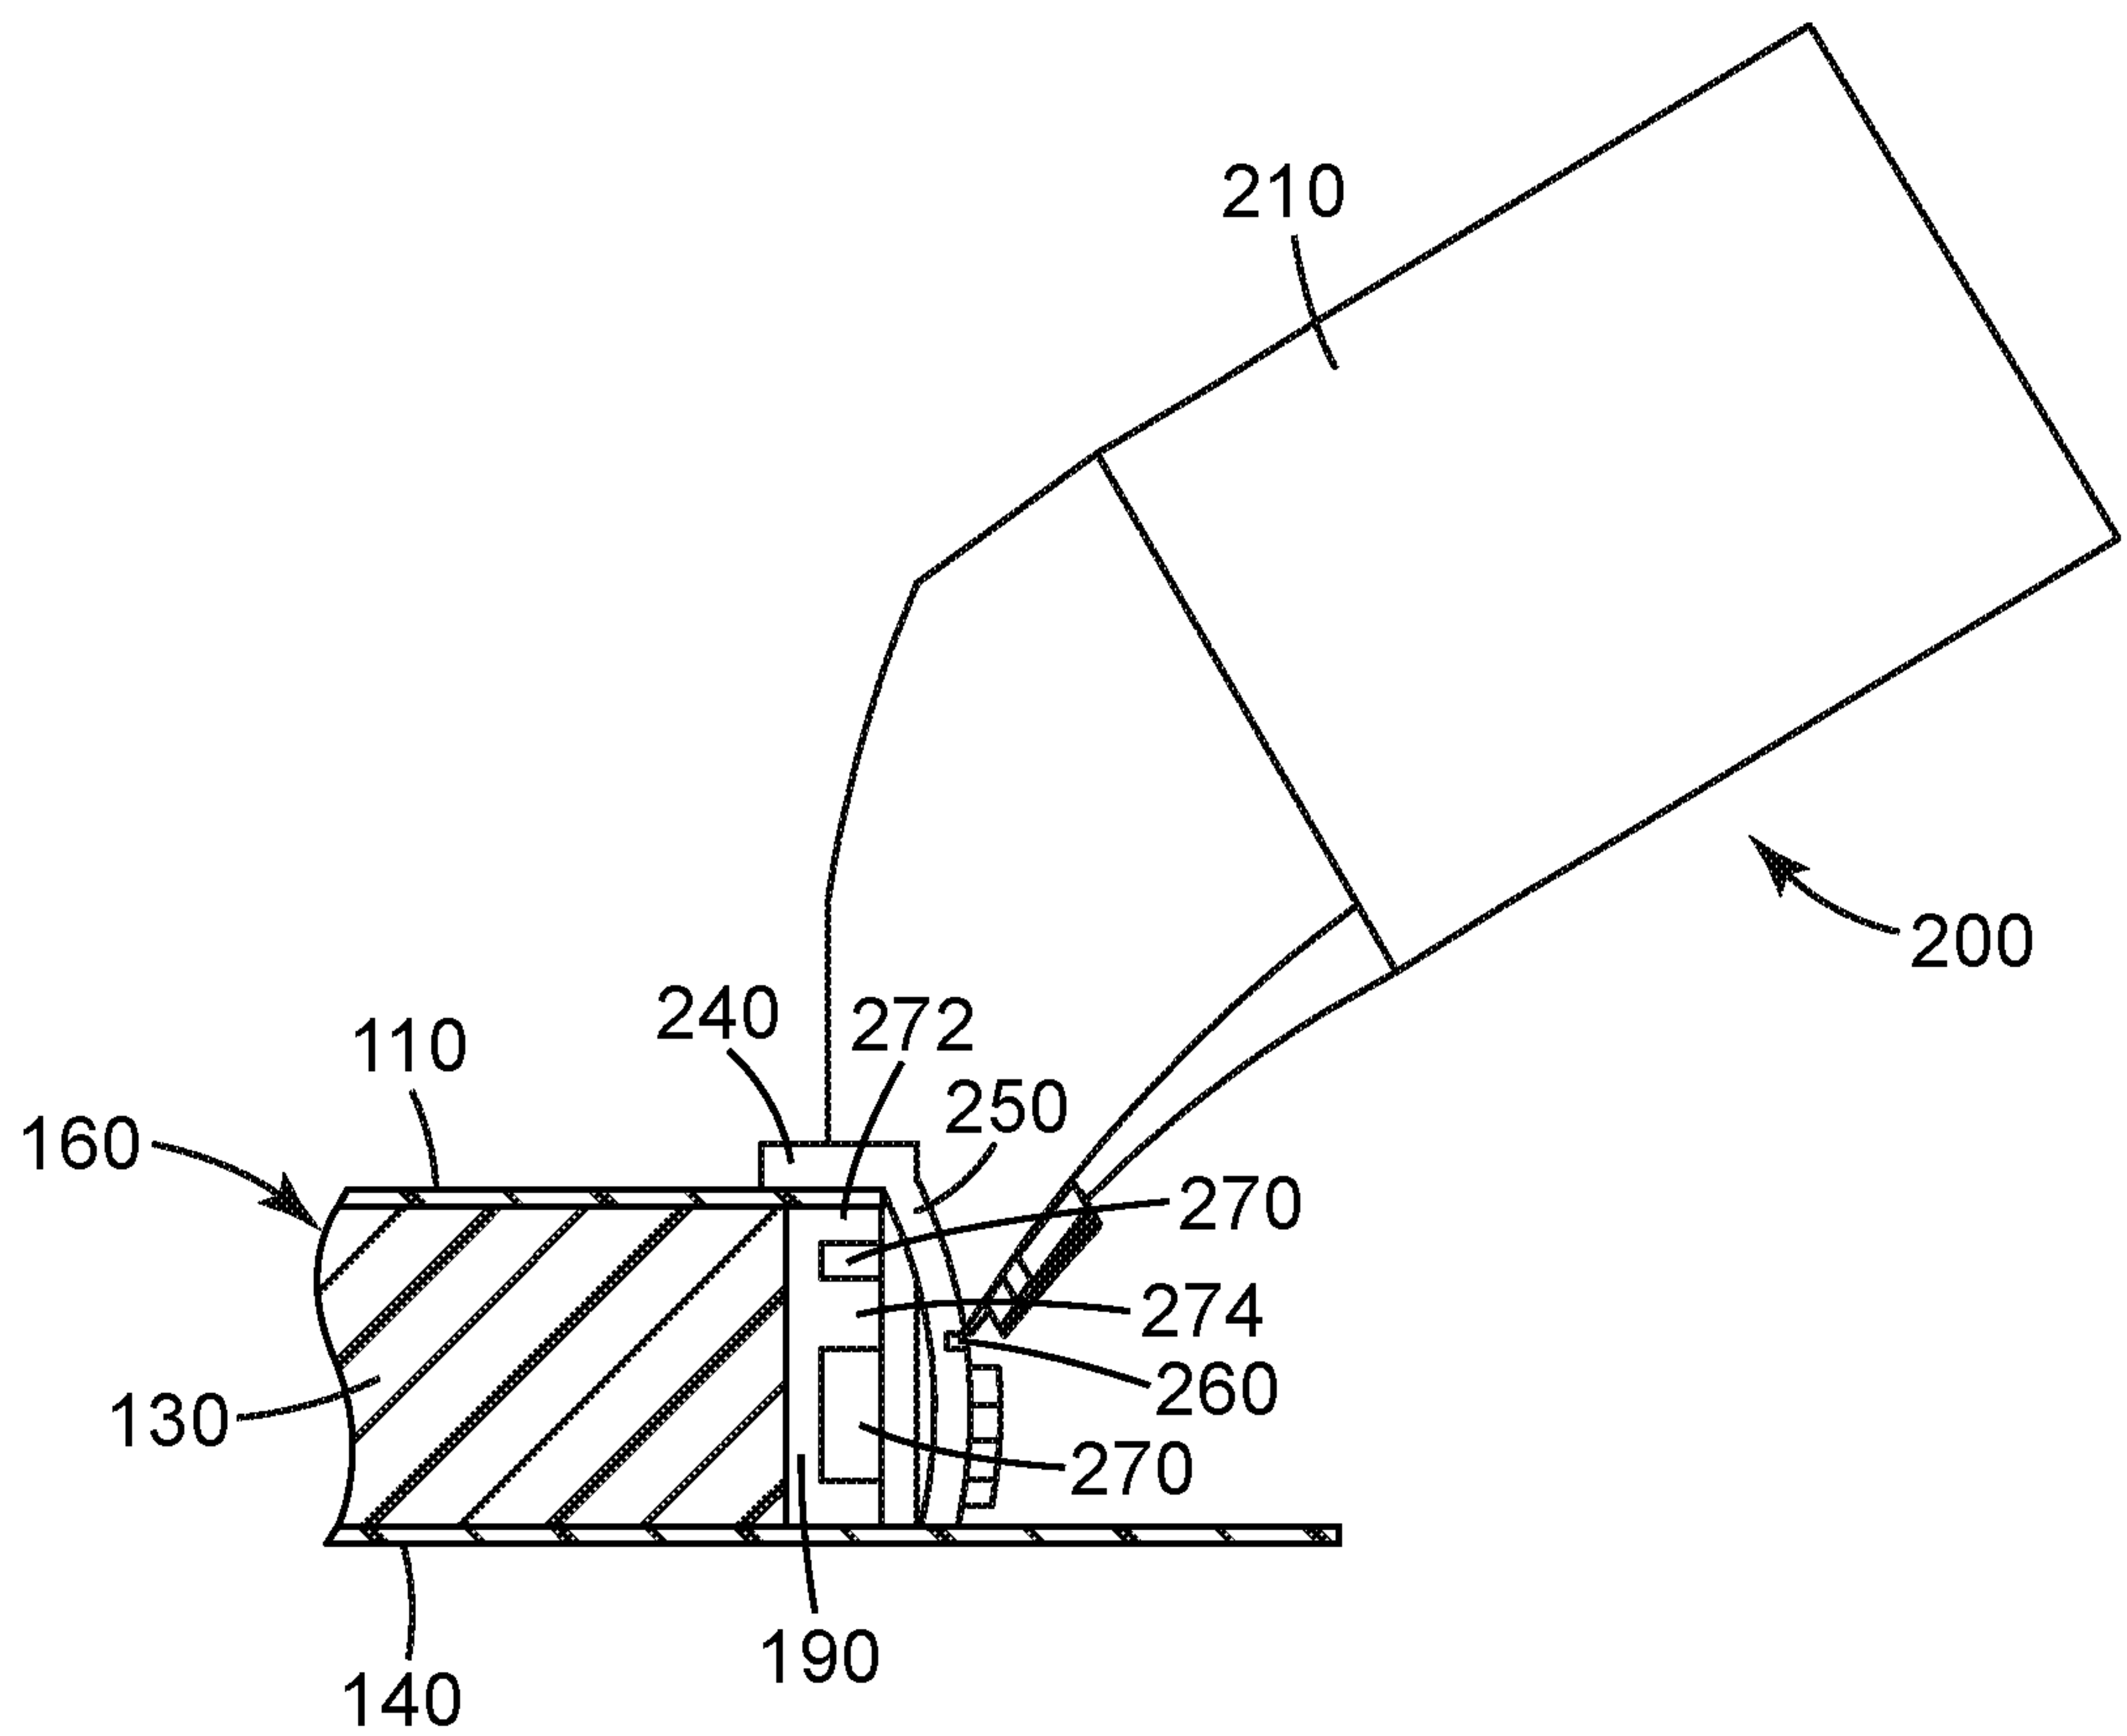
1/4

**Fig. 1A****Fig. 1B**

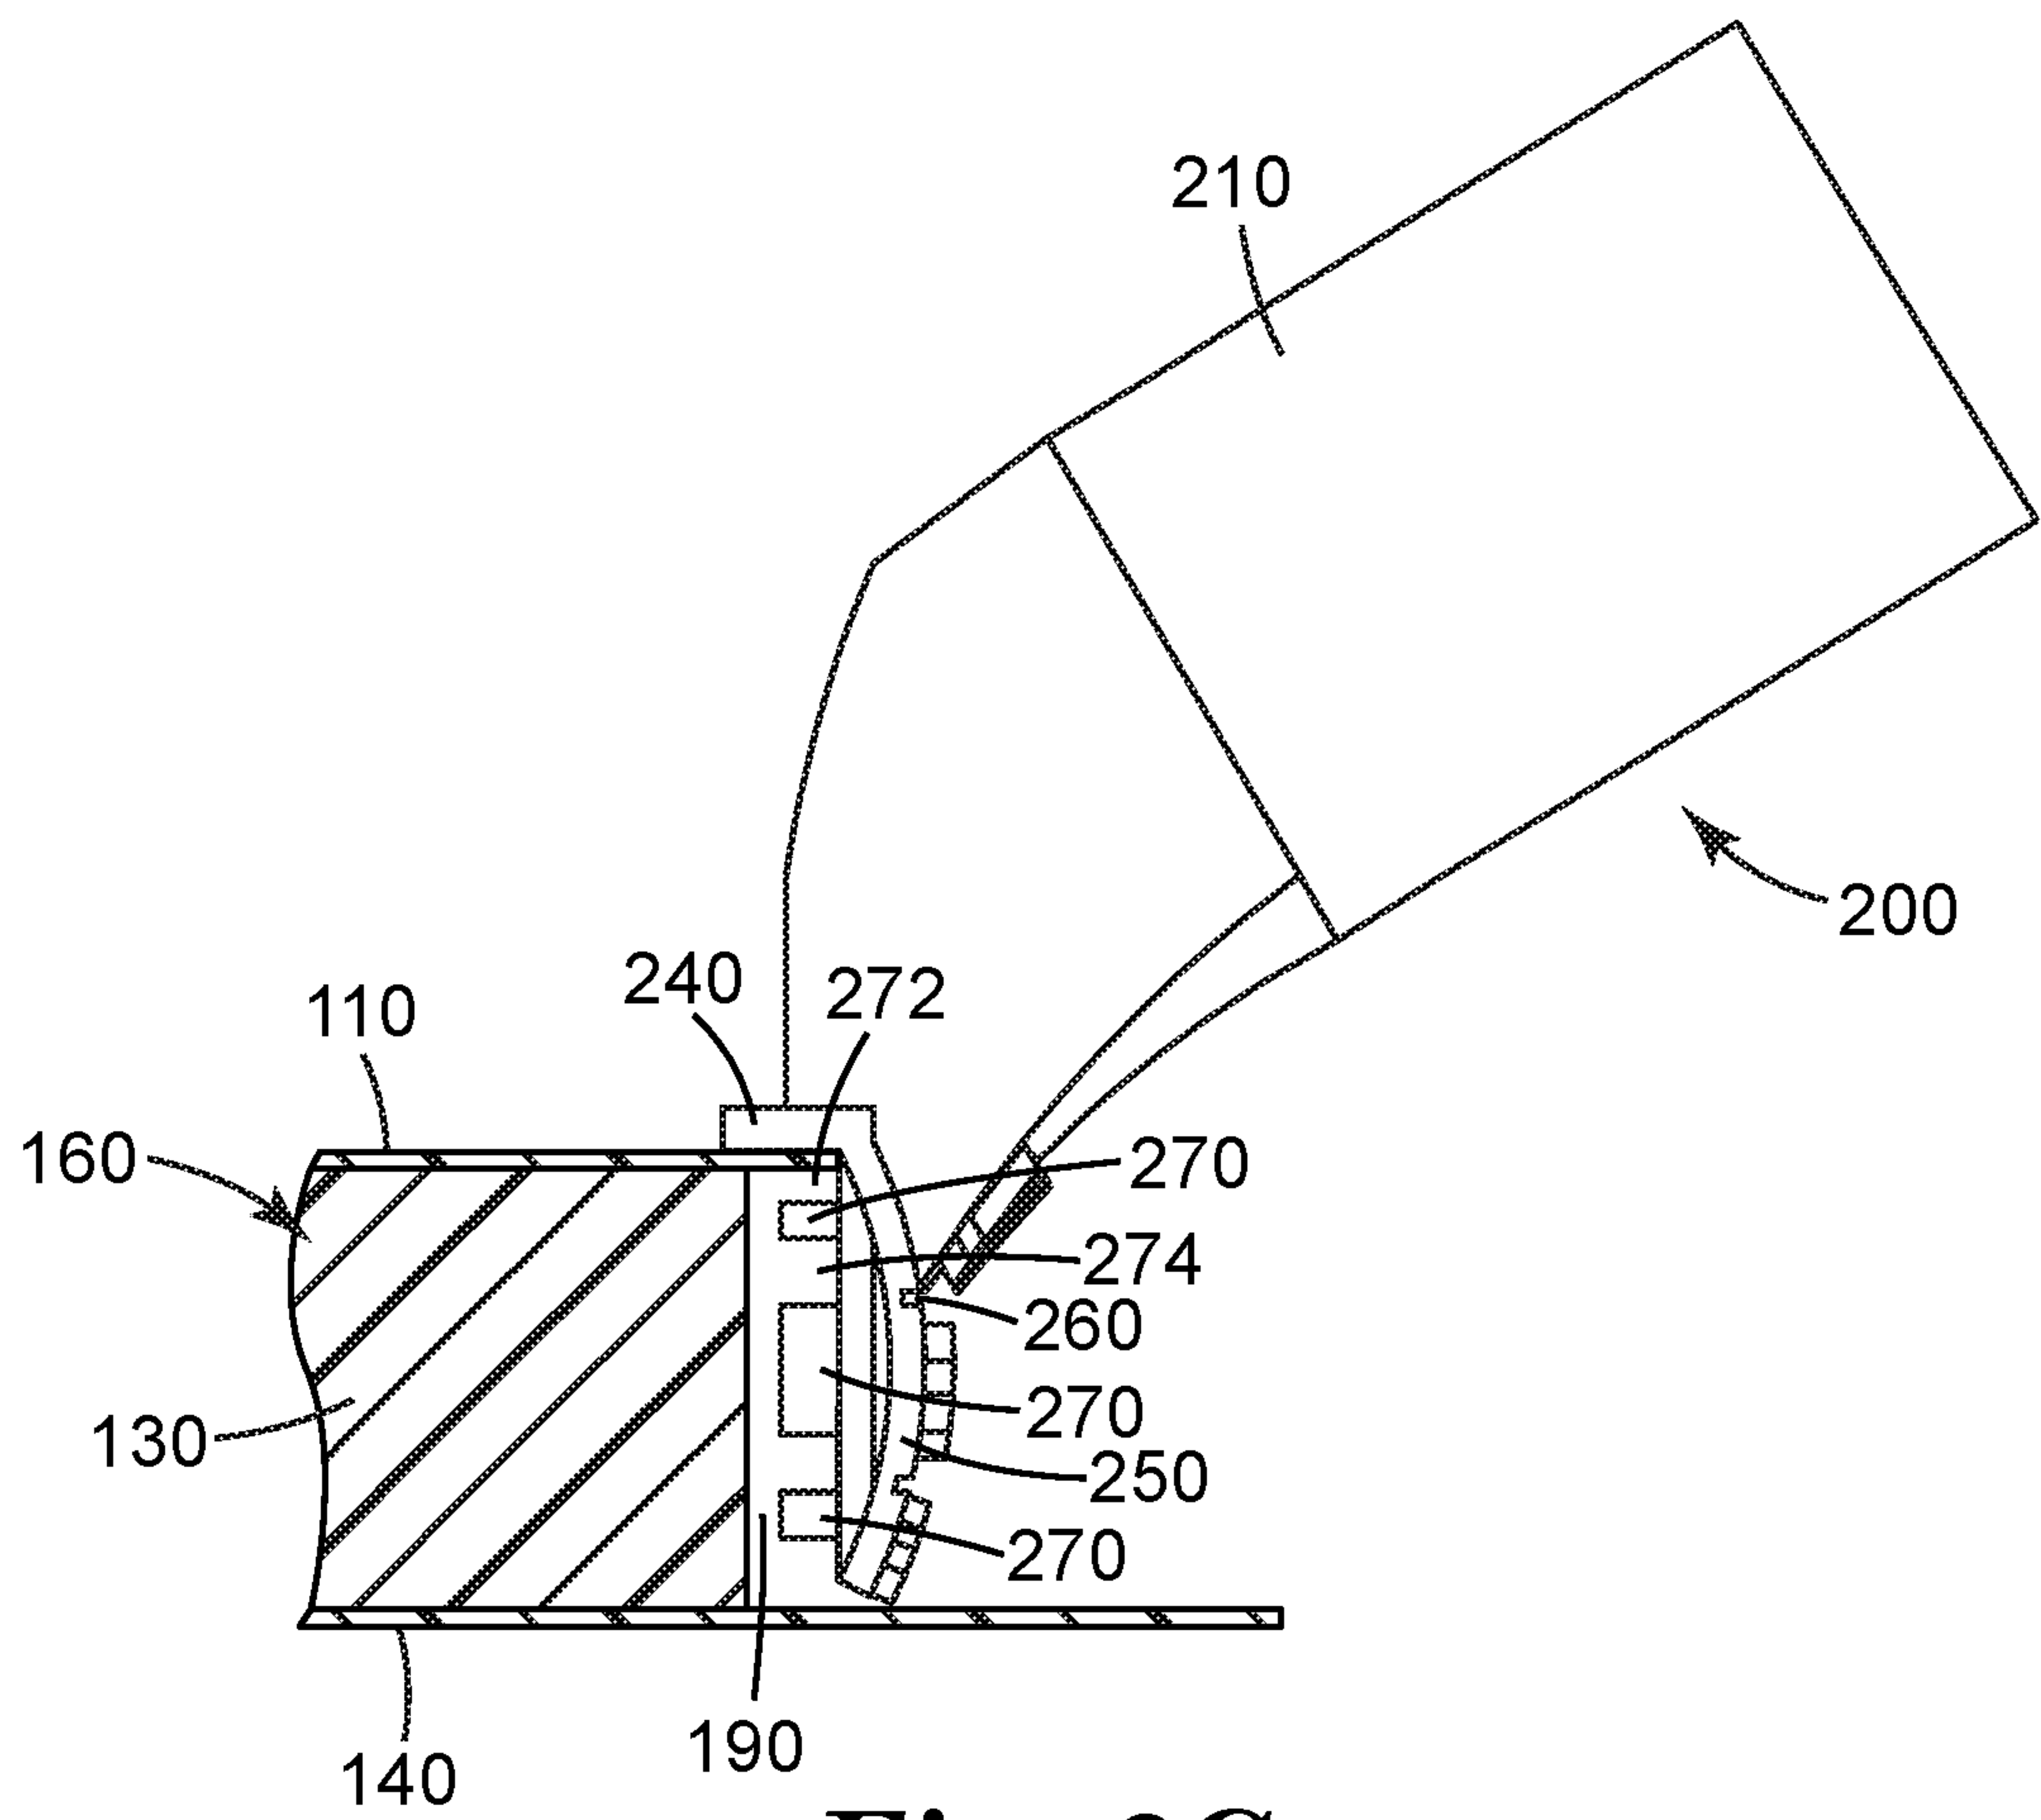
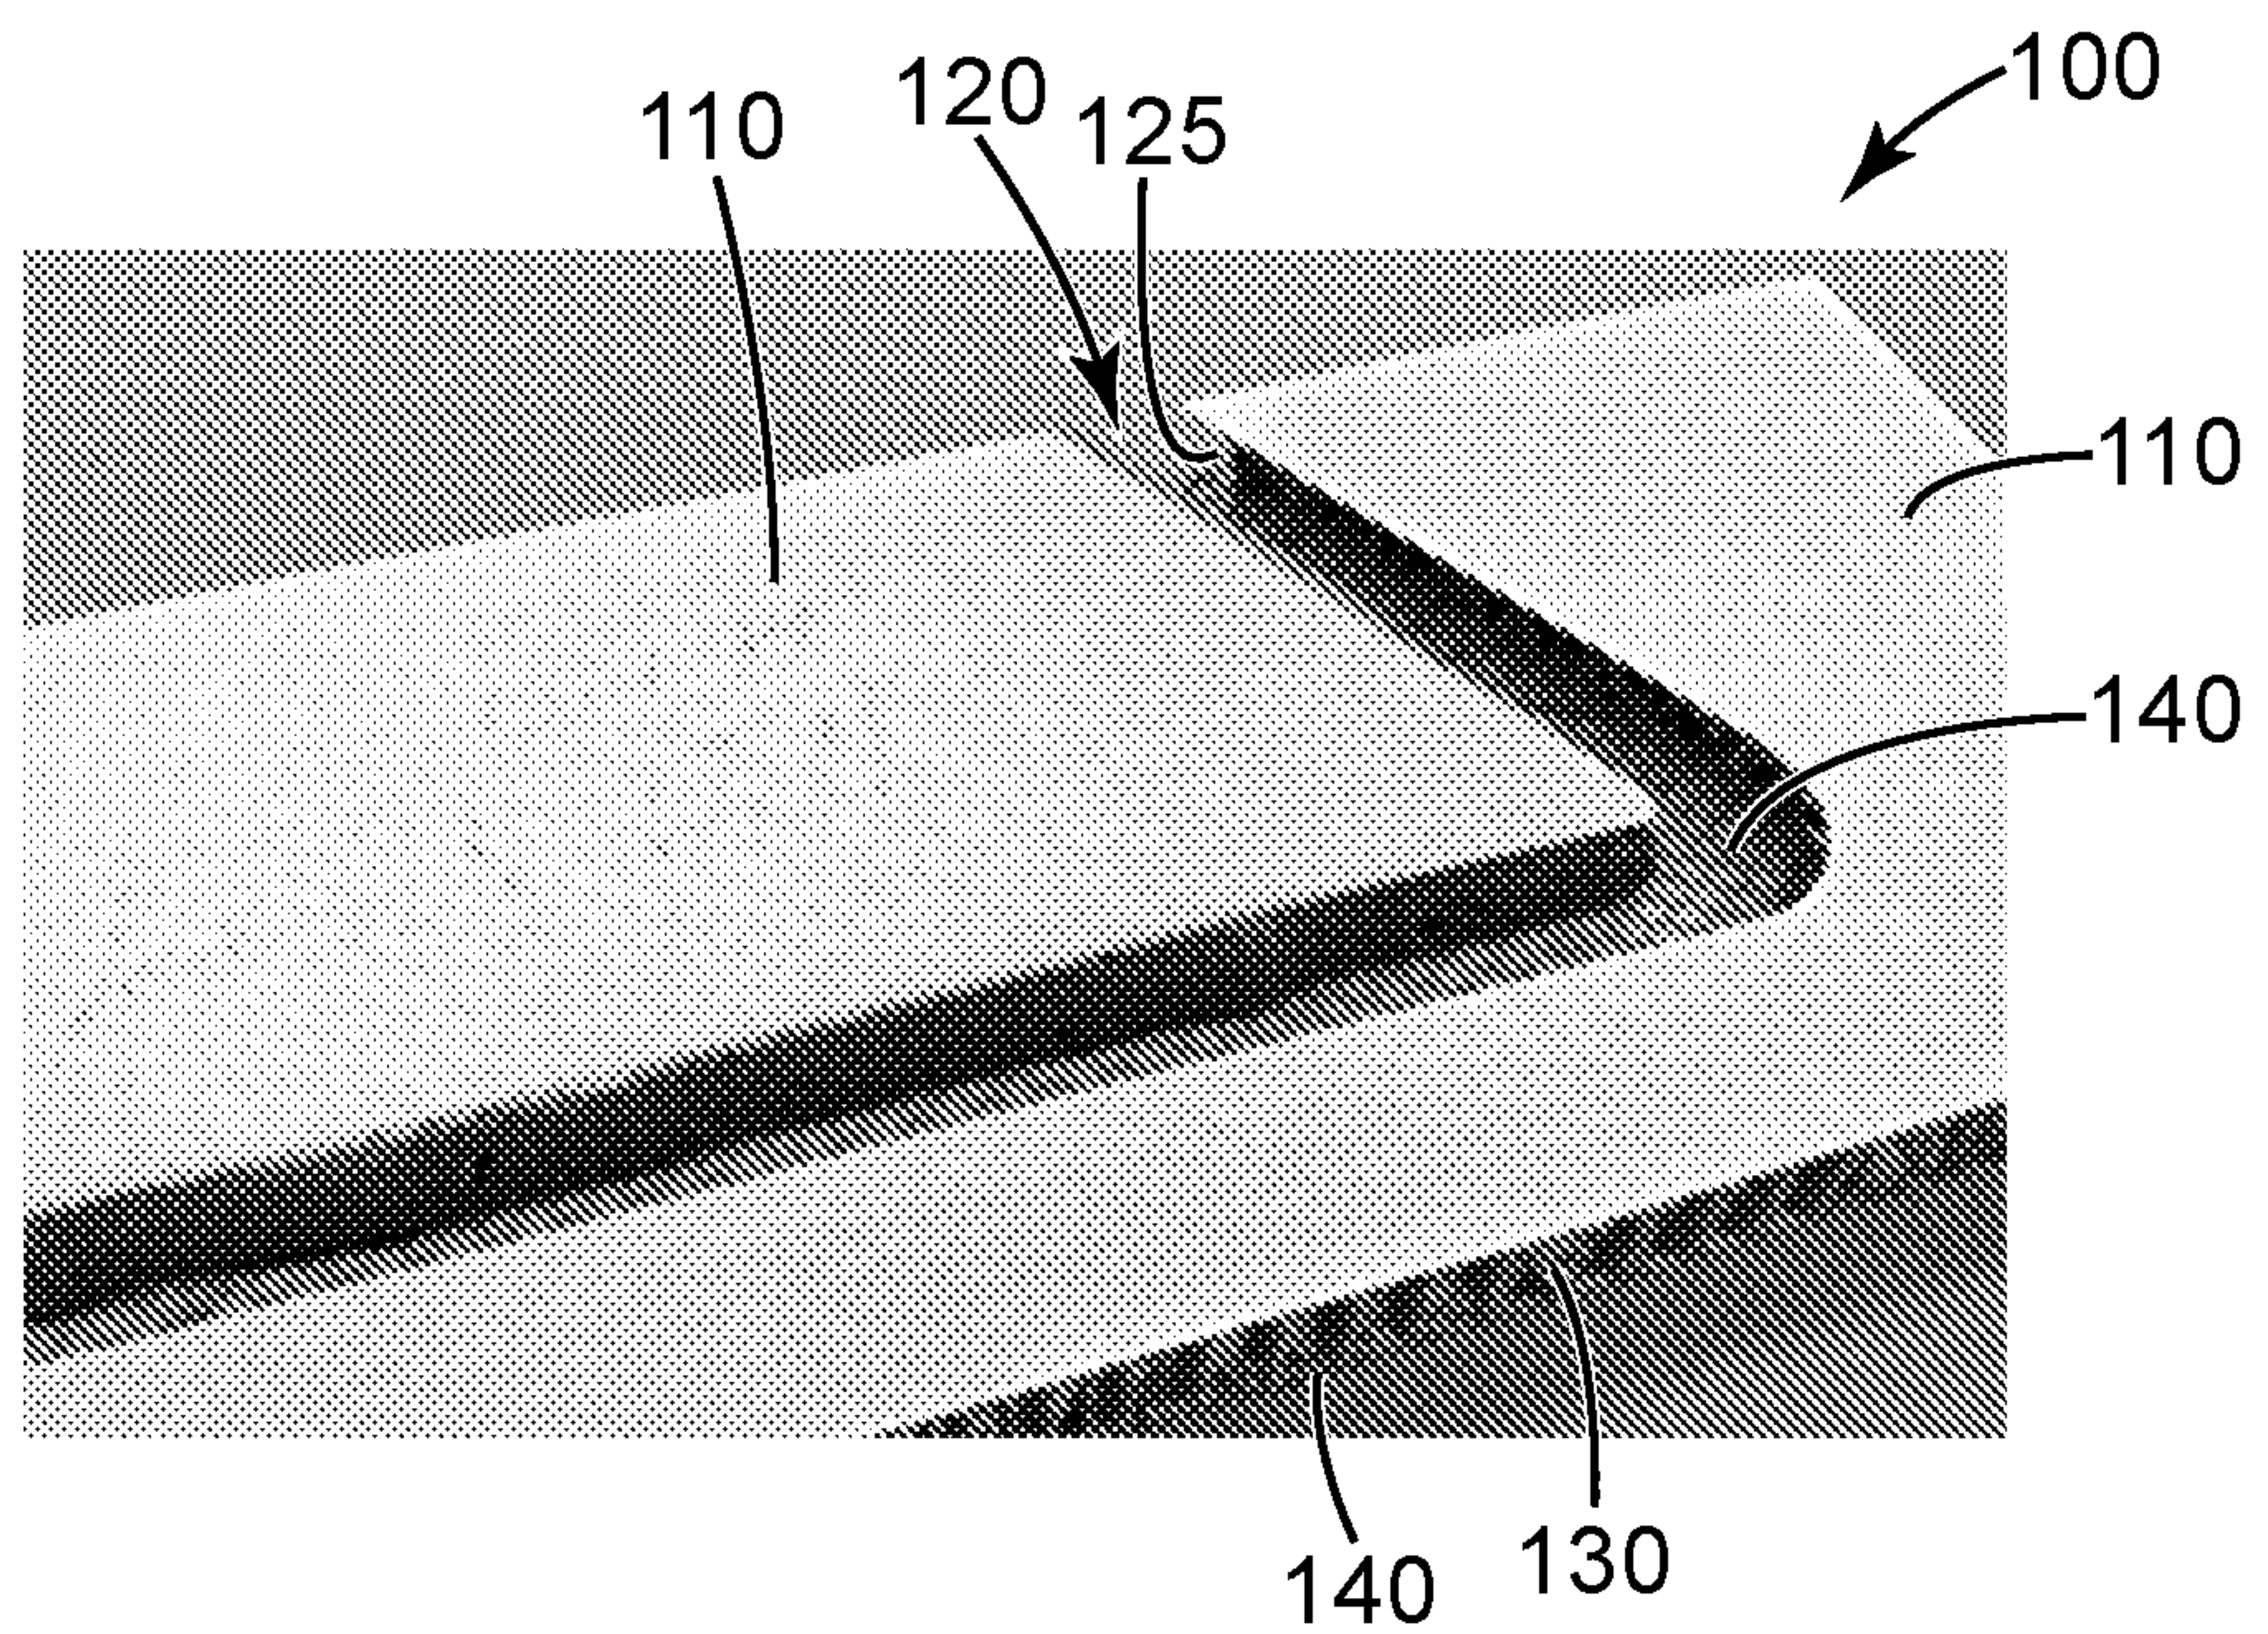
2/4

*Fig. 1C**Fig. 1D*

3/4

**Fig. 2A****Fig. 2B**

4/4

*Fig. 2C**Fig. 3*

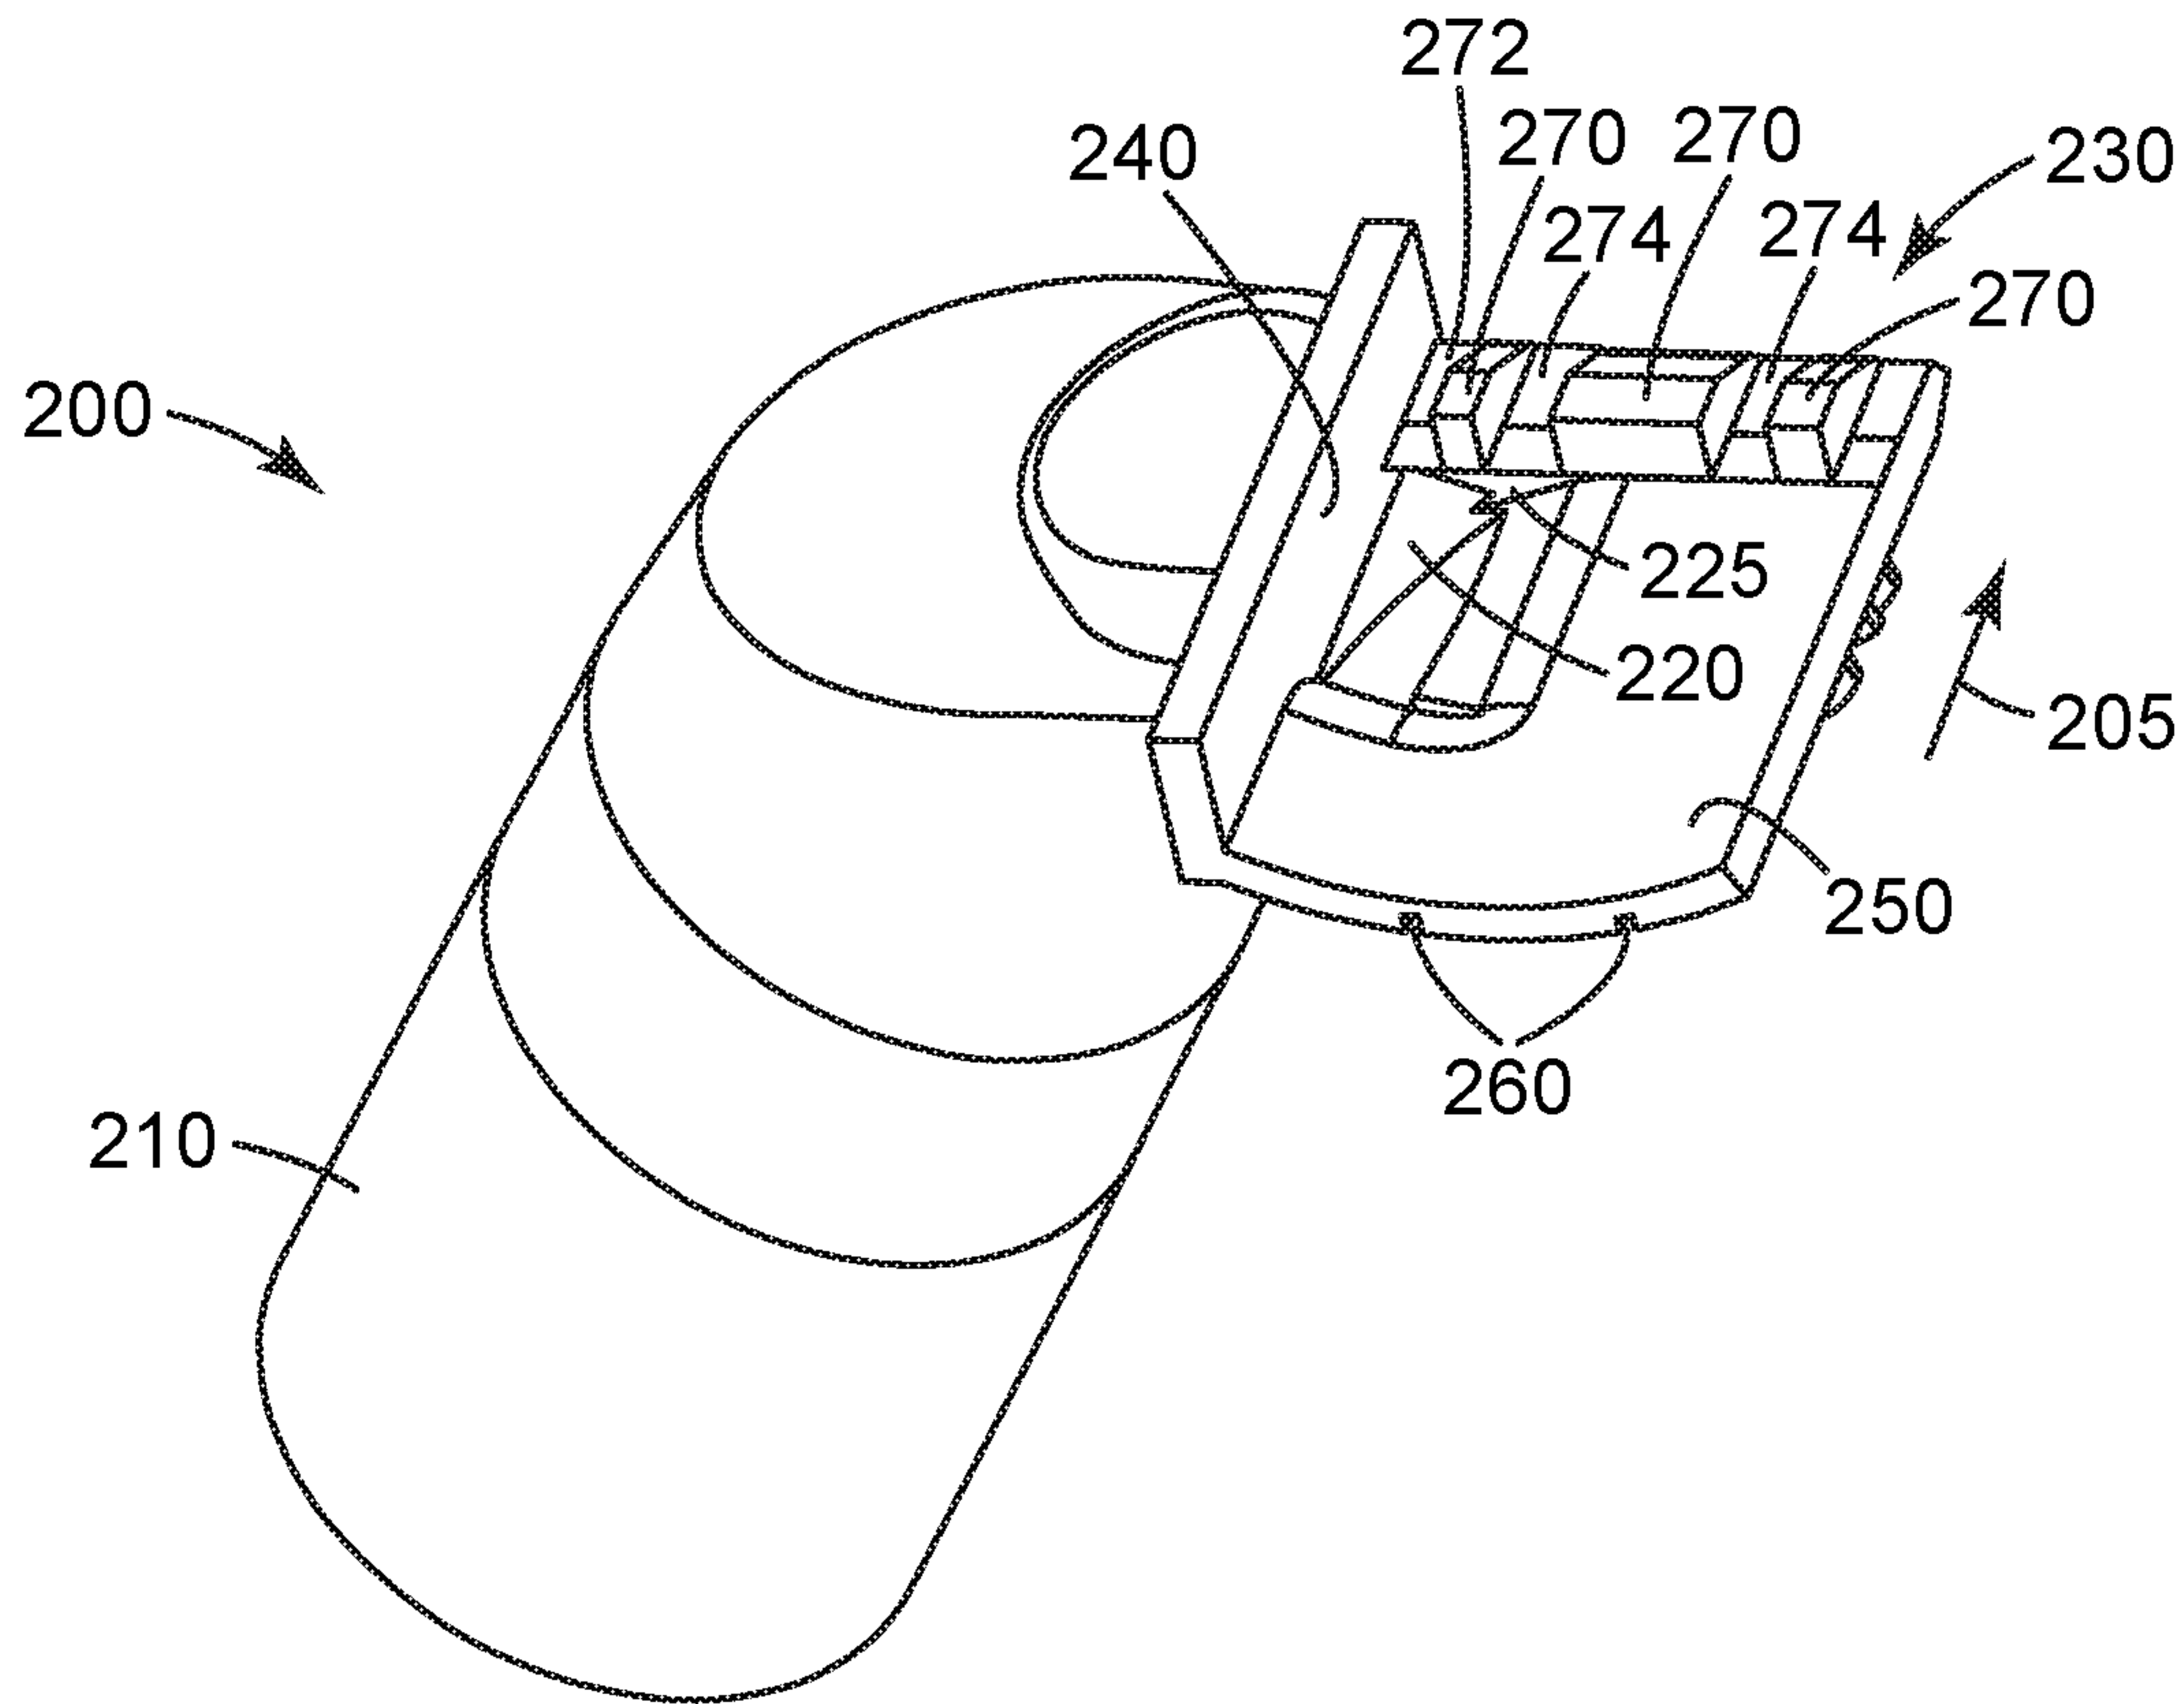


Fig. 1A