



(86) Date de dépôt PCT/PCT Filing Date: 1994/09/26
(87) Date publication PCT/PCT Publication Date: 1995/04/06
(45) Date de délivrance/Issue Date: 2006/01/24
(85) Entrée phase nationale/National Entry: 1996/03/25
(86) N° demande PCT/PCT Application No.: NL 1994/000233
(87) N° publication PCT/PCT Publication No.: 1995/009191
(30) Priorité/Priority: 1993/09/27 (9301005) BE

(51) Cl.Int.⁷/Int.Cl.⁷ C08F 4/65, C08F 4/646, C08F 4/615,
C08F 4/52, C08F 10/02

(72) Inventeurs/Inventors:
FRIEDERICH, NICOLAAS HENDRIKA, NL;
VAN BEEK, JOHANNUS ANTONIUS MARIA, NL;
HAHN RATHS, JOSEPH ANNA JACOB, NL;
POSTEMA, RUTGERUS ANTONIE JACOBUS, NL


(73) Propriétaire/Owner:
DSM IP ASSETS B.V., NL

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : SYSTEME DE CATALYSEUR POUR LA POLYMERISATION D'ETHYLENE
(54) Title: CATALYST SYSTEM FOR THE POLYMERIZATION OF ETHYLENE

(57) **Abrégé/Abstract:**

Catalyst system for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins with 3-12 carbon atoms and optionally one or more non-conjugated dienes in solution, this catalyst system comprising a catalyst A and a cocatalyst B, of which catalyst A can be obtained by reaction under inert conditions of the following components: (a) one or more organomagnesium compounds with alkyl and/or alkoxy groups bonded to the magnesium, (b) one or more chlorine-containing organoaluminium compounds and/or boron compounds, (c) one or more oxygen-containing compounds, (d) one or more transition metal compounds with alkyl, alkoxy and/or halogenide groups bonded to the transition metal; in the order (a), (b), (c), (d), or (a), (b), (d), (c), or (a), (b) and a reaction product of (c) and (d) = (e); following which catalyst A is washed and used in such a quantity that the atomic ratio of aluminium or boron of (b) to magnesium of (a) is between 2 and 15, the atomic ratio of magnesium of (a) to transition metal from (d) or (e) is between 3 and 100, the atomic ratio of oxygen from (c) or (e) to the magnesium of (a) is between 0.1 and 5; as cocatalyst B one or more organoaluminium compounds and/or boron compounds can be used.

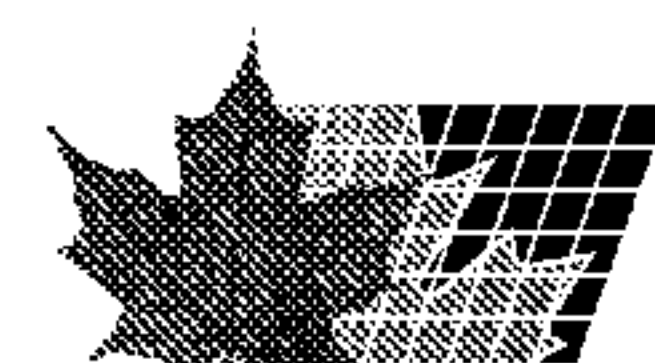

22772-1259

A B S T R A C TCATALYST SYSTEM FOR THE POLYMERIZATION OF ETHYLENE

5 Catalyst system for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins with 3-12 carbon atoms and optionally one or more non-conjugated dienes in solution, this catalyst system comprising a catalyst A and a cocatalyst B, of
10 which catalyst A can be obtained by reaction under inert conditions of the following components:

- (a) one or more organomagnesium compounds with alkyl and/or alkoxy groups bonded to the magnesium,
- (b) one or more chlorine-containing organoaluminium
15 compounds and/or boron compounds,
- (c) one or more oxygen-containing compounds,
- (d) one or more transition metal compounds with alkyl, alkoxy and/or halogenide groups bonded to the transition metal;

20 in the order (a), (b), (c), (d), or (a), (b), (d), (c), or (a), (b) and a reaction product of (c) and (d) = (e); following which catalyst A is washed and used in such a quantity that the atomic ratio of aluminium and/or boron of (b) to magnesium of (a) is between 2 and 15, the atomic
25 ratio of magnesium of (a) to transition metal from (d) or (e) is between 3 and 100, the atomic ratio of oxygen from (c) or (e) to the magnesium of (a) is between 0.1 and 5; as cocatalyst B one or more organoaluminium compounds and/or boron compounds can be used.

22772-1259

- 1 -

CATALYST SYSTEM FOR THE POLYMERIZATION OF ETHYLENE

5

The invention relates to a catalyst system for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins with 3-12 carbon atoms and optionally one or more non-conjugated dienes in solution, this catalyst system comprising a catalyst A and a cocatalyst B, of which catalyst A can be obtained by reaction of the following components:

10

15

20

25

30

- (a) one or more organomagnesium compounds with alkyl and/or alkoxy groups bonded to the magnesium,
- (b) one or more chlorine-containing organoaluminium compounds and/or boron compounds,
- (c) one or more oxygen-containing compounds,
- (d) one or more transition metal compounds with alkyl, alkoxy and/or halogenide groups bonded to the transition metal;

in the order (a), (b), (c), (d), or (a), (b), (d), (c), or (a), (b) and a reaction product of (c) and (d) = (e); following which catalyst A is washed and used in such a quantity that the atomic ratio of aluminium and/or boron of (b) to magnesium of (a) is between 2 and 15, the atomic ratio of magnesium of (a) to transition metal from (d) or (e) is between 3 and 100, the atomic ratio of oxygen from (c) or (e) to the magnesium of (a) is between 0.1 and 5; as cocatalyst B one or more organoaluminium compounds and/or boron compounds can be used. The invention further relates to the (co)polymerization of ethylene using this catalyst.

35

Polymerization of ethylene can take place in the gas-phase, in solution, in bulk or in suspension. Solution and suspension polymerization take place in a solvent and in a dispersion medium, respectively. Suspension polymerization is carried out at a temperature below the temperature at which the formed polyethylene dissolves.

Solution polymerization takes place at temperatures that are higher than the polyethylene dissolution temperature. In general, these are temperatures above 135°C.

Depending on the process chosen, gas-phase,
5 solution, bulk or suspension, different types of polyethylene can be made. The advantage of the gas-phase process is that there is no need to use a solvent or a dispersion medium, which must be removed and purified. The disadvantage of such a process is its lower flexibility.
10 A high flexibility of a process means a short transition time from one polyethylene product type to another. Other limitations are that a.o. no (very) low density polyethylenes (density lower than $\pm 910 \text{ kg/m}^3$) can be produced economically, and that the use of comonomers,
15 especially 1-octene is limited. A solution process on the other hand is characterized by its high flexibility. The linear low density and very low density polyethylenes that can be prepared in a solution process are eminently suitable for the production of films. The toughness of the
20 polyethylene can be controlled by incorporation of various comonomers. Both toughness and the chemical resistance, also referred to as the environmental stress crack resistance (ESCR), improve by the use of various comonomers, the order being 1-butene < 1-hexene < 1-
25 octene.

In a solution polymerization process the polymerization temperatures are as a rule far above 135°C. This has a number of advantages. The polymerization reaction of polyethylene is exothermic, which implies that
30 the removal of the heat of polymerization is an essential problem. In principle it is possible to cool via the wall or by means of cooling devices in the reactor, but this may lead to polymer deposits on the cooling surfaces, especially when the cooling temperature is below 150°C, so
35 it is practically almost impossible to cool the reactor content.

22772-1259

- 3 -

As a consequence the reactor is operated autothermally, this means that the heat of reaction is absorbed by the reaction medium. In order to minimise the solvent to be evaporated, the temperature difference over the reactor must be maximal, so a high reactor temperature and a low feed temperature.

With a high reactor temperature the necessity of heating the polymer solution before evaporation can be reduced or may even be absent.

10 The high temperature catalyst systems must be so active as to have sufficient residual activity at polymerization temperatures of 135°C and higher. However, at such high temperatures it is difficult to make polymers having a sufficiently high molecular weight.

15 US patent specification No. 5.045.612 already discloses such a catalyst system for solution polymerization. In this system, however, the activator is always added after the organomagnesium compound, before the other catalyst components are added. However, the activity of this catalyst system is not satisfactory. The shorter the residence time, the faster a change can be made from the production of one polyethylene type to another, and as already stated, the flexibility of the solution process is one of its main advantages.

25 The invention provides a catalyst system which not only has a very high activity at high temperatures but which also makes it possible to control the comonomer conversions.

This is achieved by a catalyst system for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins with 3-12 carbon atoms and optionally one or more non-conjugated dienes in solution, this catalyst system comprising a catalyst A and a cocatalyst B, of which catalyst A can be obtained by reaction of the following components:

35 (a) one or more organomagnesium compounds with alkyl

22772-1259

- 4 -

- and/or alkoxy groups bonded to the magnesium,
- (b) one or more chlorine-containing organoaluminium compounds and/or boron compounds,
 - (c) one or more oxygen-containing compounds,
 - 5 (d) one or more transition metal compounds with alkyl, alkoxy and/or halogenide groups bonded to the transition metal;

in the order (a), (b), (c), (d), or (a), (b), (d), (c), or (a), (b) and a reaction product of (c) and (d) = (e);

10 following which catalyst A is washed and used in such a quantity that the atomic ratio of aluminium and/or boron of (b) to magnesium of (a) is between 2 and 15, the atomic ratio of magnesium of (a) to transition metal from (d) or (e) is between 3 and 100, the atomic ratio of oxygen from

15 (c) or (e) to the magnesium of (a) is between 0.1 and 5; as cocatalyst B one or more organoaluminium compounds and/or boron compounds can be used.

Thus, a higher activity is achieved leading to short residence times. In addition, the use of such a

20 catalyst system according to the invention results in higher (controllable) comonomer conversions and in polymers having a sufficiently high molecular weight. Control of the comonomer conversions can be effected inter alia by adding the oxygen-containing compound to the

25 transition metal compound at different stages in the preparation of catalyst A. The use of this catalyst system in the (co)polymerization of ethylene also results in a substantial reduction of the residual chlorine and titanium contents of the polyethylene.

30 European patent application EP-A-0126515 discloses a catalyst system that is active also at very high temperatures. This catalyst system uses an oxygen-containing compound as activator. This activator is always added to the system after the organoaluminium compound and

35 the organomagnesium compound have been combined but before the transition metal compound is added. When all compounds

2172633 - 5 -

have been combined, the resulting solid is not washed but used as such and fed to the reactor. There is no need to wash this catalyst system, but it does leave relatively high residual chlorine (> 120 ppm) and titanium (> 10 ppm) contents in the polyethylene. This has an adverse effect on the colour and the purity of the polyethylene. In addition, the stability of the polyethylene is adversely affected and the high chlorine content causes increased corrosion of the process equipment. The last aspects can be suppressed by adding large amounts of corrosion inhibitor and/or stabilizer to the polyethylene. With the catalyst system as disclosed in EP-B-0126515 the molecular weight distribution can be controlled only to a limited extent. If ethylene is copolymerized with one or more α -olefins to yield linear low density polyethylene (LLDPE) or very low density polyethylene (VLDPE), relatively large amounts of α -olefin are needed. This, then, leads to the formation of undesired by-products, chlorinated or non-chlorinated oligomers of the monomers, internal olefins (these are olefins in which the unsaturation is not at the terminal carbon atom), and alkanes. These by-products have an adverse effect on process operation in the plant and must therefore be removed from the reaction mixture at regular intervals. The costs involved are high.

As organomagnesium compound (a), in particular a dialkylmagnesium compound is suitable, an alkoxy-alkylmagnesium compound or a dialkoxymagnesium compound, in which the alkyl or alkoxy groups can contain 1-20 carbon atoms. A hydrocarbon-soluble compound is preferred.

Examples of such compounds are di(n-butyl)magnesium, n-butyl-sec-butylmagnesium, diisopropylmagnesium, di(n-hexyl)magnesium, isopropyl-n-butylmagnesium, ethyl-n-hexylmagnesium, ethyl-n-butylmagnesium, di(n-octyl)magnesium, butyl-octylmagnesium, diethoxymagnesium, dibutoxymagnesium, n-butyl-n-butoxymagnesium, octyl-n-butoxymagnesium, etc. If use is made of a hydrocarbon-

2172633

- 6 -

soluble organomagnesium compound, it is also possible to use complexes of the organomagnesium compound with aluminium. Complexes with ether can also be used. Mixtures of all these compounds are also possible.

5 Preferably, use is made of ethylbutylmagnesium, butyloctylmagnesium, dibutylmagnesium or dihexylmagnesium, optionally converted to an alkyl-alkoxymagnesium compound with at most two mole equivalents of an alcohol with respect to the magnesium.

10 Compounds suitable for use as (b) are in particular compounds that satisfy the general formula $M(R)_{3-m}X_m$, where M is aluminium or boron, R is a hydrocarbon group or an alkoxy group with 1-20 carbon atoms, X is a halogen atom and m has a value of 1-2. In
15 the event that $m = 1$, the alkyl and/or alkoxy groups of the aluminium may be the same or different. Mixtures of these compounds can also be used.

 Preferably, use is made of diethylaluminium-chloride, sesquiethylaluminiumchloride, monoethylaluminiumchloride or mixtures thereof.
20

 As oxygen-containing compound (c) use can be made f.e. of alcohols, glycols, silanols and ethers. Examples of such compounds are hexanol, octanol, decanol, 2-ethylhexanol, triphenylsilanol, diethylether, t-butyl-
25 methylether, anisole, 1,1,3,3-tetraphenyldisiloxane-1,3-diol, 1,2-dihydroxyethane, 1,3-dihydroxypropane and 2-ethyl-hexane-1,3-diol, etc. Mixtures of these compounds can also be used.

 Preferably, use is made of hexanol, decanol, 2-ethylhexanol, t-butylmethylether, diethylether, triphenylsilanol, or mixtures of these.
30

 As transition metal compound (d), both trivalent and tetravalent titanium compounds can be used. These titanium compounds satisfy the general formulae $Ti(OR^1)_{4-n}X^1_n$ and $Ti(OR^2)_{3-m}X^2_m$, respectively, where R^1 and R^2 are the
35 same or different and represent hydrocarbon radicals with

22772-1259

- 7 -

1-20 carbon atoms, X^1 and X^2 are halogen atoms, $0 \leq n \leq 4$ and $0 \leq m \leq 3$. Titanium complexes such as $TiCl_3 \cdot 3$ decanol, $TiCl_3 \cdot 3$ tetrahydrofuran, $TiCl_3 \cdot 3$ pyridine can also be used.

Preferably, use is made of tetrabutoxytitanium (TBT),
5 and/or titaniumtetrachloride ($TiCl_4$).

Compounds of other transition metals, such as vanadium, zirconium or hafnium are also suitable. Examples of such compounds are VCl_4 , $VOCl_3$, $ZrCl_4$, $Zr(OiPr)_4$, $Zr(Obu)_4$, $Hf(Obu)_4$ and $HfCl_4$. Mixtures of compounds with
10 different transition metals can also be used.

In the preparation of catalyst A of the catalyst system, the atomic ratio of aluminium and/or boron of component (b) to the magnesium of component (a) is between 2 and 15, preferably between 2.5 and 10.

15 The atomic ratio of magnesium of component (a) to transition metal of component (d) is generally between 3 and 100, preferably between 3 and 50.

The molar ratio of the oxygen-containing compound, component (c), to the magnesium-containing compound,
20 component (a), is between 0.1 and 5, preferably between 0.5 and 4.

The preparation of the catalyst system can f.e. further take place as follows. The organoaluminium halogen compound or the boron compound (b) is added to the organomagnesium compound (a). The entire amount can be
25 added portion- or dropwise while stirring at a temperature between $-20^\circ C$ and $100^\circ C$. After this, there are at least three ways to continue the preparation of catalyst A. In the first place the oxygen-containing compound (c) can be added dropwise to the mixture that has already formed,
30 this taking place while stirring in a period of time ranging from some minutes to some hours at a temperature that can vary between $-20^\circ C$ and $100^\circ C$. Subsequently, the transition metal compound (d) is added, which can also be done portion- or dropwise. A second possibility is to add
35 component (d), dissolved or suspended in (c) and optionally after dilution within an inert dispersion

- 8 - 2172633

medium, to the reaction product of components (a) and (b) while stirring for some time at a temperature between -20°C and 100°C. In the third place it is possible to add component (d) to the reaction product of (a) and (b),
5 followed by rapid addition (usually within 5 minutes) of component (c). After this, stirring is applied for some hours at a temperature between 0 and 100°C. The catalyst system is then separated by means of filtration or decanting and washed with an inert dispersion medium.

10 Besides the catalyst system as described above, a cocatalyst B is fed to the reactor in order to activate the catalyst. As cocatalyst B use can be made of one or more organoaluminium compounds and/or boron compounds. Examples are triethylaluminium (TEA), trioctylaluminium
15 (TOA), isoprenylaluminium (IPRA), diethylaluminiumchloride (DEAC), sesquiethylaluminiumchloride (SEAC), diethylaluminiumhydride (DEAH), diethylaluminiummethoxide (DEALOX), monoethylaluminium-dichloride (MEAC), methylaluminoxane (MAO) and triethylboron or mixtures thereof.
20 TEA and DEAC are preferred.

The catalyst system and the cocatalyst can be fed to the polymerization reactor either separately or in combination.

The invention furthermore relates to a process
25 for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins with 3-12 carbon atoms and optionally one or more non-conjugated dienes. Particularly suitable α -olefins are propylene, 1-butene, 1-hexene and 1-octene. Examples of suitable dienes are
30 1,4-pentadiene, 1,4-hexadiene, 1,5-hexadiene, 1,6-heptadiene, 1,7-octadiene, 1,8-nonadiene and 1,9-decadiene.

The catalyst system of the subject invention can in principle be used in all known types of polymerization
35 processes; as already mentioned these are gas-phase, suspension, bulk and solution processes. However, this

catalyst system is particularly suitable for solution polymerization. Polymerization then takes place at temperatures between 150°C and 260°C.

As dispersion medium, both in the preparation of the catalyst and in the polymerization, use can be made of any liquid that is inert with respect to the catalyst system. One or more saturated, linear or branched aliphatic hydrocarbons, such as butanes, pentanes, hexanes, heptanes, pentamethylheptane or petroleum fractions such as light or regular gasoline, naphtha, kerosine, gas oil can be used for this purpose. Aromatic hydrocarbons, such as benzene and toluene, can be used, but for cost price considerations as well as for safety reasons such solvents will generally not be used in technical-scale production. In technical-scale polymerizations, therefore, as solvent use is preferably made of the inexpensive aliphatic hydrocarbons or mixtures thereof, as marketed by the petrochemical industry.

The polymer solution obtained in the polymerization can be processed in a way known per se. Generally, the catalyst is deactivated at some point of the polymer recovery phase. Deactivation also takes place in a way known per se f.e. by addition of an alcohol.

Polymerization can take place at atmospheric pressure but also at elevated pressure, up to 300 MPa, in a continuous or discontinuous manner. Preferably, polymerization takes place at pressures between 0,1 and 40 MPa, in particular between 1 and 18 MPa.

The molecular weight of the polymer can be controlled in the known manner by addition of hydrogen or other chain length regulators, such as dialkylzinc.

With the catalyst system according to the invention polyethylene can be produced under conditions as mentioned above, in a very short time, which means a short residence time in the reactor, with a high activity. This polyethylene has the customary high molecular weights, but

2172633

- 10 -

in addition extra low contents of catalyst residues. The molecular weight distribution can be controlled, in particular by means of the amounts components (c) and (d), or (e), and the way of preparation of catalyst A.

5 Polymerization can also be effected in several stages, both in series and in parallel. In these different stages it is possible to vary the catalyst composition, temperature, hydrogen concentration, pressure, residence time, etc., if desired. This provides additional means of
10 controlling the molecular weight distribution.

The present invention will be elucidated in the following examples and comparative experiments, without being limited to them. The examples and comparative experiments serve to illustrate the high activity of the
15 catalyst system at short residence times in the reactor. The density (d) was determined according to ASTM standard D792-66. The melt index (MI) was determined according to ASTM standard D1238, condition E.

The flow index (FI) is $I_{21.6}/[I_{2.16}]^{0.9}$, $I_{21.6}$ having been
20 determined according to ASTM standard D1238 and $I_{2.16}$ having been determined according to ASTM standard D1238, condition E.

EXAMPLE I

25 Catalyst preparation

During the entire preparation air and moisture were excluded and an inert nitrogen atmosphere was maintained. During all reactions stirring was applied, use being made of a glass stirring rod.
30 125 ml of a 0.9 M solution of butyloctylmagnesium in heptane (BOMAG-A®, Witco) was added at room temperature to a solution of 5 ml butanol in 400 ml gasoline (a mixture of aliphatic hydrocarbons with a boiling range of 65-70°C). This reaction mixture was then stirred for 30
35 minutes at room temperature. Then 65 ml SEAC (pure, Witco) was added and the mixture was heated for two hours at

60°C. After cooling to room temperature a solution of 2.5 ml TBT in 50 ml 2-ethylhexanol was added, which was again followed by heating for two hours at 60°C. After the reaction mixture had again been cooled to room temperature, it was passed over a glass filter and the solid part was separated from the liquid part. The solid part, catalyst A, was washed five times with 150 ml gasoline. Catalyst A was then suspended in gasoline for use as a slurry. The various elements of the catalyst prepared were present in the following ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 5$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 15$$

$$\text{O}_{(c)}:\text{Mg}_{(a)} = 3$$

15 EXAMPLE II

Catalyst preparation

The preparation method was the same as described in Example I, but with 25 ml 2-ethylhexanol instead of 50 ml 2-ethylhexanol.

20 Ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 5$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 15$$

$$\text{O}_{(c)}:\text{Mg}_{(a)} = 1.5$$

25 EXAMPLE III

Catalyst preparation

The same preparation method as described in Example I, but now 2-ethylhexanol (c) was added separately from TBT (d) five minutes after TBT had been added to the reaction mixture.

30 Ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 5$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 15$$

$$\text{O}_{(c)}:\text{Mg}_{(a)} = 3$$

35

EXAMPLE IV

2172633

Catalyst preparation

The same preparation method as described in Example III, but with 25 ml 2-ethylhexanol (c) instead of 50 ml 2-ethylhexanol.

5 Ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 5$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 15$$

$$\text{O}_{(c)}:\text{Mg}_{(a)} = 1.5$$

10 Comparative experiment ACatalyst preparation

The same preparation method as described in Example I, but without 2-ethylhexanol (c) and with 3.8 ml TBT.

15 Ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 5$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 10$$

$$\text{O}_{(c)}:\text{Mg}_{(a)} = 0$$

20 EXAMPLE VCatalyst preparation

The same preparation method as described in Example I, but without the butanol. As component (b) 38.5 ml SEAC was used, while, in contrast with Example III, first 2-ethylhexanol (c) was added to the reaction mixture and then the TBT (d).

Ratios:

$$\text{Al}_{(b)}:\text{Mg}_{(a)} = 3$$

$$\text{Mg}_{(a)}:\text{Ti}_{(d)} = 15$$

30
$$\text{O}_{(c)}:\text{Mg}_{(a)} = 3$$

Comparative experiment BCatalyst preparation

The same preparation method as described in Example V, without 2-ethylhexanol (c) but with butanol, as described in Example I.

Ratios:

$Al_{(b)}:Mg_{(a)} = 3$

$Mg_{(a)}:Ti_{(d)} = 15$

$O_{(c)}:Mg_{(a)} = 0$

5

EXAMPLE VI

Catalyst preparation

The same preparation method as described in Example II, but with 65 ml SEAC and 25 ml 2-ethylhexanol.

10 In contrast with Example II, first 2-ethylhexanol (c) was added to the reaction mixture and then the TBT (d).

Ratios:

$Al_{(b)}:Mg_{(a)} = 5$

$Mg_{(a)}:Ti_{(d)} = 15$

15 $O_{(c)}:Mg_{(a)} = 1.5$

EXAMPLE VII

Polymerization

20 In a continuous polymerization process for the production of an ethylene-octene copolymer the catalyst prepared according to Example I was fed as a suspension in gasoline to a 1-litre reactor filled entirely with gasoline. The production rate was 1.35 kg polyethylene per hour. The cocatalyst, triethylaluminium (TEA, 0.15 mmol/l)

25 was added to the catalyst and mixed with it for two seconds just before to the reactor. Ethylene was fed at a rate of 1040 nl/h, and octene at 800 g/h. The reaction temperature was 185°C and the reactor pressure 9 MPa. Hydrogen was supplied at a rate of 0.20 nl/h.

30 The LLDPE produced was found to contain 3 ppm Ti and 106 ppm Cl, with $d = 919 \text{ kg/m}^3$, $MI = 4.7 \text{ dg/min}$, $FI = 40$.

EXAMPLE VIII

Polymerization

Polymerization took place as described in

2172633

- 14 -

Example VII. However, the cocatalyst was supplied separately from the catalyst. The reactor temperature was 187°C and hydrogen was supplied at a rate of 0.30 nl/h. The polyethylene produced was found to have a residual content of 3 ppm Ti and 91 ppm Cl, with $d = 916 \text{ kg/m}^3$, MI = 3.2 dg/min and FI = 34.

EXAMPLE IX

Polymerization

10 Polymerization took place as described in Example VIII, with the catalyst prepared according to Example II being supplied to the reactor. The reactor temperature was 186°C.

15 The polyethylene produced was found to contain 4 ppm Ti and 125 ppm Cl as catalyst residues. The polyethylene produced had a $d = 911 \text{ kg/m}^3$, an MI = 3.3 dg/min and an FI = 35.

EXAMPLE X

Polymerization

20 Polymerization took place as described in Example VIII using the catalyst prepared according to Example III at a reactor temperature of 187°C. The residual contents in the LLDPE produced were 4 ppm Ti and 133 ppm Cl. The LLDPE produced had a $d = 915 \text{ kg/m}^3$, an MI = 8.1 dg/min and an FI = 44.

EXAMPLE XI

Polymerization

30 Polymerization took place as described in Example VIII using the catalyst prepared according to Example IV at a reactor temperature of 187°C. The LLDPE produced had a $d = 909 \text{ kg/m}^3$, an MI = 6.1 dg/min and an FI = 50, while containing 4 ppm TI and 159 ppm Cl as residual contents.

35

Comparative Experiment CPolymerization

The polymerization was carried out as described in Example VII using the catalyst prepared according to
5 Comparative Experiment A.

As catalyst residues 8 ppm Ti and 154 ppm Cl were found in the LLDPE produced, which had a $d = 921 \text{ kg/m}^3$, an MI = 4.8 dg/min and an FI = 36.

10 Comparative Experiment DPolymerization

The polymerization was carried out as described in Example VII using the catalyst prepared according to Comparative Experiment B.

15 The LLDPE had a $d = 921 \text{ kg/m}^3$, an MI = 5.6 dg/min and an FI = 36 while containing 10 ppm Ti and 286 ppm Cl as residual contents.

EXAMPLE XII20 Polymerization

The polymerization was carried out as described in Example VII using the catalyst prepared according to Example V at a reactor temperature of 188°C. The residual contents in the LLDPE amounted to 8 ppm Ti and 270 ppm Cl.

25 The LLDPE had a $d = 911 \text{ kg/m}^3$, an MI = 2.3 dg/min and an FI = 40.

EXAMPLE XIIIPolymerization

30 The polymerization was carried out as described in Example VIII using the catalyst prepared according to Example VI at a reactor temperature of 187°C. As cocatalyst diethylaluminiumchloride (DEAC, 0.15 mmol/l) was used. The catalyst residues amounted to 4 ppm Ti and
35 182 ppm Cl. The LLDPE had a $d = 909 \text{ kg/m}^3$, an MI = 3.8 dg/min and an FI = 30.

EXAMPLE XIVPolymerization

The polymerization was carried out as described in Example VII using the catalyst prepared according to Example VI at a reactor temperature of 186°C. The catalyst residues amounted to 6 ppm Ti and 147 ppm Cl. The LLDPE had a $d = 919 \text{ kg/m}^3$, an MI = 4.5 dg/min and an FI = 38.

All polymerization examples and comparative experiments were carried out under identical reactor conditions. This implies: the same temperature (i.e. $186^\circ\text{C} \pm 1^\circ\text{C}$), the same pressure, and above all the same monomer and comonomer flow rates to the reactor. As a consequence, a difference in comonomer conversion is manifested in the density: higher comonomer conversions, lower density. The width of the molecular weight distribution is manifested in the flow index: the higher the flow index, the wider the molecular weight distribution.

The catalyst activity is manifested in the residual titanium and chlorine contents: the lower these residual contents, the higher the activity of the catalyst used, for the resulting polyethylene is not washed.

Examples VII up to and including XIV prove that the moment that component (c) is added, before, after or simultaneous with component (d), greatly affects the activity (a low residual titanium content) of the catalyst. The polyethylenes produced in addition have a considerably lower density, which means comonomer conversion is higher than in the comparative experiments.

22772-1259

-17-

CLAIMS:

1. A catalyst system for the homopolymerization of ethylene or copolymerization of ethylene with one or more α -olefins having 3-12 carbon atoms and optionally one or more non-conjugated dienes in solution, the catalyst system consisting of a catalyst A and a cocatalyst B, wherein catalyst A is obtained by reaction of the following components:

(a) one or more organomagnesium compounds with alkyl groups, alkoxy groups or a combination of alkyl groups and alkoxy groups bonded to the magnesium,

(b) at least one compound represented by the formula $M(R)_{3-m}X_m$, wherein M represents an aluminium or boron atom, R represents a hydrocarbon group or an alkoxy group with 1-20 carbon atoms, X represents a halogen atom and m has value of 1-2,

(c) one or more oxygen-containing compounds selected from the group consisting of alcohols, glycols, silanols and ethers,

(d) one or more transition metal compounds with alkyl, alkoxy, halogenide groups or a combination thereof bonded to the transition metal, wherein the transition metal is selected from the group consisting of titanium, zirconium, hafnium and vanadium;

in the order (a), (b), (c), (d), or (a), (b), (d), (c), or (a), (b) and a reaction product of (c) and (d) = (e);

wherein the components (a) to (e) or combinations thereof are used in such a quantity that the atomic ratio of aluminium and boron of (b) to magnesium of (a) is between 2 and 15, the atomic ratio of magnesium of (a) to transition

22772-1259

-18-

metal from (d) or (e) is between 3 and 100, the atomic ratio of oxygen from (c) or (e) to the magnesium of (a) is between 0.1 and 5;

following which catalyst A is washed; and

5 the cocatalyst B is one or more organoaluminium compounds, boron compounds or a combination thereof.

2. The catalyst system according to claim 1, wherein component (a) is ethylbutylmagnesium, butyloctylmagnesium, or dihexylmagnesium, optionally converted in situ to an
10 alkyl-alkoxy-magnesium compound with at least two mole equivalents of the alcohol with respect to the magnesium.

3. The catalyst system according to claim 1 or 2, wherein component (b) is diethylaluminiumchloride, sesquiethylaluminiumchloride, monoethylaluminiumchloride or
15 a mixture thereof.

4. The catalyst system according to any one of claims 1 to 3, wherein cocatalyst B is triethylaluminium or diethylaluminum chloride.

5. The catalyst system according to any one of
20 claims 1 to 4, wherein component (c) is hexanol, decanol, 2-ethylhexanol, t-butyl-methyl-ether, diethylether, triphenylsilanol, 1,1,3,3-tetraphenyldisiloxane-1,3-diol, 1,2-dihydroxyethane, 1,3-dihydroxypropane and 2-ethylhexane-1,3-diol or a mixture thereof.

25 6. The catalyst system according to any one of claims 1 to 5, wherein component (d), the transition metal compound is a titanium compound.

7. The catalyst system according to claim 6, wherein the titanium compound is represented by the formula:

22772-1259

-19-



or



wherein R^1 and R^2 are the same or different and represent
 5 hydrocarbon radicals having 1 to 20 carbon atoms, X^1 and X^2
 are halogen atoms, $0 \leq n \leq 4$, and $0 \leq m \leq 3$.

8. The catalyst system according to any one of
 claims 1 to 7, wherein component (d) is tetrabutoxytitanium,
 titaniumtetrachloride or a mixture thereof.

10 9. The catalyst system according to any one of
 claims 1 to 8, wherein the atomic ratio of aluminium and
 boron of component (b) to the magnesium of component (a) is
 between 2.5 and 10.

10. The catalyst system according to any one of
 15 claims 1 to 9, wherein the atomic ratio of magnesium of
 component (a) to transition metal of component (d) is
 between 3 and 50.

11. The catalyst system according to any one of
 claims 1 to 10, wherein the molar ratio of the oxygen-
 20 containing compound, component (c), relative to the
 magnesium-containing compound, component (a), is between
 0.5 and 4.

12. The catalyst system according to any one of
 claims 1 to 11, wherein (a) is butyloctylmagnesium, (b) is
 25 sesquiethylaluminiumchloride, (c) is 2-ethylhexanol, and
 (d) is tetrabutoxytitanium.

13. A process for the homopolymerization of ethylene
 or copolymerization of ethylene with one or more α -olefins
 having 3-12 carbon atoms and optionally one or more non-

22772-1259

-20-

conjugated dienes in solution, comprising the use of a catalyst system according to any of one claims 1-12.

SMART & BIGGAR

OTTAWA, CANADA

PATENT AGENTS