




(86) Date de dépôt PCT/PCT Filing Date: 2013/07/11
 (87) Date publication PCT/PCT Publication Date: 2014/01/16
 (45) Date de délivrance/Issue Date: 2020/06/02
 (85) Entrée phase nationale/National Entry: 2014/12/04
 (86) N° demande PCT/PCT Application No.: EP 2013/064644
 (87) N° publication PCT/PCT Publication No.: 2014/009449
 (30) Priorité/Priority: 2012/07/13 (EP12305846.3)

(51) Cl.Int./Int.Cl. *F25J 3/02* (2006.01),
B01D 53/00 (2006.01), *F25J 3/06* (2006.01)
 (72) Inventeurs/Inventors:
DARDE, ARTHUR, FR;
DUBETTIER-GRENIER, RICHARD, FR;
HASSE, DAVID J., US;
KULKARNI, SUDHIR S., US;
LECLERC, MATHIEU, FR;
TERRIEN, PAUL, FR
 (73) Propriétaire/Owner:
L'AIR LIQUIDE, SOCIETE ANONYME POUR L'ETUDE
ET L'EXPLOITATION DES PROCEDES GEORGES
CLAUDE, FR
 (74) Agent: ROBIC

(54) Titre : PROCEDE ET APPAREIL PERMETTANT DE SEPARER UN FLUX CONTENANT DU DIOXYDE DE CARBONE, DE L'EAU ET AU MOINS UN TYPE D'IMPURETES LEGERES, ET IMPLIQUANT UNE ETAPE DE SEPARATION A UNE TEMPERATURE INFERIEURE A LA TEMPERATURE AMBIANTE.
 (54) Title: PROCESS AND APPARATUS FOR THE SEPARATION OF A STREAM CONTAINING CARBON DIOXIDE, WATER AND AT LEAST ONE LIGHT IMPURITY INCLUDING A SEPARATION STEP AT SUBAMBIENT TEMPERATURE.

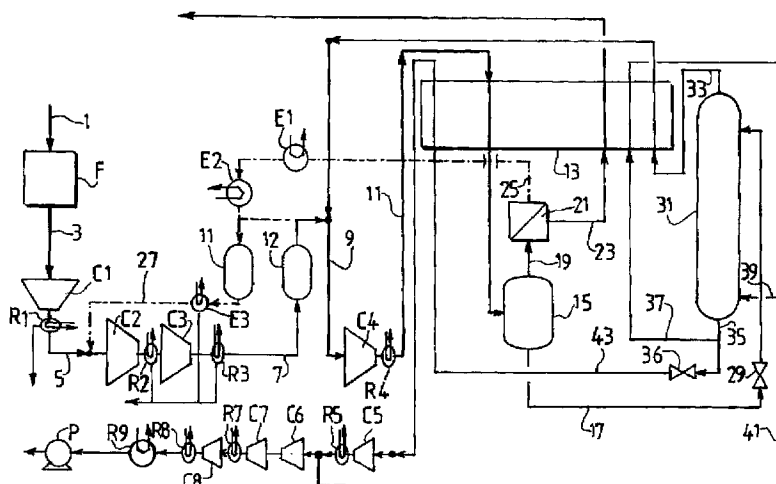

(57) **Abrégé/Abstract:**

In a process for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient temperature, the feed stream (1, 3) is compressed in a compressor (C1, C2, C3) comprising at least two stages to form a compressed feed stream (7), the compressed feed stream is purified in an adsorption unit (A1, A2) to remove water and form a dried compressed stream (9, 11), the dried compressed stream or a stream derived therefrom is cooled to a subambient temperature and separated by partial condensation and/or distillation in a separation apparatus (19, 31), liquid enriched in carbon dioxide (37, 43) is removed from the separation apparatus, the adsorption unit is regenerated using a regeneration gas (25, 53) and the regeneration gas is formed by separating, by permeation in a permeation unit (21, 51), the dried compressed stream (9) or a gas (19) derived therefrom, the permeate of the permeation unit constituting the regeneration gas.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
16 January 2014 (16.01.2014)(10) International Publication Number
WO 2014/009449 A4

- (51) **International Patent Classification:**
F25J 3/02 (2006.01) F25J 3/06 (2006.01)
B01D 53/00 (2006.01)
- (21) **International Application Number:** PCT/EP2013/064644
- (22) **International Filing Date:** 11 July 2013 (11.07.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12305846.3 13 July 2012 (13.07.2012) EP
- (71) **Applicant:** L'AIR LIQUIDE, SOCIÉTÉ ANONYME POUR L'ÉTUDE ET L'EXPLOITATION DES PROCÉDES GEORGES CLAUDE [FR/FR]; 75, Quai d'Orsay, F-75007 Paris (FR).
- (72) **Inventors:** DARDE, Arthur; 32 boulevard Saint-Marcel, F-75005 Paris (FR). DUBETTIER-GRENIER, Richard; 19 Avenue du Centenaire, F-94210 La Varenne Saint-Hilaire (FR). HASSE, David J.; 106 West Stonewall Dr., Middletown, Delaware 19709 (US). KULKARNI, Sudhir S.; 1801 Breen Lane, Wilmington, Delaware 19810 (US). LECLERC, Mathieu; 7 rue des Orteaux, F-75020 Paris (FR). TERRIEN, Paul; 77 Avenue Emile Zola, F-75015 Paris (FR).
- (74) **Agent:** MERCEY, Fiona; L'AIR LIQUIDE S.A, Intellectual Property Dept, 75, Quai d'Orsay, F-75321 Paris Cedex 07 (FR).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).


Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

[Continued on next page]

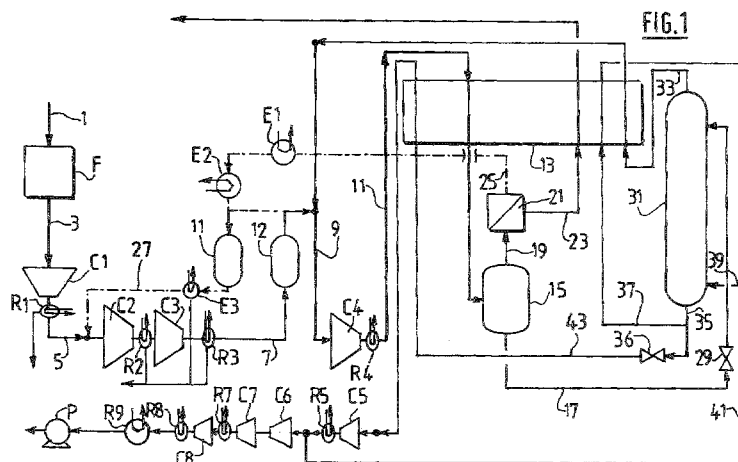(54) **Title:** PROCESS AND APPARATUS FOR THE SEPARATION OF A STREAM CONTAINING CARBON DIOXIDE, WATER AND AT LEAST ONE LIGHT IMPURITY INCLUDING A SEPARATION STEP AT SUBAMBIENT TEMPERATURE

(57) **Abstract:** In a process for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient temperature, the feed stream (1, 3) is compressed in a compressor (C1, C2, C3) comprising at least two stages to form a compressed feed stream (7), the compressed feed stream is purified in an adsorption unit (A1, A2) to remove water and form a dried compressed stream (9, 11), the dried compressed stream or a stream derived therefrom is cooled to a subambient temperature and separated by partial condensation and/or distillation in a separation apparatus (19, 31), liquid enriched in carbon dioxide (37, 43) is removed from the separation apparatus, the adsorption unit is regenerated using a regeneration gas (25, 53) and the regeneration gas is formed by separating, by permeation, in a permeation unit (21, 51), the dried compressed stream (9) or a gas (19) derived therefrom, the permeate of the permeation unit constituting the regeneration gas.

WO 2014/009449 A4

WO 2014/009449 A4 

— *with amended claims (Art. 19(1))*

Date of publication of the amended claims: 3 April 2014

Process and apparatus for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient temperature.

5 The present invention relates to a process and an apparatus for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient temperature.

 Oxycombustion flue gases are generally purified using a separation step at subambient temperature to produce pure CO₂. Upstream of the separation step
10 the flue gas is purified by adsorption to remove water. The adsorption unit typically comprises two beds which operate according to a cycle, the cycles being timed so that the flue gas can be purified at all times. It is necessary to regenerate the adsorption unit by sending a dry gas through the bed to eliminate the accumulated humidity.

15 The dried flue gas is sent from the adsorption unit to the separation unit to be separated by subambient temperature distillation using at least one phase separator and/or a distillation column. Non condensable gases are removed from the separation unit and still contain a significant portion of CO₂. CO₂ can be recovered from these non-condensable gases via a permeation device, an
20 adsorption device (Pressure Swing Adsorption or Vacuum Pressure Swing Adsorption). The dried flue gas typically contains at least 65% carbon dioxide or even at least 70% carbon dioxide and at least 1% oxygen. A maximum percentage for the carbon dioxide content could be 95%.

 It is known from US-A-8012446 to regenerate the adsorption unit with the
25 permeate of a membrane device at low pressure and recycle the permeate to the boiler or the environmental island. This allows for impurities regenerated from the dryer to be efficiently handled in the environmental island or the boiler itself (desulfurization steps and/or combustion in the boiler and/or NO_x production mitigation in the boiler).

30 It is also known from WO-A-2007/126972 to separate the feed in a phase separator and send the liquid formed to a distillation column producing pure carbon

dioxide. In this case, the gas from the phase separator is mixed with the column top gas and used to regenerate the adsorption unit.

1. EP-A-0596470 describes a process for the separation of a stream containing carbon dioxide, water and at least one light impurity including a
5 separation step at subambient temperature wherein:

- i) the stream is compressed in a compressor comprising at least two stages to form the feed stream and the feed stream contains at least 65 mol.% carbon dioxide,
- ii) the feed stream is purified in an adsorption unit to remove water and form
10 a dried compressed stream,
- iii) the dried compressed stream or a stream derived therefrom is cooled to a subambient temperature and separated by partial condensation and distillation in a separation apparatus,
- iv) liquid enriched in carbon dioxide is removed from the separation
15 apparatus,
- v) the adsorption unit is regenerated using a regeneration gas,
 - vi) the gas from the phase separator is separated in a permeation unit.

One advantage of the present invention is that it valorizes the permeate
20 pressure by recycling the permeate into the feed gas compressor at an inter-stage thereof, thus improving the energy efficiency of the system.

Low temperature operation of such a membrane system can greatly improve efficiency, as shown in US-A-20120111051. Because of this advantage, it is possible to maintain high CO₂ recovery despite increasing the permeate pressure

25 The drying stage may be placed downstream of the third or the fourth stage of compression. The permeate of the membrane unit is recycled upfront of the dryer.

Several embodiments are possible:

1. CPU (cold purification unit) + membrane, permeate recycled after dryers
30 regeneration at an inter-stage of the compressor

2. CPU + two stages of membranes in series, one permeate regenerates the dryers and is recycled in the compressor, the other permeate is sent to the boiler. The permeate which has the highest oxygen concentration would be recycled to the boiler so as to valorize the oxygen and reduce ASU production

5 According to an object of the invention, there is provided a process for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient temperature wherein:

i) the stream is compressed in a compressor comprising at least two stages to form the feed stream and the feed stream contains at least 65 mol.% carbon
10 dioxide,

ii) the feed stream is purified in an adsorption unit to remove water and form a dried compressed stream,

iii) the dried compressed stream or a stream derived therefrom is cooled to a subambient temperature and separated by partial condensation and distillation in
15 a separation apparatus,

iv) liquid enriched in carbon dioxide is removed from the separation apparatus,

v) the adsorption unit is regenerated using a regeneration gas,

vi) the gas from the phase separator is separated in a permeation unit; and
20 wherein the regeneration gas is the permeate of the permeation unit.

According to other optional aspects of the invention:

- the non-permeate of the permeation unit is warmed and removed.

- the permeation unit has an entry temperature of between -60°C and -
10°C.

25 - the non-permeate of the permeation unit is separated in a further permeation unit, the permeate of the further permeation unit being sent upstream of a stage of the compressor.

- the further permeation unit has an entry temperature of between -
60°C and -10°C.

30 - the permeation unit has an entry temperature between ambient temperature and -10°C.

- the liquid enriched in carbon dioxide vaporizes to produce refrigeration to cool the dried compressed stream or the non-permeate derived therefrom.

- the regeneration gas is sent from the adsorption unit to the compressor downstream of at least one stage of the compressor.

5 - the permeate of the permeation unit has a lower carbon dioxide purity than the gas which feeds the permeation unit.

- the permeate of the permeation unit has a higher purity in the at least one light component than the gas which feeds the permeation unit.

10 - the dried compressed stream is further compressed prior to the permeation step.

- the dried compressed stream is further compressed prior to the cooling step.

- the at least one light component is chosen from the group comprising hydrogen, oxygen, nitrogen, argon, carbon monoxide, nitrogen oxide.

15 According to an object of the invention, there is provided an apparatus for the separation of a stream containing carbon dioxide, water and at least one light impurity including a compressor comprising at least two stages for compressing the stream to form the feed stream, an adsorption unit for purifying a feed stream to remove water and form a dried stream, a heat exchanger for cooling the dried
20 stream or a stream derived therefrom to a subambient temperature, a separation apparatus comprising a phase separator for separating by partial condensation and a distillation column for separating by distillation, a conduit for removing liquid enriched in carbon dioxide from the separation apparatus, a conduit for sending regeneration gas to the adsorption unit, a permeation unit for separating the gas
25 from the phase separator and a conduit for removing a permeate of the permeation unit as the regeneration gas

 According to other optional aspects of the invention:

- a phase separator for separating the cooled dried compressed stream or a gas derived therefrom and a conduit for sending the gas from the phase
30 separator to the permeation unit.

- a conduit for sending the non-permeate of the permeation unit to the heat exchanger to be warmed.

- the permeation unit is located within an insulated enclosure.

- the apparatus comprises a further permeation unit, a conduit for sending the non-permeate of the permeation unit to be separated in the further permeation unit and a conduit for sending the permeate of the further permeation unit upstream of a stage of the compressor.

- the further permeation unit is located within an insulated enclosure.

- the permeation unit is located outside the insulated enclosure.

- the apparatus comprises means for sending the liquid enriched in carbon dioxide to the heat exchanger to be vaporized to produce refrigeration to cool the dried compressed stream or the non-permeate derived therefrom.

- a conduit for sending the regeneration gas from the adsorption unit to the compressor downstream of at least one stage of the compressor.

- the apparatus comprises a compressor for compressing the dried compressed stream prior to the permeation step and/or prior to the cooling step.

The invention will be described in greater detail with reference to the figures which illustrate processes according to the invention.

In Figure 1, a mixture of carbon dioxide, nitrogen and oxygen containing between 65 and 95% mol. carbon dioxide is separated in a filter F to remove particles and then compressed as stream 3 in compressor stage C1 and then cooled in cooler R1 to form stream 5. Stream 5 is further compressed in compressor stage C2, cooled in cooler R2, compressed in compressor stage C3 and cooler in cooler R3 to form stream 7. Stream 7 is purified in adsorber A2 to remove any remaining humidity and then further compressed in compressor stage C4 and cooled in cooler R4. The dried stream 11 cooled in R4 is cooled in heat exchanger 13 which is a brazed plate fin heat exchanger. This causes stream 11 to condense partially and the partially condensed stream is sent from the cold end of the heat exchanger 13 to phase separator 15. The liquid 17 produced in the phase separator 15 is sent to the top of the column 31 after expansion in valve 29. The liquid 17 is then separated to form a carbon dioxide rich liquid at the bottom of the

column and a gas 33 enriched in light impurities at the top of the column. The gas 33 is warmed in heat exchanger 13 and recycled downstream of the absorbent beds A1, A2 and upstream of compressor stage C4 as part of the feed stream 9.

The liquid 35 is divided in two. One part 37 is vaporized in the heat exchanger 13. The vaporized liquid is then divided in two, one part 39 being sent to the bottom of the column 31 and the rest 41 being sent to the inlet of a compressor stage C6.

Liquid 43 from the bottom of the column 31 is expanded in valve 36 and vaporized in the heat exchanger 13 at a lower pressure than stream 37 and sent to the inlet of a compressor stage C5, cooled by cooler R5, mixed with stream 41, compressed in compressor stage C6, compressed in compressor stage C7, cooled in cooler R7, compressed in compressor stage C8, cooled in cooler R8 and condensed in cooler R9 before being pressurized in pump P to form a pressurized liquid product stream.

The adsorbent beds A1, A2 are regenerated using gas 25 produced in membrane separator 21. The gas 19 from phase separator 15 is separated in the membrane separator 21, to produce a permeate stream 25 which is not warmed in exchanger 13 but is used to cool a stream in exchanger E1, warmed in exchanger E2 and then sent to adsorbent bed A1, A2, depending which bed is in service. The gas used to regenerate the bed not in service is then sent to exchanger E3 and recycled into the feed stream 5 downstream of compressor stage C1. The non-permeate 23 from membrane separator 21 is warmed and disposed of in the atmosphere.

The process of Figure 2 differs from that of Figure 1 in that two membrane separators 21, 22 are used in series. Permeate stream 25 at 1.1 bar from membrane 21 is still used to regenerate the adsorbent beds but the non permeate 23 is further separated in further membrane separator 22 to form permeate 26 which is recycled at 2.5 bars downstream of cooler R1. In this case, the regeneration gas is sent to exchanger E3 and then is sent to the boiler from which feed 1 originates.

In these cases, the inlet temperature for the membrane separator 21, 22 varies between -60°C and -10°C.

In the cases of Figures 1 and 2, the heat exchanger, phase separator, membrane unit 21 and the column 31 are located within an insulated enclosure
5 (not shown), to maintain the temperature of operation at a subambient level.

Claims

1. Process for the separation of a stream containing carbon dioxide, water and at least one light impurity including a separation step at subambient
5 temperature wherein:
- i) the stream is compressed in a compressor comprising at least two stages to form the feed stream and the feed stream contains at least 65 mol.% carbon dioxide,
 - ii) the feed stream is purified in an adsorption unit to remove water and form
10 a dried compressed stream,
 - iii) the dried compressed stream or a stream derived therefrom is cooled to a subambient temperature and separated by partial condensation and distillation in a separation apparatus,
 - iv) liquid enriched in carbon dioxide is removed from the separation
15 apparatus,
 - v) the adsorption unit is regenerated using a regeneration gas,
 - vi) the gas from the phase separator is separated in a permeation unit; and wherein the regeneration gas is the permeate of the permeation unit.
- 20 2. Process according to Claim 1, wherein a non-permeate of the permeation unit is warmed and removed.
3. Process according to Claim 2, wherein the permeation unit has an entry
25 temperature of between -60°C and -10°C .
4. Process according to Claim 2 or 3, wherein the non-permeate of the permeation unit is separated in a further permeation unit, the permeate of the further permeation unit being sent upstream of a stage of the compressor.
- 30 5. Process according to Claim 4, wherein the further permeation unit has an entry temperature of between -60°C and -10°C .

6. Process according to any one of claims 1 to 5, wherein the liquid enriched in carbon dioxide vaporizes to produce refrigeration to cool the dried compressed stream or a non-permeate derived therefrom.

5

7. Process according to any one of claims 1 to 6, wherein the regeneration gas is sent from the adsorption unit to the compressor downstream of at least one stage of the compressor.

10

8. Process according to any one of claims 1 to 7, wherein the permeate of the permeation unit has a lower carbon dioxide purity than the gas which feeds the permeation unit.

9. Apparatus for the separation of a stream containing carbon dioxide, water and at least one light impurity including a compressor comprising at least two stages for compressing the stream to form the feed stream, an adsorption unit for purifying a feed stream to remove water and form a dried stream, a heat exchanger for cooling the dried stream or a stream derived therefrom to a subambient temperature, a separation apparatus comprising a phase separator for separating by partial condensation and a distillation column for separating by distillation, a conduit for removing liquid enriched in carbon dioxide from the separation apparatus, a conduit for sending regeneration gas to the adsorption unit, a permeation unit for separating the gas from the phase separator and a conduit for removing a permeate of the permeation unit as the regeneration gas.

25

10. Apparatus according to Claim 9, comprising a conduit for sending the non-permeate of the permeation unit to the heat exchanger to be warmed.

11. Apparatus according to Claim 9 or 10, wherein the permeation unit is located inside or outside an insulated enclosure.

30

12. Apparatus according to Claim 9, 10 or 11, comprising a further permeation unit, a conduit for sending the non-permeate of the permeation unit to be separated in the further permeation unit and a conduit for sending the permeate of the further permeation unit upstream of a stage of the compressor.

5

