

**(12) STANDARD PATENT  
(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 2013206388 B2**

(54) Title  
**Contact lens**

(51) International Patent Classification(s)  
**G02B 1/04** (2006.01)      **B29D 11/00** (2006.01)

(21) Application No: **2013206388**      (22) Date of Filing: **2013.02.01**

(87) WIPO No: **WO13/083855**

(30) Priority Data

(31) Number  
**12000649.9**      (32) Date  
**2012.02.01**      (33) Country  
**EP**

(43) Publication Date: **2013.06.13**  
(44) Accepted Journal Date: **2015.08.27**

(71) Applicant(s)  
**Lenswista AG**

(72) Inventor(s)  
**Gorne, Martin;Kordick, Thomas**

(74) Agent / Attorney  
**Baxter Patent Attorneys Pty Ltd, PO Box Q72, Queen Victoria Building, NSW, 1230**

(56) Related Art  
**WO 2011/050365**  
**GB 1498665**  
**US 4285890**  
**EP 0908476**  
**US 6444145**

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges

Eigentum

Internationales Büro



(43) Internationales

Veröffentlichungsdatum

13. Juni 2013 (13.06.2013)



(10) Internationale Veröffentlichungsnummer

WO 2013/083855 A1

(51) Internationale Patentklassifikation:

G02B 1/04 (2006.01) B29D 11/00 (2006.01)

(21) Internationales Aktenzeichen: PCT/EP2013/000323

(22) Internationales Anmeldedatum:

1. Februar 2013 (01.02.2013)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
12000649.9 1. Februar 2012 (01.02.2012) EP

(71) Anmelder: LENSWISTA AG [DE/DE]; Magnusstrasse 11, 12489 Berlin (DE).

(72) Erfinder: GÖRNE, Martin; Am Stein 46, 22337 Hamburg (DE). KORDICK, Thomas; Dr.-Leissner-Strasse 5, 63773 Goldbach (DE).

(74) Anwalt: DIEHL & PARTNER GBR; Augustenstrasse 46, 80333 München (DE).

(81) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare nationale Schutzrechtsart): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK,

DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Bestimmungsstaaten (soweit nicht anders angegeben, für jede verfügbare regionale Schutzrechtsart): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches (AM, AZ, BY, KG, KZ, RU, TJ, TM), europäisches (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Veröffentlicht:

- mit internationalem Recherchenbericht (Artikel 21 Absatz 3)
- vor Ablauf der für Änderungen der Ansprüche geltenden Frist; Veröffentlichung wird wiederholt, falls Änderungen eingehen (Regel 48 Absatz 2 Buchstabe h)

[Fortsetzung auf der nächsten Seite]

(54) Title: CONTACT LENS

(54) Bezeichnung : KONTAKTLINSE

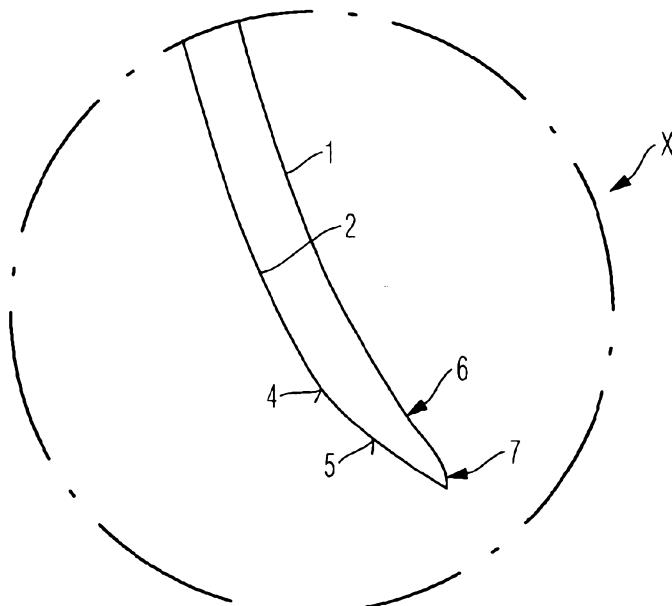


Fig. 1b

quellenden Flüssigkeit aus der Form ausgelöst und nach einer PECVD/CVD-Beschichtung ohne Randbearbeitung fertiggestellt.

(57) Abstract: A silicone contact lens coated in a hydrophilizing manner has a radial cross section of the inner surface (1) of the contact lens, the edge region contour of said cross section between a turning point (6) and the outer edge being convex (7). In order to produce it, a silicon precursor material is introduced between a female and a male mould and polymerized there, and the polymerized contact lens is released from the mould by means of a liquid which swells said contact lens and it is completed after a PECVD/CVD coating without edge processing.

(57) Zusammenfassung: Eine hydrophilierend beschichtete Silikon-Kontaktlinse weist einen radialen Querschnitt der Innenfläche (1) der Kontaktlinse auf, dessen Randbereichs-Kontur zwischen einem Wendepunkt (6) und der Außenkante konvex (7) ist. Zu ihrer Herstellung wird ein Silikon-Vorläufermaterial zwischen einer weiblichen und einer männlichen Form eingebracht und dort polymerisiert, und die polymerisierte Kontaktlinse wird mittels einer dieser



---

- *auf Antrag des Anmelders, vor Ablauf der nach Artikel 21  
Absatz 2 Buchstabe a geltenden Frist*

## Contact Lens

[1] The present application relates to a "soft" contact lens with excellent wearing properties.

[2] Conventional contact lenses, e. g. those known from the German utility model publication G 87 10 765 U1, have a radially inner part made of a harder material, and a radially outer part made of a softer material. The inner surface is entirely concave and the outer surface entirely convex, i.e. both surfaces have a positive Gaussian curvature. This known lens is not satisfactory with regard to its wearing comfort.

[3] It is also known to apply a hydrophilic coating to a contact lens made of poly(methyl methacrylate), PMMA (US 5,080,924). Still, the wearing comfort of such lenses is not perceived as satisfactory.

[4] The invention aims at providing a contact lens having good or even excellent wearing comfort, and a method for its manufacture.

[5] This problem is solved by a contact lens made of silicone, wherein a radial cross section on the inner face has a rim region between a point of inflection and the outer edge in which the cross section contour is convex, in particular with a radius of between 0,1 and 10 mm. Because of this rim contour, the lens particularly readily slips onto the tear liquid film.

[6] In embodiments, the contact lens has a surface layer made of a hydrophilic material auf, which further improves on the wearing comfort.

[7] According to another aspect, the problem is solved by a process in which a silicone precursor material is brought in between a female and a male mold and is polymerised, and the polymerised contact lens is removed from the mold by means of a liquid swelling the contact lens and completed without edge cutting. Thereby the occurrence of a cutting edge, which might be perceived as irritating, is avoided.

[8] In embodiments, the raw lens thus obtained is hydrophilized in a combined PECVD/CVD-process, whereby particularly thick coatings are achieved.

[9] Further features of the invention are available from the subsequent description of embodiments in conjunction with the claims and the drawings. The invention is not limited to the described embodiments, but defined by the scope of the appended claims. In particular, individual features of embodiments of the invention may be realized in a

different number or combination than in the examples explained hereunder. In the following explanation of embodiments reference is made to the appended drawings, which show:

[10] Figure 1a a schematic cross-sectional view of a contact lens placed on the cornea of an eye,

[11] Figure 1b a schematic close-up view of a rim portion of the contact lens of Figure 1a,

[12] Figure 2 an electron-microscopic image of the rim portion of the contact lens,

[13] Figure 3 a fluorescence diagram indicating a surface coating,

[14] Figure 4 a flow diagram for a manufacturing method of the contact lens according to the invention, and

[15] Figure 5 a cross-sectional view of a molding apparatus suitable for the manufacturing according to Figure 4.

[16] The general shape of a contact lens is shown in Figures 1a and 1b: The inner face 1 facing the cornea, which face, in use, floats on a film of tear liquid, is concave in its central part Z, namely rotationally symmetric-aspheric with a conus coefficient of about -0.1 to -0.5, thus somewhat elliptically pointed. In principle, this face also may deviate from the rotational symmetry if required by the physiological conditions. The outer face 2 of the lens is naturally convex with radius somewhat deviating from that of the inner face in magnitude, in order to provide the desired dioptric power. In the outer rim portion R, the curvatures or radii, respectively, deviate from the central values in the following manner: On the outer face, an annular part 4 with stronger (inward) curvature, thus smaller radius, is radially contiguous to the central portion. To this part, another may be outwards contiguous which is again less curved, conical (thus non-curved) or slightly outwardly (i.e. negatively) curved portion 5. In terms of magnitude, the curvature here is always less (i.e. the radius larger) than in the first mentioned transition region 4, i.e. the lens smoothly terminates.

[17] The inner face 1 also has an annular region radially contiguous to the central region with the elliptical face, which, however, is less curved, thus more flattish, corresponding to a larger radius of curvature in this region. Herein, the radius of curvature in a sectional plane is meant, which plane contains the optical axis of the lens. The line formed by the inner face and the sectional plane forms a point of inflection 6, i.e. the

curvature of the line first becomes zero and then positive. For the Gaussian surface curvature, this means a transition to negative values. To this region, the region 7 is contiguous, where the inner face of the contact lens approaches to the global tangential plane; here, the curvature in the main section perpendicular to the radial sectional plane is zero, so that the Gaussian surface curvature becomes zero and still further outside, in the immediate edge region, again transitions to positive values.

[18] Between these two points (in the sectional plane) or lines (on the surface) of curvature inflection 6 und 7 there is a region in which the contact lens gradually lifts, when viewed radially from inner to outer region, from the cornea. This region is crucial for the wearing comfort. As recognized by the inventors, in this region there should neither be formed an overly sharp edge, which might interrupt the film of tear liquid present on the cornea or might even cut into the cornea; nor should the rim region have an outwardly pointed, protruding, strongly curved edge ("Skispitzen-Profil"), which might irritate the eyelid slipping onto it from outwards during blinking. Rather, the annular regions according to the invention, smoothly transitioning towards an outer edge free from any sharp edges, (see Figure 2) achieve an unperturbed floating of the contact lens onto the tear liquid film and at the same time enable an unperturbed slipping of the eyelid onto the contact lens. It was found that the radius of the inner face, i.e. the inverse curvature, along the radial sectional plane, is for example between 0,1 and 4 mm, or above 0,5 mm on the one hand or/and below 2 mm on the other hand. The radial extension of the negatively curved area region may be 1  $\mu$ m to 1 mm, for example more than 10  $\mu$ m on the one hand or/and below 100  $\mu$ m on the other hand. The outer edge itself may include, instead of one acute angle 8, two obtuse angles, between which an approximately cylindrical outer rim region 9 extends for e.g. 10-30  $\mu$ m as discernible from Figure 2.

[19] In Figure 3, a fluorescence diagram of a surface coating is shown, as may be applied for hydrophilizing the *per se* hydrophobic silicone base material of the contact lens. The core part of the lens consists of poly(dimethylsiloxane) with a Shore-A hardness of 25. In this example, for the purpose of analysis an applied PAA-(poly acrylic acid) layer has been stained with the fluorescence dye Rhodamin 6G, and the depth extension of the fluorescence has been determined by confocal microscopy. As can be seen, the entire thickness (line width) of the PAA coating is several tens of  $\mu$ m. The lens thickness at the measurement position (line spacing) is 118  $\mu$ m. The coating was made by PECVD followed by CVD. During the plasma coating phase the pressure ratio was changed from an initially prominent Argon excess (>10:1) towards a similarly prominent Argon deficiency (<1:10) near the end, at decreasing total pressure. This conditioning step was followed by an on-top-polymerisation of water-free acrylic acid from the vapour phase at its normal vapour pressure, without action of a plasma and without the presence of a noble gas. The initially plasma-enhanced provided layer had a thickness of 20-30 nm, i.e.

in the order of magnitude of about one part per thousand of the entire layer thickness. Such layers have optically as well as physiologically excellent properties due to the strong hydrophilicity. The contact angle of the applied layer in water is less than 10° and typically 2-5°. The beneficial shape effects of the according to the invention are targeted supported by this treatment of the material.

[20] In Figure 4, a flow diagram of a process according to the invention is shown. Initially, a female and a male mold are provided, and a precursor material for poly(dimethylsiloxane) is brought into female mold, closed with the male part, and polymerized at a temperature between 15°C-160°C for 12-720 min. S1 (molding). After the closing, the mold parts are rotated with respect to one another by 180° or another angle sufficiently large (>20°), as long as the reaction mixture is just viscous (over 1000 cP; typically ca. 4000 cP), so that excess silicone is reliably separated and displaced into the annular space between the mold parts. In this separation, the rim contour described above is created due to the effect of the surface energy, allowing the dispensing with an edge cutting step or other edge treatment creating a cutting edge (e.g. punching). For demolding, the contact lens is partially swollen with an alkane such as e.g. hexane or another nonpolar or little polar solvent S3, so that it releases S5 without mechanical action from the mold and the manufacturing parts. The dipole moment of the solvent should not be more than 0,2 Debye to this end. In support, an ultrasonic bath may be employed. The starting material may be a liquid 2-component silicone by NuSil with a DK-value of above 700 barrer. If desired, the lens is transferred after evaporating the solvent in a vacuum into a coating chamber and initially is cleaned with an Argon plasma (ca. 1 min) and prepared. Then, a phase S7 with a slight Argon excess 1:1 to 2:1 (partial pressure ratio) with respect to acrylic acid vapour follows, the latter obtained from water-free acrylic acid. Exemplary pressures are 0,03 Torr for Argon and 0,015 Torr for acrylic acid. This phase, which takes 10 to 90 min, is followed by an about ten-minute phase at closed Argon supply and further reduced acrylicacid pressure (ca. 0,1 mTorr). Then, the plasma generator is switched off, and the lens is exposed at room temperature to the saturation pressure of the acrylic acid, until a turbidity indicates the completion of the process (about 5 min). The contact lens is watered for 24 h in a hydrophilic liquid, for example in isotonic saline solution, to remove potential remainders of the coating agent, and is steam sterilized at above 120°C.

[21] In Figure 5, a two-part mold is shown, which is suitable for carrying out the above described process. The lower, female part 10 initially accommodates the reaction mixture and is then closed with the upper, male part 12, wherein a space 11 filled with the reaction mixture remains between them. The lower part 10 has chamfers 13', 13" facilitating the fitting together and separating the mold parts 10 and 12. The annular space is indicated as 14.

[22] From the proceedings of the process an irregularity of the outer results insofar as it deviates from an exact circle line, other than known e.g. from punched lens contours. Because also the cornea never has exactly regular contours, this deviation from an ideal shape not only is not detrimental, but even has beneficial effects on the wearing comfort. The amount of the irregularity may be quantified by assigning, by calculation, an ideally approximating circle line to the projection of the outer rim, according to the criterion of a minimum sum of the squared deviations. The, the average square deviation is a measure of the irregularity, and is at least  $5000 \mu\text{m}^2$  (converted to magnitudes: about 1 % of half the lens diameter), but in embodiments may be more than  $1000 \mu\text{m}^2$  or more than  $10000 \mu\text{m}^2$ .

[23] The contact lenses formed according to the invention may be used as cover lenses, i.e. with or without refractive power for physically protecting the cornea from irritations. This may be useful as a flanking, itself non-therapeutic measure for a medicinal-therapeutic eye treatment.

[24] In the subsequent claims, "*mainly consisting*" is understood as a mass proportion of more than 50 %, in particular of more than 90 % up to entirely. "*Curvature*" is in each case the inverse radius of curvature, i.e. the radius of the approaching circle, wherein the sign is positive for convex surfaces and is negative for concave surfaces. The Gaussian surface curvature is the product of the two principal curvatures, thus is negative when both the principal curvatures have different signs (saddle surface), and is zero when one or both principal curvatures are zero (e.g. cylinder and conus surface).

[25] The skilled person will realize that deviations from the embodiments described above are possible without leaving the scope of protection of the appended claims.

2013206388 21 Jul 2015

## Claims:

1. A process for the manufacture of a silicone contact lens, the radial cross-section of which on the inner face of the contact lens includes a rim portion between a point of inflection and the outer edge in which the contour of the cross-section is convex, in which process a female mold part and a male mold part are provided, and a silicone precursor material is brought in between the mold parts and is polymerized there, characterized in that the two mold parts are rotated with respect to one another while the reaction mixture is still liquid, in order to separate the portion of the reaction mixture intended for forming the contact lens from excess material, and wherein the polymerized contact lens is released from the mold using a liquid swelling the contact lens, and is completed without generating a cutting edge and is then hydrophilized in a combined PECVD/CVD-process.
2. The process of claim 1, wherein the contact lens is coated with cross-linked (meth)acrylic acid units.
3. The process of claim 1 or 2, wherein a first coating step occurs in a low-pressure plasma.
4. The process of claim 3, wherein a subsequent coating step occurs in the gas phase without action of a plasma.
5. The process of one of claims 1 to 4, wherein a non-polar solvent is employed for releasing the contact lens from the mold.
6. The process of claim 5, wherein the dipole moment is less than 0.2 Debye.
7. The process of one of claims 1 to 6, wherein the released contact lens is treated with a polar liquid, after coating where applicable.
8. The process of claim 7, wherein the dipole moment of the polar liquid is more than 1 Debye.

9. Use of the contact lens manufactured according to the process of one of claims 1 to 8, as a cover lens for protecting the cornea.

10. A contact lens produced by the process of one of claims 1 to 8

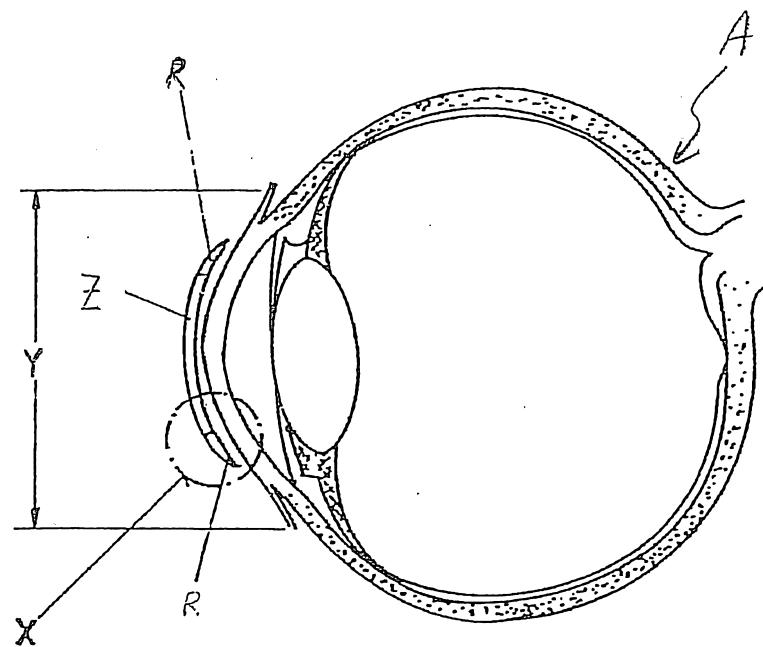


Fig. 1a

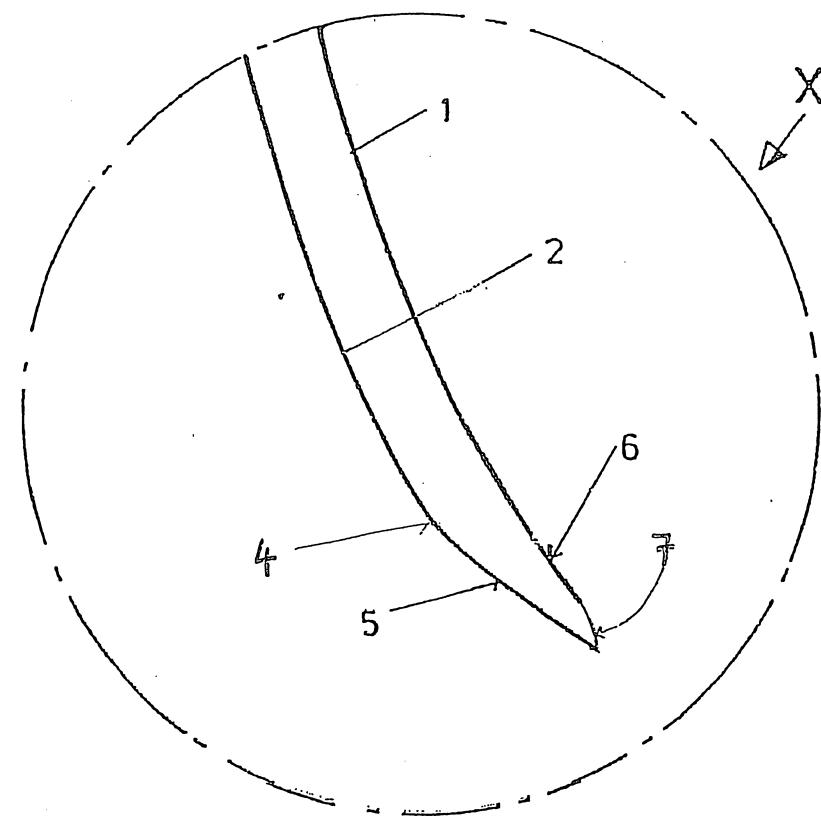


Fig. 1b

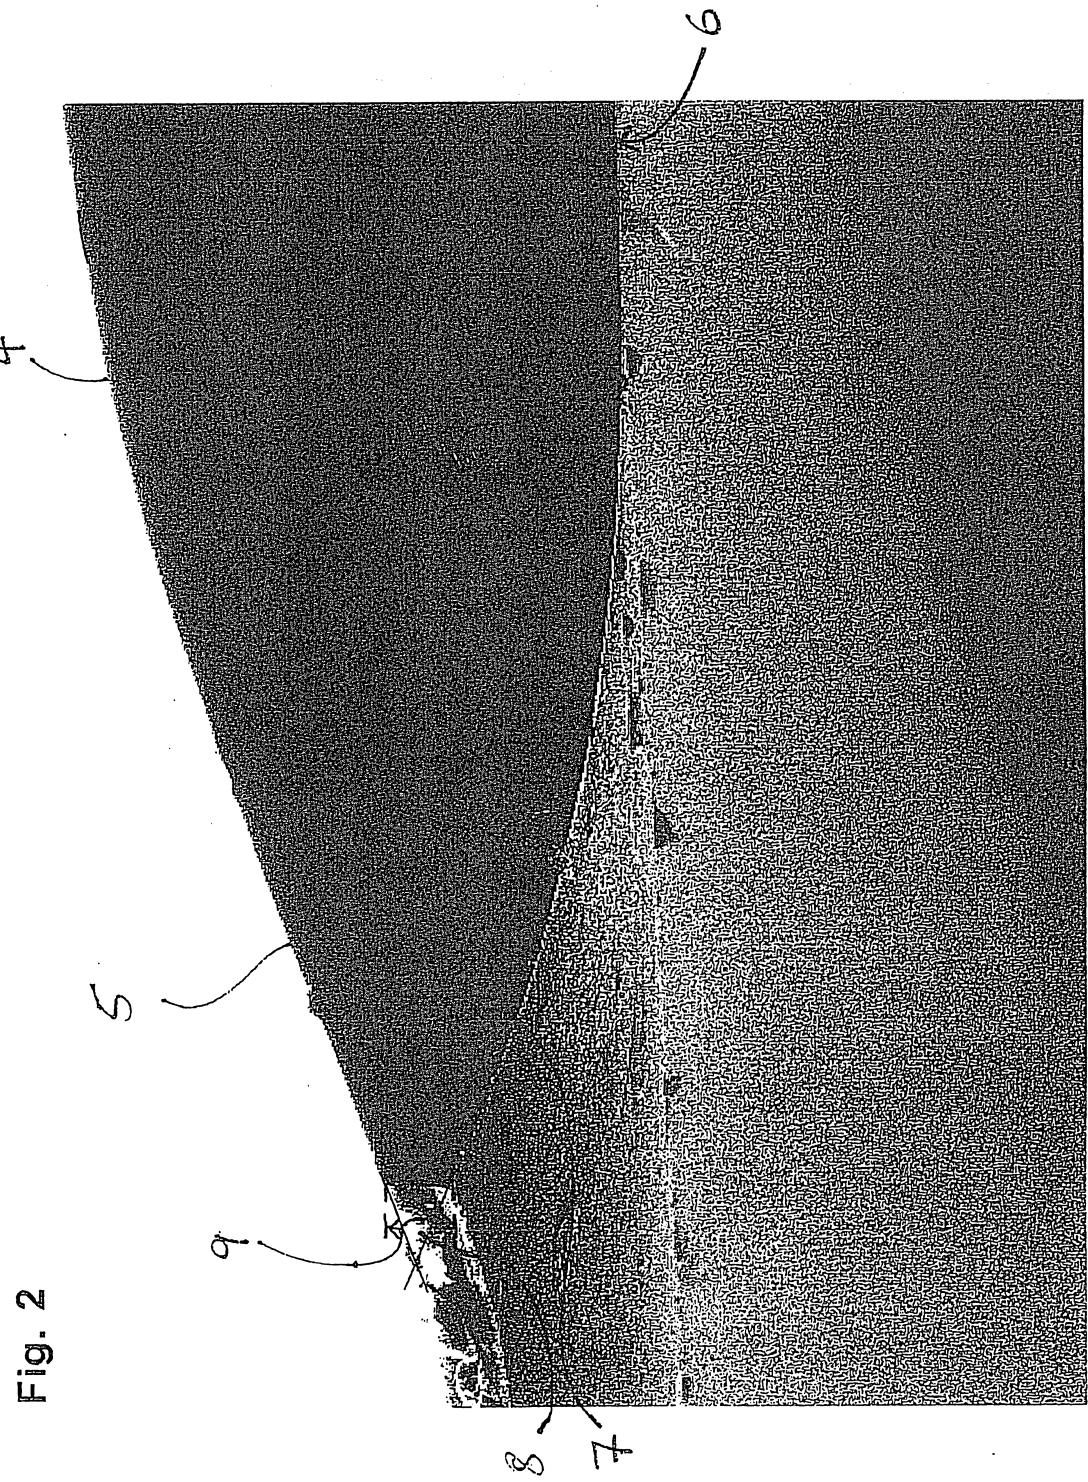


Fig. 2

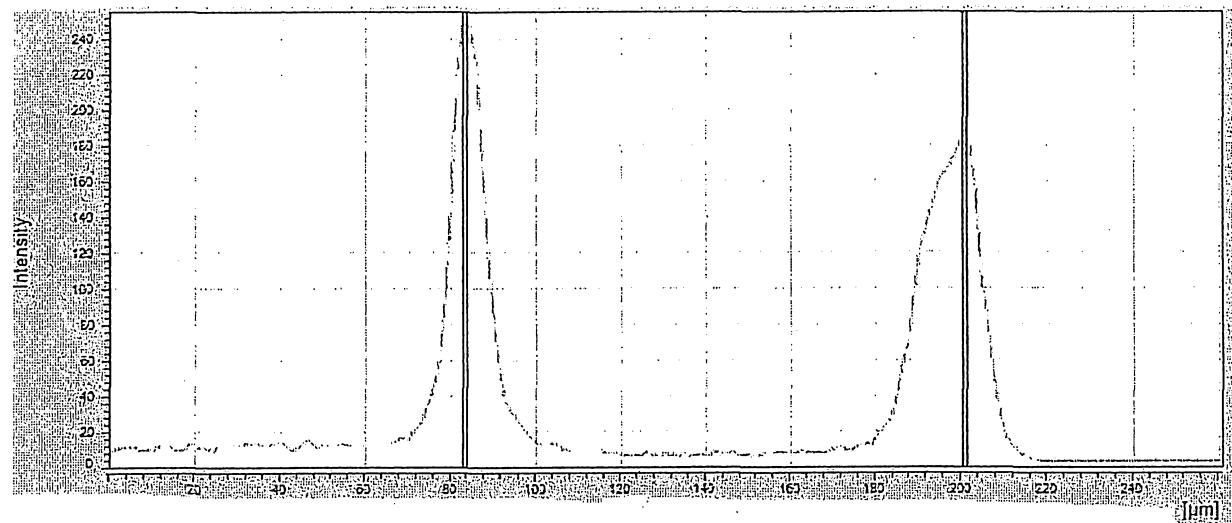


Fig. 3

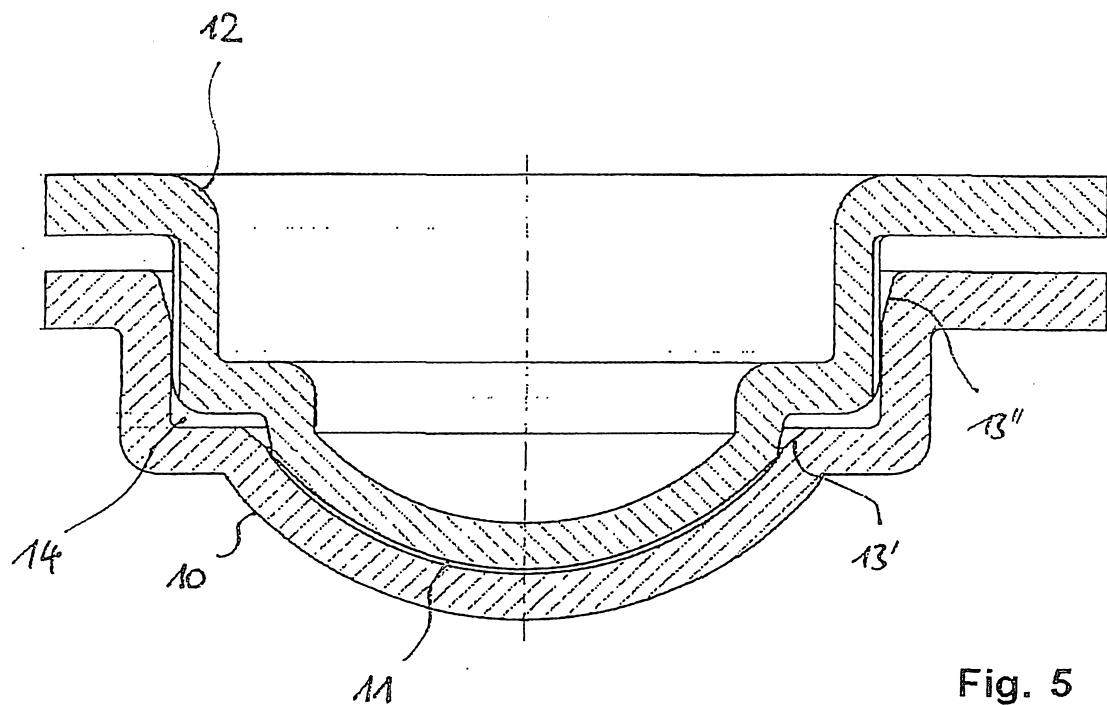
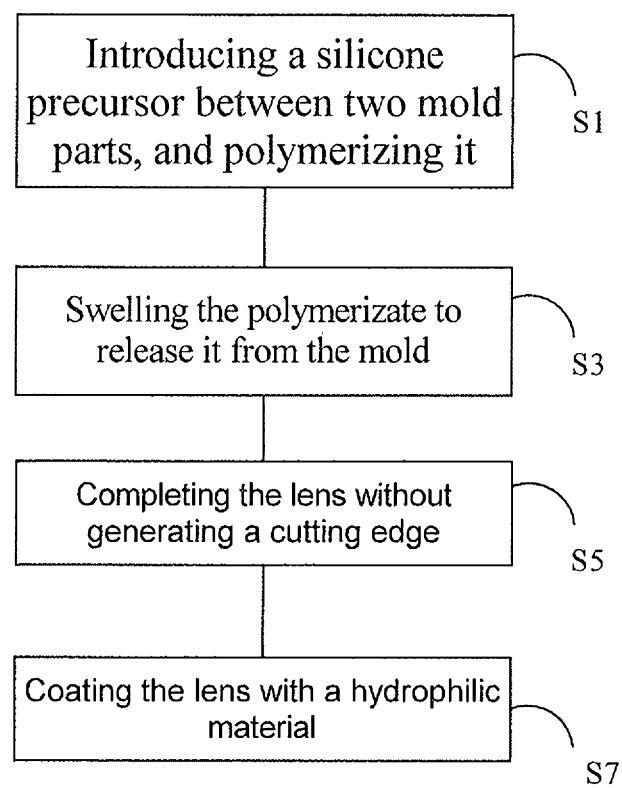


Fig. 5



**Fig. 4**