



US009270744B2

(12) **United States Patent**  
**Chaturvedi et al.**

(10) **Patent No.:** **US 9,270,744 B2**  
(45) **Date of Patent:** **\*Feb. 23, 2016**

- (54) **SYSTEM AND METHOD FOR PROVIDING ADDITIONAL FUNCTIONALITY TO EXISTING SOFTWARE IN AN INTEGRATED MANNER**
- (71) Applicant: **DAMAKA, INC.**, Richardson, TX (US)
- (72) Inventors: **Sivakumar Chaturvedi**, Allen, TX (US); **Satish Gundabathula**, Irving, TX (US); **Rashmi Hiremath**, Allen, TX (US)
- (73) Assignee: **Damaka, Inc.**, Richardson, TX (US)
- (\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.  
  
This patent is subject to a terminal disclaimer.

- H04W 12/08* (2009.01)
- H04N 7/14* (2006.01)
- H04L 29/06* (2006.01)
- (52) **U.S. Cl.**  
CPC *H04L 67/10* (2013.01); *G06F 9/54* (2013.01); *G06F 9/541* (2013.01); *G06F 9/542* (2013.01); *G06F 15/167* (2013.01); *G06F 21/00* (2013.01); *H04L 65/1069* (2013.01); *H04L 65/1089* (2013.01); *H04M 1/72519* (2013.01); *H04N 7/141* (2013.01); *H04W 12/08* (2013.01); *H04L 63/0457* (2013.01); *H04N 2007/145* (2013.01)
- (58) **Field of Classification Search**  
None  
See application file for complete search history.

(21) Appl. No.: **14/690,619**

(22) Filed: **Apr. 20, 2015**

(65) **Prior Publication Data**  
US 2015/0229706 A1 Aug. 13, 2015

**Related U.S. Application Data**  
(63) Continuation of application No. 14/024,027, filed on Sep. 11, 2013, now Pat. No. 9,027,032.  
(60) Provisional application No. 61/846,958, filed on Jul. 16, 2013.


(51) **Int. Cl.**  
*G06F 3/00* (2006.01)  
*G06F 9/44* (2006.01)  
*G06F 9/46* (2006.01)  
*G06F 13/00* (2006.01)  
*H04L 29/08* (2006.01)  
*G06F 9/54* (2006.01)  
*G06F 15/167* (2006.01)  
*G06F 21/00* (2013.01)  
*H04M 1/725* (2006.01)

(56) **References Cited**  
U.S. PATENT DOCUMENTS  
2010/0058353 A1 \* 3/2010 Turski ..... G06F 9/54 719/311  
2015/0026700 A1 \* 1/2015 Chaturvedi ..... H04W 12/08 719/313

\* cited by examiner  
  
*Primary Examiner* — Craig Dorais  
(74) *Attorney, Agent, or Firm* — Howison & Arnott, LLP

(57) **ABSTRACT**  
An improved system and method are disclosed for improving functionality in software applications. In one example, the method includes a mobile device having a network interface, a processor, and a memory configured to store a plurality of instructions. The instructions include instructions for a super-block application having instructions for a function block included therein. The function block is configured to provide functions that are accessible to the superblock application via an application programming interface (API). The functions are provided within the superblock application itself and are accessible within the superblock application without switching context to another application on the mobile device.

**28 Claims, 12 Drawing Sheets**

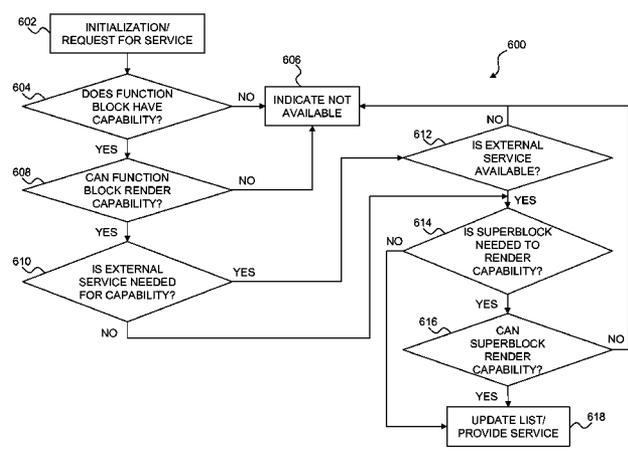

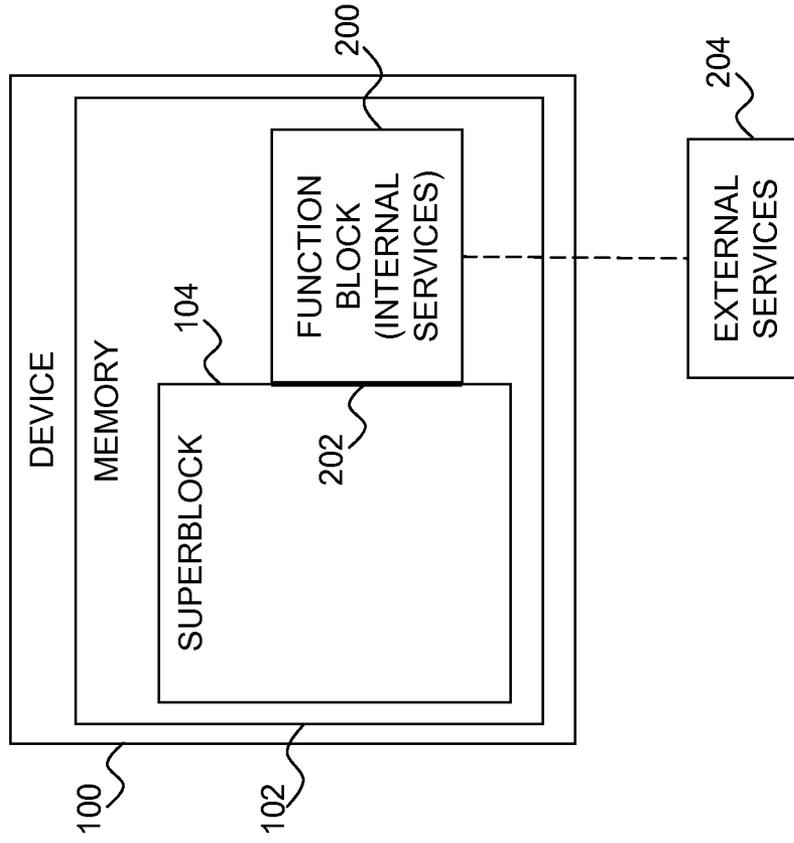


FIG. 2A

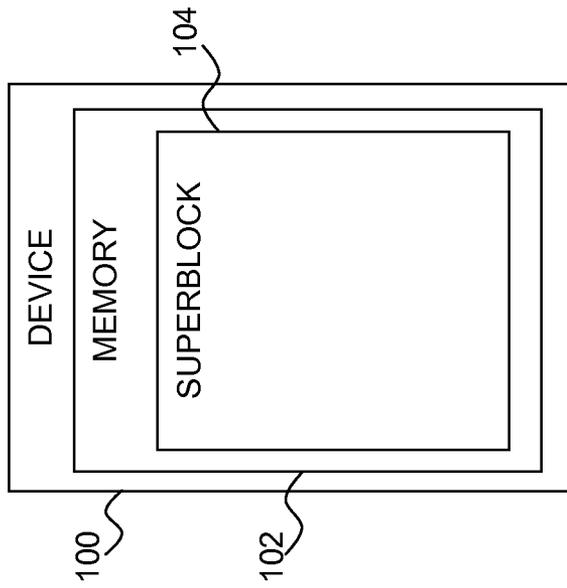
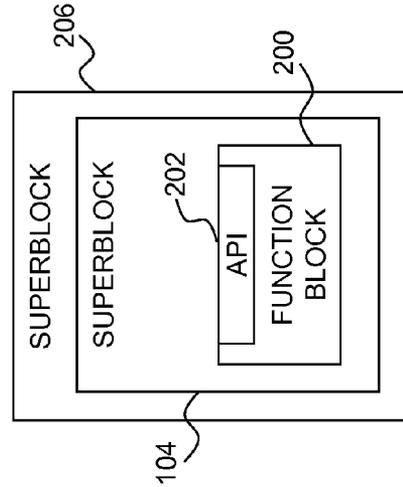
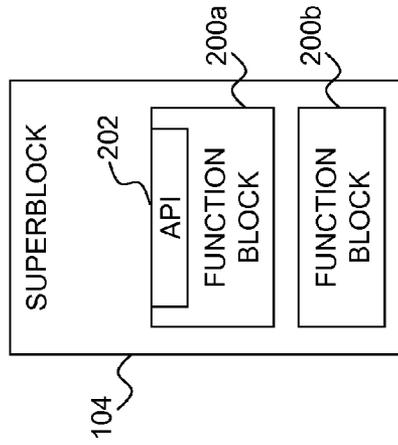
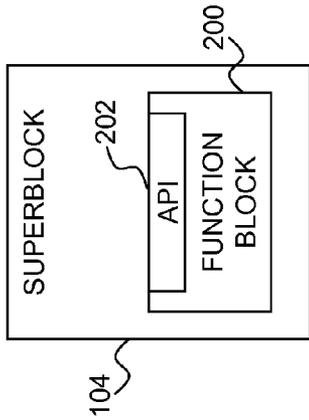
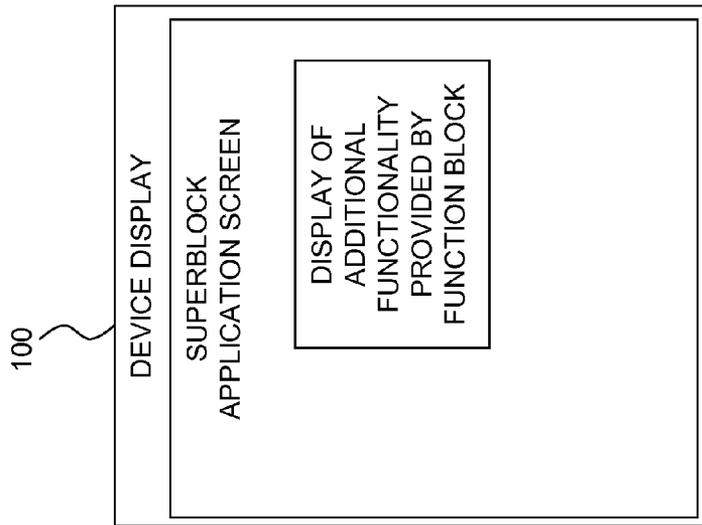


FIG. 1



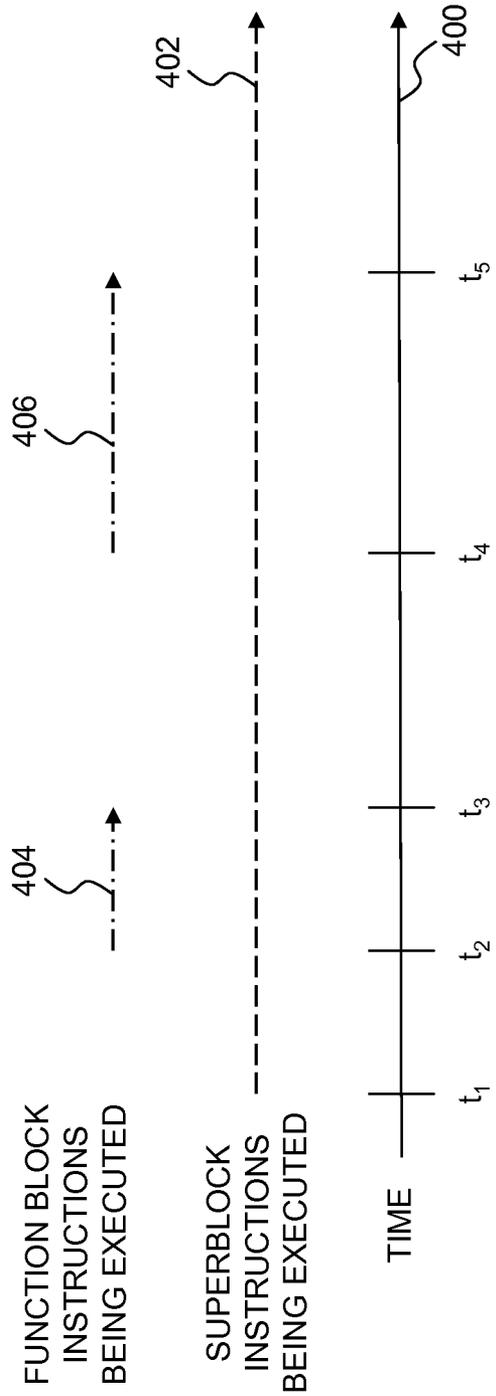


FIG. 4

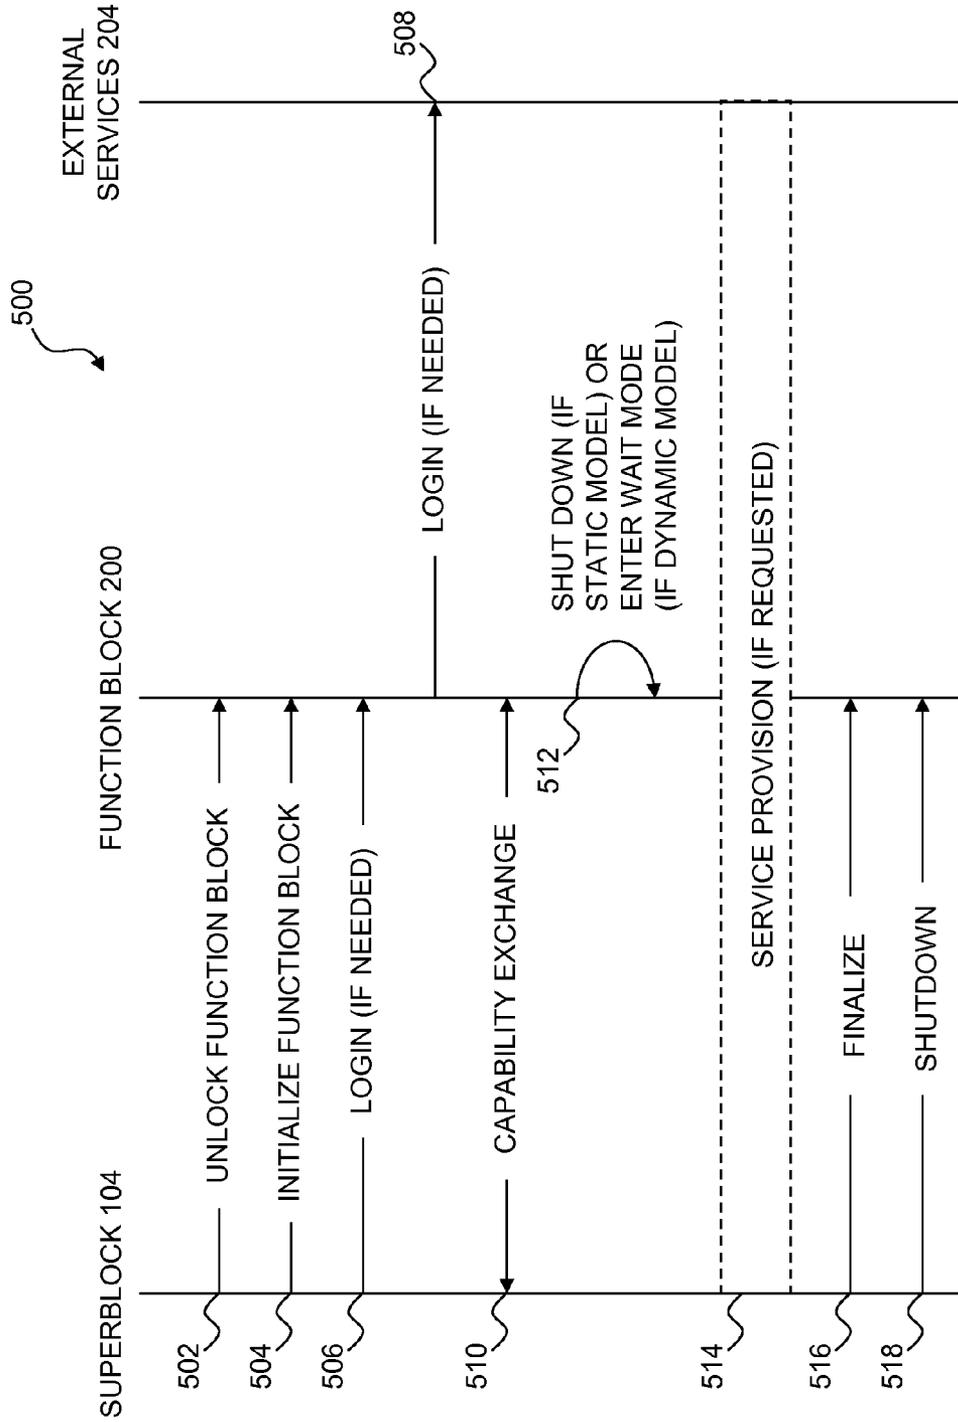


FIG. 5

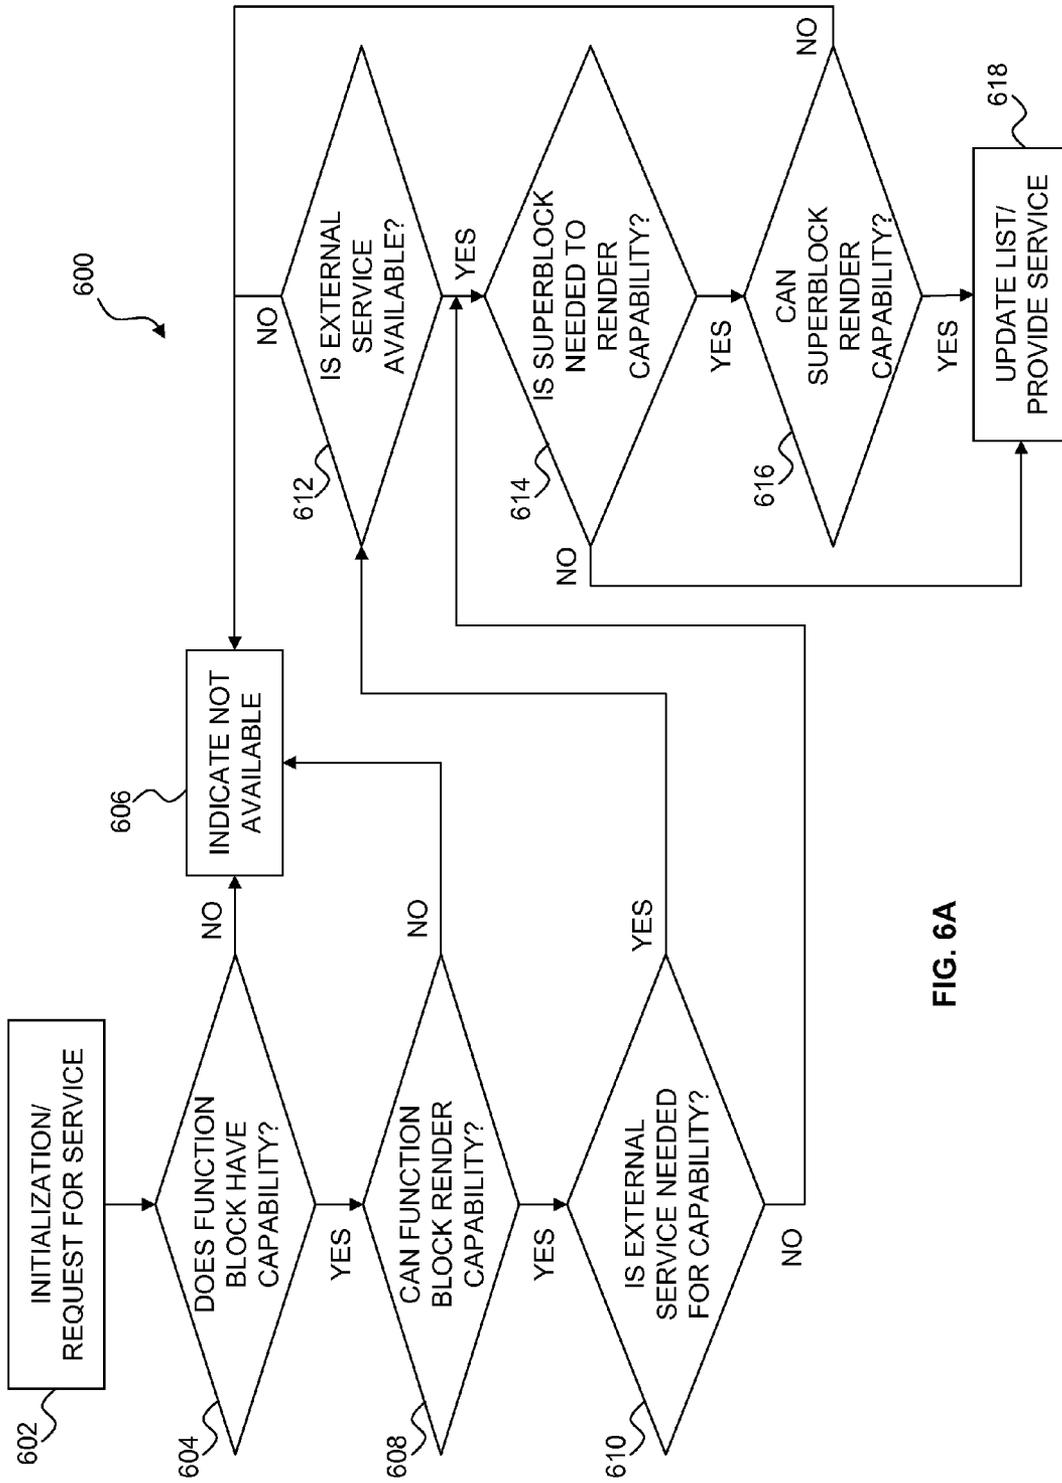


FIG. 6A

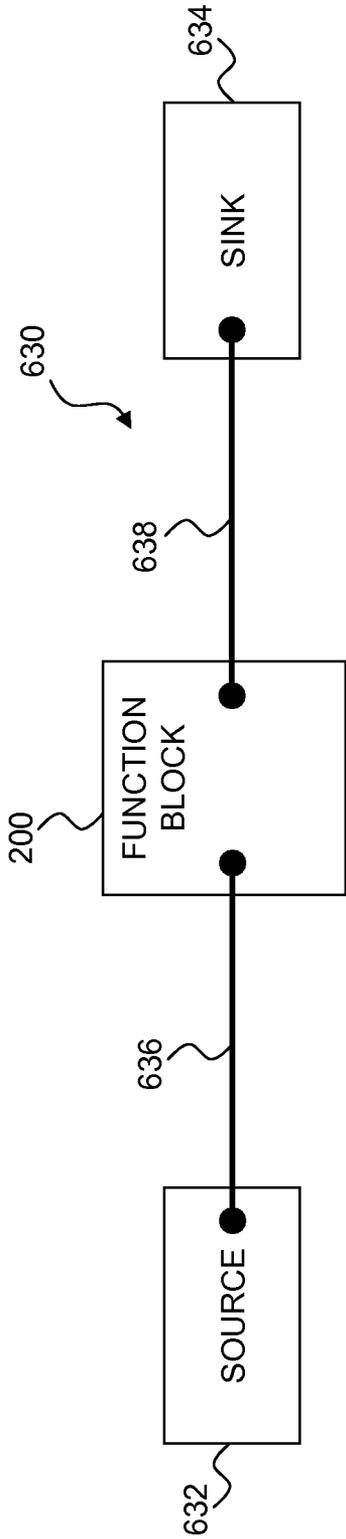


FIG. 6B

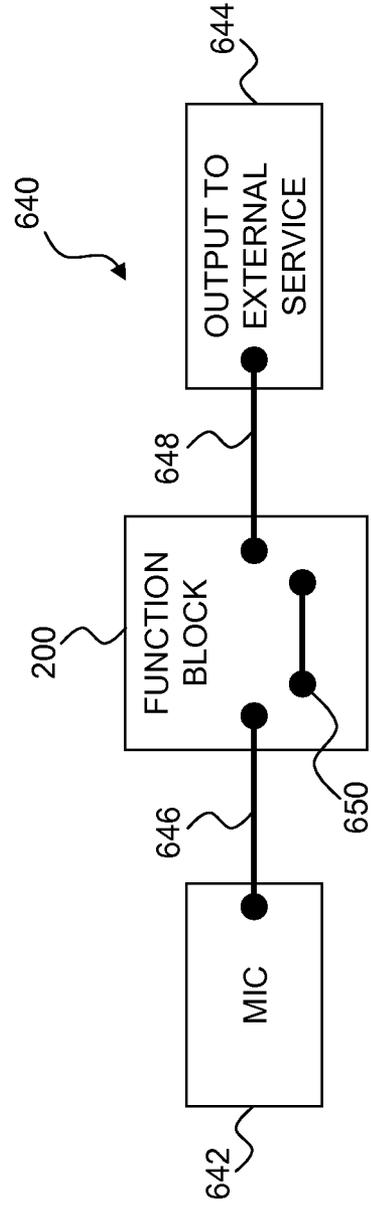


FIG. 6C

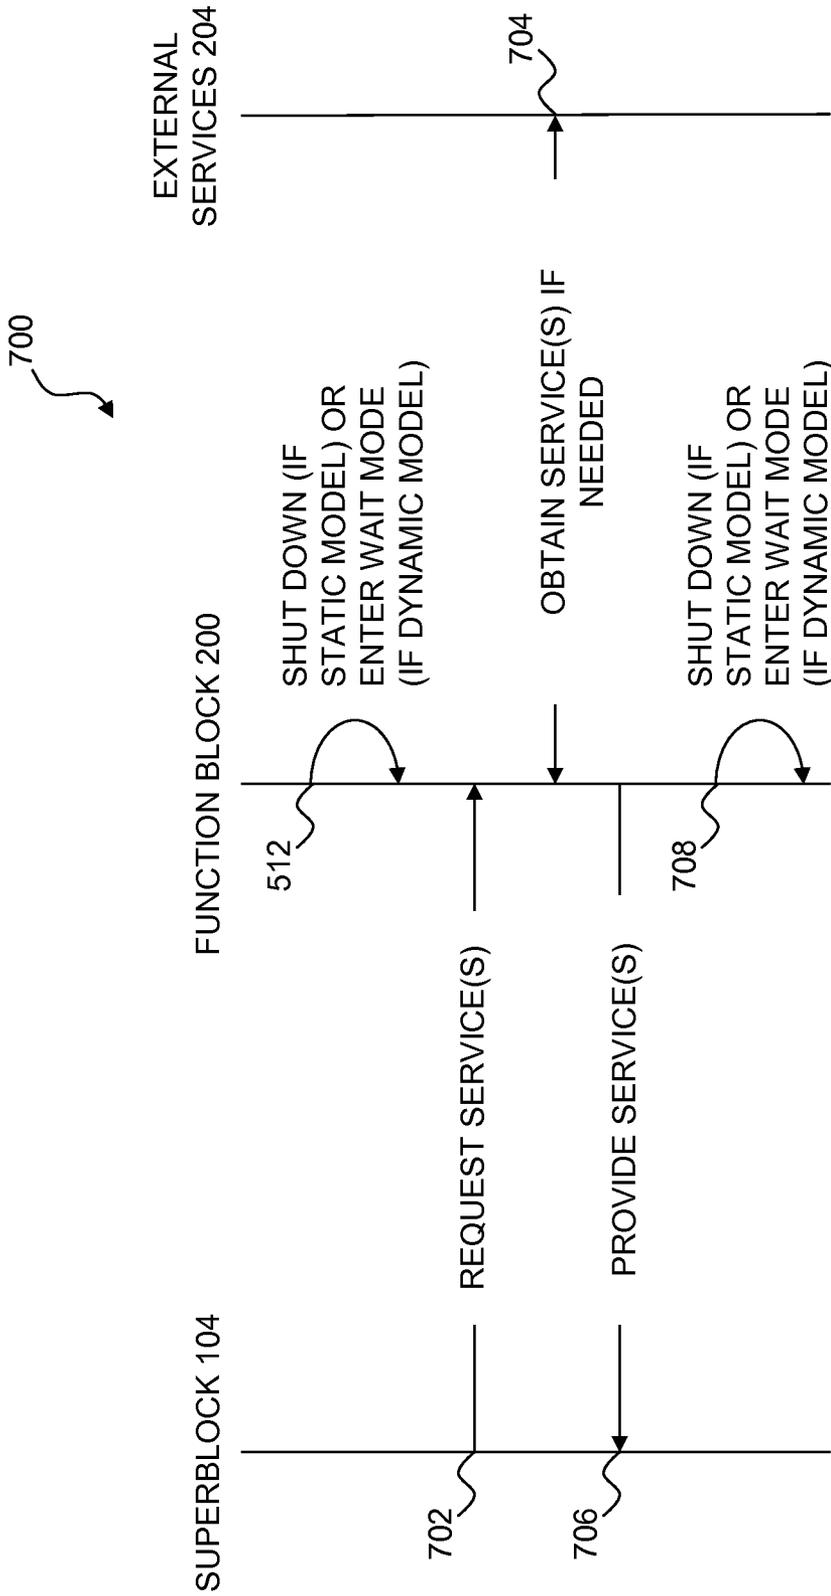


FIG. 7

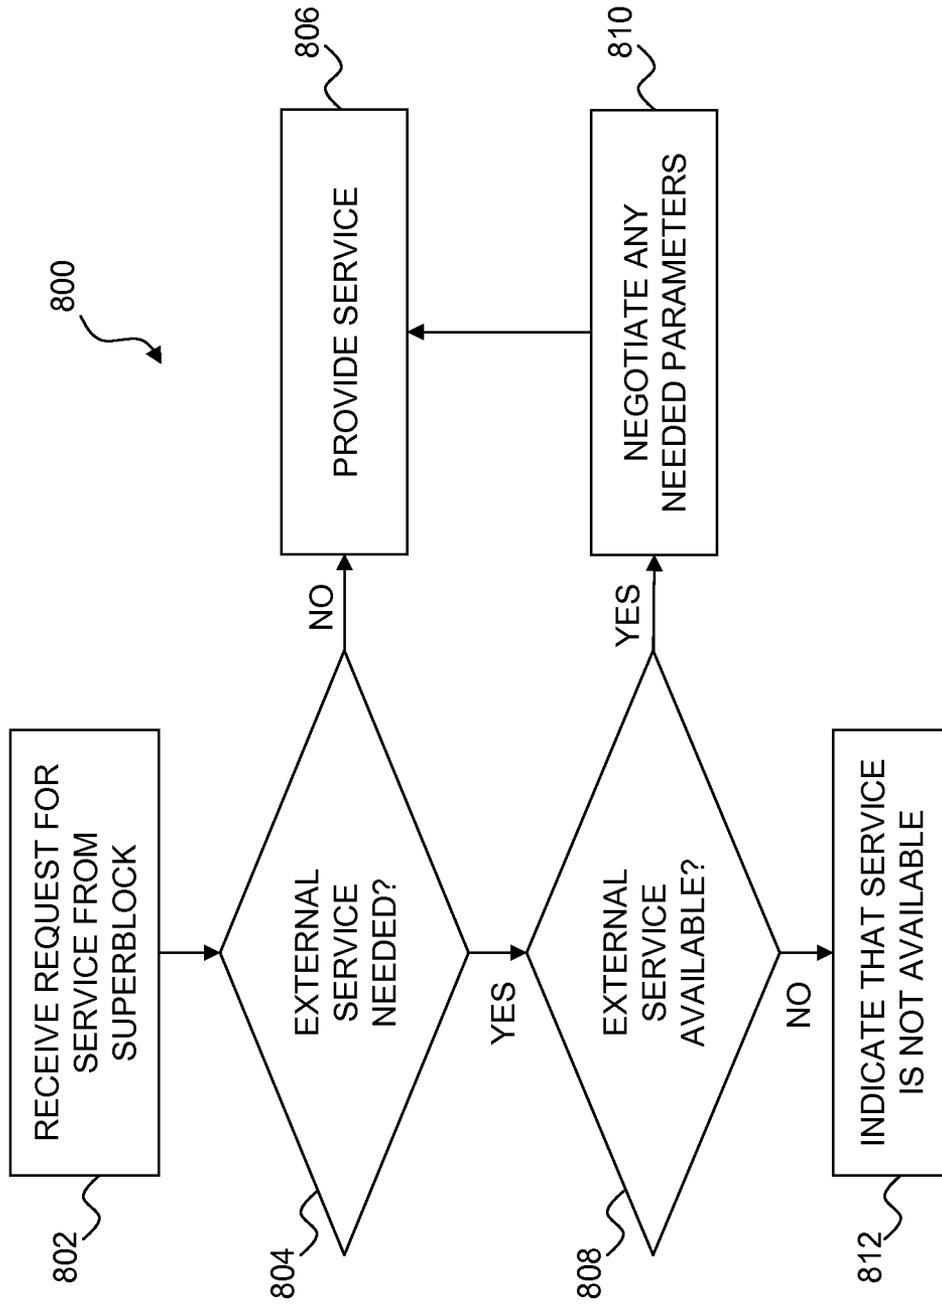


FIG. 8

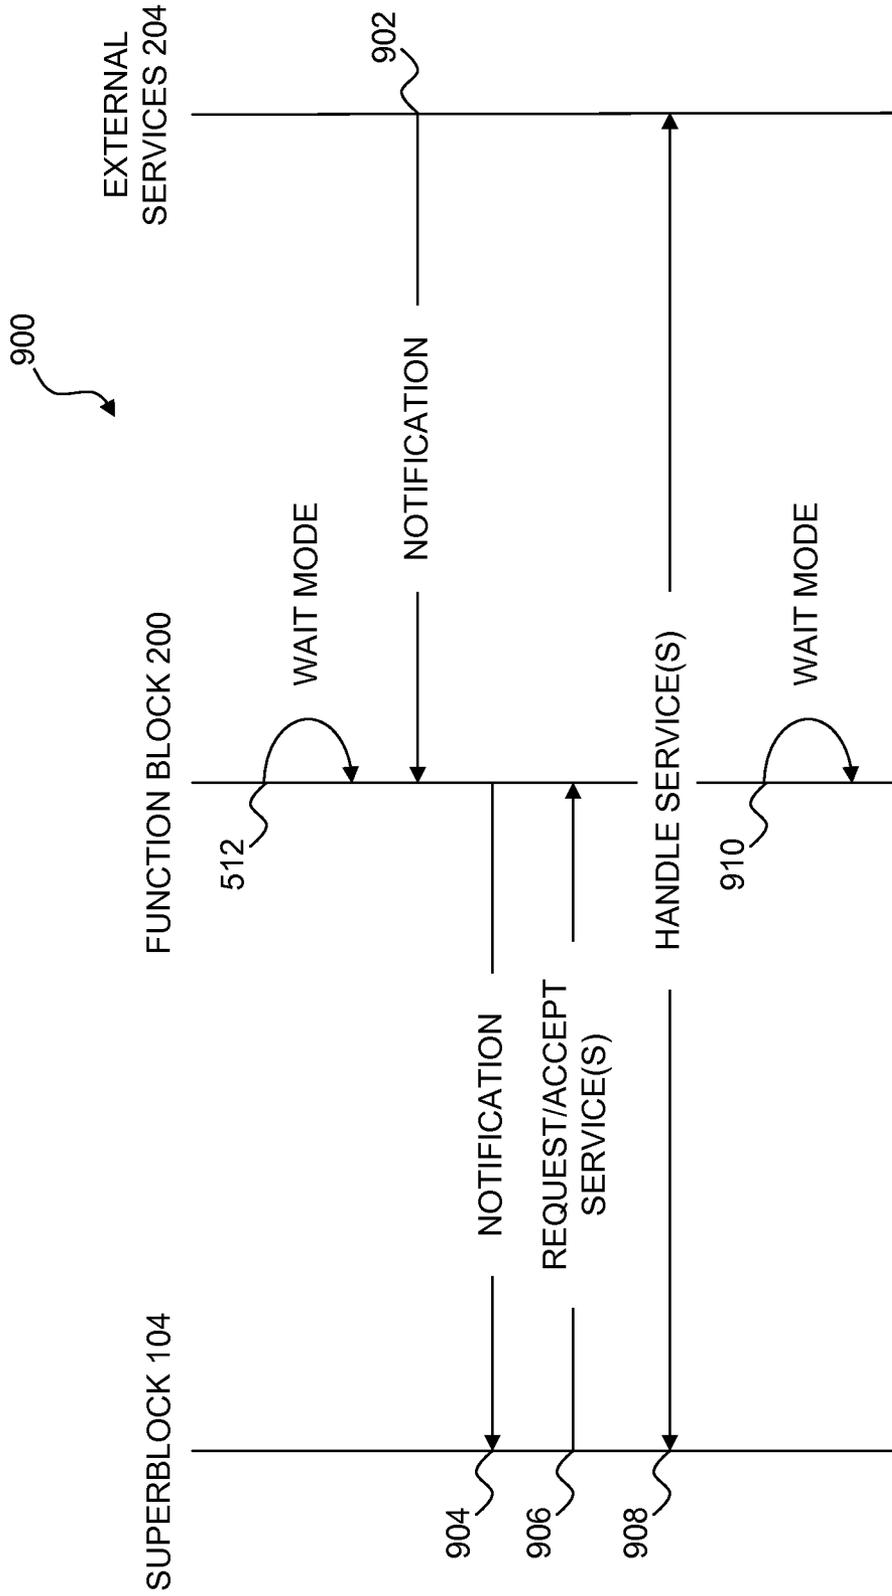


FIG. 9

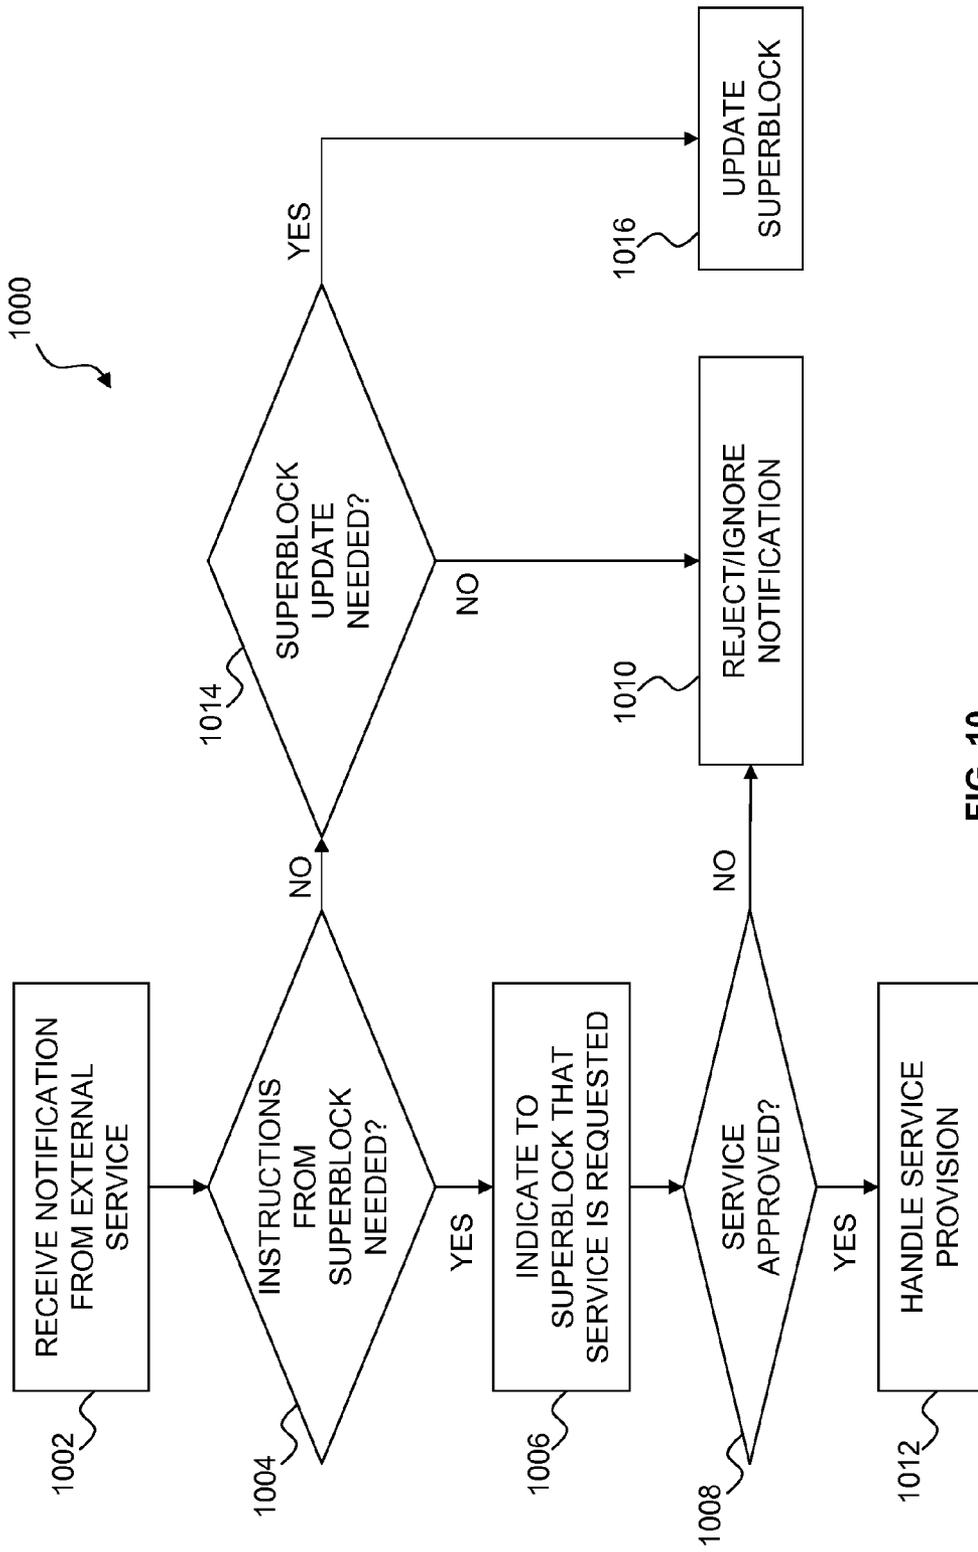


FIG. 10

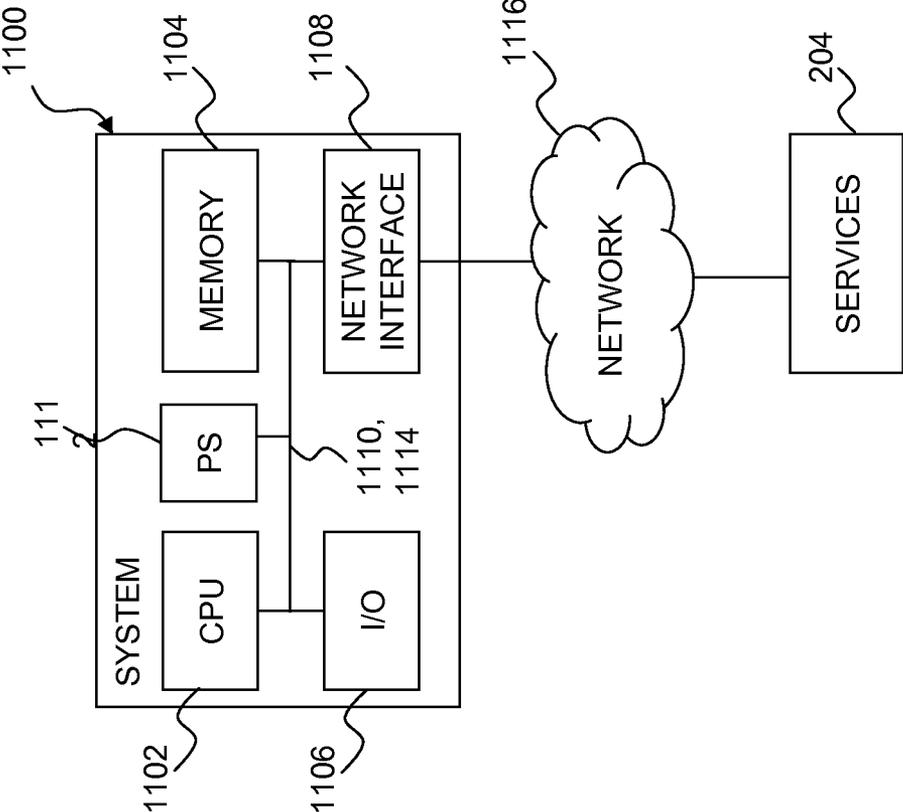


FIG. 11

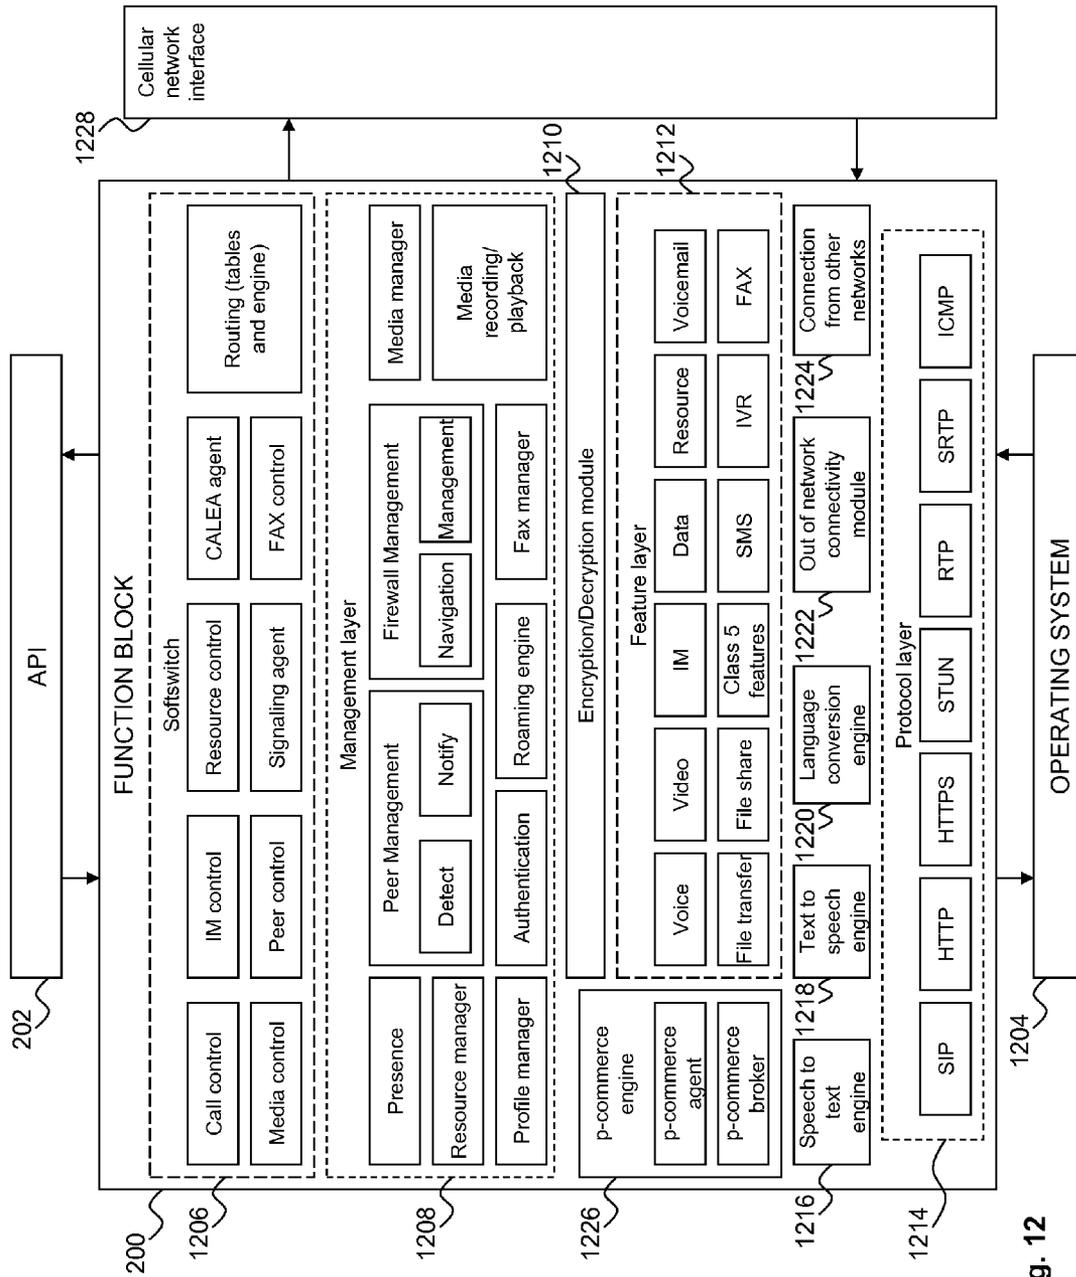


Fig. 12

1

# SYSTEM AND METHOD FOR PROVIDING ADDITIONAL FUNCTIONALITY TO EXISTING SOFTWARE IN AN INTEGRATED MANNER

## CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. application Ser. No. 14/024,027, filed on Sep. 11, 2013, entitled SYSTEM AND METHOD FOR PROVIDING ADDITIONAL FUNCTIONALITY TO EXISTING SOFTWARE IN AN INTEGRATED MANNER, which claims the benefit of U.S. Provisional Application No. 61/846,958, filed on Jul. 16, 2013, entitled SYSTEM AND METHOD FOR PROVIDING ADDITIONAL FUNCTIONALITY TO EXISTING SOFTWARE IN AN INTEGRATED MANNER, the specifications of which are incorporated by reference herein in their entirety.

## BACKGROUND

The manner in which functionality is accessed in certain environments, such as mobile device environments, may impact performance and/or battery life. Accordingly, what is needed are a system and method that addresses these issues.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding, reference is now made to the following description taken in conjunction with the accompanying Drawings in which:

FIG. 1 illustrates one embodiment of a device having a memory and a superblock stored within the memory;

FIG. 2A illustrates one embodiment of the device of FIG. 1 with the addition of a function block;

FIG. 2B illustrates one embodiment of the device of FIG. 2A with a superblock application displayed simultaneously with the additional functionality provided by a function block;

FIG. 3A illustrates one embodiment of the function block of FIG. 2 incorporated into the superblock;

FIG. 3B illustrates one embodiment of the superblock of FIG. 3A nested within another superblock;

FIG. 3C illustrates one embodiment of the function block of FIG. 2 incorporated into the superblock in multiple parts;

FIG. 4 illustrates one embodiment of a timeline showing the execution of superblock and function block instructions;

FIG. 5 illustrates a sequence diagram of one embodiment of a process that may be executed to access the functionality provided by the function block of FIG. 2;

FIG. 6A illustrates a flow chart of one embodiment of a process by which the function block may determine the services that can be provided to the superblock during the process of FIG. 5;

FIG. 6B illustrates one embodiment of a diagram showing a source and a sink coupled by the function block of FIG. 2;

FIG. 6C illustrates a more detailed embodiment of the diagram of FIG. 6B;

FIG. 7 illustrates a sequence diagram of one embodiment of a process that may be executed by the function block of FIG. 2 to respond to a service request from the superblock;

FIG. 8 illustrates a flow chart of one embodiment of a process by which the function block may determine whether to provide external services in responding to the service request of FIG. 7;

2

FIG. 9 illustrates a sequence diagram of one embodiment of a process that may be executed by the function block of FIG. 2 to respond to a notification from an external service;

FIG. 10 illustrates a flow chart of one embodiment of a process by which the function block may determine how to handle the notification of FIG. 9;

FIG. 11 illustrates one embodiment of a system that may be used for the device of FIG. 1; and

FIG. 12 illustrates one embodiment of the function block of FIG. 2.

## DETAILED DESCRIPTION

It is understood that the following disclosure provides many different embodiments or examples. Specific examples of components and arrangements are described below to simplify the present disclosure. These are, of course, merely examples and are not intended to be limiting. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

Referring to FIG. 1, in one embodiment, a device 100 includes a memory 102. The memory 102 stores a superblock 104, which may be a set of executable instructions used to perform one or more functions via the device 100. For example, the device 100 may be a mobile device and the superblock 104 may be an application (the “superblock application”) on the mobile device. The instructions of the superblock 104 enable a user of the mobile device to perform one or more actions, such as communications, data manipulation, and/or data management. However, the functionality of the superblock application is constrained to some degree by the device 100 and by the instructions of the superblock itself.

With respect to the device 100, the amount of available memory, how the memory 102 is structured (e.g., segment sizes), and how the memory is managed (e.g., how much memory is allocated to the superblock 104, how swapping occurs when another application needs physical memory, and how multiple applications are handled) are generally outside of the control of the superblock 104. However, mobile devices frequently provide a separate memory space for each application that is being run and so must keep track of the memory boundaries for each application. This tracking requires resources, such as processing time and power.

Furthermore, as a user switches between applications (e.g., switches contexts), the device 100 may have to swap instructions into and out of physical memory, which impacts performance and battery life. While context switching occurs in other devices, such as desktop and laptop computers, the resource impact used for those context switches is generally lower due to the greater amount of resources available for such devices compared to mobile devices. For example, as mobile devices generally have a smaller memory footprint compared to larger devices such as desktop and laptop computers, not only will a mobile device likely need to swap files in and out of memory when a context switch occurs, but the processor load and battery life will likely be negatively impacted on the mobile device more than would occur on larger devices having more resources. In addition, while a single application may use multi-threading and therefore require the allocation of processor time for different threads, swapping between applications is generally a more resource intensive task for a mobile device.

With respect to the instructions of the superblock 104, additional functionality may be desired for the superblock

application that is not provided by the instructions. For example, the superbloc application may not currently support a particular type of data and/or operation (e.g., audio, video, email, and/or file transfer) and it may be desirable for the superbloc application to do so. To provide such additional functionality, instructions would have to be added to the superbloc **102** to give the superbloc application the ability to support the data type and/or operation. This process typically entails reworking the superbloc application to include the desired functionality and then releasing the updated version of the superbloc application for use. Depending on the complexity and nature of the superbloc application and the desired functionality, this process may take a substantial amount of time, effort, and/or expense.

One alternative is to use another application to provide the desired functionality, but this may not be a satisfactory solution. For example, assume the superbloc **102** provides a superbloc application that needs email functionality. On current mobile devices, a user would typically select a link in the superbloc application, such as an email address. Selection of the link would launch an email application (or switch context to an email application if one is already running), which removes the user from the superbloc application and places the user in the email application. The user would then compose and send the email before switching back to the superbloc application. This process of leaving the superbloc application, performing some other function, and then returning to the superbloc application is currently a common occurrence for mobile device users.

However, this process is disruptive, difficult to manage, and pulls the user away from the superbloc application while the provider of the superbloc application may want the user to continue to stay in their application. Furthermore, the functions of the superbloc application are not available while in the other application, and so the user may have to switch back and forth between the superbloc application and the other application in order to interact with both applications. This is inefficient and frustrating for the user, and may also increase the number of errors in the text of the email since both applications are not simultaneously available for reference.

Another example is a video window for a phone call. Assume a user is in the superbloc application and has a question about data that the superbloc application is displaying. In order to call and visually interact with someone about the question and still have access to the data, the user has to conduct the call while switching back and forth between the video window of the call and the superbloc application. This is extremely disruptive to the user and limits the benefits of the video call, which include the ability to interact with someone on a visual basis rather than just an audio basis.

Yet another example is a user walking around a shop floor, engaged in his or her duties. In order to join a virtual meeting, the user will have to exit the superbloc application, find and/or enter the meeting information using another application, and join the meeting using the other application. As with the preceding example, this is extremely disruptive to the user, wastes time, and lowers productivity.

Referring to FIGS. 2A and 2B, in another embodiment, the superbloc **104** of FIG. 1 is illustrated with a function block **200** attached via a glue point **202** (FIG. 2A). It is understood that FIG. 2A is for purposes of illustration and may not represent an actual arrangement of the superbloc **104** and function block **200** in the memory **102**.

The function block **200** includes instructions for providing the superbloc **104** with one or more functions (e.g., capabilities) that are not otherwise possessed by the superbloc **104**. Such functions are illustrated in part with respect to FIG.

**12**, and may include instant messaging, presence (e.g., online, offline, and away), audio, video, collaboration (e.g., sharing of applications, documents, and/or files), whiteboard, file transfer, email, backgrounding, push notifications, conferencing, meetings, and/or other functions. Continuing the previous examples, the function block **200** may provide email or video capabilities for the superbloc **104** and does so by providing those capabilities within the superbloc application. Although the functions need not be provided visually as shown in FIG. 2B (e.g., in the case of playing an audio file), visual functions may also be presented without leaving the superbloc application display. In other words, there is no need to switch context to an email application or to any other application in order to access the additional functionality provided by the function block **200**.

To accomplish this, the function block **200** may be provided as a set of instructions that are included in the superbloc **104**. For example, the function block **200** may be provided as a software developer's kit (SDK) or as an otherwise independent module by a developer unrelated to the superbloc **104**. The developer of the superbloc **104** may then compile or otherwise include the function block instructions in the superbloc **104**. This ensures that the function block **200** will occupy the same memory space as the superbloc **104** unless otherwise placed elsewhere by the mobile device **100**. For example, as the superbloc **104** likely has little or no control over how the mobile device **100** handles memory management, the mobile device may actually separate some or all of the instructions making up the superbloc **104** and the function block **200**. However, by including the instructions for the function block **200** within the instructions for the superbloc **104**, the likelihood that the instructions will be separated may be minimized. The independent nature of the function block **200** means that the developer of the superbloc **104** needs little information about the operation of the function block **100** other than how to access the services.

Furthermore, the function block **200** may be handled by developers as a single block of instructions or as multiple blocks depending on the operating system environment. For example, the function block **200** may be handled as a single block in an environment such as iOS (a mobile operating system developed and distributed by Apple Inc. of Cupertino, Calif.), while the function block **200** may be handled as multiple blocks in an environment such as Android (a mobile operating system released as open source by Google Inc. of Mountain View, Calif.).

The function block **200** may be configurable after being distributed as part of the superbloc application. For example, the function block **200** may provide access to certain parameters, such as network address information of a server for the external services **204**. Other parameters, such as call parameters (e.g., payload size) may also be configurable.

The function block **200** may provide services in a self-contained manner (e.g., internal services that may be provided without needing support outside of the device **100**) or may use one or more external services **204**. The external services **204** may be provided via a server, a peer-to-peer endpoint, and/or by any other source with which the function block **200** is able to communicate. For example, the function block **200** may be able to provide audio/video playback services for a file stored in the memory **102** without needing anything outside of the device **100**, assuming the device **100** includes a screen for displaying the video and speakers and/or a headset for sound output.

However, for an audio/video call session, the function block **200** needs to connect to another device in order to establish the session, even though it can play audio/video

locally. In order to connect to the other device, the function block **200** may use the services **204**. Accordingly, how the function block **200** handles a particular service request from the superblock **104** may depend on the specific service and the resource needs of that service. From the point of view of the superblock **104**, whether the function block **200** uses local and/or external services does not matter as the superblock **104** is simply requesting the service from the function block **200**. In embodiments that use an external service **204**, the function block **200** is the entity between the superblock **104** and the external service **204**, but does not control either the superblock **104** or the external service **204**.

In the case of a request from the external services **204** (e.g., an incoming file transfer or phone call), the handling performed by the function block **200** may also depend on the specific service and the resource needs of that service. For example, the function block **200** may send a notification to the superblock **104** and wait for a response, or may handle the externally initiated request according to defined parameters.

Returning to the previous examples, the function block **200** may provide the superblock application with email functionality that enables a user to receive notifications, check email, and compose/edit/send/manage email without leaving the superblock application. For the audio/video phone call, the function block **200** may provide a video window for the phone call within the display of the superblock application, enabling a user to simultaneously see the video window and the superblock application. The video window may be resizable and/or movable. For the user walking around on the shop floor, the function block **200** may enable the user to receive a meeting notification, accept the meeting, and enter the meeting, all within the superblock application. To accomplish this,

the function block **200** may hook into the meeting information (e.g., on a server) and render this in the superblock application.

Referring to FIG. 3A, one embodiment of the superblock **104** illustrates the role of the glue point **202** in enabling the superblock **104** to interact with the function block **200**. For example, the glue point **202** may be an application programming interface (API) and the superblock **104** may make API calls to the function block **200** to access the function block's capabilities. The function block **200** then provides services to the superblock **104** in response to the API calls. In some embodiments, the function block **200** may also provide notifications to the superblock **104** in response to events triggered by the external services **204**.

In the present example, the set of instructions that make up the function block **200** may be used with many different applications and on many different platforms and accessed via the API **202**, although some customization may be performed if needed or desired. The function block **200** may be viewed as a set of instructions providing intelligence needed to perform the tasks described herein, and that set of instructions may be compiled or otherwise incorporated into the instructions of the superblock **104**. As the instructions can be incorporated into many different applications to satisfy many different needs, some of the capabilities provided by the function block **200** may not be used by a particular application, but may still be present. In other embodiments, functionality that is not desired may be removed to minimize the footprint of the function block **200**.

One embodiment of a header for the function block **200** (referred to in the header text as the Amadeo block) may be as follows:

---

```

#ifndef AMADEOBLOCK_H
#define AMADEOBLOCK_H
#include <string>
#include <list>
#include "AmadeoBlockConfig.h"
#include "AmadeoBlockCB.h"
class AmadeoBlock
{
public:
    static AmadeoBlock& instance();
    static bool UnlockSDK( const std::string& key );
    virtual bool Initialize( const AmadeoBlockConfig& config,
AmadeoBlockCB* callback ) = 0;
    virtual bool Finalize( ) = 0;
    virtual bool Activate( ) = 0;
    virtual bool Deactivate( ) = 0;
    virtual bool SetPresence( const std::string& presence, const std::string&
text ) = 0;
    virtual bool AddContact( const std::string& contact, const std::string&
displayname, const std::string& group ) = 0;
    virtual bool DeleteContact( const std::string& contact, const std::string&
group ) = 0;
    virtual bool MoveContact( const std::string& contact, const std::string&
fromgroup, const std::string& togroup, const std::string& nickname ) = 0;
    virtual bool CopyContact( const std::string& contact, const std::string&
newgroup, const std::string& nickname ) = 0;
    virtual bool AuthorizeContact( const std::string& contact, const
std::string& group ) = 0;
    virtual bool RejectContact( const std::string& contact ) = 0;
    virtual bool BlockContact( const std::string& contact ) = 0;
    virtual bool UnblockContact( const std::string& contact ) = 0;
    virtual bool AddGroup( const std::string &group ) = 0;
    virtual bool DeleteGroup( const std::string& group ) = 0;
    virtual bool RenameGroup( const std::string& oldgroup, const std::string&
newgroup ) = 0;
    virtual bool Search( const std::string& searchstring ) = 0;
    virtual bool SendIM( const std::string& who, const std::string& msg ) = 0;
    virtual bool StartIMConf( std::string& roomid, const
std::list<std::string>& contacts, const std::string& subject ) = 0;
    virtual bool EndIMConf( const std::string& roomid ) = 0;

```

-continued

---

```

    virtual bool AcceptIMConf( const std::string& roomid ) = 0;
    virtual bool SendConfIM( const std::string& roomid, const std::string&
msg ) = 0;
    virtual bool AddPartyIMConf( const std::string& roomid, const
std::string& invitee ) = 0;
    virtual bool StartFT( std::string& sessionid, const std::string& to, const
std::string& filename ) = 0;
    virtual bool AcceptFT( const std::string& sessionid, const std::string&
pathtosave ) = 0;
    virtual bool CancelFT( const std::string& sessionid ) = 0;
    virtual bool DeclineFT( const std::string& sessionid ) = 0;
    virtual bool CallStart( const std::string& calledparty, std::string& callid,
bool startvideo ) = 0;
    virtual bool CallAccept( const std::string& callid, bool startvideo ) = 0;
    virtual bool CallEnd( const std::string& callid ) = 0;
    virtual bool CallHold( const std::string& callid ) = 0;
    virtual bool CallUnhold( const std::string& callid ) = 0;
    virtual bool CallMute( const std::string& callid ) = 0;
    virtual bool CallUnmute( const std::string& callid ) = 0;
    virtual bool AddVideo( const std::string& callid ) = 0;
    virtual bool RemoveVideo( const std::string& callid ) = 0;
    virtual bool CallTransfer( const std::string& callid, const std::string&
transferparty ) = 0;
    virtual bool CallForward( const std::string& callid, const std::string&
forwardparty ) = 0;
    virtual bool CallPark( const std::string& callid ) = 0;
    virtual bool CallPickup( const std::string& slotid ) = 0;
    virtual bool CallVoicemail( const std::string& callid ) = 0;
    virtual bool CallMerge( const std::string& callid, const std::string&
othercallid ) = 0;
    virtual bool CallUnmerge( const std::string& callid ) = 0;
    virtual bool SendDTMF( const std::string& callid, char digit ) = 0;
    virtual bool Escalate( const std::string& callid, const
std::list<std::string>& targets ) = 0;
    virtual bool Deescalate( const std::string& callid, const
std::list<std::string>& targets ) = 0;
    virtual bool VMRefresh( ) = 0;
    virtual bool VMFetch( const std::string& itemid ) = 0;
    virtual bool VMDelete( const std::string& itemid ) = 0;
    virtual bool VMPlay( const std::string& itemid ) = 0;
    virtual bool SharingStart( const std::string& callid ) = 0;
    virtual bool SharingStop( const std::string& callid ) = 0;
    virtual bool WBStart( const std::string& target, const std::string& wbid ) =
0;
    virtual bool WBEnd( const std::string& wbid ) = 0;
    virtual bool WBSend( const std::string& wbid, const std::string& wldata ) =
0;
    virtual bool Logging( bool enable ) = 0;
    virtual bool GoToBackground( ) = 0;
    virtual bool MonitorNetwork( bool checknetwork ) = 0;
protected:
    AmadeoBlock( );
private:
    AmadeoBlock( const AmadeoBlock& );
    const AmadeoBlock& operator=( const AmadeoBlock& );
};
#endif // AMADEOBLOCK_H

```

---

Referring to FIG. 3B, another embodiment illustrates the superblock 104 as being part of another superblock 206. It is understood that any number of nested superblocks may be present. The function block 200 may be accessible to only the superblock 104, or may be accessible to one or more of the other superblocks (e.g., the superblock 206), either directly or via the superblock 104. For example, the superblock 206 may be able to make an API call directly to the function block 200 in some embodiments, or may only be able to make a call through the superblock 104 in other embodiments (e.g., the superblock 206 may call the superblock 104 for a service, and the superblock 104 may in turn make an API call to the function block 200 for that service).

Referring to FIG. 3C, as previously stated, it is understood that the function block 200 need not be a single block in memory. As illustrated by blocks 200a and 200b, the function block 200 may be separated into different parts automatically

50

(e.g., due to the operation of the operating system and how it handles memory allocation) or may be handled as separate parts during integration into the superblock application (e.g., by the developer of the superblock application).

55

Referring to FIG. 4, one embodiment of a timeline 400 illustrates the simultaneous operation of the superblock 104 and function block 200 when the instructions of the function block 200 are being executed to provide one or more services to the superblock application. The timeline 400 moves from left to right and includes five specific times  $t_1$ - $t_5$ . At time  $t_1$ , the superblock instructions (as indicated by line 402) are being executed, but the function block 200 instructions are not. In other words, the superblock application is in use and has not called the function block API to provide any services. It is understood that the function block 200 may be in a waiting state at time  $t_1$  and instructions of the function block

60

65

200 may be executed to maintain the waiting state, but the function block 200 is not actively providing services.

At time  $t_2$ , the superblock application calls the function block API or an external service contacts the function block 200, and the function block 200 instructions (as indicated by line 404) are executed to provide the service requested by the API call or handle the contact from the external service 204. The instructions for the superblock 104 and function block 200 are executed from time  $t_2$  until time  $t_3$ , at which time the function block 200 is no longer needed and is shut down (although this may include going into the waiting state for purposes of example). The superblock instructions are executed from time  $t_3$  until time  $t_4$ , at which time the function block 200 is again called (as indicated by line 406). The instructions for the superblock 104 and function block 200 are executed from time  $t_4$  until time  $t_5$ , at which time the function block 200 is no longer needed and is shut down (although this may include going into the waiting state for purposes of example) while the superblock instructions continue being executed.

Accordingly, while two different applications on a mobile device would not typically execute concurrently, the execution of the instructions for the superblock 104 and function block 200 as shown in FIG. 4 allows the function block 200 to provide additional capabilities to the superblock 104 through the use of API calls. By providing an interface for the function block 200 such as an API, the instructions of the superblock 104 may require minimal modification to access the capabilities provided by the function block 200.

Referring to FIG. 5, a sequence diagram 500 illustrates one embodiment of a process that may be executed to access the functionality provided by the function block 200. The superblock 104 may use the function block 200 under a static model or a dynamic model. In the static model, the superblock 104 calls for a specific function (e.g., video), the function block 200 provides the requested function (if available), the superblock 104 consumes the services provided, and the function block 200 is shut down. In the dynamic model, the function block 200 may enter a waiting state and wait for a request from the superblock 104 and/or a request or another event trigger from the external services 204 (e.g., an incoming call, email, or file transfer), handle the request, and then resume the waiting state.

In step 502, the superblock 104 unlocks the function block 200. For example, the unlock process may indicate that the superblock 104 is authorized to unlock some or all of the functionality provided by the function block 200 by providing a key or other authorization indicator. This step may not only limit the superblock 104 to authorized functionality, but may also insure that other applications cannot access the function block's capabilities. In step 504, the function block 200 is initialized. It is noted that these steps may occur during initialization of the superblock 104 or may occur later, such as when the superblock 104 calls the function block 200 for a particular function. For example, steps 502 and 504 may occur when the superblock application is launched and may not be repeated while the superblock application remains open, may occur each time the superblock application calls the function block API for a service, may occur only for particular services, may occur for defined periods of time (e.g., the function block 200 may lock every half hour), and/or using other parameters. It is understood that steps 502 and 504 may be reversed in some embodiments.

During initialization or at another time, policies may be applied. For example, a cost policy may require that any available Wi-Fi network is used before a 3G network. A security policy may require that a virtual private network

(VPN) be used whenever available. Backgrounding may be selected as an option when available to allow the superblock application to run in the background. Accordingly, the function block 200 may be configured to provide for specific behavior if desired and this behavior may in turn limit or enhance the capabilities of the superblock 104.

In steps 506 and 508, the superblock 104 may provide login information to the function block 200, and the function block 200 may use this information to access the external services 204. For example, if the function block 200 needs authentication credentials to access the external services 204, steps 506 and 508 may be used to gain access to those external services. In some embodiments, steps 506 and/or 508 may be combined with step 502 and the unlocking of the function block 200 may include logging into whatever external services are authorized and/or available.

In step 510, the function block 200 and the superblock 104 may perform a capability exchange. More specifically, the function block 200 may determine whether (1) the function block 200 has a particular capability, (2) whether the function block 200 can render that capability, and (3) whether the superblock 104 can render that capability. For example, the function block 200 may determine that the function block 200 has the capability to capture audio and play that captured audio through a speaker.

Next, the function block 200 may determine whether it can render that capability by checking, for example, to see whether there is an available microphone (mic) input and an available speaker output. If one or both of the mic and speaker are not present, then the function block 200 has the capability to handle the audio, but not the capability to render the audio. The superblock 104 is not involved in this process as it is not needed to render the audio, so the third determination may not be made. Although the superblock 104 is not involved in rendering the audio, it is understood that the superblock 104 may visually represent the audio, such as by means of an icon, one or more control buttons (e.g., play and stop), and/or other visual representations.

In another example, the superblock 104 may desire to display video. Again, the function block 200 may determine that the function block 200 has the capability to handle the video. Next, the function block 200 may determine whether it can render that capability by checking, for example, to see whether there is an available screen. If a screen is not present, then the function block 200 has the capability to handle the video, but not the capability to render the video. In this example, the superblock 104 is involved in this process as it is needed to provide a video window to render the video (e.g., the function block 200 may provide the video data to be rendered and the superblock 104 may place that video data in a video window), so the third determination is made.

By making such determinations, the function block 200 is able to notify the superblock 104 of the available functions. If a function needs the external services 204, lack of a connection may prevent the function block 200 from delivering external services to the superblock 104, but local services may still be provided. It is understood that while a screen, speaker, or other destination (e.g., a sink) may not be available, the function block 200 may handle some services using a secondary sink, such as a memory to which the video or audio is stored for later use.

With additional reference to FIG. 6A, a flow chart 600 illustrates one embodiment of a process for the capability exchange of step 510 of FIG. 5. In step 602, the function block 200 may be initialized (in embodiments where the capability exchange is performed on initialization) or the function block

200 may receive a request for service (in embodiments wherein the capability exchange occurs when a service is requested).

In step 604, a determination is made as to whether the function block 200 has the particular capability. For example, whether the function block 200 has the capability to support an audio/video call. If the determination of step 604 is that the function block 200 does not have the particular capability, the method 600 moves to step 606 and the capability is indicated as not being available. It is noted that if a particular capability has not been unlocked, the function block 200 may indicate the capability is not available even if the function block 200 can actually provide the capability. If the determination of step 604 is that the function block 200 does have the particular capability, the method 600 moves to step 608.

In step 608, a determination is made as to whether the function block 200 can render the capability as described previously. This step may determine whether the device 100 supports the needed functionality (e.g., has a microphone if audio input is needed or a speaker if audio output is needed). If the determination of step 608 is that the function block 200 cannot render the capability, the method 600 moves to step 606 and the capability is indicated as not being available. If the determination of step 608 is that the function block 200 does have the capability, the method 600 moves to step 610.

In step 610, a determination is made as to whether an external service 204 is needed to provide the capability. If the determination of step 610 is that an external service 204 is not needed, the method 600 moves to step 614. If the determination of step 610 is that an external service 204 is needed, the method 600 moves to step 612.

In step 612, a determination is made as to whether a needed external service 204 is available. For example, the external service 204 may be offline (e.g., a server used to provide the service may be non-responsive or the device 100 may have minimal or no network connectivity). This step may also determine whether the superbloc application is authorized to access the external service 204 (e.g., whether the external service will allow access by the superbloc application). If the determination of step 612 is that the needed external service 204 is not available, the method 600 moves to step 606 and the capability is indicated as not being available. If the determination of step 612 is that the needed external service 204 is available, the method 600 moves to step 614.

In step 614, a determination is made as to whether the superbloc 104 is needed to render the capability as described previously. If the determination of step 614 is that the superbloc 104 is not needed to render the capability, the method 600 moves to step 618 and the service is indicated as available (e.g., a capability list is updated and/or the service is provided). If the determination of step 614 is that the superbloc 104 is needed to render the capability, the method 600 moves to step 616.

In step 616, a determination is made as to whether the superbloc 104 can render the capability as described previously. If the determination of step 616 is that the superbloc 104 cannot render the capability, the method 600 moves to step 606 and the capability is indicated as not being available. If the determination of step 616 is that the superbloc 104 does have the capability, the method 600 moves to step 618.

The superbloc 104 and/or function block 200 may use a table or other structure for listing available capabilities. For example, a table may identify a particular service, whether the superbloc 104 is authorized to access the service, whether the function block 200 can support the service, whether the function block 200 can render the service, whether the superbloc 104 is needed to render the service, and whether the

superblock 104 can render the service if needed. It is understood that this information may not be provided in detail in all embodiments, but may be condensed to a simple indication of whether the service is available or not. However, by providing additional levels of detail, more useful indicators may be provided. For example, the superbloc application may be able to indicate that a particular service is not authorized or that speakers are not available, rather than simply indicating that audio service is not available.

Table 1 illustrates one embodiment of a mapping table that may be used to track the capabilities that the function block 200 can provide to the superbloc 104 on the device 100. It is understood that the mapping table may vary for the same function block 200, superbloc 104, and device 100 in different scenarios, such as whether the device 100 has network access or not when needed for a particular service. For purposes of illustration, the first column lists services supported by the function block 200, the second column identifies whether that service is supported by the device (e.g., whether the function block 200 can render the service), the third column identifies whether the superbloc application can render the service (if needed), the fourth column identifies whether the external services 204 support the service (if needed), and the fifth column identifies where the superbloc application has authorization rights to that service.

In some embodiments, the service column may be limited to services that the superbloc application is authorized to access. For example, if function block 200 supports instant messaging but the superbloc application 104 is not authorized to use this feature, the service may or may not show up in the mapping table depending on the particular implementation. An additional column may be used to identify whether a needed external service is currently available or the fourth column may be used to show this information.

TABLE 1

SERVICE	DEVICE	SUPER-BLOCK	EXTERNAL SERVICE	AUTH?
In app video from file	Yes	Yes	N/A	Y
Audio - local file	Yes	N/A	N/A	Y
Audio - streaming	Yes	N/A	Yes	Y
Sharing	Yes	Yes	No	Y
Instant messaging	Yes	No	Yes	Y
Whiteboard	N/A	N/A	N/A	N

For purposes of example, the first service involves playing a video from a file and is supported by both the device 100 and the superbloc 104. The external services 204 are not needed and are marked as not applicable. The second service involves playing a local audio file and is supported by the device 100. The superbloc 104 and external services 204 are not needed and are marked as not applicable. The third service involves playing a streaming audio file and is supported by the device 100 and the external services 204. The superbloc 104 is not needed and is marked as not applicable. The fourth service involves content sharing and is supported by the device 100 and the superbloc 104, but not the external services 204. As the external services 204 are needed for sharing in this example, this service is not available to the superbloc application. The fifth service involves instant messaging and is supported by the device 100 and the external services 204, but not the superbloc 104.

The sixth service involves a whiteboard, but the superbloc 104 is not authorized to access this service, and so the capabilities are not checked. In other embodiments, capabilities for unauthorized services may be checked and, if supported,

the superblock application may notify the user that the service is not authorized. In such embodiments, a dialog or other option may appear to allow the user to subscribe or otherwise gain access to the service if allowed.

With additional reference to FIG. 6B, a diagram 630 provides a visual illustration of the process of FIG. 6A from a source/sink perspective. For the function block 200 to successfully bridge a source 632 and a sink 634 to provide a service, both the source 632 and the sink 634 must be present and available to the function block 200 as indicated by lines 636 and 638, respectively. The source 632 may be the superblock 104, the external services 204, and/or a component of the device 100 such as a wireless interface, a microphone, a camera, and/or any other component capable of providing input to the function block 200. The sink 632 may be the superblock 104, the external services 204, and/or a component of the device 100 such as a wireless interface, a speaker, a display screen, and/or any other component capable of receiving output from the function block 200. In some cases, the lack of availability of a sink may result in the use of a dummy sink (e.g., writing audio to memory when there is no available speaker).

It is understood that the source/sink model provided by the source 632 and sink 634 may be viewed as generic. For example, at the device level, the source 632 and sink 634 operate to read/send data. At the network interface level, each side acts as both source/sink because network interfaces allow for read/write simultaneously in most modern devices. In contrast, a microphone is a source and a speaker is a sink. A speaker may serve as a sink for multiple data in some cases, such as if multiple audio sources are mixed into the single speaker. In this scenario, the source for rendering audio data may be a microphone, network audio encoded data, a music file on the device, and/or other sources. The source/sink model can also be considered for service level consumer/producer models. For example, the function block 200 may be viewed as a source for presenting client side capabilities to a server and at the same time may be viewed as a sink for rendering capabilities presented by the server.

With additional reference to FIG. 6C, a diagram 640 provides a more detailed illustration of FIG. 6B. Source 642 is a microphone and the function block 200 is to send the audio captured from the microphone to sink 644 representing an external service 204 (e.g., as outbound audio for a telephone call). For the function block 200 to successfully bridge the source 642 and the sink 644, both the source 642 and the sink 644 must be present and available to the function block 200 as indicated by lines 646 and 648, respectively, and the source 642, sink 644, and function block 200 must be capable of handling the service. If the function block 200 is thought of as providing services via a series of switches, lines 646 and 648 must both be closed to connect the source 642 and sink 644. Accordingly, the process of FIG. 6A may be executed to ensure that the function block 200 can render the audio input and that the connection to the external service is valid (e.g., that the switches can be closed).

In the present example, one or more additional flow layers represented by line 650 may also present. For example, line 650 may represent whether an audio hold exists. If the audio has been placed on hold, the function block 200 will notify the audio pipeline to stop (e.g., the switch will be opened). The audio capture may continue, but it will not be rendered (e.g., sent to the external services represented by sink 644) as the circuit formed by the function block 200 will no longer be complete.

Referring again to FIG. 5, in step 512, the function block 200 may shut down if operating under the static model or may

enter a wait mode if operating under the dynamic model. In step 514, the function block 200 may provide one or more services to the superblock 104 if requested by the superblock 104 or an external service 204. It is understood that steps 512 and 514 may repeat any number of times while the superblock application is running. If no services are requested, step 514 would not be executed.

In steps 516 and 518, the superblock 104 may finalize any service requests and shutdown the function block 200. For example, if the superblock application is closing, the superblock 104 may use one or more API calls to the function block 200 to notify the function block 200 that the function block 200 should close any open ports (e.g., with an external service 204) and close down any running processes.

Referring to FIG. 7, a sequence diagram 700 illustrates one embodiment of a process that may be executed in order to provide a service by the function block 200 in response to a service request by the superblock 104. This present example may operate under either the static model or the dynamic model. The process begins with step 512 of FIG. 5, which is not described in detail in the present example.

In step 702, the superblock 104 issues a request for a service to the function block 200 using an API call or another suitable method. In step 704, the function block 200 obtains any needed support from the external services 204. In step 706, the function block 200 provides the service to the superblock 104. In step 708, the function block 200 may repeat step 512 and either shut down or enter the wait mode depending on whether the function block 200 is operating under the static model or the dynamic model.

Referring to FIG. 8, a flow chart 800 illustrates one embodiment of a process for accessing an external service 204, such as may occur with respect to step 704 of FIG. 7. In step 802, the function block 200 receives a request from the superblock 104 (as occurs in step 702 of FIG. 7). In step 804, a determination is made as to whether the function block 200 needs to use an external service to handle the request. If the determination of step 804 indicates that no external service is needed, the method 800 moves to step 806. In step 806, the service is provided by the function block 200. If the determination of step 804 indicates that an external service is needed, the method 800 moves to step 808.

In step 808, a determination is made as to whether the external service is available. If the determination of step 808 indicates that the external service is available, the method 800 moves to step 810, where any parameters needed for communications and/or service provision may be negotiated between the function block 200 and external service 204. Such parameters may include both signaling and media parameters such as bandwidth, codecs, and/or similar information, and would typically depend on the particular service.

The method 800 then moves to step 806 where the service is provided by the function block 200. If the determination of step 808 indicates that the external service is not available, the method 800 moves to step 812. In step 812, the function block 200 may indicate that the service is not available. For example, the function block 200 may indicate that the server is not responding or that there is no network connectivity for the device 100.

Referring to FIG. 9, a sequence diagram 900 illustrates one embodiment of a process that may be executed in order to provide a service by the function block 200 in response to a notification from an external service 204. This present example may operate under the dynamic model as the function block 200 is in listening mode to receive notifications

15

from the external services **204**. The process begins with step **512** of FIG. **5**, which is not described in detail in the present example.

In step **902**, an external service **204** issues a notification to the function block **200** that the external service **204** has something for the superblock **104**. In step **904**, the function block **200** may pass the notification to the superblock **104**. It is understood that step **904** may not actually pass on the notification, but that the notification of step **902** may trigger functionality within the function block **200** that serves to notify the superblock **104**. For example, if the notification of step **902** is about an incoming phone call, the function block **200** may receive the notification, initiate a phone response display (e.g., a display with options for accepting or rejecting the call), and provide the information to the superblock **104** in that manner. In another example, the notification of step **902** may be a presence change (e.g., a user changes status from offline to online), and the function block **200** may update a presence indicator within the superblock application's display. In still another example, the function block **200** may use an event system and send event notifications to the superblock **104**. Accordingly, some notifications may require action on the part of a user of the superblock application, while other notifications may not.

In the present example, the notification requires a response and the superblock **104** responds in step **906** by requesting and/or accepting the service (e.g., a phone call). In step **908**, the function block **200** handles services between the superblock **104** and the external service **204**. In other words, the function block **200** serves as an interface between the external service **204** and the superblock **104**. For example, the function block **200** may bridge the phone call, handle call waiting and other call features, and otherwise provide support for the superblock application. In step **910**, the function block **200** may enter wait mode after the services have been provided.

Referring to FIG. **10**, a flow chart **1000** illustrates one embodiment of a process for execution by the function block **200** with respect to an external service **204**, such as may occur with respect to FIG. **9**. In step **1002**, the function block **200** receives a notification from the external service **204**. In step **1004**, a determination is made as to whether the function block **200** needs instructions from the superblock **104**. If the determination of step **1004** indicates that instructions are needed, the method **1000** moves to step **1006**. In step **1006**, the function block **200** indicates to the superblock **104** that service is requested. The method **1000** then moves to step **1008**.

In step **1008**, a determination is made as to whether the service request has been approved by the superblock **104**. If the determination of step **1008** indicates that the request has not been approved, the method **1000** moves to step **1010**, where the notification may be rejected, ignored, or otherwise handled. It is understood that the actual response of the function block **200** in step **1010** may vary depending on the notification type. For example, the function block **200** may indicate to the external service **204** that the call is rejected. If the determination of step **1008** indicates that the request has been approved, the method **1000** moves to step **1012**, where the function block **200** may handle the service provision.

Returning to step **1004**, if the determination of step **1004** indicates that instructions are not needed, the method **1000** moves to step **1014**. In step **1014**, a determination is made as to whether the superblock **104** is to be updated based on the notification. If the determination of step **1014** indicates that the superblock **104** is not to be updated, the method **1000** moves to step **1010**, where the notification may be rejected, ignored, or otherwise handled. If the determination of step

16

**1014** indicates that the superblock **104** is to be updated, the method **1000** moves to step **1016**, where the update may be performed. For example, another user's presence status may be updated from online to offline or vice versa.

Referring again to FIG. **1**, embodiments of the device **100** include cellular telephones (including smart phones), personal digital assistants (PDAs), netbooks, tablets, laptops, desktops, workstations, telepresence consoles, and any other computing device that can communicate with another computing device using a wireless and/or wireline communication link. Such communications may be direct (e.g., via a peer-to-peer network, an ad hoc network, or using a direct connection), indirect, such as through a server or other proxy (e.g., in a client-server model), or may use a combination of direct and indirect communications. Although not shown, in other embodiments, the device **100** may be an application specific integrated circuit (ASIC), a processor, or another device within which the function block **200** may be embedded. In some embodiments, external access may not be needed. Accordingly, the function block **200** may be implemented in many different ways and in many different types of systems, and may be customized as needed to operate within a particular environment.

Referring to FIG. **11**, one embodiment of a system **1100** is illustrated. The system **1100** is one possible example of a device such as the device **100** of FIG. **1**. The system **1100** may include a controller (e.g., a central processing unit ("CPU")) **1102**, a memory unit **1104**, an input/output ("I/O") device **1106**, and a network interface **1108**. The components **1102**, **1104**, **1106**, and **1108** are interconnected by a transport system (e.g., a bus) **1110**. A power supply (PS) **1112** may provide power to components of the computer system **1100**, such as the CPU **1102** and memory unit **1104**, via a power system **1114** (which is illustrated with the transport system **1110** but may be different). It is understood that the system **1100** may be differently configured and that each of the listed components may actually represent several different components. For example, the CPU **1102** may actually represent a multi-processor or a distributed processing system; the memory unit **1104** may include different levels of cache memory, main memory, hard disks, and remote storage locations; the I/O device **1106** may include monitors, keyboards, and the like; and the network interface **1108** may include one or more network cards providing one or more wired and/or wireless connections to a network **1116**. Therefore, a wide range of flexibility is anticipated in the configuration of the computer system **1100**.

The system **1100** may use any operating system (or multiple operating systems), including various versions of operating systems provided by Microsoft (such as WINDOWS), Apple (such as Mac OS X), UNIX, and LINUX, and may include operating systems specifically developed for handheld devices, personal computers, servers, and embedded devices depending on the use of the system **1100**. The operating system, as well as other instructions (e.g., for the superblock **104** and function block **1100**), may be stored in the memory unit **1104** and executed by the processor **1102**. For example, if the system **1100** is the device **100**, the memory unit **1104** may include instructions for performing some or all of the message sequences and methods described herein.

Referring to FIG. **12**, in one embodiment, the function block **200** may contain functionality similar to that of an endpoint as described in detail in U.S. Pat. No. 7,656,870, filed on Mar. 15, 2005, and entitled SYSTEM AND METHOD FOR PEER-TO-PEER HYBRID COMMUNICATIONS and hereby incorporated by reference in its entirety. In such an embodiment, the graphical user interface

(GUI) of the endpoint may be replaced with the API 202 of FIG. 2, and some functionality may be removed if not needed for a particular implementation of the function block 200. Other functionality that is not necessarily in the described endpoint, such as mobile device management (MDM) functionality, may be included in the function block 200. Accordingly, the basic functionality of the described endpoint may exist as logic embodied in the instruction set of the function block 200.

For purposes of example, the function block 200 may be accessed by the API 202 and may communicate with an operating system 1204 of the device 100 of FIG. 1. The API 202 provides access to the capabilities of the function block 200 for the superbloc 104, while the operating system 1204 provides underlying functionality, as is known to those of skill in the art. Although shown as separate from the function block 200 for purposes of illustration, it is understood that the API 202 may be part of the function block 200 in some embodiments.

The function block 200 may include multiple components and layers that support the functionality required to perform the operations requested by the superbloc 104. For example, the function block 200 may include a softswitch 1206, a management layer 1208, an encryption/decryption module 1210, a feature layer 1212, a protocol layer 1214, a speech-to-text engine 1216, a text-to-speech engine 1218, a language conversion engine 1220, an out-of-network connectivity module 1222, a connection from other networks module 1224, a p-commerce (e.g., peer commerce) engine 1226 that includes a p-commerce agent and a p-commerce broker, and a cellular network interface module 1228.

Each of these components/layers may be further divided into multiple modules. For example, the softswitch 1206 may include a call control module, an instant messaging (IM) control module, a resource control module, a CALEA (Communications Assistance to Law Enforcement Act) agent, a media control module, a peer control module, a signaling agent, a fax control module, and a routing module.

The management layer 1208 may include modules for presence (i.e., network presence), peer management (detecting peers and notifying peers of being online), firewall management (navigation and management), media management, resource management, profile management, authentication, roaming, fax management, and media playback/recording management.

The encryption/decryption module 1210 may provide encryption for outgoing packets and decryption for incoming packets. In the present example, the encryption/decryption module 1210 provides application level encryption at the source, rather than at the network. However, it is understood that the encryption/decryption module 1210 may provide encryption at the network in some embodiments.

The feature layer 1212 may provide support for various features such as voice, video, IM, data, voicemail, file transfer, file sharing, class 5 features, short message service (SMS), interactive voice response (IVR), faxes, and other resources. The protocol layer 1214 may include protocols supported by the function block 200, including SIP, HTTP, HTTPS, STUN, RTP, SRTP, and ICMP. It is understood that these are examples only, and that fewer or more protocols may be supported.

The speech-to-text engine 1216 converts speech received by the function block 200 (e.g., via a microphone or network) into text, the text-to-speech engine 1218 converts text received by the function block 200 into speech (e.g., for output via a speaker), and the language conversion engine 1220 may be configured to convert inbound or outbound

information (text or speech) from one language to another language. The out-of-network connectivity module 1222 may be used to handle connections between the function block 200 and the external services 204, and the connection from other networks module 1224 handles incoming connection attempts from the external services 204. The cellular network interface module 1228 may be used to interact with a wireless network.

While the preceding description shows and describes one or more embodiments, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the present disclosure. For example, various steps illustrated within a particular flow chart or sequence diagram may be combined or further divided. In addition, steps described in one flow chart or diagram may be incorporated into another flow chart or diagram. Furthermore, the described functionality may be provided by hardware and/or software, and may be distributed or combined into a single platform. Additionally, functionality described in a particular example may be achieved in a manner different than that illustrated, but is still encompassed within the present disclosure. Therefore, the claims should be interpreted in a broad manner, consistent with the present disclosure.

What is claimed is:

1. A mobile device comprising:

a network interface;

a processor coupled to the network interface; and

a memory coupled to the processor and configured to store a plurality of instructions executable by the processor, the instructions including instructions for:

receiving, by a function block stored in the memory of the mobile device, a request for a communication service from a superbloc application stored in the memory of the mobile device, wherein the superbloc application is configured to access the function block for functionality that is lacking in the superbloc application;

determining, by the function block, that providing the communication service to the superbloc application requires access to an external device;

establishing, by the function block, a connection with the external device via the network interface to support the communication service, wherein the establishing is not supported by the superbloc application; and

providing, by the function block, the communication service to the superbloc application, wherein the steps of receiving, determining, establishing, and providing are performed without switching context from the superbloc application to another application on the mobile device.

2. The mobile device of claim 1 wherein providing the communication service includes operating, by the function block, as a bridge between the superbloc application and the external device.

3. The mobile device of claim 1 wherein the request is an application programming interface (API) call from the superbloc application to the function block.

4. The mobile device of claim 1 wherein the communication service is a collaboration session.

5. The mobile device of claim 1 wherein the communication service is a whiteboard session.

6. The mobile device of claim 1 wherein the communication service is an instant messaging session.

7. The mobile device of claim 1 wherein the communication service is an audio session.

19

8. The mobile device of claim 1 wherein the communication service is an audio/video (A/V) session.

9. The mobile device of claim 1 wherein the instructions further include determining, by the function block, whether the function block has a capability to provide the communication service.

10. The mobile device of claim 1 wherein the instructions further include determining, by the function block, whether the function block has a capability to perform any rendering needed by the communication service.

11. The mobile device of claim 1 wherein the instructions further include determining, by the function block, whether the superblock has a capability to perform any rendering needed by the communication service.

12. The mobile device of claim 1 wherein the instructions further include initializing the function block, by the superblock application, when the superblock application is loaded into the memory and executed.

13. The mobile device of claim 1 wherein the instructions further include determining, by the function block, that the superblock application is authorized to access functionality provided by the function block for the communication service.

14. The mobile device of claim 1 wherein the instructions further include providing at least one configuration parameter for the function block, wherein the configuration parameter enables the function block to be configured after the function block is distributed as part of the superblock application.

15. A mobile device comprising:

a network interface;

a processor coupled to the network interface; and

a memory coupled to the processor and configured to store a plurality of instructions executable by the processor, the instructions including instructions for:

receiving, by a function block stored in the memory of the mobile device, a request from an external device for a communication session with a superblock application that is stored in the memory of the mobile device and is currently being displayed within a display window of the superblock application on a display screen of the mobile device, wherein the function block is configured to provide functionality for the communication service to the superblock application; notifying, by the function block, the superblock application that the communication session is being requested by the external device, wherein the notification occurs within the display window of the superblock application;

establishing, by the function block, a connection with the external device via the network interface to support the communication session only after receiving an approval from the superblock application to establish the communication session, wherein the establishing is not supported by the superblock application; and

providing, by the function block, the communication session to the superblock application, wherein the steps of receiving, notifying, establishing, and providing are performed without switching context from the superblock application to another application on the mobile device.

16. The mobile device of claim 15 wherein the instructions further include determining, by the function block, whether the function block has a capability to perform any rendering needed by the communication session.

20

17. The mobile device of claim 15 wherein the instructions further include determining, by the function block, whether the superblock has a capability to perform any rendering needed by the communication session.

18. The mobile device of claim 15 wherein the instructions further include determining, by the function block, that the superblock application is authorized to access functionality provided by the function block for the communication session.

19. The method of claim 15 wherein the function block and the superblock application communicate via an application programming interface (API) provided by the function block.

20. A method comprising:

receiving, by a function block stored in a memory of a mobile device, a request for a communication service from a superblock application stored in the memory of the mobile device, wherein the superblock application is configured to access the function block for functionality that is lacking in the superblock application;

determining, by the function block, that providing the communication service to the superblock application requires access to an external device;

establishing, by the function block, a connection with the external device to support the communication service via a network interface of the mobile device, wherein the establishing is not supported by the superblock application; and

providing, by the function block, the communication service to the superblock application, wherein the steps of receiving, determining, establishing, and providing are performed without switching context from the superblock application to another application on the mobile device.

21. The method of claim 20 wherein providing the communication service includes operating, by the function block, as a bridge between the superblock application and the external device.

22. The method of claim 20 wherein the request is an application programming interface (API) call from the superblock application to the function block.

23. The method of claim 20 further comprising determining, by the function block, whether the function block has a capability to provide the communication service.

24. The method of claim 20 further comprising determining, by the function block, whether the function block has a capability to perform any rendering needed by the communication service.

25. The method of claim 20 further comprising determining, by the function block, whether the superblock has a capability to perform any rendering needed by the communication service.

26. The method of claim 20 further comprising initializing the function block, by the superblock application, when the superblock application is loaded into the memory and executed.

27. The method of claim 20 further comprising determining, by the function block, that the superblock application is authorized to access functionality provided by the function block for the communication service.

28. The method of claim 20 further comprising providing at least one configuration parameter for the function block, wherein the configuration parameter enables the function block to be configured after the function block is distributed as part of the superblock application.