



- (51) International Patent Classification:
H01L 29/78 (2006.01) *G11C 11/412* (2006.01)
H01L 29/772 (2006.01)
- (21) International Application Number:
PCT/US2015/067505
- (22) International Filing Date:
22 December 2015 (22.12.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
14/579,763 22 December 2014 (22.12.2014) US
- (71) Applicant: UNIVERSITY OF NOTRE DAME DU LAC
[US/US]; 940 Grace Hall, Notre Dame, Indiana 46556
(US).
- (72) Inventors: SEDIGHI, Behnam; 8860 Villa La Jolla Dr.,
San Diego, California 92037 (US). NIEMIER, Michael;
15698 Cedar Cove Dr., Granger, Indiana 46530 (US). HU,
X. Sharon; 51420 Coveseide Dr., Granger, Indiana 46530
(US). NAHAS, Joseph J.; 5824 Gentle Breeze Terrace,
Austin, Texas 78731 (US).
- (74) Agents: JAROSIK, Keith R. et al.; Greenberg Traurig,
LLP, 77 W. Wacker Drive, Suite 3100, Chicago, Illinois
60601-1732 (US).
- (81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,

[Continued on next page]

(54) Title: DEVICES FOR UTILIZING SYMFETS FOR LOW-POWER INFORMATION PROCESSING

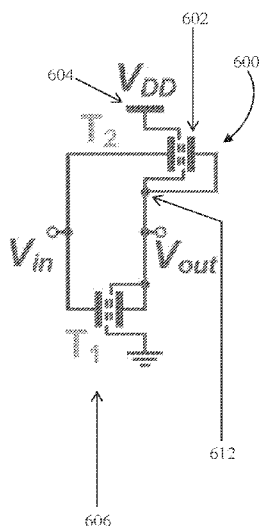


FIG. 6A

(57) Abstract: A Boolean gate includes at least one symmetric tunneling field-effect transistor (SymFET) for low-power information processing. SymFETs are ideal for applications that demand low power and have moderate speed requirements, and demonstrate better dynamic energy efficiency than CMOS circuits. Negative differential resistance (NDR) behavior of SymFETs leads to hysteresis in inverters and buffers, and can be used to build simple Schmitt-triggers. Further, pseudo-SymFET loads may be utilized in circuits similar to all-n-type or dynamic logic. For example, latches and flip-flops as well as NAND, NOR, IMPLY, and MAJORITY gates may employ SymFETs. Such SymFET-based devices require fewer transistors than static CMOS-based designs.



GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,

SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

DEVICES FOR UTILIZING SYMFETS FOR LOW-POWER INFORMATION PROCESSING

Field of the Disclosure

[0001] The present disclosure relates generally to the field of low-power information processing hardware and, more specifically, to devices for utilizing symmetric tunneling field-effect transistors (SymFETs) for low-power information processing.

Background of Related Art

[0002] In the pursuit of low-power information processing hardware, many new post-complementary metal-oxide-semiconductor (CMOS) transistors have been created in the past few decades. One desirable property for these new devices is a large on-current to off-current ratio, which enables low-power, low-voltage operation. Initial studies and experiments on a class of emerging field effect transistor (FET) technologies that operate upon the principle of tunneling between 2-D materials have indicated their potential for low-power operation. However, current-voltage characteristics (or “I-V curves”) of these devices appear to be dissimilar to those of today’s metal-oxide-semiconductor field-effect transistors (MOSFETs), and instead exhibit bell-curve characteristics. Further, double-layer graphene transistors, such as SymFETs, and bilayer pseudo-spin FETs (BiSFETs) may all possess at least some of the aforementioned characteristics. Such behavior is also observed in some molecular transistors and single-electron transistors. To date, though, little if any work has considered how such devices might be employed for the purposes of digital logic, which will ultimately help to determine the “fate” of these new device technologies. For example, scientists have not yet described how to leverage the use of SymFETs in sequential circuits. Therefore, it is both important and desirable to utilize new SymFET-based devices that are superior to CMOS designs with regards to compactness, speed, and/or energy efficiency.

[0003] Until now, little has been done in the way of designing circuits comprised of SymFETs and other devices with similar graphene-insulator-graphene structures. New topologies involving such devices can benefit from unique I-V curves. Known attempts to incorporate graphene-insulator-graphene structures to date have not proven helpful. For example, one recent gate design uses BiSFETs at a supply voltage of 25 millivolts (mV), but a 25 mV supply is likely to prove challenging when considering supply, substrate, and device noises, where, in practice, the ripple on supply rails often amounts to a few tens of mV. On

the other hand, some researchers have proposed a static random-access memory (SRAM) cell without access transistors. Due to the negative differential resistance (NDR) of that device, the circuit is bistable while having only two transistors as opposed to four in a similar CMOS SRAM cell.

[0004] Therefore, a need exists for several new Boolean gates that are practical and take advantage of unique I-V curves. Even simple gates, such as an inverter, for example, exhibit new properties (*i.e.*, hysteresis) when realized by way of SymFETs. The present disclosure concerns several new circuits with a topology different from those of popular CMOS designs. To quantify the performance of these new SymFET-based gates and determine their potential benefits, the present disclosure benchmarks these gates against existing CMOS-functional equivalents. The present disclosure also examines the relationship between SymFET and resonant tunneling diodes (RTDs) to verify the feasibility of adopting RTD-based circuits. In turn, the present disclosure will aid in developing new circuits with other SymFET-like transistors and also assist in improving future transistors.

Brief Description of the Drawings

[0005] FIG. 1A is an exploded graphic perspective view of an example SymFET.

[0006] FIG. 1B is a circuit diagram of the example SymFET of FIG. 1A.

[0007] FIG. 2 is a chart plotting current against voltage for various voltages applied to top and back gates of the example SymFET of FIGS. 1A – 1B.

[0008] FIG. 3A is a circuit diagram of an example SymFET-based inverter.

[0009] FIG. 3B is chart showing voltage in/out signals of the example SymFET-based inverter of FIG. 3A when loaded by a fanout-of-4 (FO4) inverter at $V_{DD} = 0.3$ V.

[0010] FIGS. 4A – 4C together are a series of charts showing the variation in currents at first and second transistors T_1 , T_2 of the example SymFET-based inverter of FIG. 3A where $V_{DD} = 0.3$ V, with quiescent points shown by a star, along with a chart in FIG. 4D plotting the transfer characteristics of the SymFET-based inverter of FIG. 3A.

[0011] FIGS. 5A – 5C together are a series of charts showing the variation in currents at first and second transistors T_1 , T_2 of the example SymFET-based inverter of FIG. 3A where $V_{DD} = 0.5$ V, with quiescent points shown by a star, along with a chart in FIG. 5D plotting the transfer characteristics of the SymFET-based inverter of FIG. 3A.

[0012] FIG. 6A shows a circuit diagram for an example Schmitt-trigger inverter.

[0013] FIG. 6B shows a chart plotting the drain current of a first transistor T_1 of the example Schmitt-trigger inverter against the same current based on the example SymFET-based inverter of FIG. 3A.

[0014] FIG. 6C shows a chart indicating the transfer characteristics of the example Schmitt-trigger inverter for $V_{DD} = 0.3$ V.

[0015] FIG. 7A is a circuit diagram of an example SymFET-based buffer.

[0016] FIG. 7B is a chart plotting voltage out against voltage in for the example SymFET-based buffer of FIG. 7A.

[0017] FIG. 8A is a circuit diagram of another example SymFET-based buffer designed to eliminate or at least minimize hysteresis.

[0018] FIG. 8B is a chart plotting voltage out against voltage in for the example SymFET-based buffer of FIG. 8A.

[0019] FIG. 9A is a circuit diagram of an example SymFET-based NAND gate.

[0020] FIG. 9B is a circuit diagram of a pseudo-SymFET logic style gate.

[0021] FIG. 9C is a chart plotting the I-V curve of the pseudo-SymFET logic style gate of FIG. 9B, where a nonlinear load resistance was implemented by SymFET.

[0022] FIG. 9D is a circuit diagram of an example pseudo-SymFET OR gate.

[0023] FIGS. 9E – 9F together show input and output charts, where the output of a pseudo-SymFET NOR gate is compared with the output of a gate with linear resistive load (*i.e.*, $V_{DD} = 0.4$ V; size of a third transistor T_3 is twice that of first and second transistors T_1 , T_2 ; load is a FO4 inverter).

[0024] FIG. 10A is a circuit diagram of a dynamic pseudo-SymFET NOR gate.

[0025] FIGS. 10B – 10D together show the simulated input/output of a NOR gate, where the size of T_3 is three times that of first and second transistors T_1 , T_2 and the load is a FO4 inverter.

[0026] FIG. 11A is a circuit diagram for a SymFET-based IMPLY gate.

[0027] FIG. 11B is a circuit diagram for a CMOS-based IMPLY gate.

[0028] FIG. 11C shows a corresponding truth table applicable to both the SymFET- and CMOS-based IMPLY gates of FIGS. 11A – 11B.

[0029] FIGS. 11D – 11F together show several charts plotting input and output for the respective SymFET- and CMOS-based IMPLY gates of FIGS. 11A – 11B.

[0030] FIG. 12A is a circuit diagram of an example NAND-based XOR gate.

[0031] FIG. 12B is a circuit diagram of an example IMPLY-based XOR gate.

[0032] FIG. 13A is a circuit diagram of an example resistive network, which serves as the basis for a MAJORITY gate.

[0033] FIG. 13B is a circuit diagram of an example SymFET-based MAJORITY gate.

[0034] FIG. 13D is a corresponding truth table for the example SymFET-based MAJORITY gate of FIG. 13B.

[0035] FIGS. 13D – 13E together show an input voltage chart and an output voltage chart based on the example SymFET-based MAJORITY gate of FIG. 13B.

[0036] FIG. 13F is a chart plotting the absolute values of current versus voltage for a nonlinear SymFET-based resistor.

[0037] FIG. 13G is a chart plotting total current versus voltage for the example SymFET-based MAJORITY gate of FIG. 13B.

[0038] FIG. 14 is an exploded graphic perspective view of an example diode-connected SymFET.

[0039] FIG. 15 is a circuit diagram of an example full adder cell.

[0040] FIG. 16A is a circuit diagram of an example SymFET-based reset/set (RS) latch.

[0041] FIG. 16B is a model showing how two transistors of the example SymFET-based RS latch of FIG. 16A are being used.

[0042] FIG. 16C is a chart plotting the current through a first and second transistor T_1 , T_2 of the example SymFET-based RS latch of FIG. 16A against output voltage when $A = 0$ and $B = V_{DD}$.

[0043] FIG. 16D is a truth table of the example SymFET-based RS latch of FIG. 16A.

[0044] FIG. 17A is a circuit diagram of an RS latch with an inverter.

[0045] FIG. 17B is a truth table for the RS latch of FIG. 17A.

[0046] FIG. 17C is a circuit diagram for a conventional RS latch having eight transistors.

[0047] FIGS. 18A – 18B show a simulated transient response of the example SymFET-based RS latch of FIG. 16A.

[0048] FIG. 19A is a circuit diagram of another example SymFET-based latch.

[0049] FIG. 19B is a truth table for the example SymFET-based latch of FIG. 19A.

[0050] FIGS. 19C – 19E together show several charts plotting current versus voltage at different input values for a latch without speedup transistors.

[0051] FIGS. 20A – 20C together show input and output voltages for latches with and without speedup.

[0052] FIGS. 21A – 21C together show the I-V curves of transistors from the example SymFET-based latch of FIG. 19A where $I_{D13} = I_{DS1} + I_{DS3}$ and $I_{S24} = I_{SD2} + I_{SD4}$.

- [0053] FIG. 22A is a circuit diagram of an RTD-like device based on SymFETs.
- [0054] FIG. 22B is a chart plotting the sum of the currents in two SymFETs T_1 , T_2 of the device of FIG. 22A against input voltage.
- [0055] FIG. 23A is a circuit diagram of an RTD-based MOBILE inverter/DFF.
- [0056] FIGS. 23B – 23D show several charts plotting current versus output voltage for a low A input as a clocked input gradually increases.
- [0057] FIG. 24A is a circuit diagram of an example SymFET-based MOBILE device.
- [0058] FIG. 24B is a chart plotting input through the SymFETs against output voltage of the SymFET-based MOBILE device of FIG. 24A for a high clock input.
- [0059] FIG. 24C is a chart similar to FIG. 24B, but shows a combined current of $I_{DS1} + I_{DS2}$.
- [0060] FIGS. 24D – 24F together show input/output waveforms of the example MOBILE circuit of FIG. 24A showing that the output F is high only if input A is low at the rising edge of the clocked input.
- [0061] FIG. 25A is a chart showing power dissipation of a SymFET-based inverter at 100 MHz with an FO4 inverter as load.
- [0062] FIG. 25B is a chart showing the propagation delay of a SymFET-based inverter measured from 50% input to 50% output.
- [0063] FIG. 25C is a chart illustrating the delay-energy relationship at different supply voltages.
- [0064] FIG. 25D is a chart showing energy dissipation of SymFET-based inverters (squares) in comparison with that of CMOS-based inverters at 100 MHz.

Detailed Description

[0065] The following description of example devices is not intended to limit the scope of the description to the precise form or forms detailed herein. Instead the following description is intended to be illustrative so that others may follow its teachings.

Device Description and Model

[0066] FIG. 1A shows a physical structure of an example SymFET 100 along with an electrical diagram 102 in FIG. 1B representing the example SymFET 100. In some examples, operation of the SymFET 100 shown in FIGS. 1A – 1B is summarized as follows. Tunneling occurs between two example graphene layers 104, 106 separated by an example thin insulator 108. The voltages associated with an example top-gate (TG) 110, which is disposed above an example first oxide layer 112, and an example back-gate (BG) 114, which is disposed below an example second oxide layer 116, change the carrier type/density of the graphene layers

104, 106 by electrostatic field. In the example, shown in FIGS. 1A – 1B, the graphene layer 104 is associated with a source 118, while the graphene layer 106 is associated with a drain 120. Because tunneling probability depends on occupied/empty states on both sides of the tunneling barrier, voltages of the top and back gates 110, 114 can modulate the drain-source current (I_{DS}). In addition, FIG. 2 illustrates I-V characteristics 200 of the example SymFET 100 shown in FIGS. 1A – 1B under various load conditions. Peak currents for each respective I_{DS} – drain-source voltage (V_{DS}) curve depend on the voltages at the top and back gates 110, 114.

[0067] To build a tabular representation of I_{DS} in terms of the terminal voltages for a device constructed with undoped graphene sheets, the present disclosure employs the previously-published analytical models described in P. Zhao et al., “SymFET: A Proposed Symmetric Graphene Tunneling Field-Effect Transistor,” *IEEE Trans. Electron Devices*, vol. 60, no. 3, pp. 951-957 (Mar. 2013), R.M. Feenstra et al., “Single-particle tunneling in doped graphene-insulator-graphene junctions,” *J. Appl. Phys.*, vol. 111, no. 4, p. 043711 (Apr. 2012), and S.C. de la Barrera et al., “Theory of graphene-insulator-graphene tunnel junctions,” *J. Vac. Sci. Technol. B*, vol. 32, 04E101, (July / Aug. 2014), all of which are hereby incorporated by reference in their entireties. The results are incorporated in a Verilog-A model such that the 4-terminal device can be used in simulation program with integrated circuit emphasis (SPICE) simulations.

[0068] In some examples, the device capacitances are constant and are based on planar capacitance between the TG 110 and the source 118, between the BG 114 and the drain 120, and between the drain 120 and the source 118. Moreover, in the examples disclosed below, both the TG 110 and the BG 114 have an effective oxide thickness (EOT) of 1.2 nanometers (nm). In some examples, the thin insulator 108 acting as a tunneling barrier is comprised of 1.34 nm-thick Boron-Nitride (*i.e.*, 4 layers of h-BN). Still further, coherence length determines what percentage of the graphene layers 104, 106 are structurally perfect. And in these examples, the active device area is assumed to be a square and the coherence length is 0.75 times the square side. This follows because researchers are generally limited to large graphene sheets, which prevents researchers from fully accounting for edge effects. Therefore, unless otherwise stated, the minimum-size transistor in the examples below has been conservatively selected to be 100 nm-by-100 nm, though considerations for scaling to smaller dimensions are also disclosed below.

[0069] Yet further, those having ordinary skill in the art will recognize that the aforementioned design parameters are merely examples and that the characteristics of the

disclosed devices may vary. For instance, in some examples the disclosed devices may be asymmetric with no BG, even though N-type and P-type transistors may be required. In other words, to achieve the same functionalities, a SymFET with a constant V_{BG} can be replaced with a device without a BG but with a doped drain (or source).

Inverter / Buffer

[0070] Turning now to FIG. 3A, an example inverter circuit 300 having a first SymFET T_1 and a second SymFET T_2 is shown. If a bias voltage (V_B) is set close to half of a positive supply voltage (V_{DD}) of the second SymFET T_2 (*i.e.*, $V_{DD} / 2$), then for an input voltage (V_{in}) close to zero the first SymFET T_1 is off because a top gate voltage (V_{TG}) minus a back gate voltage (V_{BG}) differential is negative ($V_{TG} - V_{BG} < 0$), and the second SymFET T_2 is on. As a result, an output voltage (V_{out}) will be close to the positive supply voltage V_{DD} of the second SymFET T_2 . As shown in a voltage-time chart 302 in FIG. 3B, a high-level input leads to a low-level output. FIG. 3B illustrates the relationship between input and output signals of the example inverter circuit 300 when loaded by a fanout-of-4 (FO4) inverter at $V_{DD} = 0.3$ V. Furthermore, FIGS. 4A – 4C illustrate how stable quiescent operating points 400 and V_{out} of the example inverter circuit 300 can be determined using a characteristic of transistors where V_{DD} is small. In particular, FIGS. 4A – 4C show the respective currents through T_1 and T_2 at various input voltages V_{in} when $V_{DD} = 0.3$ V. FIG. 4D shows a chart 402 illustrating the transfer characteristics of the example inverter 300 when $V_{DD} = 0.3$ V. The operation of the example inverter circuit 300 is similar to that of a CMOS inverter. Notably, the current in the off transistor is not zero, and consequently the output levels will not be equal to ground and V_{DD} . This is no problem so long as the noise margin is sufficiently large, namely, where V_{DD} is greater than 0.2 V. Still, the leakage current results in static power dissipation.

[0071] FIGS. 5A – 5D are similar to FIGS. 4A – 4D, but show stable quiescent operating points 500 of the example inverter circuit 300 when V_{DD} is somewhat higher at 0.5 V. FIGS. 5A – 5C show the respective currents through T_1 and T_2 at various input voltages V_{in} when $V_{DD} = 0.5$ V. When $V_{in} = V_{DD} / 2$, the example inverter circuit 300 becomes bistable due to NDR. More specifically, when the input signal V_{in} is close to $V_{DD} / 2$, the circuit 300 has two possible outputs for the same input when $V_{DD} = 0.5$ V. This condition is also shown in a chart 502 plotting V_{out} against V_{in} where $V_{DD} = 0.5$ V. FIG. 5C, moreover, also shows a third possible, but unstable, point where $I_{DS1} = I_{DS2}$ when $V_{in} = 0.6 V_{DD}$. This point is unstable because it lies on the NDR region of the I-V curve. The bistability manifests itself as the hysteresis in the characteristic of the gate, resulting in a Schmitt-trigger inverter. For example, when output is high, and V_{in} is increasing, the output remains high even for an input

close to $V_{DD}/2$. But when input approaches roughly $0.6 V_{DD}$, the circuit 300 changes from bistable to monostable and the output V_{out} toggles to a low level, as shown in the chart 502.

[0072] In some instances, a low-voltage Schmitt-trigger inverter may be required. Therefore, in some examples, a positive feedback 600 from a BG 602 to a drain 604 can be incorporated into an example Schmitt-trigger inverter circuit 606 as shown in FIG. 6A. As shown in an $I_{out} - V_{out}$ curve 608 of FIG. 6B, the feedback 600 brings the current of transistors T_1 and T_2 down at large $|V_{DS}|$ and makes the $I_{out} - V_{out}$ curve 608 similar to that of FIGS. 4A – 4C, where $V_{in} = V_{DD}/2$. The attained hysteresis for a small V_{DD} of 0.3V is observed in a chart 610 plotting V_{out} against V_{in} in FIG. 6C. As those having ordinary skill in the art will recognize, the difference between the example circuit 300 in FIG. 3A and the example circuit 606 in FIG. 6A can be explained when the input is increasing and just passes $V_{DD}/2$. For the circuit 300, the value of $V_{TG1} - V_{BG1} = V_{in} - V_{DD}/2$ becomes positive and hence I_{DS1} becomes larger than I_{DS2} , whereas for the circuit 606, $V_{TG} - V_{BG}$ of T_1 is still negative for $V_{in} \approx V_{DD}/2$ as the BG 602 is connected to an output node 612 coupled to V_{out} .

[0073] An example buffer 700 is illustrated in FIG. 7A. Compared to an inverter, the role of TG and BG terminals of transistors T_1 and T_2 are interchanged in the example buffer 700. The buffer 700 can also exhibit hysteresis in its characteristic, as shown in a chart 702 plotting V_{out} against V_{in} . If the hysteresis is undesirable, an example circuit 800 shown in FIG. 8A may be used instead. In the example circuit 800, added negative feedback 802 eliminates the bistability evident in the example buffer 700. A chart 804 plotting V_{out} against V_{in} demonstrates that the example circuit 800 does not involve hysteresis. Further, those having ordinary skill in the art will recognize that with static CMOS logic it is not possible to construct circuits similar to those illustrated in FIGS. 7A and 8A. As a result, two inverters are often cascaded to build a buffer.

NAND / NOR / IMPLY

[0074] An example NAND gate 900 is shown in FIG. 9A. Although the example NAND gate 900 provides desirable functionality, it is not any less complex than its static CMOS counterpart. That said, more compact gates are made possible by using the nonlinear behavior of SymFETs to build pseudo-SymFET gates (similar to pseudo-nMOS style logic).

[0075] In FIG. 9B, an example SymFET 902 with feedback 904 is used as the load. When compared with the conventional NAND gate 900 shown in FIG. 9A using conventional logic, the SymFET 902 using pseudo-SymFET logic lowers the number of transistors required. For instance, if a conventional static CMOS circuit has N transistors, a pseudo-SymFET circuit will only require $(N/2) + 1$ transistors. Further, the input capacitance of the gate is also cut

by one half. The benefit of using a SymFET load compared with a linear resistor can be explained by way of an I-V curve 906 having a bell-curve shape 908 shown in FIG. 9C. In this example, the current passing through the device will be small (close to I_{V1}) for a low output level. In contrast, for a resistor, the current will be the largest when the output of the gate is low, resulting in large leakage. Similarly, in pseudo-N-type metal-oxide-semiconductor (pseudo-NMOS) circuits, the current is the largest when the output signal is low, since MOSFETs do not have NDR.

[0076] An example pseudo-SymFET NOR gate 910 having three SymFETs T_1 , T_2 , and T_3 is shown in FIG. 9D. If the third SymFET T_3 is replaced with a 200 k Ω resistor, a similar output DC level and swing is achieved as depicted in FIGS. 9E – 9F. However, the average power dissipation when using SymFET and resistive loads is 0.16 μ W and 0.51 μ W, respectively, for the input waveform shown in FIGS. 9E – 9F. Hence, there is more significant leakage when a resistor is employed. More significant improvements with respect to power would be possible if I_{V1} was reduced. However, a small I_{V1} also has an adverse effect, namely, when the output changes from low to high, the load capacitance is initially charged with a current of $\approx I_{V1}$. This results in a slow rise time as seen in FIGS. 9E – 9F, wherein the low-to-high delay with the SymFET-based and resistor-based loads is 1.6 ns and 0.46 ns, respectively.

[0077] To enhance the speed of the pseudo-SymFET gates, one might think to increase the size of the load transistor to have a larger I_{V1} . However, this could result in an incorrect output because the pull-down network might not be able to bring the output voltage down from a high state. Instead, in some examples a clocked-supply is used, as in resistance thermometer detector (RTD)-based circuits. The resulting circuit, which is referred to herein as “dynamic pseudo-SymFET logic” 1000 and includes three SymFETs T_1 , T_2 , and T_3 , is shown in FIG. 10. In this example, an output signal is reset to zero during each clock cycle. The delay of the dynamic pseudo-SymFET circuit 1000 is reduced to 0.39 ns, whereas the power consumed from a clock input CLK is 0.12 μ W. As shown in FIGS. 10B – 10D, if the size of the third SymFET T_3 is three times that of the first and second SymFETs T_1 and T_2 , the pseudo-SymFET NOR gate 910 of FIG 9D can produce a wrong output, but the dynamic pseudo-SymFET gate 1000 functions correctly. Besides a larger third SymFET T_3 , another aspect of the dynamic pseudo-SymFET logic 1000 helps improve the rise time of the circuit. More specifically, as the clock input CLK is rising, an output node is simultaneously being charged. When the clock input CLK reaches V_{DD} , the output voltage is somewhat higher than zero, and $|V_{DS3}| = V_R$ is smaller than V_{DD} . As a result, I_{DS3} will be larger than I_{V1} (*see, e.g.,*

FIG. 9C). Subsequently, the output node will be charged by a current larger than that of FIG. 9D.

[0078] The IMPLY gate is another universal gate besides NAND and NOR that may be implemented with SymFETs. To that end, FIG. 11A shows an example IMPLY gate 1100 implemented by way of first and second SymFETs T_1 and T_2 , whereas FIG. 11B shows an example IMPLY gate 1102 based on CMOS elements. In both circuits, an output F can be low only when A is high and B is low, and therefore the first SymFET T_1 is on, as reflected in a truth table 1104 of FIG. 11C. However, unlike the SymFET-based IMPLY gate 1100, the CMOS-based IMPLY gate 1102 has a shortcoming that often precludes its usage.

Specifically, when A is high and B transitions from low to high, the charging of the output capacitive load is performed via a CMOS transistor T_1 in FIG. 11B. Moreover, as F increases and approaches $V_{DD} - V_{TH}$ (*i.e.*, where V_{TH} is the threshold voltage), the CMOS transistor T_1 is almost turned off, causing incomplete settling. By contrast, the SymFET-based IMPLY gate 1100 of FIG. 11A does not have this problem because it does not have a large V_{TH} . This much is demonstrated in FIGS. 11D – 11F, where the functionality of the SymFET-based IMPLY gate 1100 at a V_{DD} of 0.3 V, and 130-nm CMOS-based IMPLY gate 1102 at a V_{DD} of 1 V are examined. In short, the SymFET-based IMPLY gate 1100 does not have this disadvantage inherent with the CMOS-based IMPLY gate 1102. One advantage of the example SymFET-based IMPLY gate 1100 is its fewer transistors in comparison with NAND or NOR gates. Traditional realization of IMPLY gates requires an inverter and a NAND gate, amounting to six transistors. For instance, two XOR gates 1200, 1202 are shown in FIGS. 12A – 12B. The realization using the NAND-based design in FIG. 12A has sixteen transistors, whereas the IMPLY-based design in FIG. 12B has eight transistors.

MAJORITY Gate

[0079] Another useful gate that is popular at least in the context of cellular automata and spintronics is the MAJORITY gate. It is possible to construct a SymFET-based MAJORITY gate with as few as three devices. The starting point for the SymFET-based MAJORITY gate is an example resistive network 1300 shown in FIG. 13A. If $V_{in1} = V_{in2} = 0$ V and $V_{in3} = V_{DD}$ in the example resistive network 1300, the output voltage V_{out} will be as follows:

$$V_{out} = V_{DD} (R_1 \parallel R_2) / [(R_1 \parallel R_2) + R_3] = V_{DD} / 3$$

[0080] To convert the circuit into a MAJORITY gate for this input combination, the output voltage level V_{out} should be brought close to zero. The voltage across R_1 and R_2 is smaller than that of R_3 , and if resistors are replaced with nonlinear elements whose resistances increase with voltage, R_3 will become larger than R_1 and R_2 and the output V_{out} will be

pushed toward ground. An example SymFET-based circuit 1302 of FIG. 13B is designed for this purpose. If input levels are 0 and V_{DD} , both gates of first, second, and third SymFETs T_1 , T_2 , T_3 are set to $V_B = V_{DD} / 2$ (see the case of $V_{TG} = V_{BG}$ in FIG. 2 for the I-V curve of the device). The transient response of the example SymFET-based circuit 1302 when loaded with an FO4 inverter is shown in FIGS. 13D – 13E. When both V_{inB} and V_{inC} are zero, an output F is also zero independent of input V_{inA} . Moreover, V_{inA} changes the output F when one and only one of the V_{inB} or V_{inC} inputs is high. Here, each of the transistors T_1 , T_2 , T_3 behaves like a symmetric nonlinear resistor with an I_{DS} - V_{DS} curve 1304 like that illustrated in FIG. 13F. If $V_{inA} = V_{inB} = V_{inC} = 0$ V, the output F will be zero since there is no path to charge the output F. Similarly when all of the inputs V_{inA} , V_{inB} , and V_{inC} are set to V_{DD} , the output voltage F will equal V_{DD} as well. In another example, if the inputs $V_{inA} = V_{inB} = 0$ V and $V_{inC} = V_{DD}$ (*i.e.*, 001), T_3 has a large $|V_{DS}|$, and a large resistance as seen in FIG. 13F.

[0081] Further, FIG. 13G provides still more insight as to the operation of the example SymFET-based circuit 1302. FIG. 13G shows a total current 1306 discharging an output node ($I_{SD1} + I_{SD2} = 2 \times I_{SD1}$) and a current 1308 charging the output (I_{DS3}). An intersection 1310 of the two curves 1306, 1308 gives the output voltage F, which is close to zero as desired. The quiescent current of the transistors T_1 , T_2 , T_3 is $I_{SD1} = I_{SD2} \approx I_{v1} / 2$ and $I_{DS3} \approx I_{v1}$. Even though a small I_{v1} is ideal with respect to power dissipation considerations, the two curves should not have more than one intersection for correct operation. This means that in most examples I_{v1} will be greater than $I_{pk} / 2$.

[0082] An example diode-connected SymFET 1400 (*e.g.*, where the TG and the BG are shorted, respectively, to the drain and the source) may in some instances exhibit the same behavior as shown in FIG. 13F. This in turn eliminates the need for V_{inB} . Even a single graphene-insulator-graphene junction without any gate exhibits this characteristic, and hence the example diode-connected SymFET 1400 of FIG. 14 can be utilized as a MAJORITY gate. Combining inverters and MAJORITY gates enables the creation of an example full adder cell 1500, as shown in FIG. 15. The outputs of the MAJORITY gates are buffered to isolate the gates from each other. The example full adder cell circuit 1500 is designed to be cascadable by providing output carry (C_o) and its inverted signal ($\overline{C_o}$). The example full adder cell circuit 1500 has fifteen transistors in total as opposed to twenty-eight in a conventional CMOS adder cell such as the Mirror Adder.

[0083] The next few topologies for sequential circuit design utilizing SymFETs can offer low transistor count and low dynamic power dissipation.

RS Latch

[0084] FIG. 16A shows an example SymFET-based reset/set (RS) latch 1600 that includes two-transistor circuits T_1 and T_2 . Here, two SymFETs T_1 and T_2 are used like nonlinear resistors R_1 and R_2 as shown in a circuit 1602 of FIG. 16B. If inputs A and B in FIG. 16B have the same logic level, an output F will have the same level, independent of whether the resistors R_1 and R_2 are linear or nonlinear. If one input (*e.g.*, A) is low and the other one (*e.g.*, B) is high, the circuit 1602 is bistable and, as shown in a chart 1604 in FIG. 16C, has two stable quiescent points 1606, 1608. I-V curves 1610, 1612 of the two transistors T_1 , T_2 have three intersections, one intersection 1614 of which is unstable because it lies on an NDR region of the I-V curves 1610, 1612. As a result, the output voltage F can be either low or high when one and only one of the two inputs A, B is high, and is determined by its previous state.

[0085] A truth table 1616 of the example SymFET-based RS latch 1600 is represented in FIG. 16D, where “F*” refers to the previous “F” value. The truth table 1616 of the SymFET-based RS latch 1600 resembles that of a latch. In fact, adding an inverter 1700 to the SymFET-based RS latch 1600 of FIG. 16A results in an RS latch 1702 as shown in FIG. 17A that is known in the art. A truth table 1704 corresponding to the RS latch 1702 is shown in FIG. 17B. In addition, FIG. 17C shows a conventional RS latch 1706, which has eight transistors. By way of comparison, the example SymFET-based RS latch 1600 has only four transistors. A simulated transient response 1800 of the example SymFET-based RS latch 1600 is shown in FIGS. 18A – 18B, where a 10%-to-90% rise time is 0.8 ns.

Latch 2

[0086] FIG. 19A shows another example SymFET-based latch 1900, with a corresponding truth table 1902 in FIG. 19B. First and second transistors T_1 , T_2 form a core part of the example SymFET-based latch 1900, whereas third and fourth transistors T_3 , T_4 are used primarily to speedup the example SymFET-based latch 1900. As shown in the truth table 1902, the SymFET-based latch 1900 has three valid input combinations, although a combination where $R = 0$ and $\overline{S} = 1$ is not allowed. Operation of the SymFET-based latch 1900 (without speedup) can be explained using FIGS. 19C – 19E. For example, if $R = \overline{S} = 0$, then the first transistor T_1 is off and the second transistor T_2 is on. Consequently, output capacitance is charged, and a final output voltage V_Q is close to V_{DD} . Further, if $R = 1$ and $\overline{S} = 0$, the SymFET-based latch 1900 is bistable. Depending on the previous Q, the output voltage V_Q can be either low or high.

[0087] FIGS. 20A – 20C shows transient simulation results 2000 of the SymFET-based latch 1900 without the speedup transistors T_3 , T_4 . The transient simulation results 2000 reveal large rise and fall times. The reason behind the large rise and fall times is the small charge and discharge current. For instance, consider a case where output is initially low and then input is set to $R = \bar{S} = 0$. The output capacitance must be charged, but the charging current (*i.e.*, the difference between the currents of T_1 and T_2 ($I_2 - I_1$ in FIGS. 19C – 19E)) is small for a large range of output voltages.

[0088] To accelerate the transient response of the SymFET-based latch 1900, the third and fourth transistors T_3 , T_4 are employed. In some examples, the BGs of the third and fourth transistors T_3 , T_4 are connected to their respective source terminals, and therefore $V_{TG3} - V_{BG3}$ is larger than $V_{TG1} - V_{BG1}$ for high-level R . This shifts the peak current of an $I_{DS} - V_{DS}$ curve of the third transistor T_3 to a higher V_{DS} . The sum currents $I_{DS1} + I_{DS3}$ and $I_{SD2} + I_{SD4}$ will have two peaks, as shown in FIGS. 21A – 21C. Comparing FIGS. 19C – 19E (*i.e.*, the I-V curve of the first and second transistors T_1 and T_2 with no speedup transistors) and FIGS. 21A – 21C (*i.e.*, the I-V curve of transistors where $I_{D13} = I_{DS1} + I_{DS3}$ and $I_{S24} = I_{SD2} + I_{SD4}$) shows that operation of the SymFET-based latch 1900 after adding the speedup transistors T_3 , T_4 does not change in principle. The main difference is that charge and discharge currents will be higher. In the aforementioned example, wherein an output node was supposed to be charged, adding the fourth transistor T_4 increases the charging current from $I_2 - I_1$ to $I_{24} - I_1$ at certain output voltages (*i.e.*, $I_{24} = I_2 + I_4$). On average, the charge current is significantly larger. The effect of speedup transistors can also be seen in FIGS. 20A – 20C, where the rise time of the SymFET-based latch 1900 is reduced from 5.1 ns to 0.83 ns after adding speedup transistors.

Mobile DFF

[0089] Furthermore, some features of SymFETs resemble that of resistance temperature detectors (RTDs), and SymFETs can achieve RTD-like behavior. FIG. 22A shows an example circuit 2200 built by placing two SymFETs T_1 , T_2 in parallel. As such, the current passing through the circuit 2200 is the sum of the currents in the first and second SymFETs T_1 , T_2 . FIG. 22B shows a chart 2202 plotting input current I_i against input voltage V_i . In this example, each of the transistors T_1 , T_2 contributes to peaks 2204, 2206 in a total current 2208 and an N-shaped curve expected from an RTD is obtained for a properly designated voltage range. Those having ordinary skill in the art will appreciate that the shape of total current curve 2208 can be tuned by adjusting the bias voltages V_{B1} , V_{B2} in the circuit 2200.

[0090] That said, there are still other ways to achieve this functionality without replacing an RTD with two SymFETs. By way of example, one of the most popular RTD-based logic elements is a monostable–bistable transition logic element (MOBILE). MOBILES have a self-latching property. For instance, a circuit 2300 shown in FIG. 23 works both as an inverter and as an edge-triggered flip-flop (DFF). The example circuit 2300 includes a switch 2302, implemented by a transistor, and three RTDs D_1 , D_2 , and D_3 , which should be properly sized such that their peak currents satisfy the following conditions:

$$I_{pk2} < I_{pk3} \quad \text{and} \quad I_{pk1} + I_{pk2} > I_{pk3}.$$

[0091] In this example, operation of the circuit 2300 relies heavily on NDR regions of the three RTDs D_1 , D_2 , and D_3 , as reflected in charts 2304, 2306, 2308 of FIGS. 23B – 23D. When a clock input CLK is a small voltage, the circuit 2300 is monostable and an output F is low. As the clock input CLK increases (*e.g.*, from much less than V_{DD} to $2 \times V_{pk}$ to V_{DD} shown in FIGS. 23B – 23D), a driving current curve ($I_{D1}+I_{D2}$) will intersect with a load current curve (I_{D3}) in an NDR region, resulting in metastability. When the clock input CLK becomes high enough, the output reaches one of two stable points. The example shown in FIGS. 23B – 23D corresponds to a low A (*e.g.*, $I_{D1} = 0$) and a high final output voltage.

[0092] Still further, an example SymFET-based MOBILE 2400 is shown in FIG. 24A. A first SymFET T_1 acts as both the switch A and the first RTD D_1 from FIG. 23A. Moreover, a fourth SymFET T_4 may be omitted in some examples, but utilized in others. The fourth SymFET T_4 helps to discharge the output faster when a clock input CLK switches from high to low. Proper operation of the example SymFET-based MOBILE circuit 2400 depends on sizing of the first, second, and third SymFETs T_1 , T_2 , T_3 as well as bias voltages (V_{B1-2}). In some examples, there are many ways to satisfy the conditions that $I_{pk2} < I_{pk3}$ and that $I_{pk1} + I_{pk2} > I_{pk3}$. In the example SymFET-based MOBILE 2400 here, the second and third SymFETs T_2 , T_3 are minimum-size transistors, while in other examples they may be larger. Nonetheless, when input is low, I_{DS1} is negligible. $V_{DD} - V_{B2}$ is positive (0.3 V), but the gate voltages of the second SymFET T_2 are both grounded. This insures that a peak current of the second SymFET T_2 is smaller than that of the third SymFET T_3 as desired ($I_{pk2} < I_{pk3}$). Further, V_{B1} is selected to be $V_{IH} - 0.3$ V so that the gate differential of T_1 and T_3 are equal, when input is high. The size of the second SymFET T_2 is twice that of the first SymFET T_1 and, therefore, a peak current of the second SymFET T_2 is higher than that of the third SymFET T_3 . This in turn insures that a high-level input will result in a low-level output. FIGS. 24B and 24C show current through the SymFETs of the MOBILE circuit 2400 for a

high clock input CLK (*e.g.*, equal to $V_{DD} = 1$ V). The SymFET-based MOBILE circuit 2400 is bistable for both input logic levels.

[0093] With reference now to FIGS. 24D – 24F, input/output waveforms 2402 of the example MOBILE circuit 2400 are shown. Input levels have been selected to be 0.1 V and 0.7 V, similar to worst-case output levels. Those having ordinary skill in the art will understand that altering A does not change the output, even when the clock input CLK is high.

Benchmarking

[0094] The quantitative performance of the aforementioned example SymFET-based gates was evaluated using SPICE simulations. As shown below, Table I compares the metrics of several inverters and buffers in terms of peak-to-peak output swing ($V_{o,pp}$), propagation delay (T_{pd}), average dynamic energy per output switching (E_{DYN}), and static power dissipation (P_{STAT}).

TABLE I. PERFORMANCE OF INVERTERS/BUFFERS

Circuit	$V_{o,pp}$ (V)	T_{pd} (ns)	T_{rise}, T_{fall} (ns)	E_{DYN} (fJ)	P_{STAT} (nW)
Inv. FIG 3A	0.25	0.28	0.64	0.13	71
Inv. FIG. 6A	0.19	0.32	0.61	0.1	45
Buf. FIG 7A	0.17	0.20	1.3	0.08	68
Buf. FIG. 8A	0.13	0.13	0.85	0.03	120
Inv. FIG. 9D*	0.23	0.91	1.5, 0.83	0.15	68
Inv. FIG. 9A*	0.22	0.29†	0.7, 0.57	0.12/.07‡	62

*: without T2. †: from CLK to F (from A to F for others).

‡: depends on capability of CLK to absorb power (see the text).

Note: all simulations are done with a FO4 inverter of FIG. 3A as driver and load of the gate under test at $V_{DD} = 0.3$ V (= high level of CLK). Rise/fall times (T_{rise} , T_{fall}) are measured from 10% to 90% of the output levels.

[0095] Some of the example gates have a smaller output swing (and hence a smaller noise margin), which results in lower dynamic energy dissipation. As in CMOS designs, each gate might be suitable for a certain application. For example, the example inverter of FIG. 9 has a

larger delay compared with that in FIG. 3A, but also has a smaller input capacitance. In another example, the clocked inverter of FIG. 10A might be viewed as an adiabatic circuit. That is, when the clocked input CLK goes low, the charge stored at the output node F will return back to the value at the clock input CLK node. Depending on whether the clock input CLK generator circuitry is capable of absorbing this charge or simply directs it to ground, two different dynamic energy values are provided in Table I.

[0096] In Table II, the performances of three example SymFET-based adders based on conventional topology (mirror adder), a dynamic pseudo-SymFET design, and a MAJORITY gate are compared.

TABLE II. PERFORMANCE OF 1-BIT SYMFET-BASED FULL-ADDERS

	T_{pd} (ns)	E_{DYN} (fJ)	P_{STAT} (μ W)	P_{TOT} (μ W)	PDP (fJ)	Area* (μm^2)
Conventional (0.3 V)	1.4	0.4	0.64	0.72	1.0	0.64
Dyn. pseudo-Sym. (0.4V)	1.1	0.95	0.61	0.8	0.88	0.49
Majority (0.4V)	0.65	0.37	1.1	1.2	0.78	0.42

*: assuming total area (including wirings) is twice the area of transistors.

Note: In SPICE simulation, a 100 MHz signal is applied to A while B is Low and C_i is High. The adder is cascaded with a similar one.

[0097] For the purposes of Table II, a slightly higher supply voltage is used for the MAJORITY-based adder in order to have the same output swing in both circuits. The MAJORITY-based adder has a better power-delay product (PDP) and occupies less area, but has higher static power dissipation. Those having ordinary skill in the art will recognize that at this test frequency (i.e., 100 MHz), the power dissipation is dominated by leakage.

[0098] Likewise, it is informative to benchmark the performance of SymFET technologies against CMOS technologies. Due to the different structure of the SymFET, it is non-trivial to select a certain CMOS technology node for a comparison. In the examples that follow, a 100-nm SymFET device is compared with 90-nm and 130-nm CMOS technologies. According to a manual of several standard cell libraries for said technologies, the dynamic energy of the minimum-size inverter and full-adder cell are, respectively, 4 to 6 fJ and 10 to 20 fJ. The dynamic energy of a CMOS DFF is 20 to 30 fJ. Compared with the E_{DYN} in Tables I, II, and IV, the SymFET-based circuits are approximately one order of magnitude more energy efficient. This is especially impressive for the MOBILE DFF, which has a delay close to

those given for standard cell DFFs (around 0.1 ns). However, in some examples, the leakage of CMOS standard cells is smaller (in sub-nW range for low-leakage CMOS).

[0099] Moreover, an inverter of FIG. 3A was used as a basis for further comparison. The results shown in FIG. 25 involve a 100-nm SymFET device and a 130 nm CMOS device. All results belong to a minimum-size inverter that is both driven and loaded with FO4 inverters. More particularly, FIG. 25A shows power dissipation of a SymFET-based inverter. The dynamic power dissipation rapidly changes with supply (cf., CV^2). In this example, a relationship appears between propagation delay of the SymFET-based gate and V_{DD} , shown in FIG. 25B, which is quite different than the behavior of CMOS inverters. An explanation follows with reference back to FIG. 2. If V_{DD} (and consequently the gate voltage of the transistor) is large, the peak in the I_{DS} curve is pushed to higher V_{DS} values. This means that for a large V_{DD} , the current drive capability of the SymFET-based inverter is relatively small in a large output voltage range and the gate becomes slow. FIG. 25C shows both delay and energy at different supply voltages. In this example, the SymFET has a better performance-energy tradeoff, if the desired delay is not demanding.

[0100] Next, the performance of the inverters is compared at several technology nodes. The data for CMOS is from A. Stillmaker et al., "Toward more accurate scaling estimates of CMOS circuits from 180 nm to 22 nm," Technical Report ECE VCL 2011 4 VLSI Computation Lab, Univ. of Cali., Davis, <http://www.ece.ucdavis.edu/vcl/pubs>, which is hereby incorporated by reference in its entirety. The SymFET dimensions and other properties are given in Table III, wherein EOT is also reduced with device dimension to enhance the electrostatic control of the gates.

TABLE III. SYMFET SCALING

Dimensions	Gate Oxide	V_{DD}	Inverter delay
100nm-by-100nm	EOT = 1.2 nm	0.3 V	0.28 ns
50nm-by-50nm	EOT = 1.0 nm	0.36 V	0.49 ns
20nm-by-20nm	EOT = 0.7 nm	0.49 V	1.2 ns

[0101] As the SymFET area is reduced, its characteristic changes somewhat (off-current increases). To keep the voltage swings in a practical range (i.e., > 0.25 V), the supply voltage (Table III) was increased. When compared with the CMOS device in FIG. 25D, the SymFET exhibits more than an order of magnitude improvement in dynamic energy. One having ordinary skill in the art will recognize that if operation frequency increases, the impact of

leakage in total energy will be reduced and “Total” energy points will move toward “Dynamic” energy points. However, it is also possible to reduce the dynamic energy dissipation of CMOS gates by an order of magnitude by lowering VDD by a factor of 3.1, where the resulting VDD of 0.3 to 0.4 V would make their delay larger than that of the SymFET gates (see FIG. 25C). Consequently, SymFETs prove more energy efficient than CMOS at least when clock frequencies of a few hundred MHz and delays on the order of few tenths of nanoseconds are desired.

[0102] What’s more, FIG. 25D indicates that dynamic energy of the SymFET scales rapidly with device dimension. When the SymFET is scaled by λ (<1), its area and hence both capacitance and current drive are reduced by two. Energy and delay are scaled as

$$E_{DYN}(\alpha C_L V_{SW} V_{DD}) \xrightarrow{\text{scaled}} \lambda^2 E_{DYN}$$

$$T_{pd}(\alpha \frac{C_L V_{SW}}{I_{ON} - I_{OFF}}) \xrightarrow{\text{scaled}} T_{pd}$$

where C_L is the load capacitance, V_{SW} is the output swing, and I_{ON} and I_{OFF} are the on-current and off-current of the transistor. The above equation suggests that delay will not be scaled with technology. Table III shows that simulated T_{ps} increases with scaling. This is a consequence of higher gate capacitance, which is inversely proportional to EOT, and also lower $I_{ON} - I_{OFF}$ attributable to the higher off-current.

[0103] Yet another tool can be used to modify the performance of the SymFETs and trade off delay with leakage, namely, the thickness of the tunneling barrier. In some examples, 1.34 nm BN was used as discussed in L. Britnell et al., “Field-effect tunneling transistor based on vertical graphene heterostructures,” Science, vol. 335, no. 6071, pp. 947–950, Feb. 2012, which is hereby incorporated by reference in its entirety. Further, if fabrication technology and breakdown voltage of the insulator allow for a thinner barrier, tunneling current will substantially increase. For instance, if barrier thickness is reduced to 0.67 nm (i.e., 2 layers of BN), then delay of the inverter will be reduced by at least 10,000 times, even though the leakage current may increase proportionally.

[0104] Similar to Tables I and II above, the performance of SymFET latch and MOBILE DFF devices were also evaluated, as shown in Table IV below.

TABLE IV. PERFORMANCE OF INVERTERS/BUFFERS

	V_{DD} (V)	$V_{o,pp}$ (V)	T_{pd} (ns)	E_{DYN} (fJ)	P_{STAT} (nW)
RS Latch FIG. 17A	0.5	> 0.4	0.41	0.5	270
Latch FIG. 19A	1	0.84	1.8	2	640
Inv./DFF FIG. 24A	1*	0.71	0.06	2.9/0.7†	480

*: high level of CLK .

†: depends on capability of CLK to absorb power (see the text).

Note: all simulations are done with a FO4 inverter of FIG. 3A as load.

[0105] Therefore, several new topologies for circuit design involving SymFETs have proven that they can offer low transistor count and low dynamic power dissipation. More specifically, SymFET-based inverters provide a lower switching energy compared with the iso-delay CMOS-based circuits, due in large part to their low operating supply voltage.

[0106] Although certain example devices have been described herein, the scope of coverage of this patent is not limited thereto. On the contrary, this patent covers all devices, methods, apparatus, systems, and articles of manufacture fairly falling within the scope of the appended claims either literally or under the doctrine of equivalents.

We claim:

1. A Boolean logic device comprising:

at least two SymFETs, with each of the at least two SymFETs including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates, wherein conductivity of each of the at least two SymFETs is controlled at least in part by a first voltage supplied to the top gate and a second voltage supplied to the back gate;

wherein the at least two SymFETs are configured in at least one of a parallel or series circuit arrangement such that input voltage is transformed to an output voltage.

2. A Boolean logic device of claim 1, wherein the circuit inverts the input voltage and the circuit is bistable for at least one non-zero value of the input voltage.

3. A Boolean logic device of claim 2, further comprising:

an electrical drain in electrical communication with a first of the at least two SymFETs; and

a feedback loop disposed between the electrical drain and the back gate of the first of the at least two SymFETs.

4. A Boolean logic device of claim 1 wherein the at least two SymFETs define a first SymFET and a second SymFET, the Boolean logic device further comprising:

a third SymFET and a fourth SymFET, with the third and fourth SymFETs including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates,

wherein conductivities of the first and second SymFETs are controlled at least in part by a first voltage,

wherein conductivities of the third and fourth SymFETs are controlled at least in part by a second voltage;

wherein the first, second, third, and fourth SymFETs are configured in a circuit such that the output voltage is false only if the first and second voltages are true.

5. A Boolean logic device of claim 1 wherein the at least two SymFETs define a first SymFET and a second SymFET, the Boolean logic device further comprising:

a third SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates,

wherein conductivity of the first SymFET is controlled at least in part by a first voltage,

wherein conductivity of the second SymFET is controlled at least in part by a second voltage;

wherein the first, second, and third SymFETs are configured in a circuit such that the output voltage is true only if both the first and second voltages are false.

6. A Boolean logic device of claim 5, further comprising a clocked input.

7. A Boolean logic device of claim 1 wherein the at least two SymFETs define a first SymFET and a second SymFET, the Boolean logic device further comprising:

a first voltage source applying a first voltage to the top gates of the first and second transistors; and

a source terminal applying a second voltage, the source terminal coupled to the first SymFET,

wherein an output of the circuit is false only if the first voltage is true and the second voltage is false.

8. A Boolean logic device of claim 1 wherein the at least two SymFETs define a first SymFET and a second SymFET, the Boolean logic device further comprising:

a third SymFET and a fourth SymFET, with the third and fourth SymFETs including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates,

wherein the first and second SymFETs are in parallel, wherein the fourth SymFET is in series with the second SymFET, wherein the third SymFET is in series with the first SymFET,

wherein the input voltage is supplied to the top gates of the second SymFET and the fourth SymFET and a bias voltage is supplied to the back gates of the first and second SymFETs,

wherein a second input voltage is supplied to the top gates of the first and third SymFETs,

wherein a drain voltage is coupled to the second and fourth SymFETs, wherein the first and third SymFETs are grounded, wherein the back gate of the third SymFET is grounded, wherein the back gate of the fourth SymFET is supplied with the drain voltage,

wherein a first conductor extends between the first and second SymFETs and a second conductor extends between the third and fourth SymFETs, wherein the first and second conductors are coupled to one another at which point the output voltage is measured.

9. A Boolean logic device of claim 1 wherein the at least two SymFETs define a first SymFET and a second SymFET, the Boolean logic device further comprising:

a third SymFET and a fourth SymFET, with the third and fourth SymFETs including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates,

wherein a first conductor extends between the first and fourth SymFETs and a second conductor extends between the second and third SymFETs, with the first and second conductors being coupled, the output voltage taken from the first and second conductors,

wherein a clocked input voltage is supplied to the third and fourth SymFETs and a drain voltage is supplied to the back gates of the third and fourth SymFETs,

wherein a first bias voltage is supplied to a back gate of the first SymFET, and a second bias voltage is supplied to a top gate of the third SymFET,
wherein the input voltage is supplied to the top gate of the first SymFET,
wherein outputs of the first and second SymFETs are grounded, wherein the top and back gates of the second SymFET are grounded,
wherein the top gate of the fourth SymFET is coupled to the first conductor.

10. A Boolean MAJORITY gate comprising:

a first SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates;

a second SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates;

a third SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates;

a first input supplying a first voltage to the first SymFET;

a second input supplying a second voltage to the second SymFET; and

a third input supplying a third voltage to the third SymFET,

wherein the first, second, and third SymFETs are configured to be in parallel in a circuit.

11. A Boolean MAJORITY gate of claim 8 further comprising a fourth input supplying a bias voltage to the top and back gates of the first, second, and third SymFETs.

12. A Boolean logic latch comprising:

a first SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates;

a second SymFET including a top gate, a back gate, an insulator, a first graphene layer, a second graphene layer, a first oxide layer, and a second oxide layer, the insulator being disposed between the first and second graphene layers, the first and second graphene layers being disposed between the first and second oxide layers, the first and second oxide layers being disposed between the top and back gates;

a first input supplying a first voltage to the first SymFET;

a second input supplying a second voltage to the second SymFET; and

a third input supplying a bias voltage to the top and back gates of the first and second SymFETs,

wherein the first and second SymFETs are configured to be in parallel in a circuit.

13. A Boolean logic latch of claim 12 further comprising an inverter between the second input and the second SymFET.

FIG. 1B


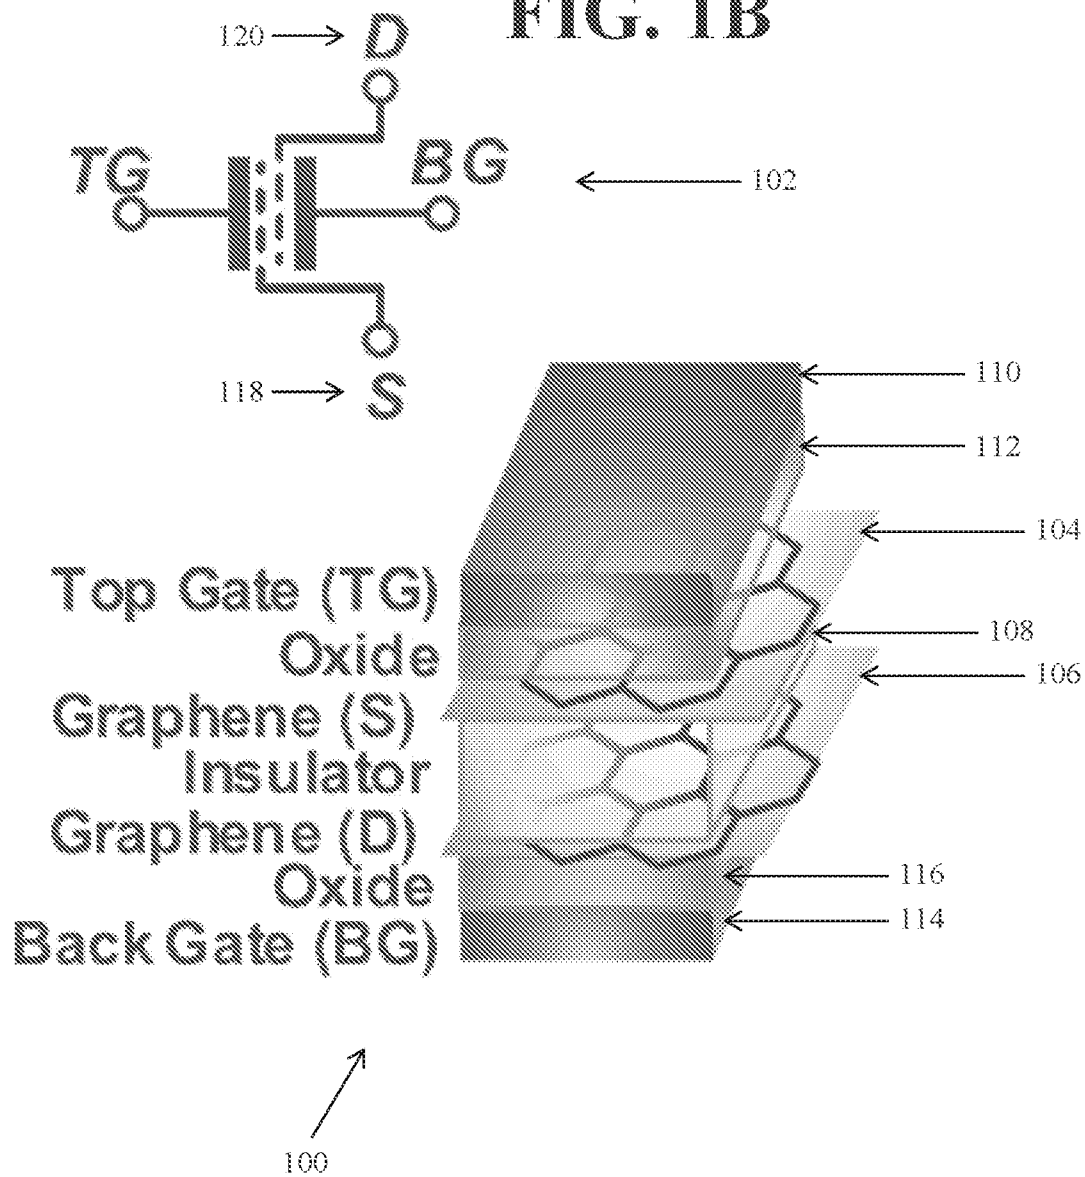


FIG. 1A

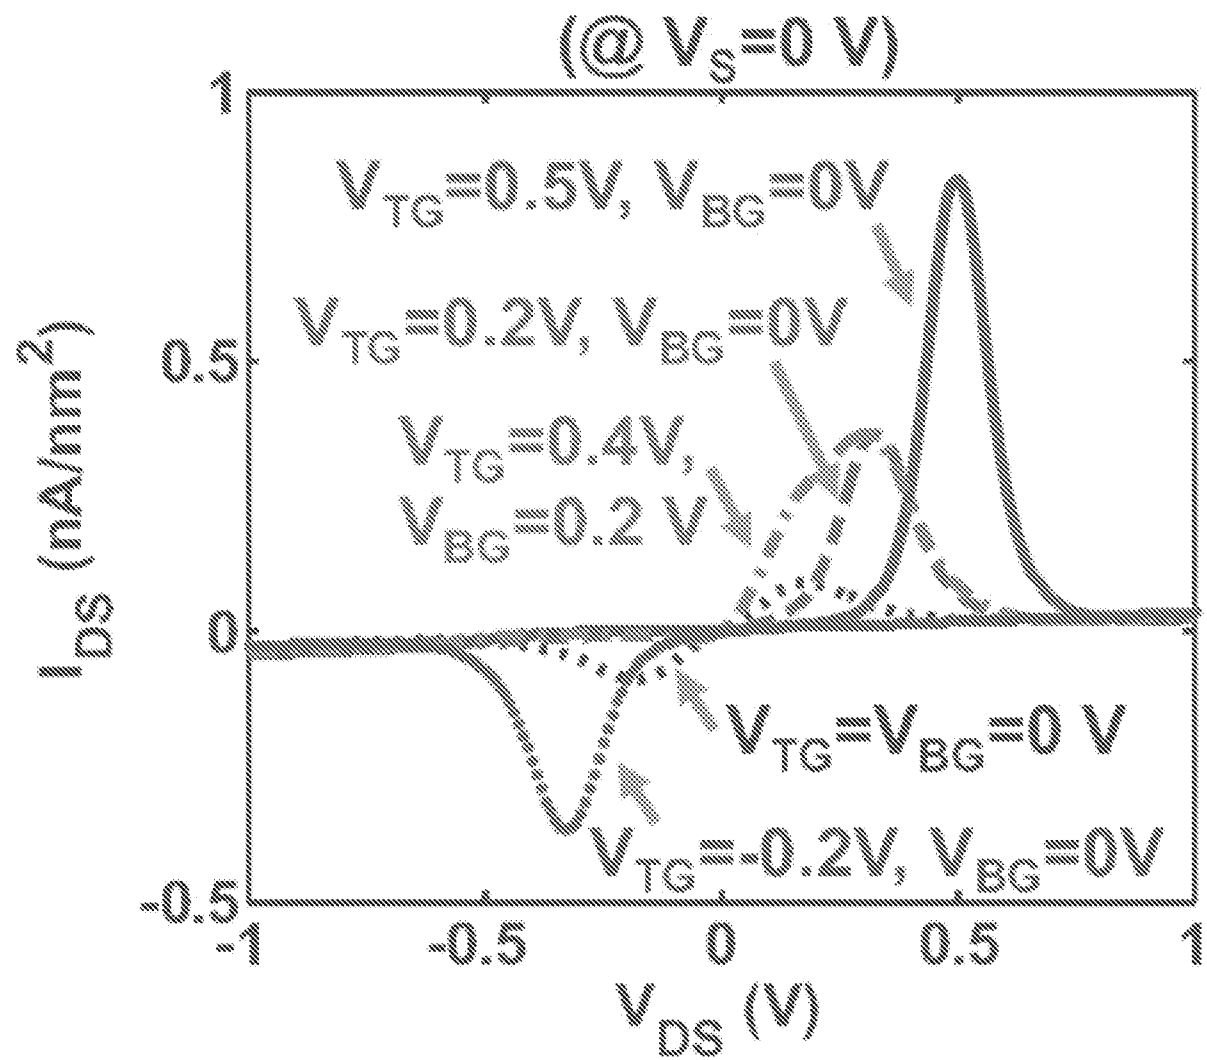

200

FIG. 2

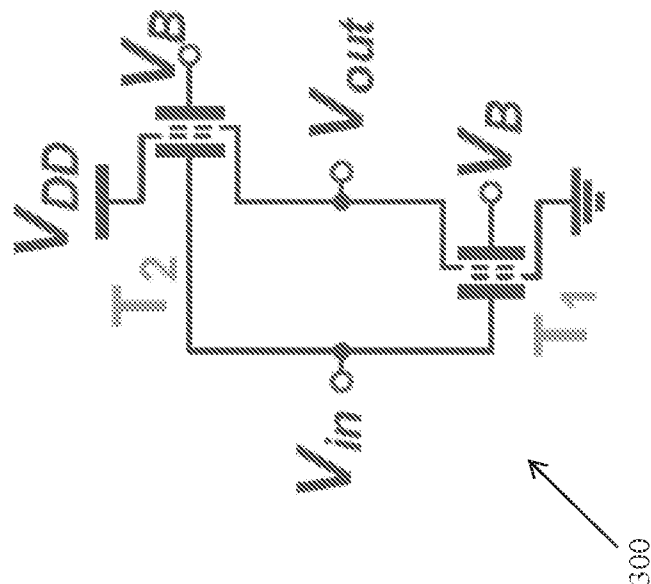


FIG. 3A

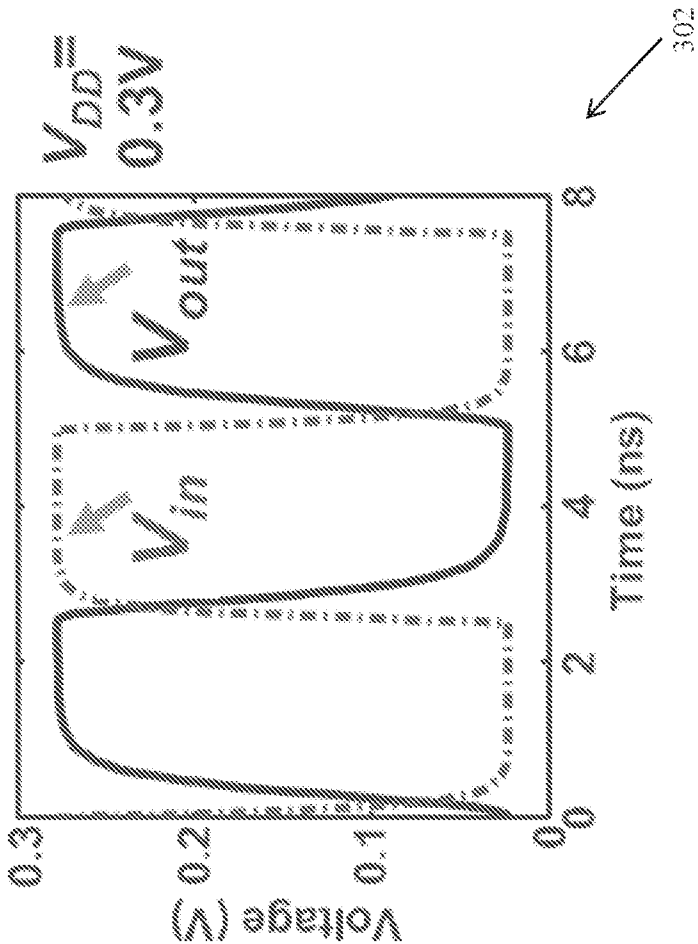


FIG. 3B

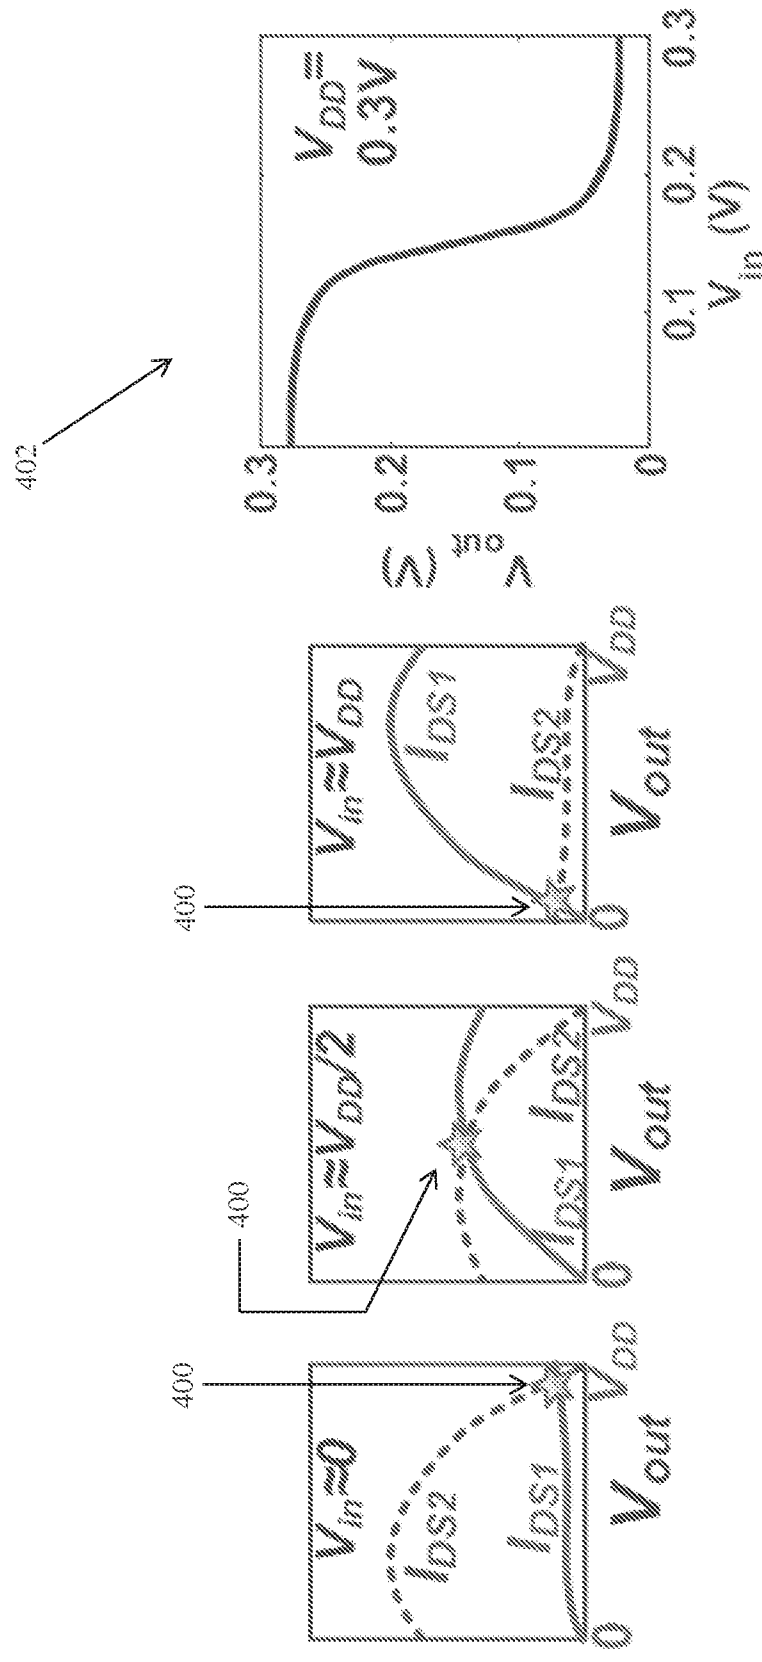


FIG. 4A FIG. 4B FIG. 4C FIG. 4D

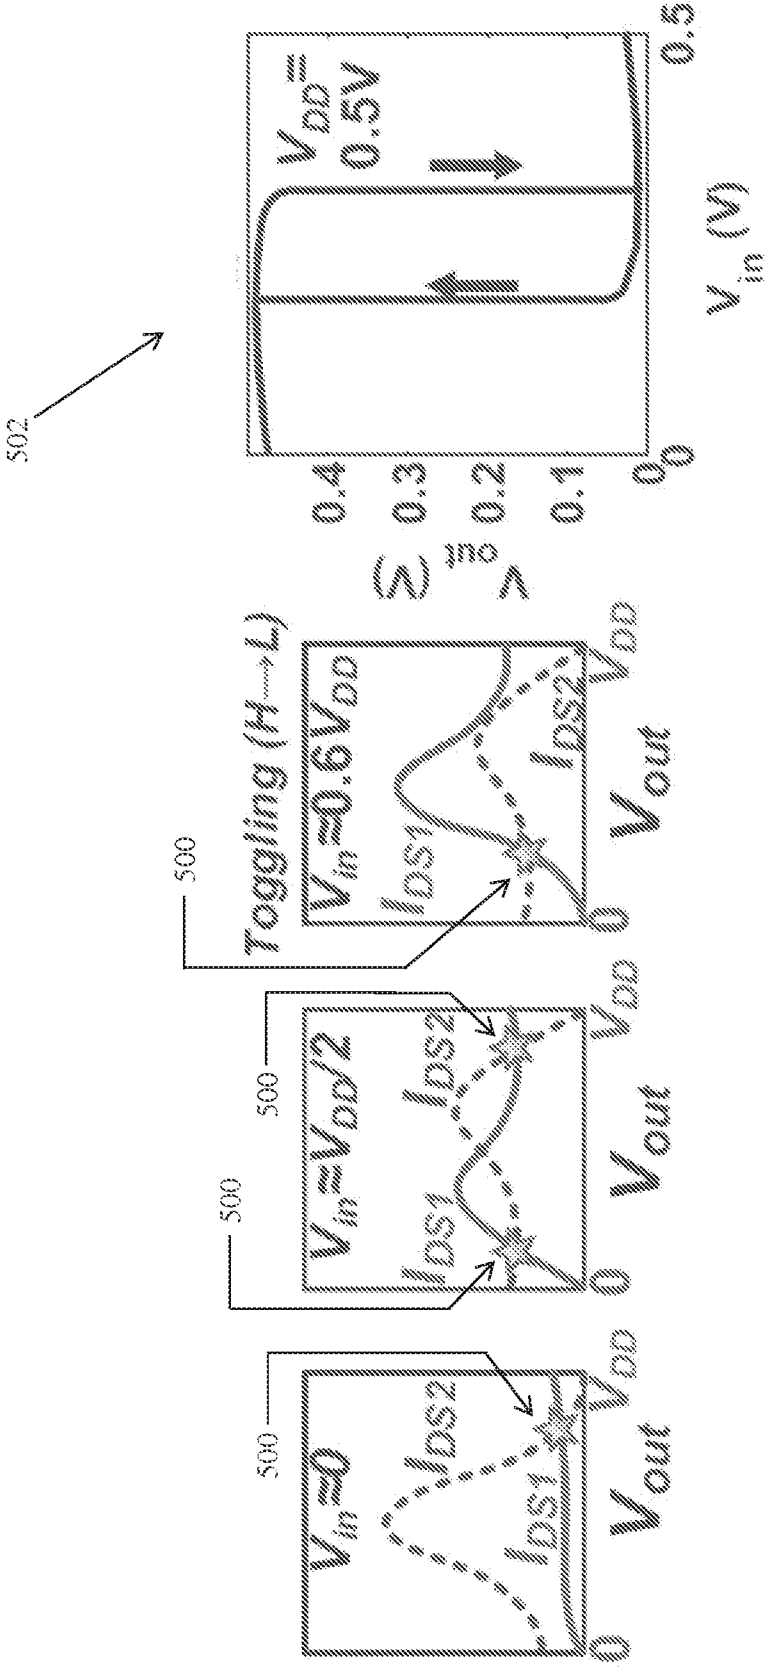


FIG. 5A FIG. 5B FIG. 5C FIG. 5D

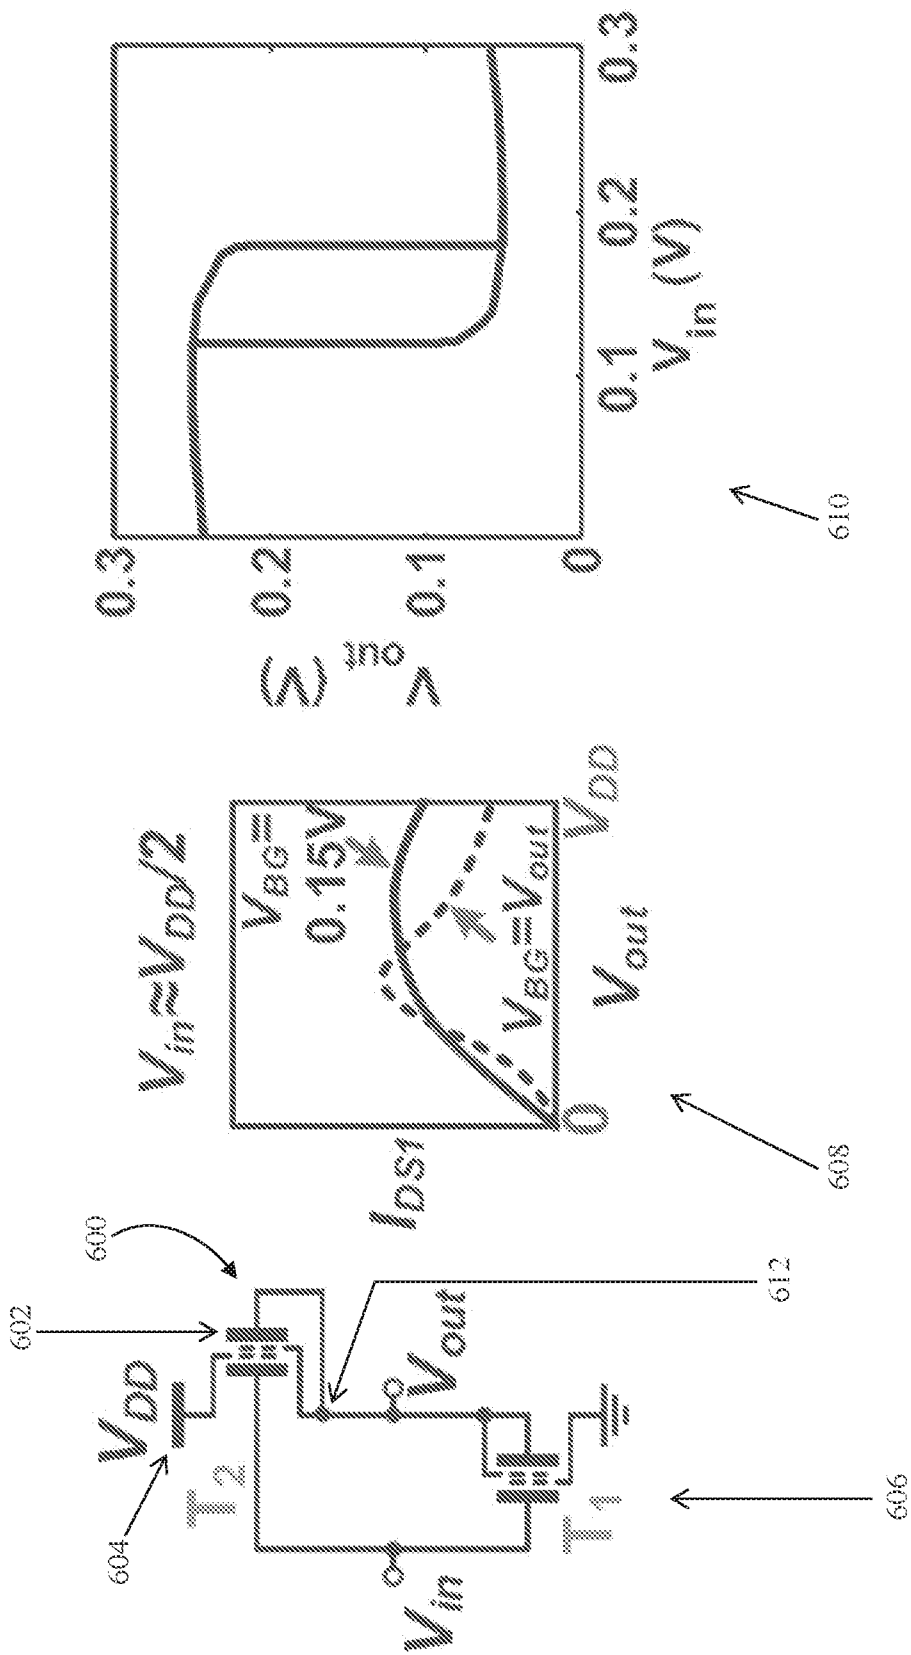


FIG. 6A

FIG. 6B

FIG. 6C

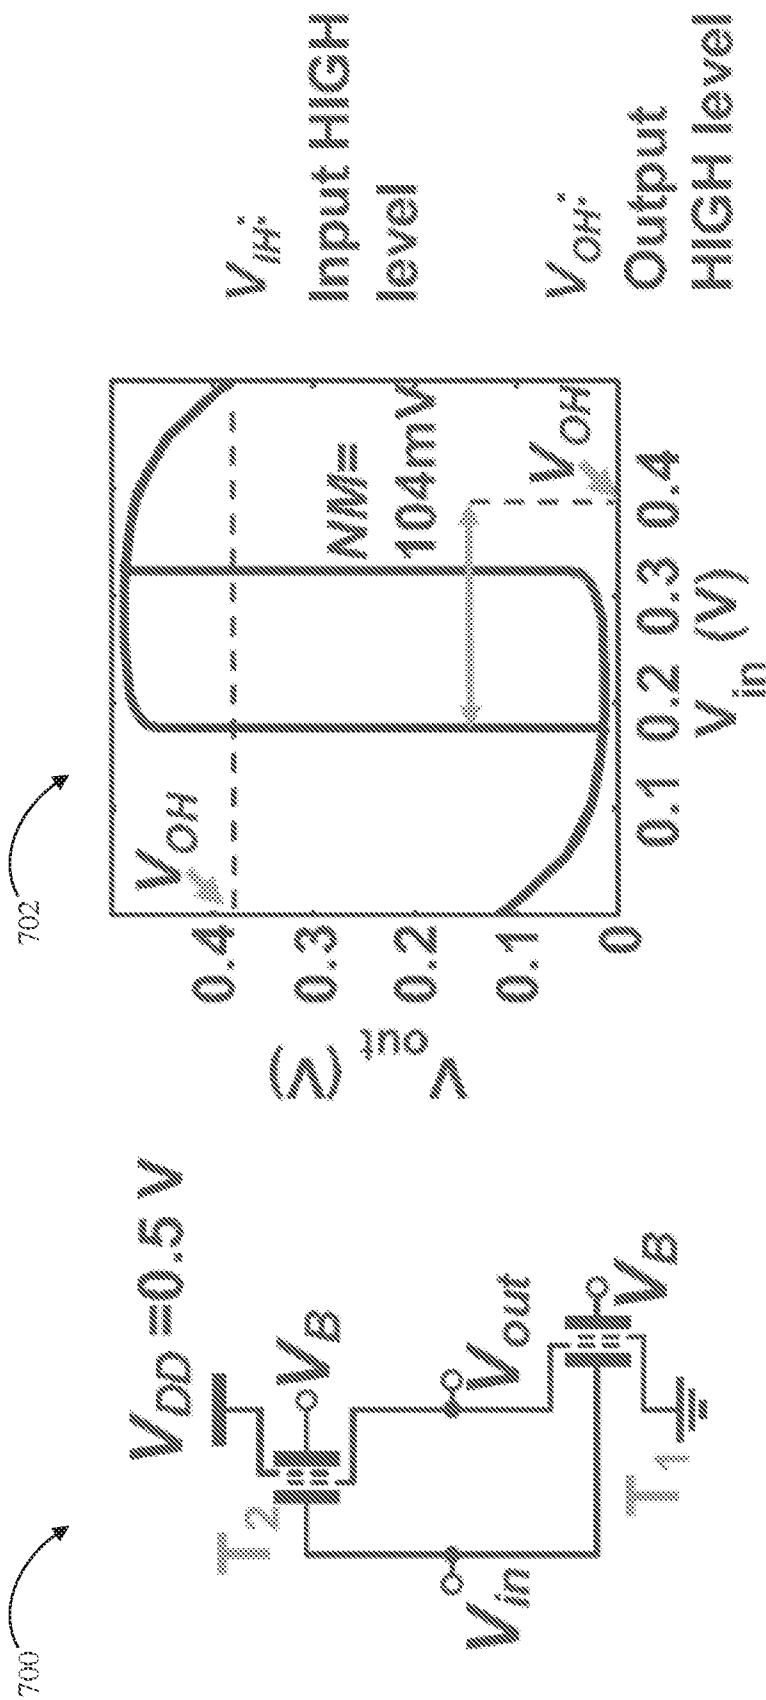


FIG. 7A

FIG. 7B

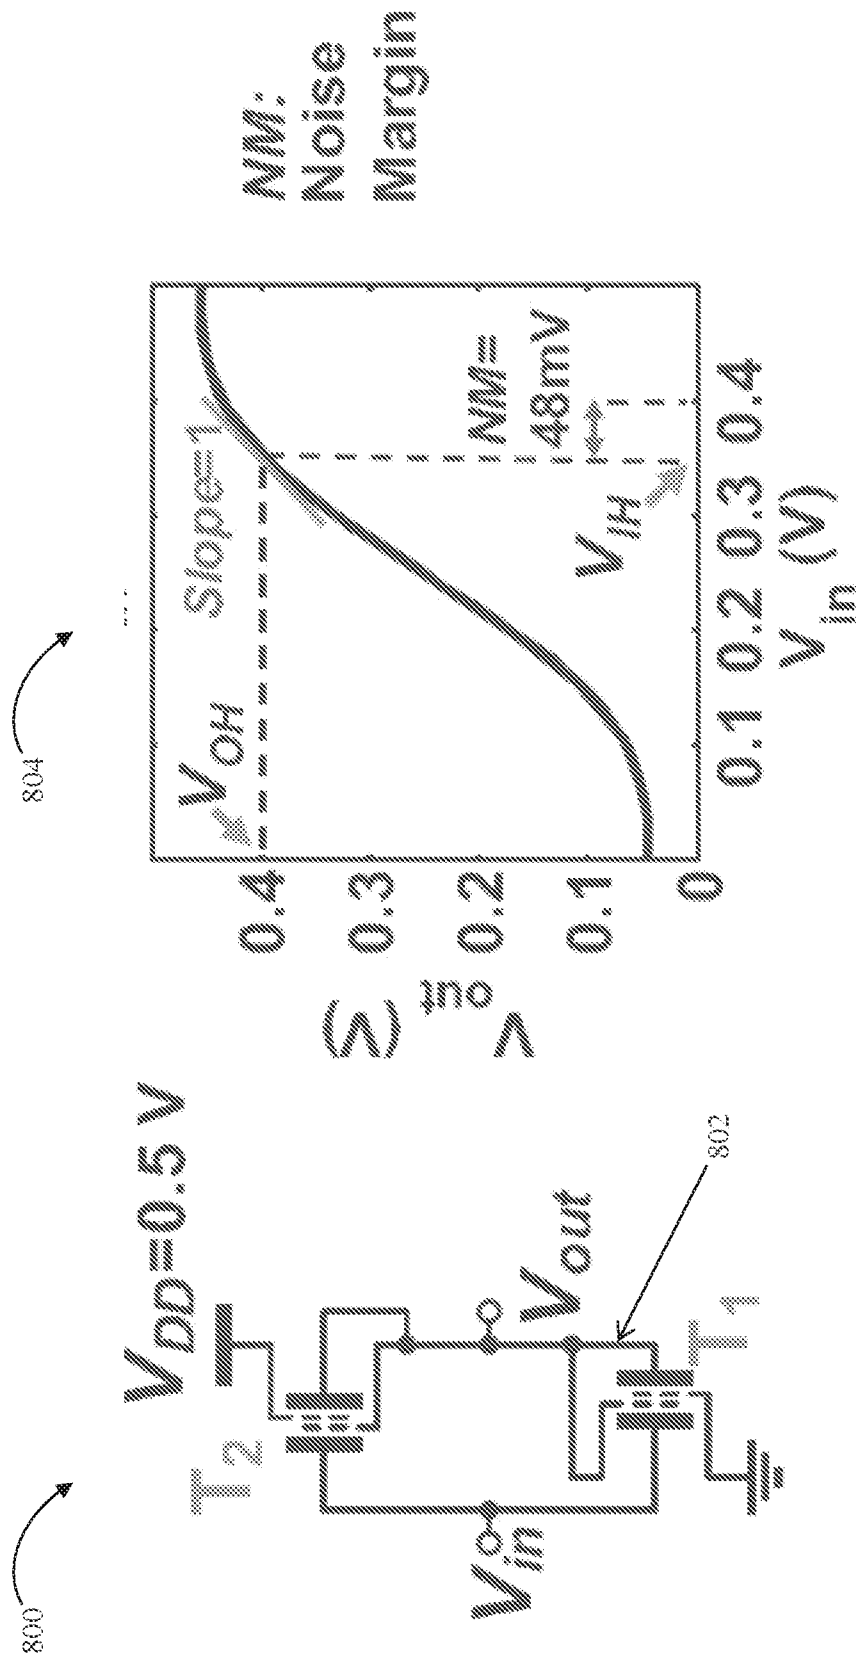
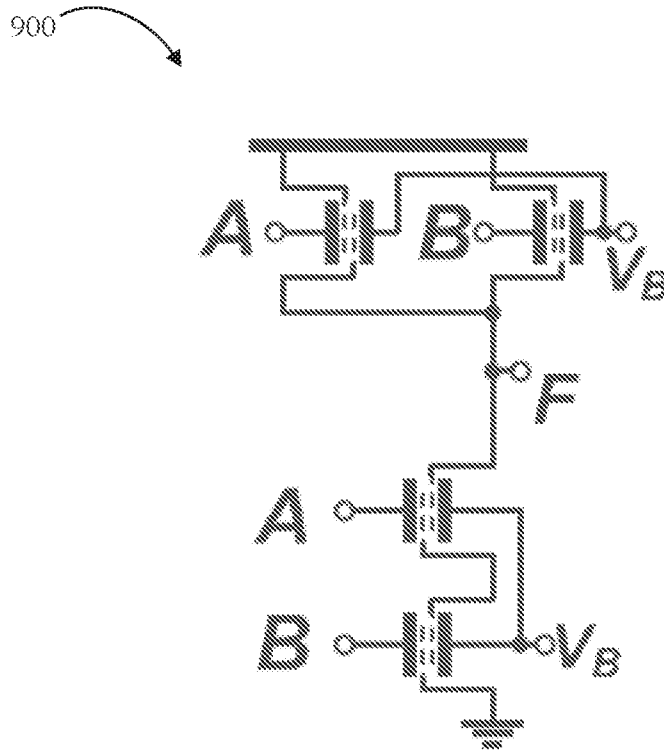


FIG. 8B

FIG. 8A

**FIG. 9A**

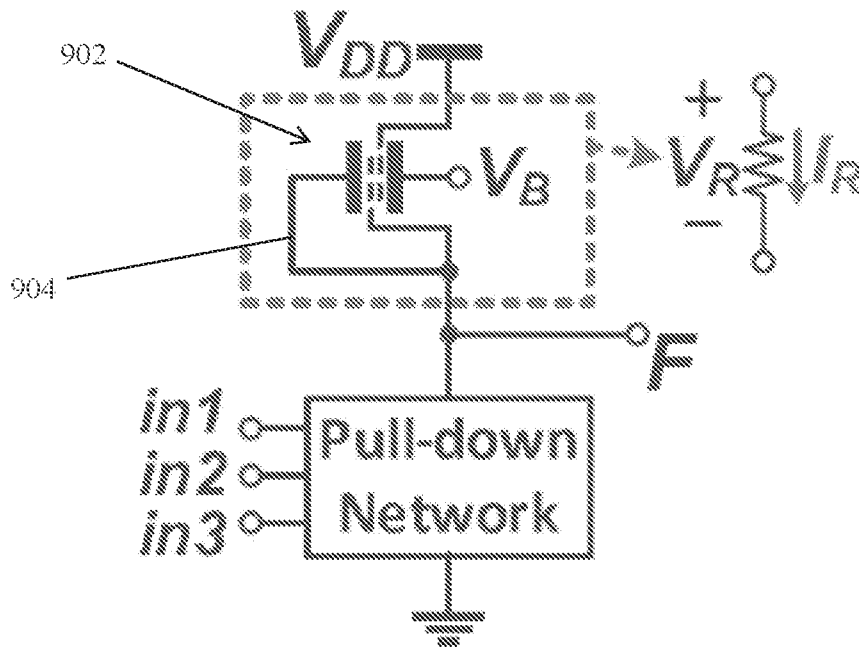


FIG. 9B

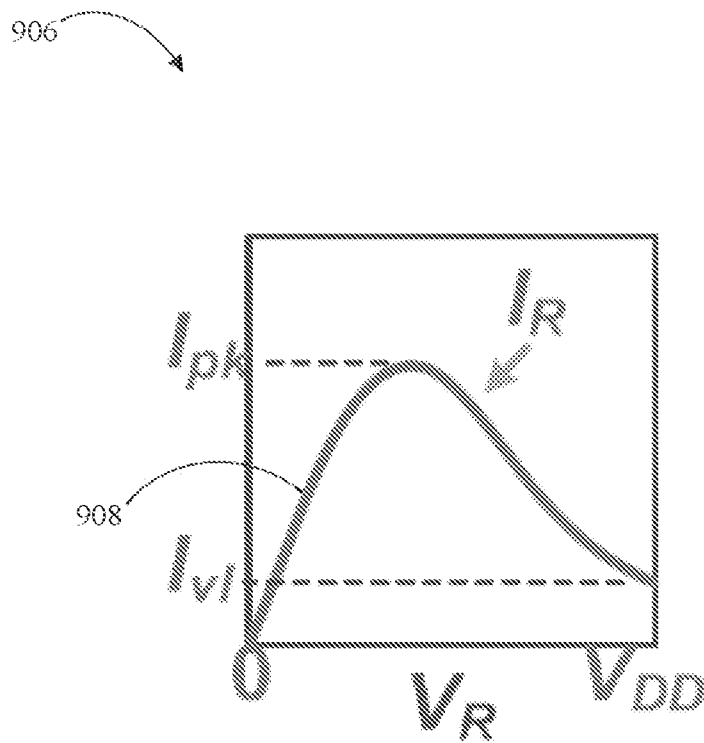


FIG. 9C

910

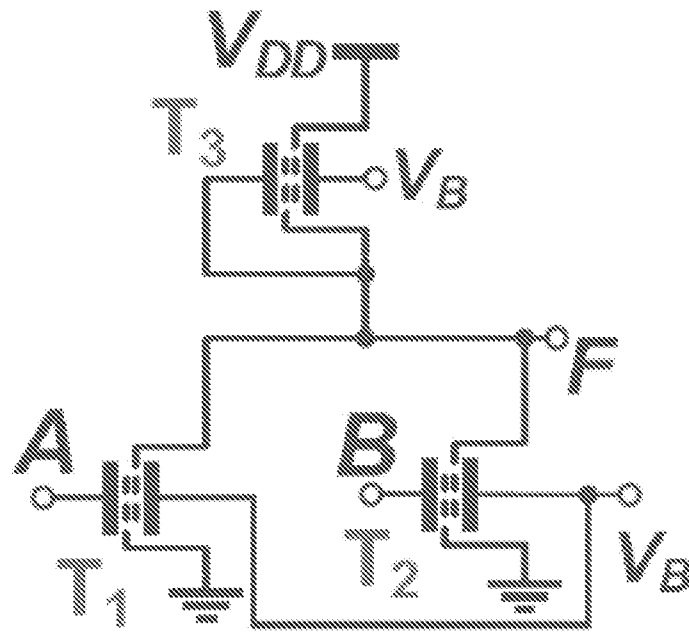


FIG. 9D

FIG. 9E

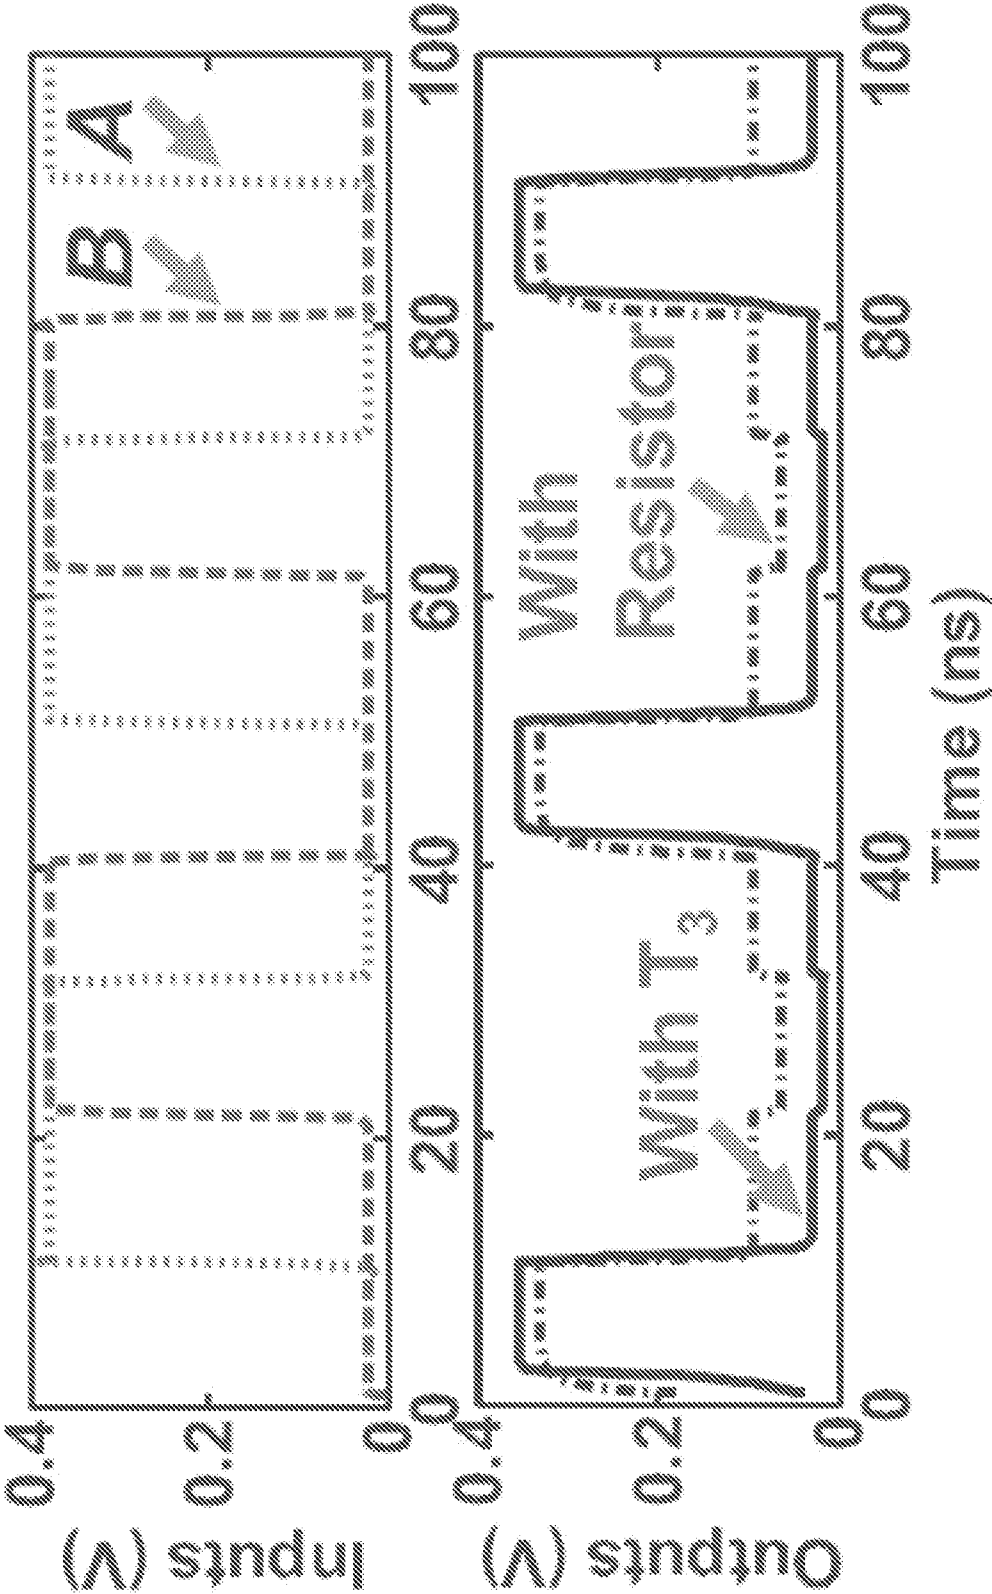


FIG. 9F

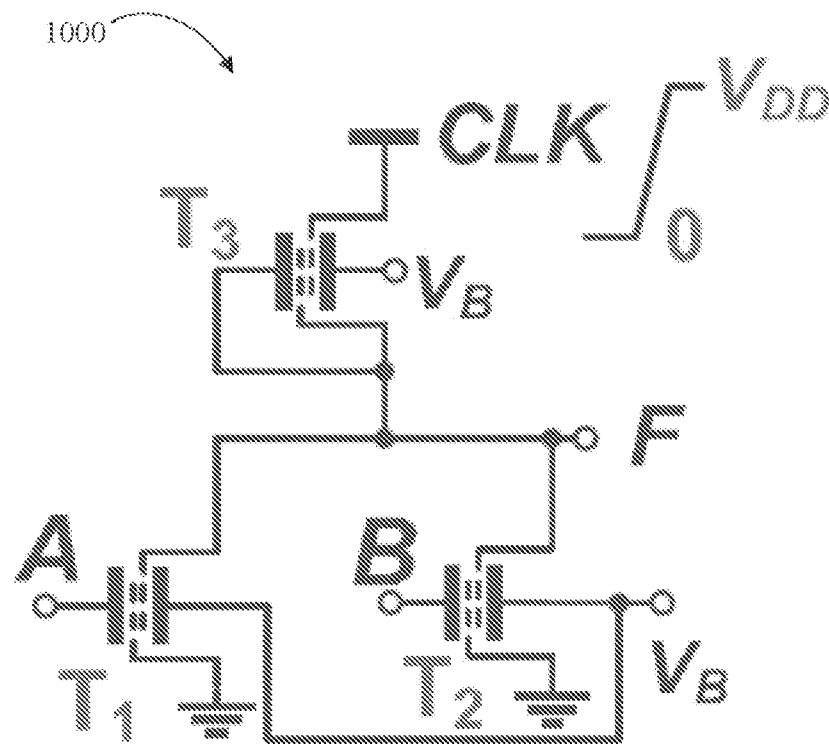
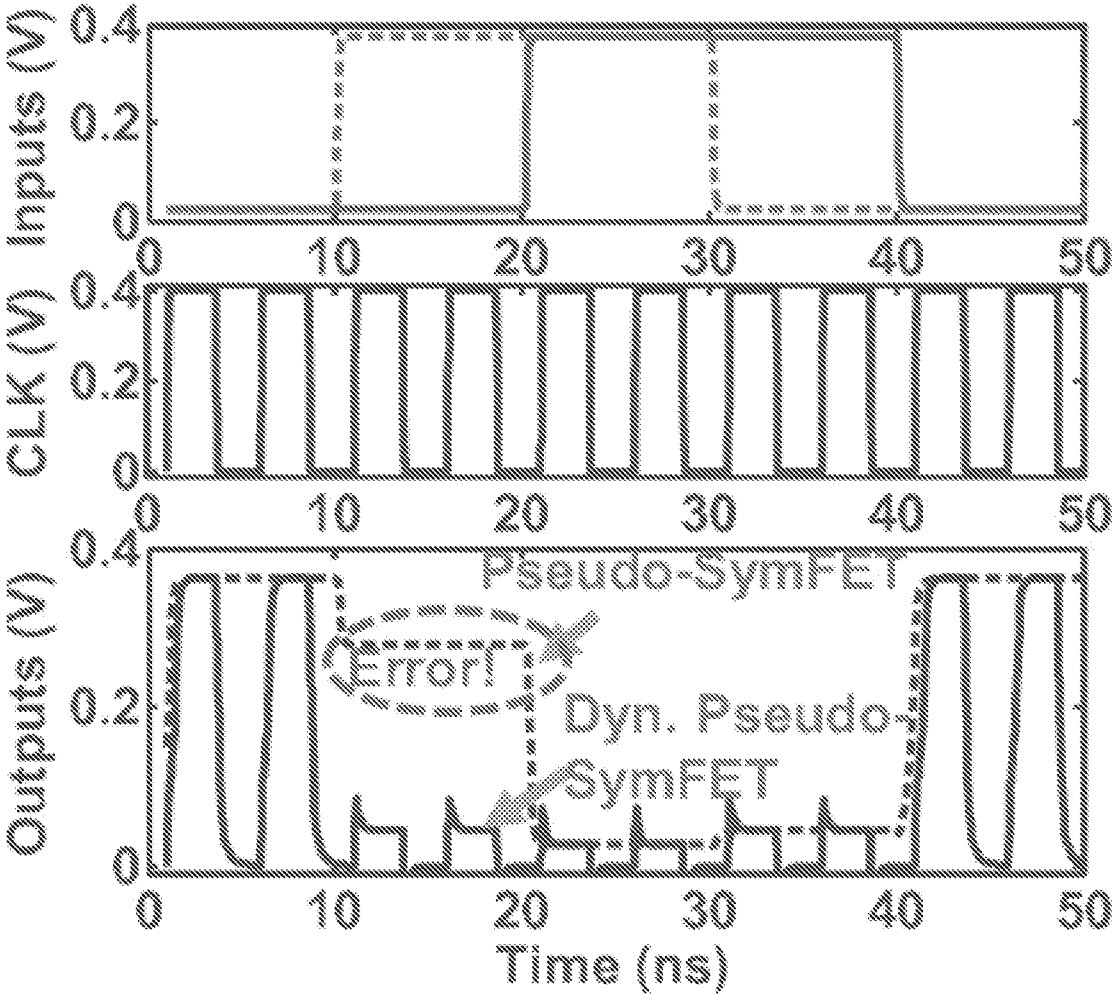


FIG. 10A

FIG. 10D FIG. 10C FIG. 10B



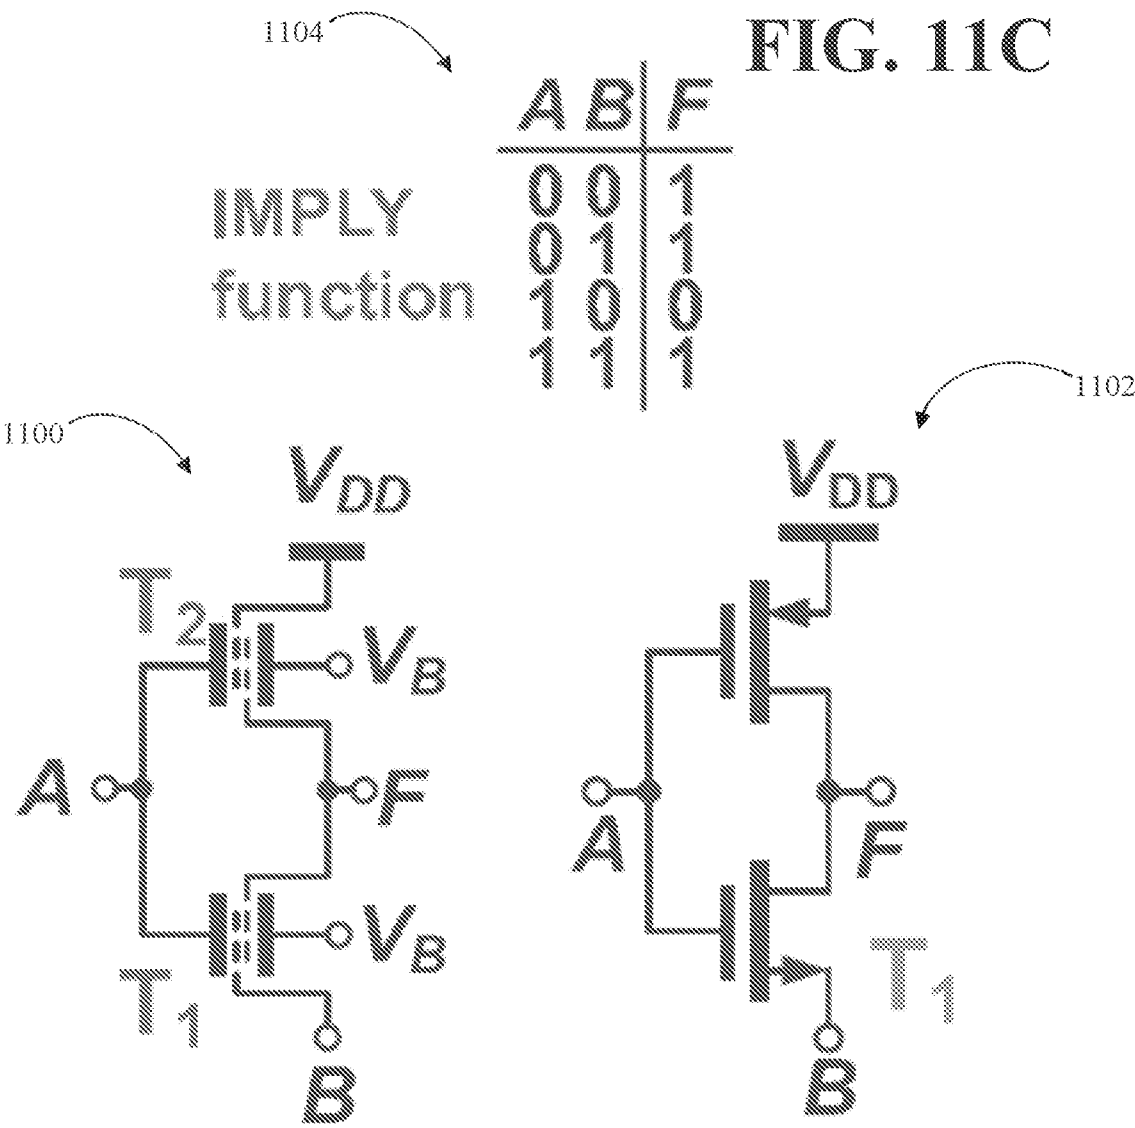


FIG. 11A

FIG. 11B

FIG. 11D

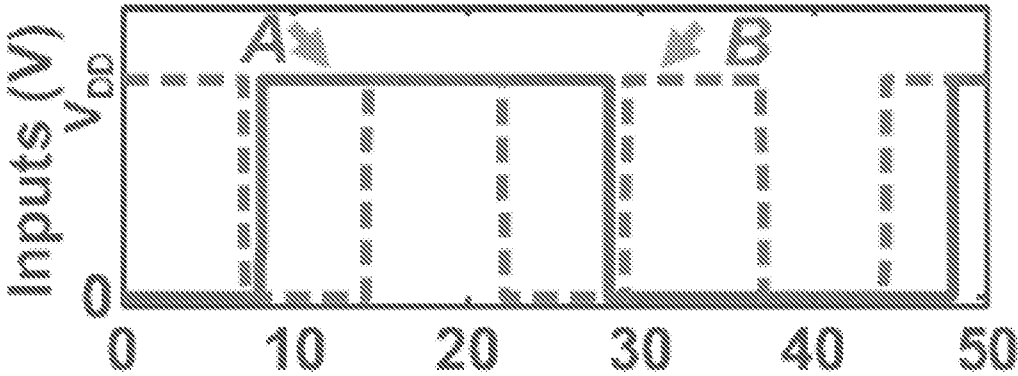


FIG. 11E

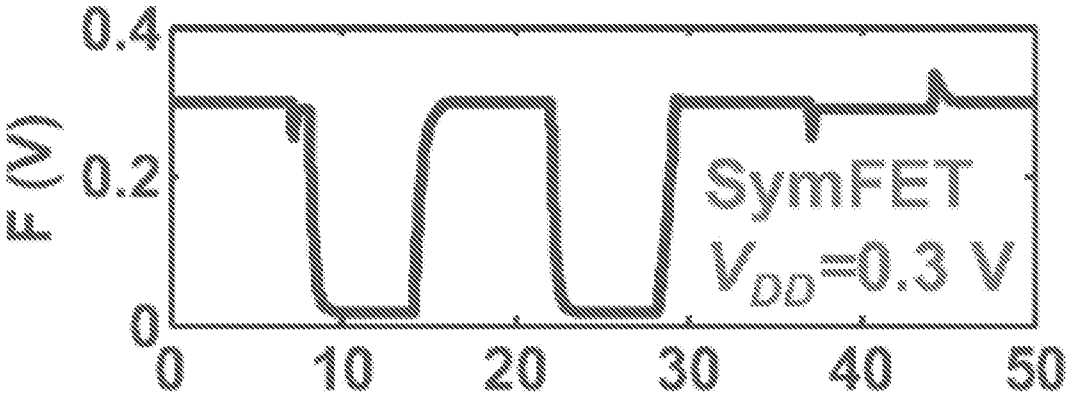
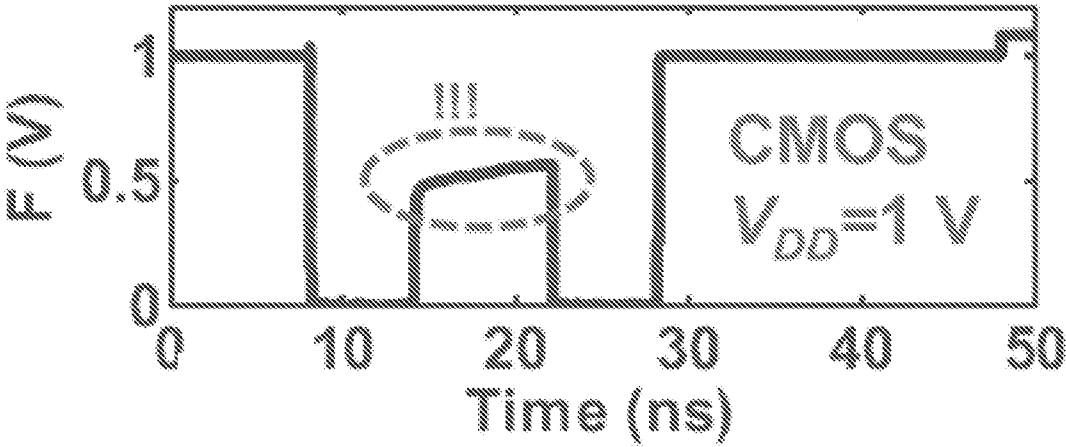


FIG. 11F



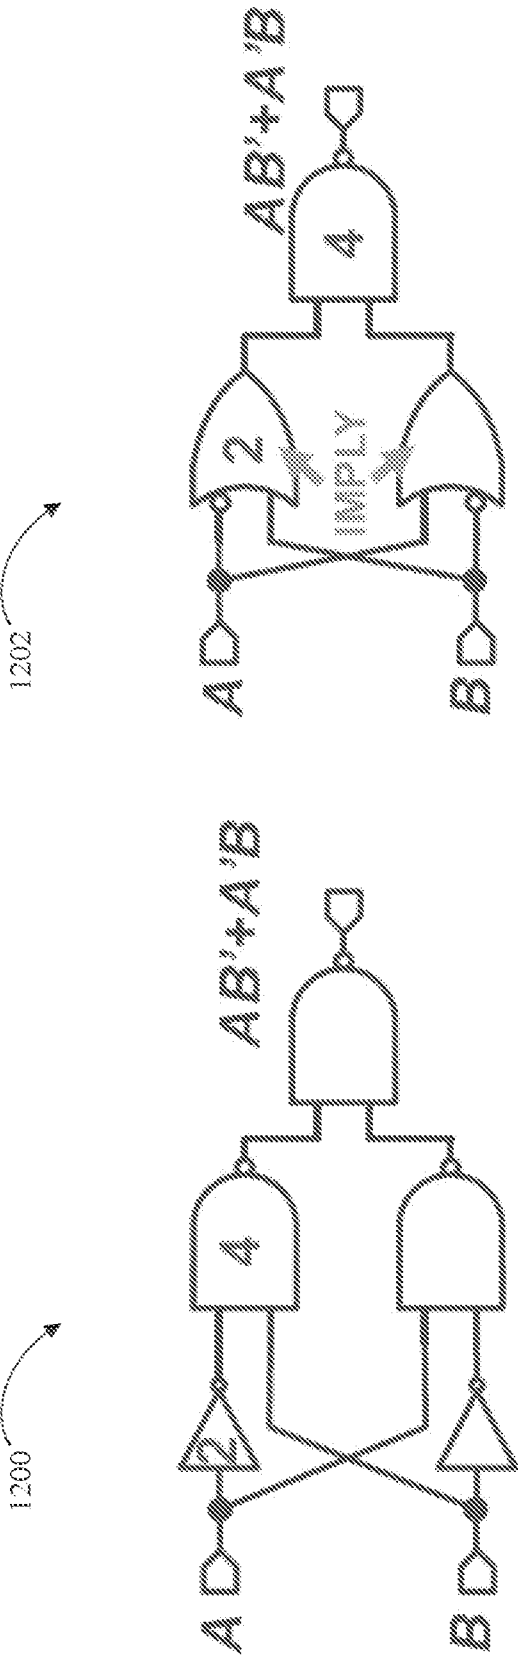


FIG. 12A

FIG. 12B

1300


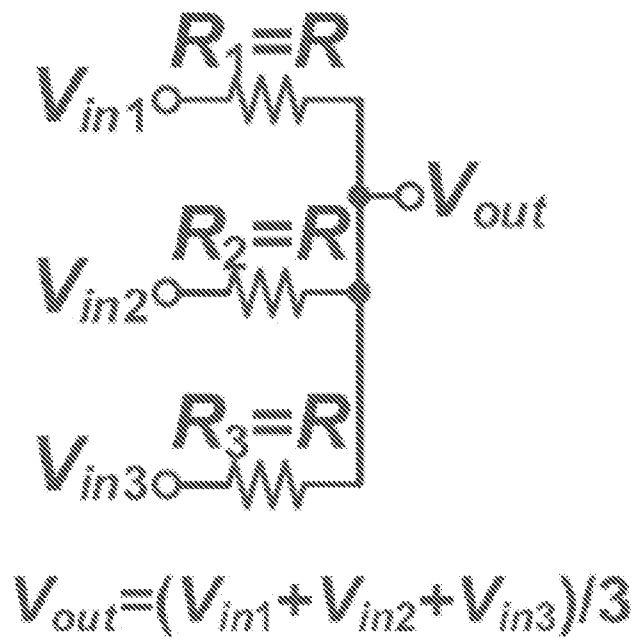


FIG. 13A

1302

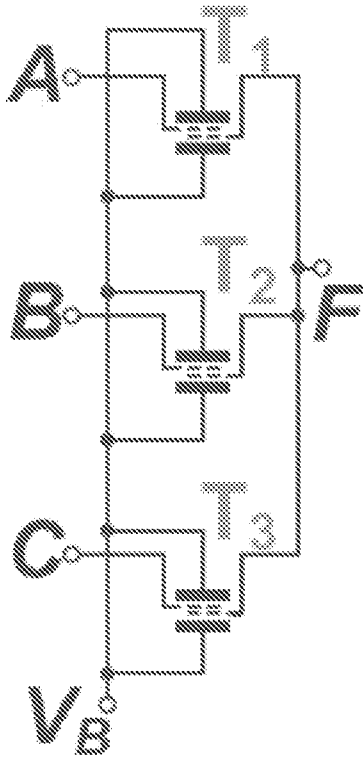

A	B	C	F
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1

FIG. 13B

FIG. 13C

FIG. 13D

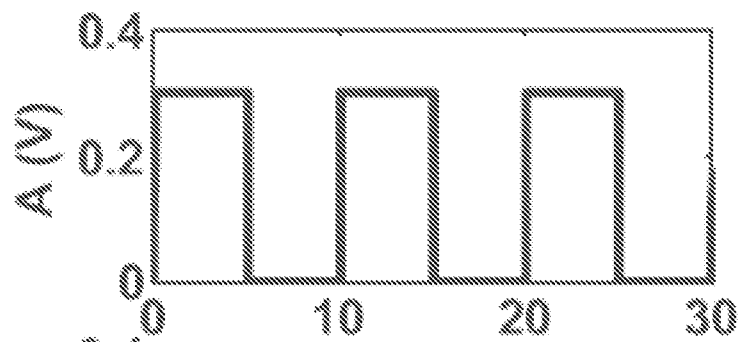
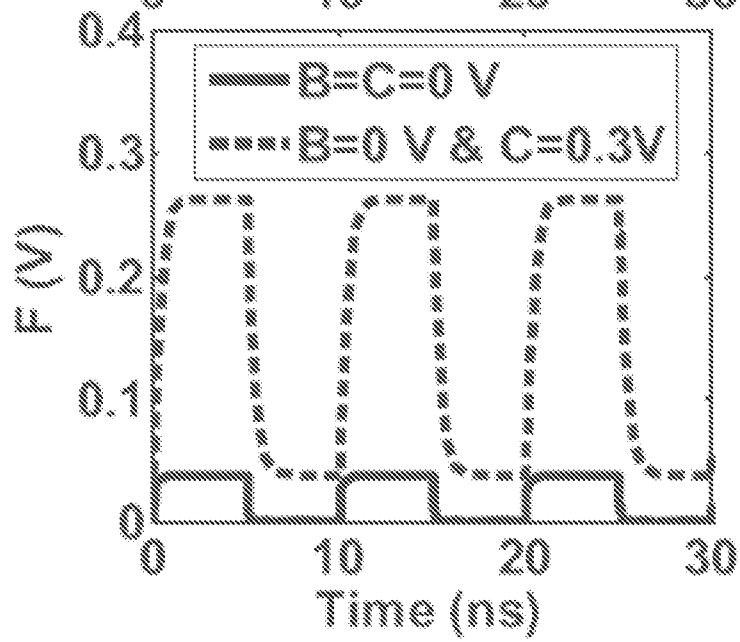


FIG. 13E



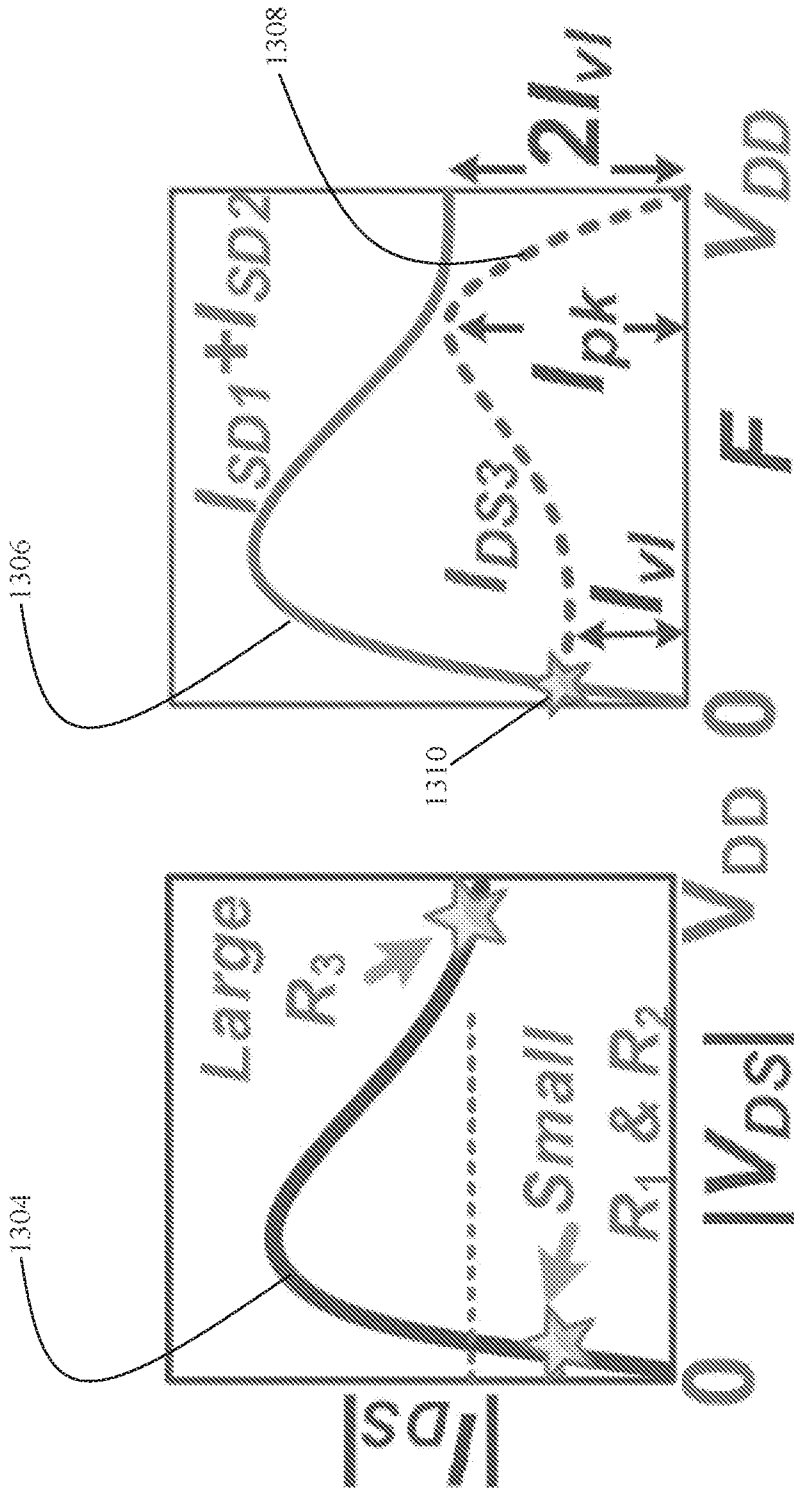


FIG. 13G

FIG. 13F

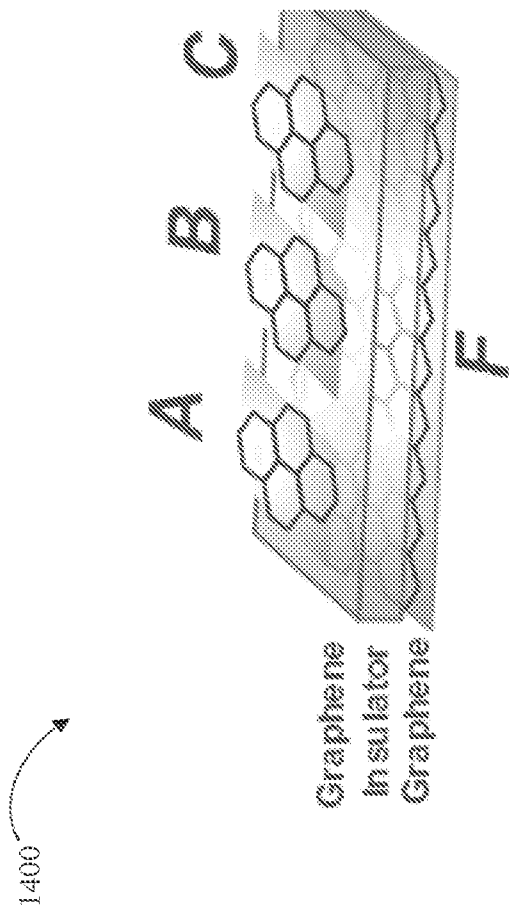


FIG. 14

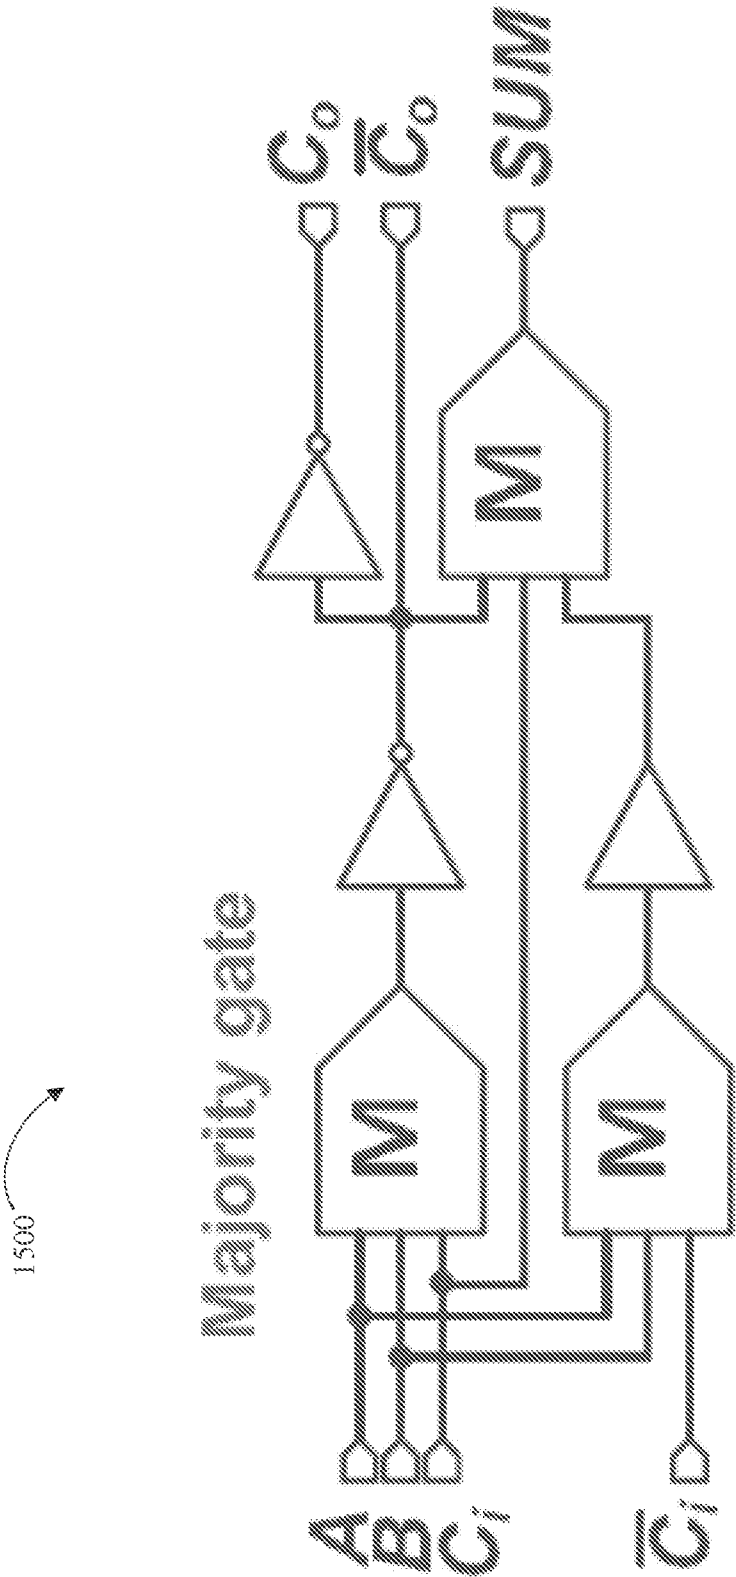


FIG. 15

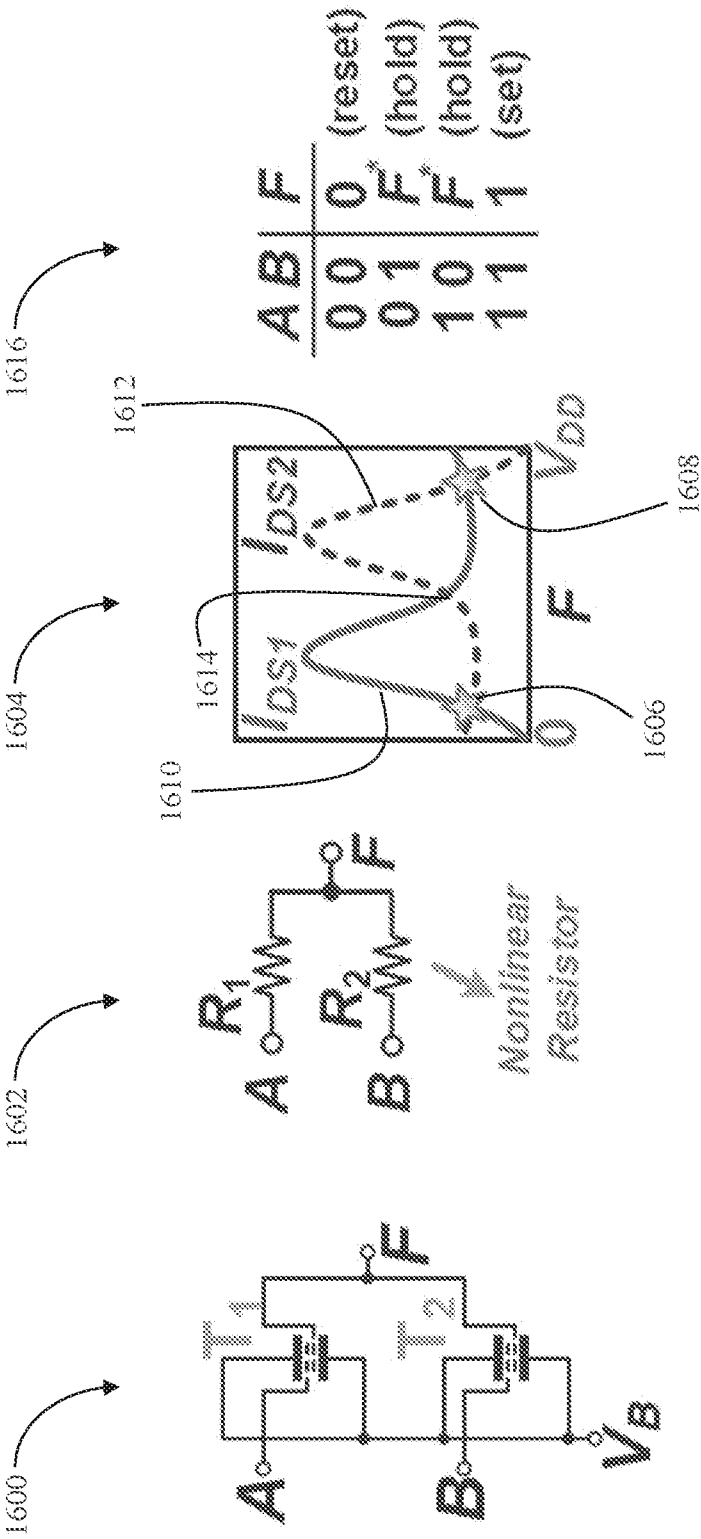


FIG. 16A FIG. 16B FIG. 16C FIG. 16D

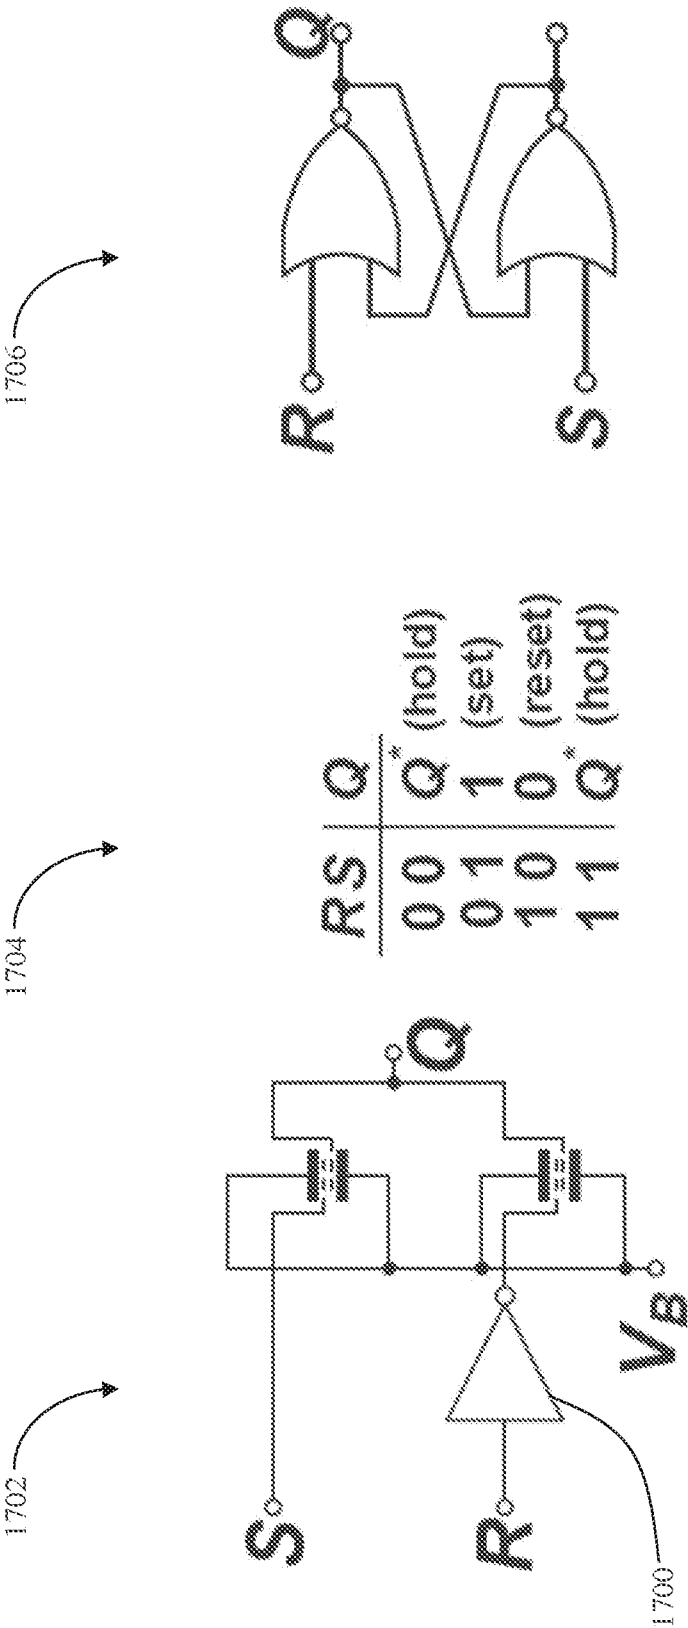


FIG. 17C

FIG. 17B

FIG. 17A

FIG. 18B

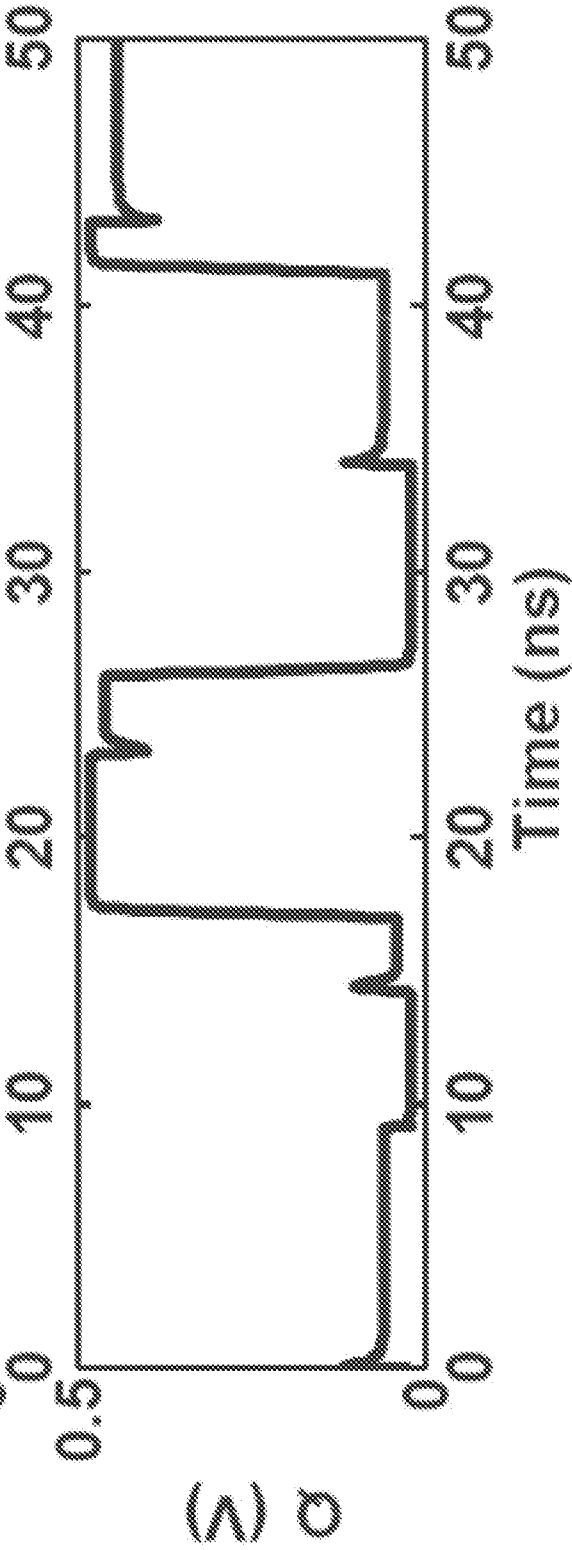
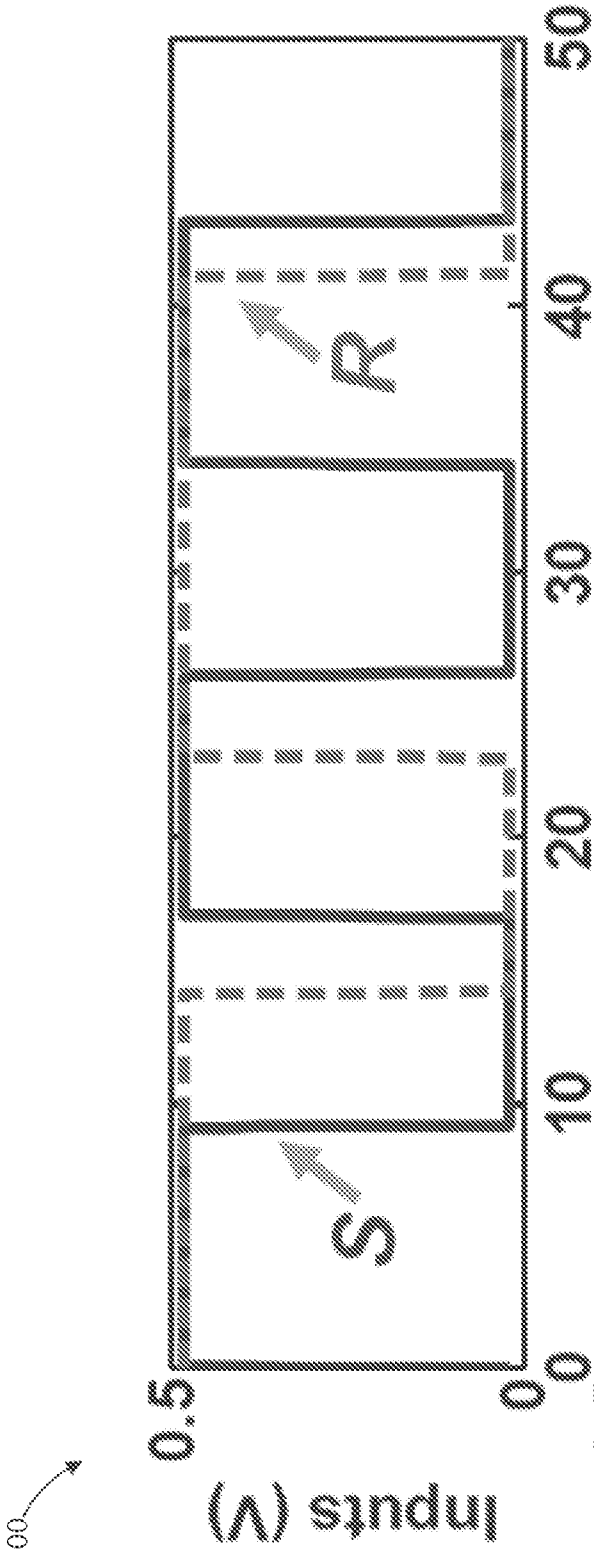


FIG. 18A



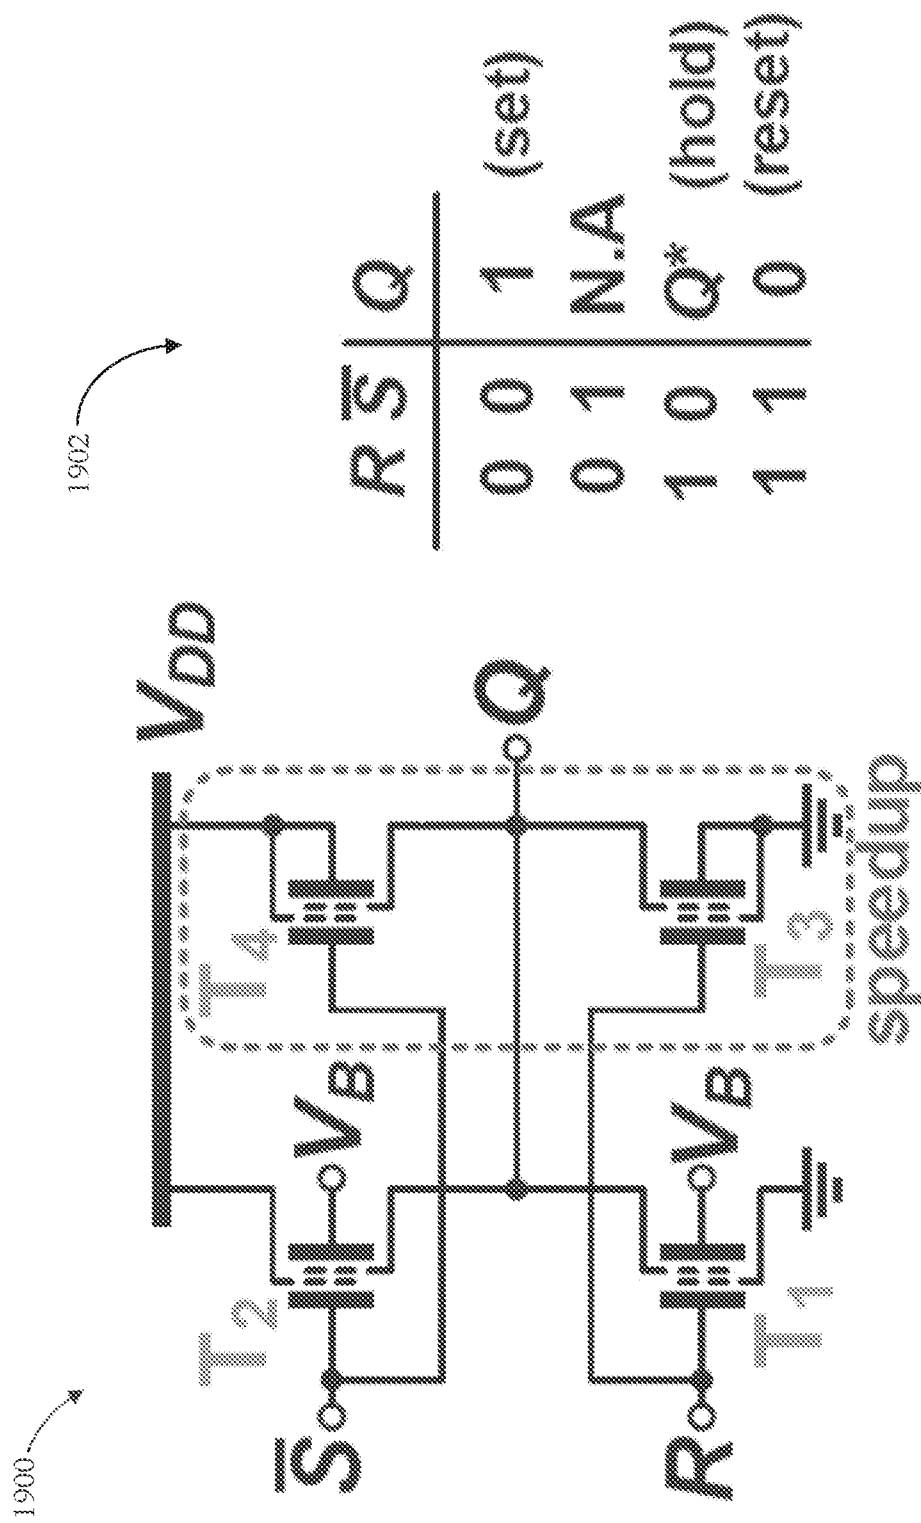


FIG. 19A

FIG. 19B

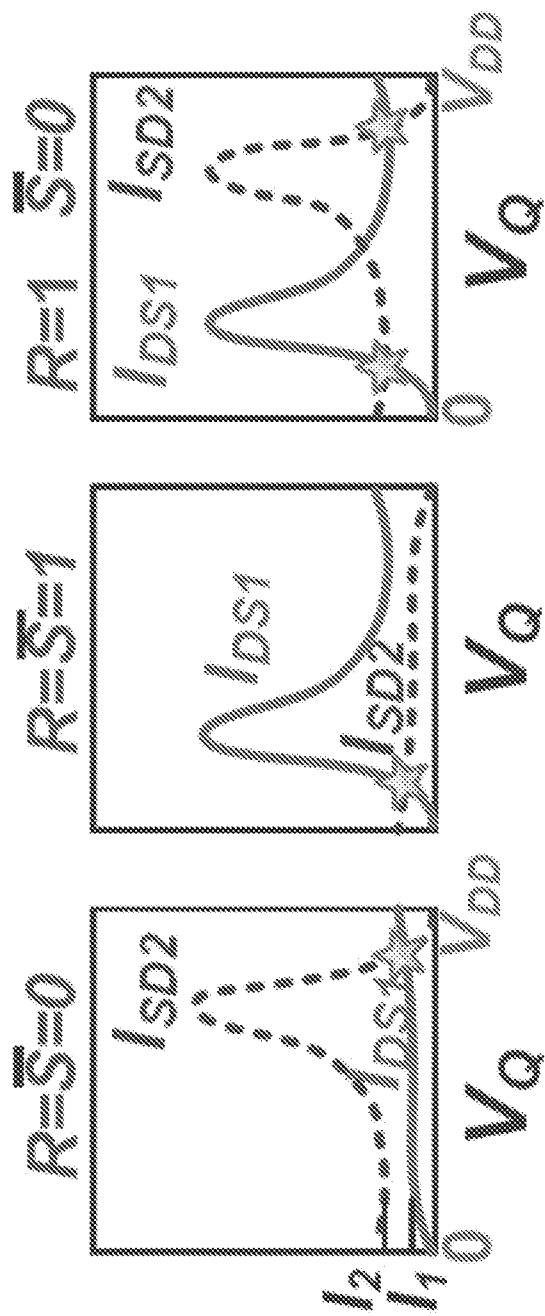


FIG. 19C FIG. 19D FIG. 19E

FIG. 20A

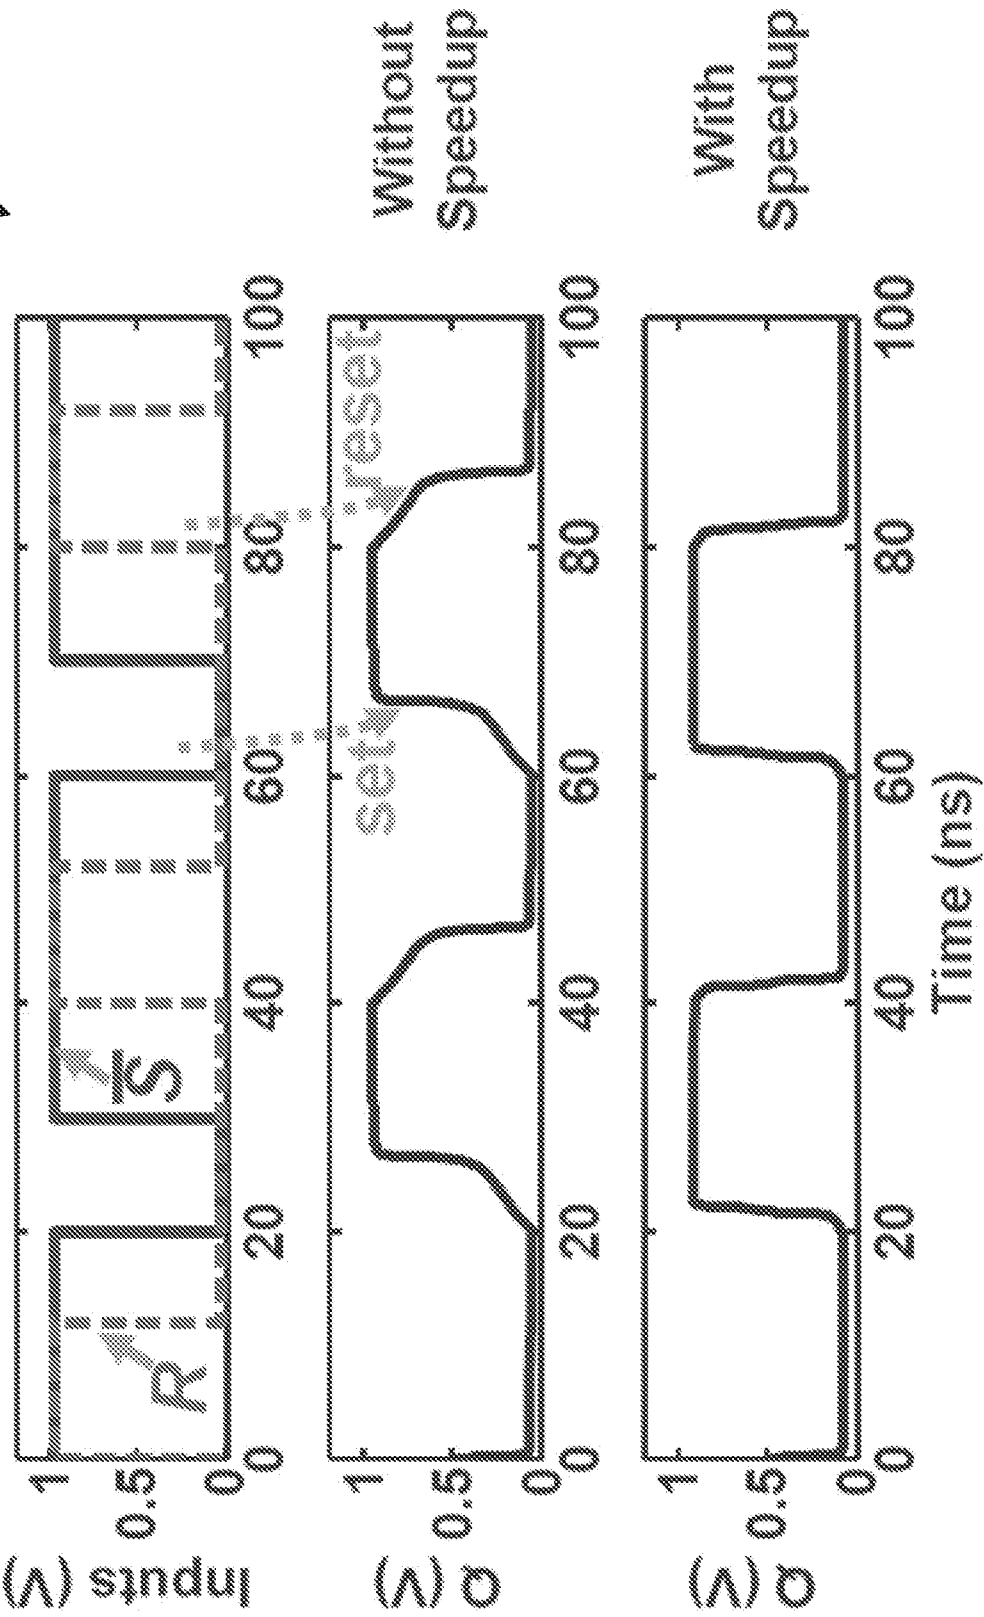


FIG. 20B

FIG. 20C

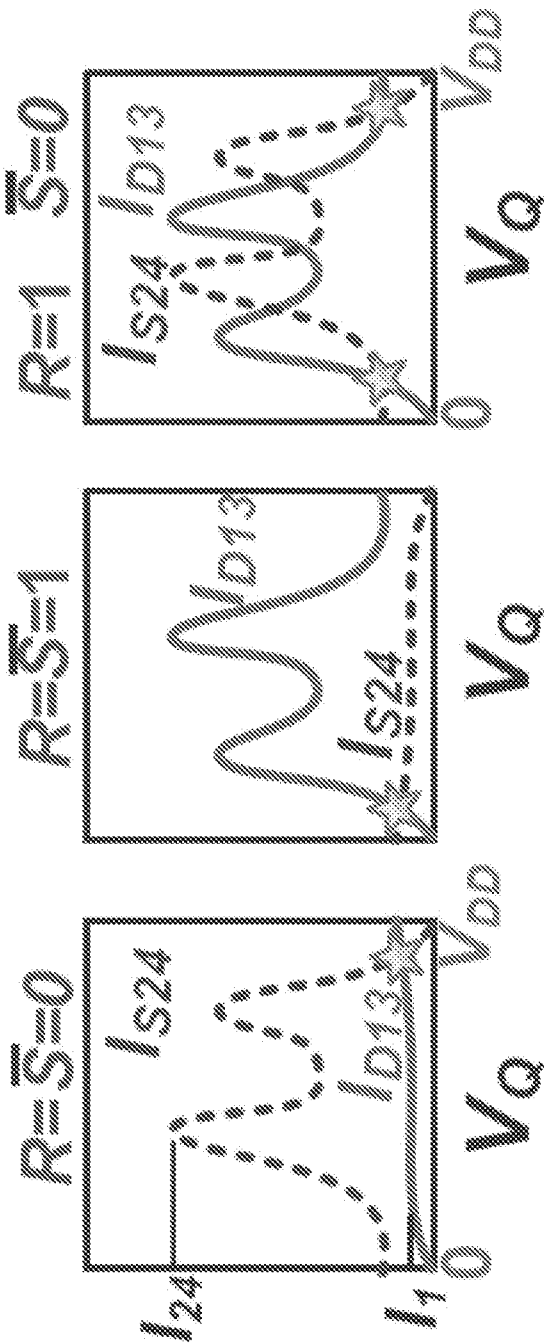


FIG. 21A FIG. 22B FIG. 22C

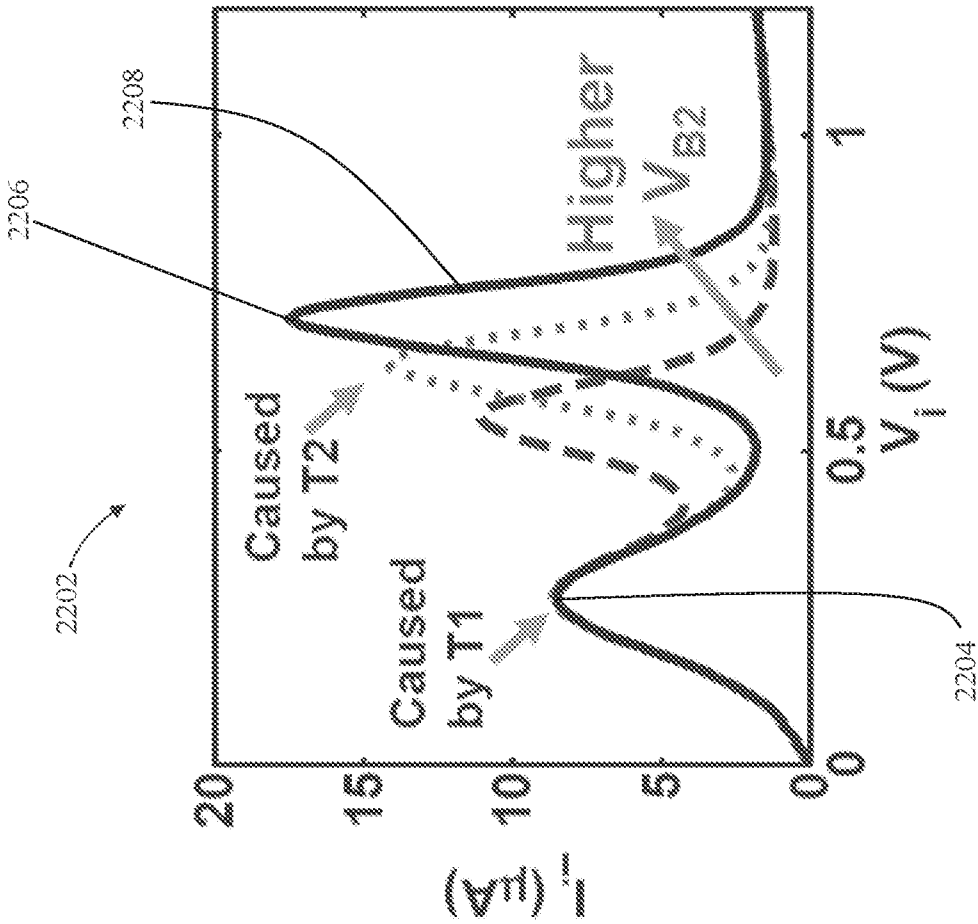


FIG. 22B

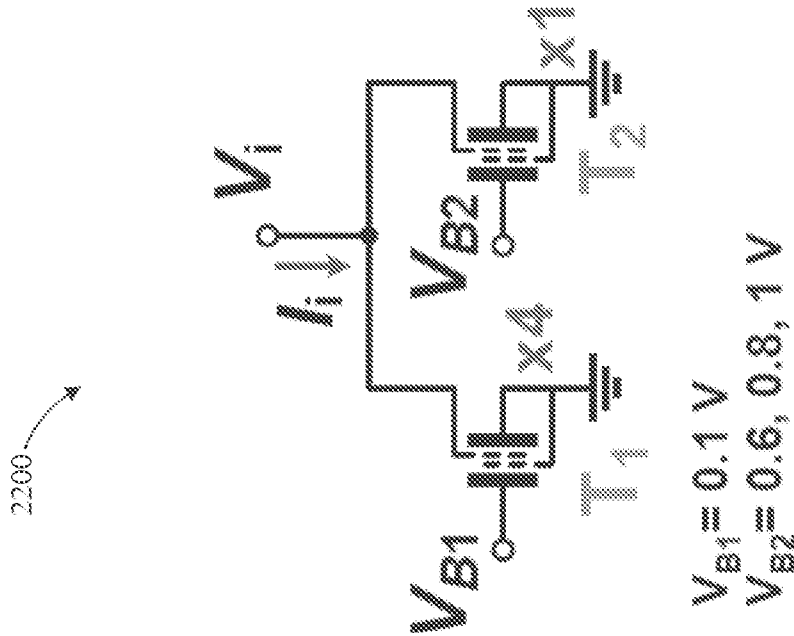


FIG. 22A

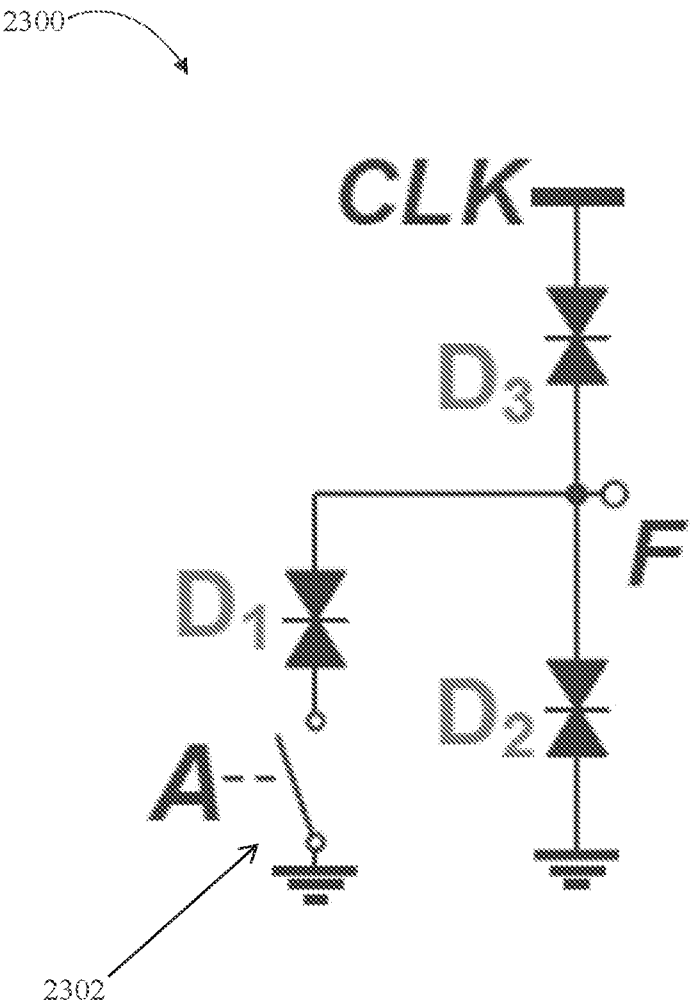


FIG. 23A

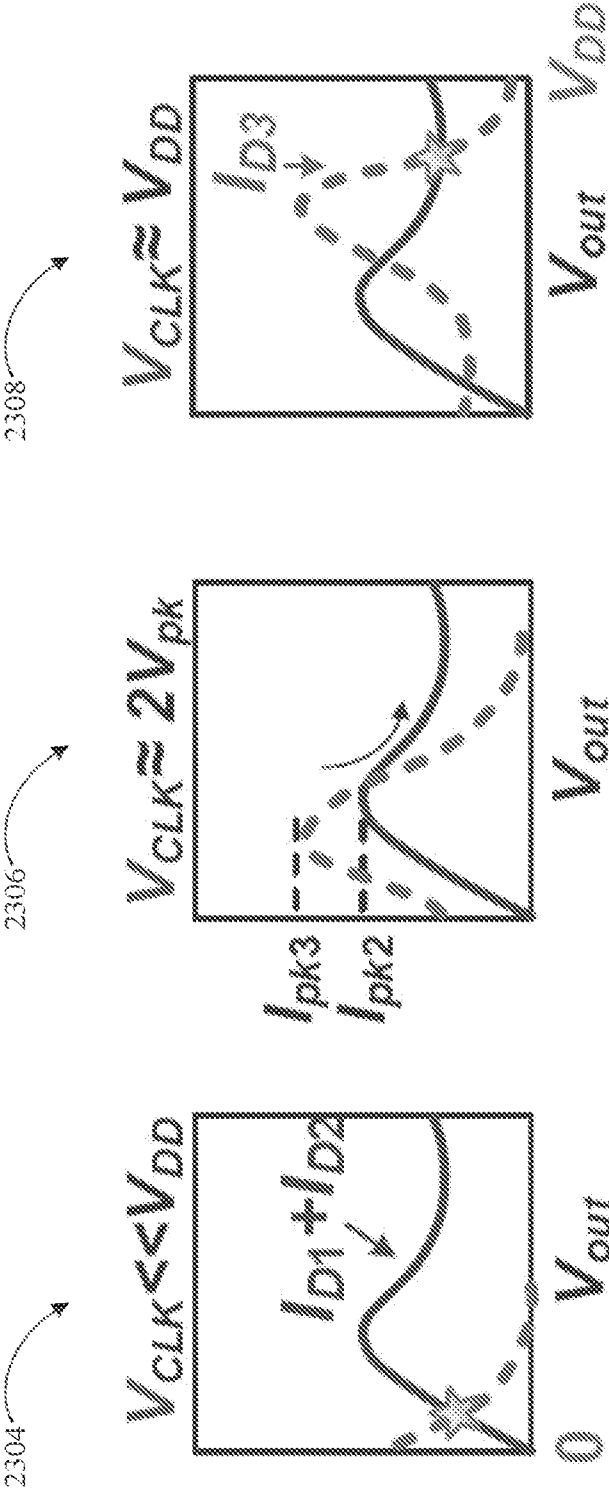


FIG. 23B

FIG. 23C

FIG. 23D

2400

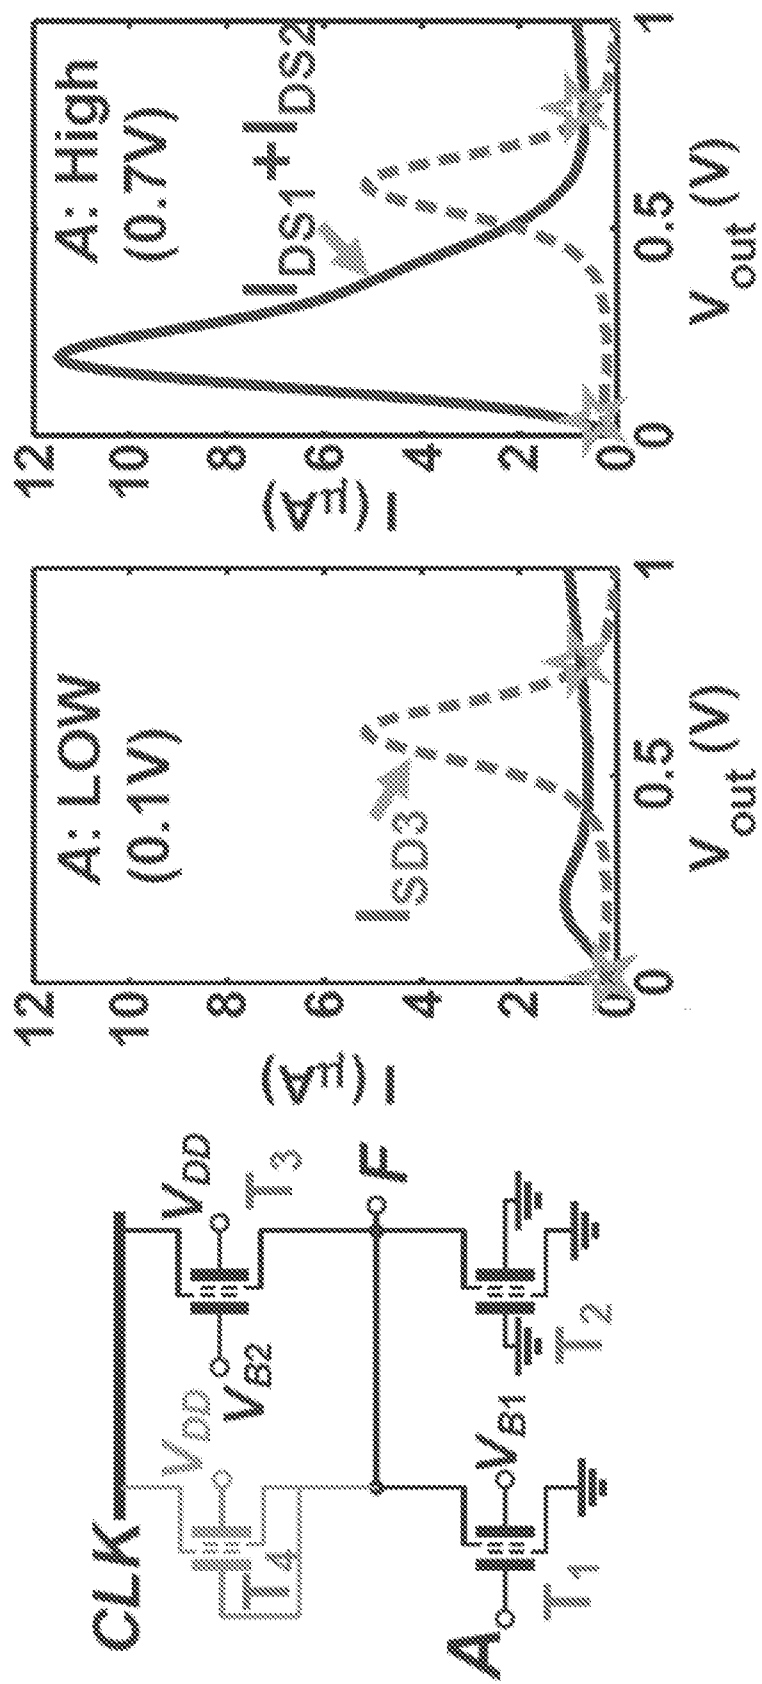


FIG. 24A

FIG. 24B

FIG. 24C

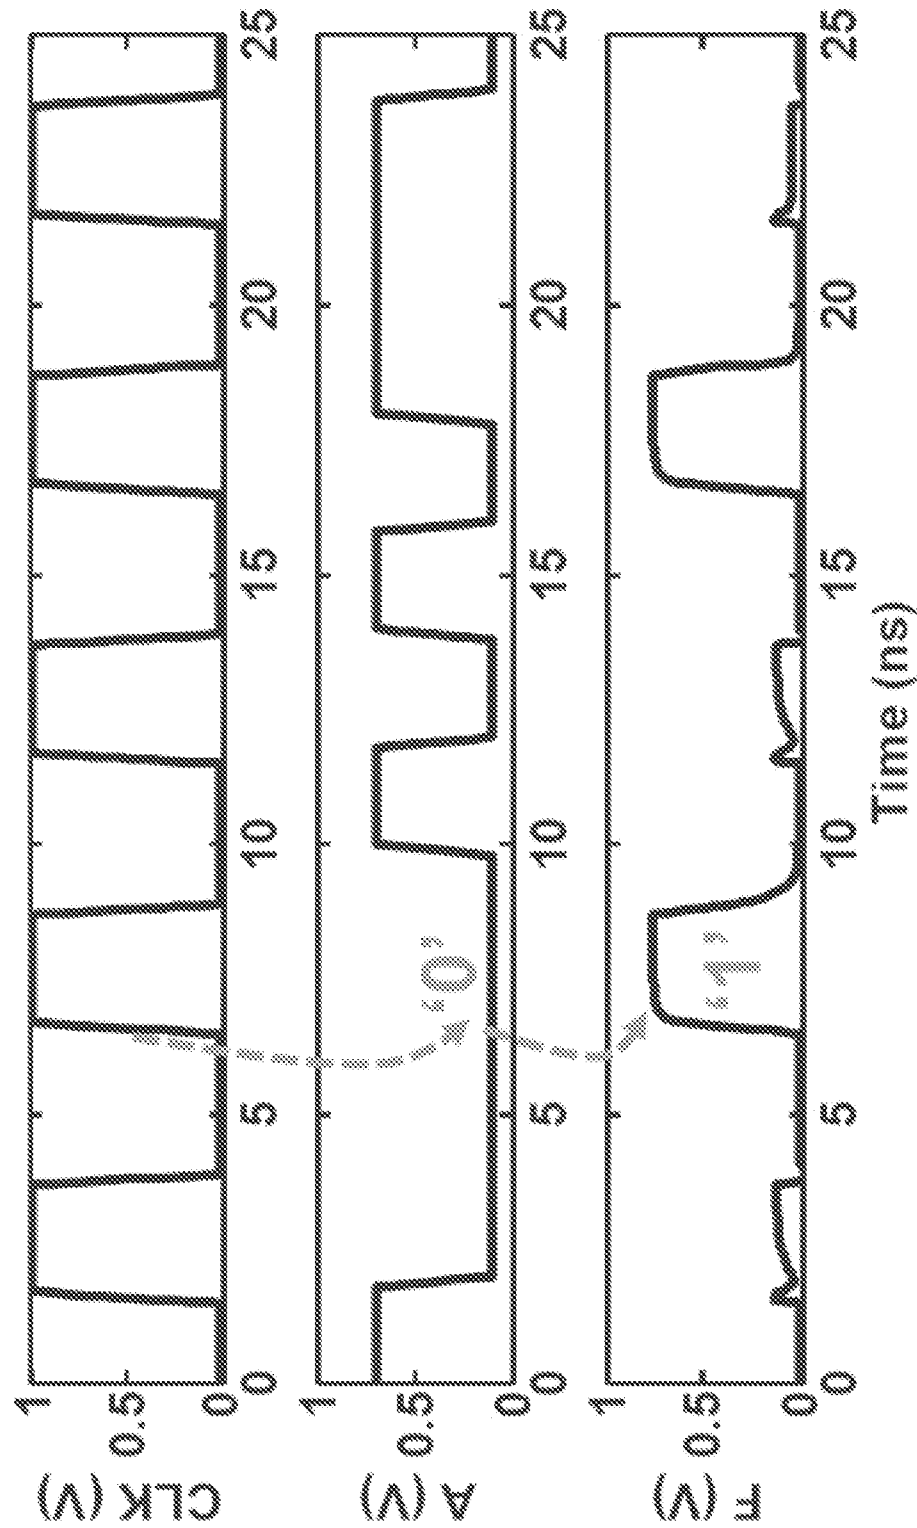


FIG. 24F FIG. 24E FIG. 24D

2400

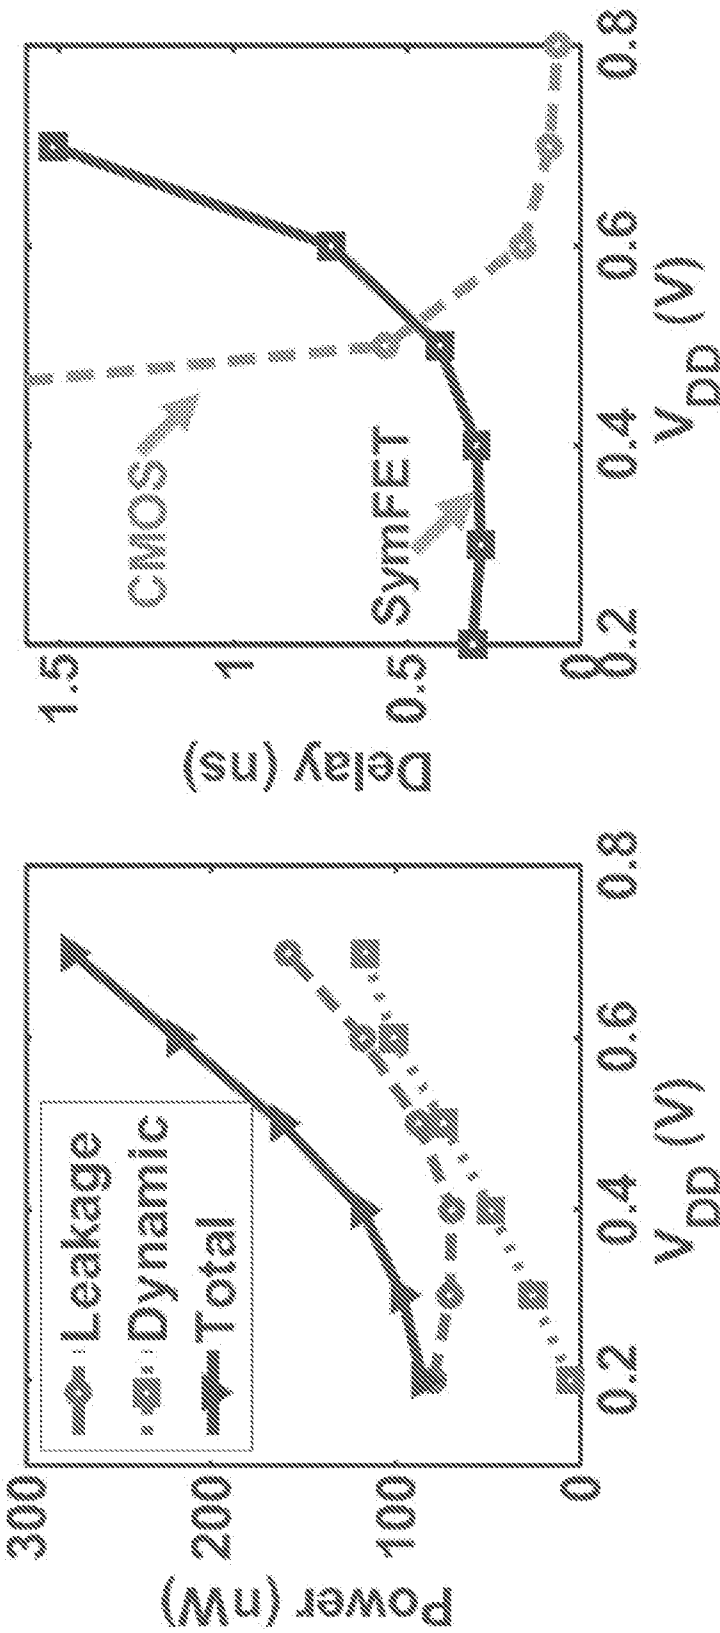


FIG. 25B

FIG. 25A

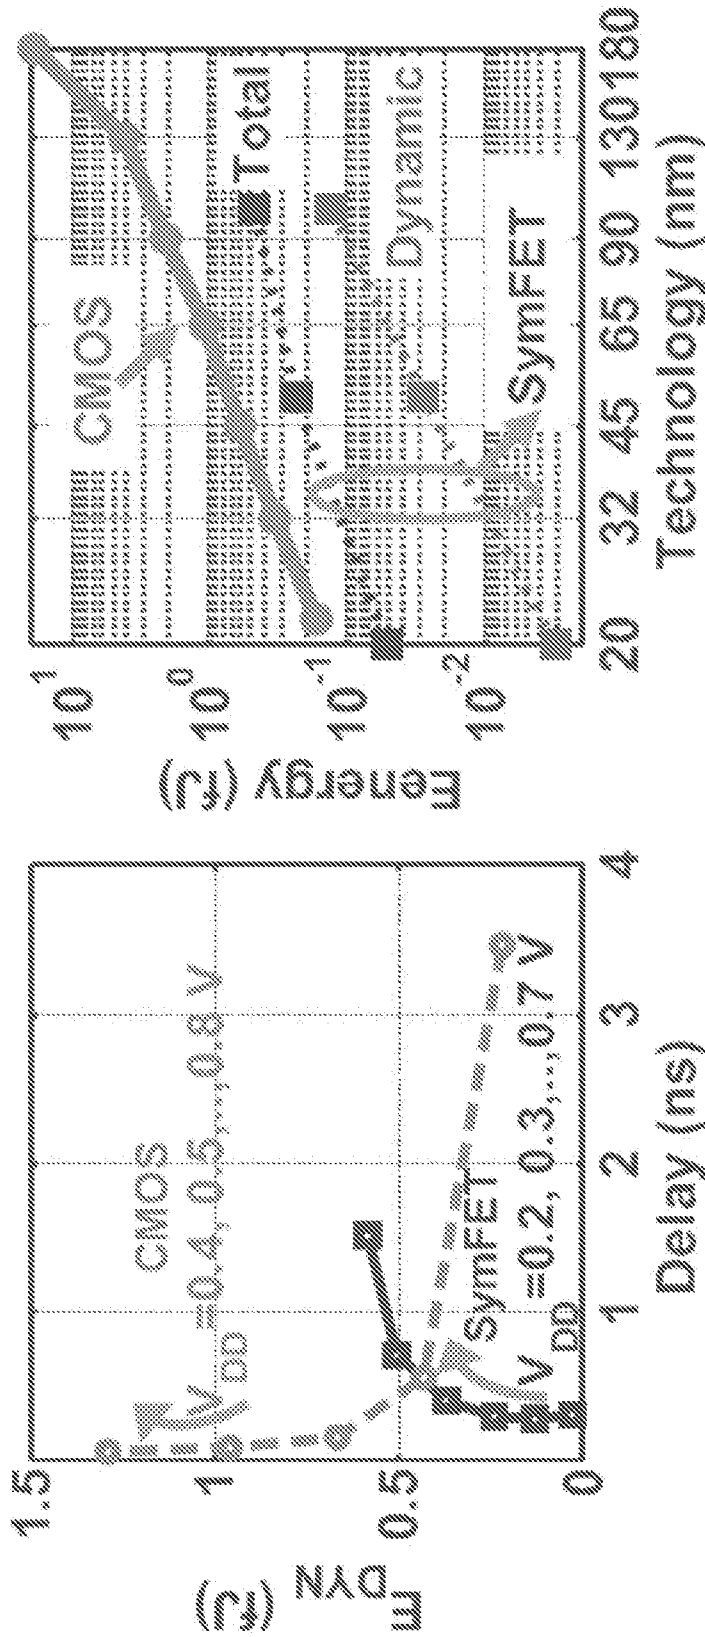


FIG. 25D

FIG. 25C

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US15/67505

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - H01L 29/78, 29/772; G11C 11/412 (2016.01)

CPC - H01L 29/772, 29/66742; G11C 11/4125

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) Classification(s): H01L 29/78, 29/772; G11C 11/412 (2016.01)

CPC Classification(s): H01L 29/772, 29/66742; G11C 11/4125; H01L 27/11

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

PatSeer (US, EP, WO, JP, DE, GB, CN, FR, KR, ES, AU, IN, CA, INPADOC Data); Google Scholar; IEEE; EBSCO

Keywords used: symmetric tunneling field-effect transistors; SymFETs; graphene layers; Boolean logic device; Boolean logic latch; Boolean MAJORITY gate

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	Bi, Y et al. "Leveraging Emerging Technology for Hardware Security-Case Study on Silicon Nanowire FETs and Graphene SymFETs" in Test Symposium (ATS), 2014 IEEE 23rd Asian , vol., no., pp.342-347, 16-19 Nov. 2014, [retrieved on 2/19/2016], Retrieved from the internet URL: http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=6979124&isnumber=6979054 .	1-3, 5-7, 10, 12-13 4, 8-9, 11
Y A	Li, X et al. "A Low-Voltage Low-Power LC Oscillator Using the Diode-Connected SymFET" in VLSI (ISVLSI), 2014 IEEE Computer Society Annual Symposium on , vol., no., pp.302-307, 9-11 July 2014; [Retrieved on 02/19/2016]; Retrieved on online at URL: http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=6903380&isnumber=6903314	1-3, 5-7, 10, 12-13 4, 8-9, 11
Y A	SEDIGHI, B et al. "Boolean circuit design using emerging tunneling devices" in Computer Design (ICCD), 2014 32nd IEEE International Conference on , vol., no., pp.355-360, 19-22 Oct. 2014; [retrieved online on 02/19/2016]. Retrieved from the internet at URL: http://ieeexplore.ieee.org/stamp/stamp.jsp?tp=&arnumber=6974705&isnumber=6974646	2-3 4
Y	US 5,438,292 A (TADOKORO, K) August 01, 1995; abstract; figure 3; column 3, lines 56-63; column 4, lines 1-16	3
Y A	US 4,344,121 A (WEBER, H) August 10, 1982; abstract; column 1, lines 1-14	6 9
A	US 5,424,655 A (CHUA, H) June 13, 1995; figure 3A-3C; abstract; column 2, lines 45-54	8-9, 11
Y	US 3,609,329 A (MARTIN, H) May 05, 1969; figures 3, 6; column 2, lines 53-56	10



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 February 2016 (19.02.2016)

Date of mailing of the international search report

10 MAR 2016

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US15/67505

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2009/0302894 A1 (CHUANG, C et al.) December 10, 2009; figure 3; abstract; paragraphs [0009], [0022], [0027]	13