



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 432 082 B1**

12

EUROPEAN PATENT SPECIFICATION

49 Date of publication of patent specification: **02.11.94** 51 Int. Cl.⁵: **B05B 1/30, B65D 35/50**

21 Application number: **90610073.0**

22 Date of filing: **06.12.90**

54 **Pressure sensitive valve.**

30 Priority: **07.12.89 DK 6172/89**

43 Date of publication of application:
12.06.91 Bulletin 91/24

45 Publication of the grant of the patent:
02.11.94 Bulletin 94/44

84 Designated Contracting States:
DE FR GB IT NL SE

56 References cited:
DE-A- 2 703 095
DE-A- 2 715 787
FR-A- 825 740
US-A- 2 109 397

73 Proprietor: **Palsson, Allan Kenneth**
Ringsbjergvej 31
DK-4682 Tureby (DK)

72 Inventor: **Palsson, Allan Kenneth**
Ringsbjergvej 31
DK-4682 Tureby (DK)

74 Representative: **TER MEER - MÜLLER - STEIN-**
MEISTER & PARTNER
Mauerkircherstrasse 45
D-81679 München (DE)

EP 0 432 082 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention relates to a valve of the kind, having a cylindrical valve housing with a rectilinear continuous flow path, a conical valve seat disposed on the valve housing concentric to the flow path and a disc-shaped valve body with at least a stem and a closure member. The valve body is arranged fluid tight and moveable in the valve housing and actuated by a spring device, which further end makes contact to a spring seat.

The valve according to the invention may be employed for controlling the flow of a liquid or gaseous medium from a container or in a pipe, wherein the medium is contained.

Valves for this service are usually globe valves with a valve body fastened to a stem, which stem being actuated by the force of an actuator spring arranged externally to the valve housing. The valve closure member of such a valve is lifted from the valve seat when the pressure in the medium to be controlled extends a predetermined limit where the spring force is defeated, which otherwise forces the closure member against the seat.

As a disadvantage, the medium flow through the known globe valves is caused to take a non-linear path through the seat and along the closure member, which results in a large pressure drop.

A valve with a linear flow path is the known gate valve. This valve is opened when the gate is moved by the stem into the yoke or top section of the valve. The yoke or top section is positioned externally to the valve housing. Neither this kind of valve provides a compact valve assembly, having all components arranged within the valve housing.

A compact seat valve with a substantially rectilinear continuous flow path is mentioned in DK-Patent Publication No. 4345/75, wherein a circular valve seat is arranged within the valve housing concentric to the flow path. A valve ball, which works together with the seat is spring loaded by a spiral spring.

One end of the spring makes contact to a spring seat provided with a central bore. The opposite end of the spring, which actuates the valve ball, makes contact to a further spring seat having in its circumference grooves parallel to the axis of the spring seat. The flow path is thereby obtained through the grooves and the central bore of the spring seat. According to this reference, the valve is suitable as a check valve for a suction flask.

A disadvantage of the mentioned valve is the restricted path through the grooves of the spring seat and the arrangement of the spring within the flow path. This is particular disadvantageous, when the valve is used to control flow of highly viscous media or flowable solids.

A closure valve with a rectilinear flow path and an annular pressure sensitive plunger is mentioned in US Patent No. 2,109,397. The disclosed valve is intended for dispensing contents from collapsible tubes or similar containers, wherein contents passing through the neck portion of a tube exert a downward pressure on the plunger to unseat the valve upon squeezing the tube. When squeezing of the tube is stopped a spring returns the valve to seated position.

The object of the present invention is to provide a valve of that kind, which has a rectilinear continuous flow path through the valve housing, and which is useful to control a stream of highly viscous or flowable media without the disadvantages of the known valves.

Accordingly, the present invention comprises a valve of the introductory mentioned kind, and wherein the stem is coaxially to the axis of the flow path arranged on the valve body, which concentric to the axis of the flow path is provided with a central bore and with an axially directed cylindrical nozzle opposite to the stem, the nozzle surrounds concentric and moveable in fluid tight manner a cylindrical nozzle guide arranged on the spring seat around an inlet section, the inlet section is in form of a central bore through the spring seat and has a cross sectional area, which is less than the cross sectional area of the valve body, the spring device is concentrically arranged around the axially directed nozzle.

The valve is characterized in that the valve closure member is provided with an auxiliary check valve. The check valve is of the kind comprising a plug with peripheral grooves parallel to the axis of the plug, thereby providing a flow path from the inside of the main valve housing to the outside of the valve. The plug is disposed in a bore through the closure member and has on the side being outside the main valve housing a bonnet or a thickening, which prevents the plug from sliding through the bore. On the side being inside the housing, the plug is provided with a cone or disc-shaped body, which upon pressure in the main valve is forced tightly against the closure member.

The flow path through the valve according to the invention is thus provided by the central bore through the spring seat, the central bore through the valve body together with the axially directed nozzle, and by the conical seat, which concentric to the axis of the flow path is arranged on the valve housing.

The spring device is thereby disposed outside the flow path, which is advantageous, in particular when the valve is flushed by viscous liquids or particulate materials.

At vacuum or under pressure inside the valve housing, the pressure is equalized by leaking air or

a medium outside the valve through the grooves in the plug and into the space defined by the main valve body and valve seat.

A particular feature of the valve according to the invention is the difference between the cross sectional areas of the inlet section and the disc-shaped valve body, which is exposed to the pressure in the medium controlled by the valve.

The pressure exerted by a fluid in closed containers is as known the same all over the boundaries of a container. Thus the pressure in the valve can be expressed by the following relationship:

$$P_m = F_f/A_f = F_v/A_v = \text{const.},$$

where P_m is the pressure exerted by the fluid in the valve; F_f and F_v is the force acting in the central bore of the inlet section and on the valve disc of the valve body, respectively; and A_f and A_v is the cross sectional area of the central bore and the valve disc, respectively.

By providing the valve disc with a larger area than the area of the inlet section a large spring force exerted by the spring device can act on the closure member in order to provide an air tight closure of the valve, which is particularly advantageous, when the medium to be controlled comprises air sensible or air hardening components, such as pastes or adhesives. On the other hand the pressure in the medium can be relatively low in order to open the valve, which is further desirable, when the medium is released from a container by manual pressure on the container.

In a further embodiment of the invention, the distance between the valve body and the spring seat can be regulated continuously by arranging the spring seat displaceable in the valve housing. The spring seat is thereby formed as a cylinder with projections on the cylinder wall, preferably a thread, which acts together with a compatible projection on the inner wall of the valve housing. By regulating the distance, the spring force acting on the valve body, is regulated by screwing the valve housing or the spring seat a number of turns around its axis.

The valve according to the invention may further advantageously be used as exit nozzle in extruders.

For this purpose, the valve seat may be provided with e.g. a cylindrical nozzle piece.

In the following description the invention is more fully described with reference to the drawings, in which

FIG. 1 shows a cross sectional view of a valve constructed according to one embodiment of the invention;

FIG. 2 is a cross sectional view of a valve closure member according to a fur-

ther embodiment of the invention; and
FIG. 3 is a horizontal section through the valve closure member of FIG. 2.

Referring now to FIG. 1, the valve comprises a cylindrical valve housing 1, which in its upper part is provided with a cone-shaped valve seat 3. Valve seat 3 has a circular opening 3a concentric to the axis of flow path 2 through the valve. Opening 3a constitutes the outlet of the valve.

A valve closure member 4, which acts together with valve seat 3, has in the shown embodiment a conical shape. Other shapes, such as a hemispherical or a lenticular shape, may be suitable as well.

Closure member 4 may as mentioned above be provided with an inlet valve 40 (FIG. 2).

As shown in FIG. 2 and FIG. 3 the closure member 4 has in such an embodiment built in a cylindrical plug 41, which slides in a central bore 42 through closure member 4. Plug 41 is provided with peripheral grooves 41a parallel to the axis of the plug. A bonnet 41b on the plug 41 outside the main valve, prevents the plug from sliding completely through bore 42. On the opposite side plug 41 has a conical body 41c, which acts together with an equivalent conicity 4b on the downside of closure member 4.

Closure member 4 (FIG. 1) is connected via a valve stem 6 to a valve body 8, which consists of a valve disc 8a and an axial directed nozzle 8b around a central bore 8c through body 8.

The peripheral part of valve disc 8a makes fluid tight contact to the inner wall 1a of housing 1. Body 8 is at its downside loaded with a spiral spring 10, which further end makes contact to a cylindrical spring seat 12.

Spring seat 12 is in the shown embodiment formed as screw plunger with a thread 12a, which acts together with a compatible thread 1b at the inner wall 1a of the valve housing.

As mentioned hereinbefore it is possible to control in such an embodiment of the valve the flow through the valve by varying the distance between spring seat 12 and the closure member 8. The valve may be closed constantly, by screwing seat 12 into the valve housing 1, until seat 12 hits nozzle 8b, so that any movement of body 8 is prevented.

Spring seat 12 is further provided with a central bore 12c, and an axial disposed guide nozzle 12b, which is surrounded tightly slidingly by nozzle 8b.

Central bore 12c constitutes the valve inlet 11, through which the medium to be controlled flows into the valve flow path 2. Flow path 2 is further constituted by central bore 12c and 8c through spring seat 12 and valve disc 8, and by guide nozzle 12b, nozzle 8b and the conical valve seat 3 with annular opening 3a.

The valve is in its normal state closed and a medium flowing into the valve housing fills up the space between valve seat 3 and the upper side of valve body 8. The body 8 is moved by a force directed against the upper side of valve disc 8a, which force is proportional to the medium pressure at inlet 11 and the area of disc 8a.

Body 8 is moved thereby towards spring seat 12 when this force overcomes the spring force of spring 10. The flow path through opening 3a in the valve seat is then opened and the medium flows through the valve.

The circumferential part of disc 8a slides tightly along the inner wall 1a of the valve housing and nozzle 8b slides along guide nozzle 12b, thereby preventing fluttering of the valve body 8. At decreasing pressure in the medium and consequently a decreasing force on disc 8a, the spring force acting oppositely on disc 8a overcomes this force and the valve returns to its closed position.

Although the present invention has been shown and described with reference to particular embodiments thereof, the invention is not limited to the shown embodiments. Thus in further embodiments of the invention, the outer wall of valve housing 1 may be provided with a thread allowing the valve to be screwed into a pipe or tube.

Furthermore, the central bore 12c through the spring seat 12, may be provided with a thread, a coupler or a spring lock by which the valve may be fastened to a container.

Dimensions and materials of the valve are not important to the invention and may be chosen freely.

Claims

1. A valve of the kind having a cylindrical valve housing (1) with a rectilinear continuous flow path (2), a conical valve seat (3) having a circular valve opening (3a) and being disposed concentric to the flow path (2) on the valve housing (1), and a valve body (8) comprising a valve disc (8a) and arranged on the valve disc (8a) at least a stem (6) and via the stem (6) a valve closure member (4), said valve body (8) being arranged fluid tight and moveable in the housing (1) and being actuated by a spring device (10), the further end of the spring device (10) making contact to a spring seat (12), wherein the stem (6) is arranged axially displaced to the flow path (2) on the valve body (8) being provided with a central bore (8c) and on the opposite side to the stem (6) concentrically to the central bore (8c) with an axially directed cylindrical nozzle (8b), the nozzle (8b) surrounds concentric and movable in fluid tight manner a cylindrical nozzle guide (12b) being

arranged on the spring seat (12) concentric to an inlet section (11), the inlet section (12) is centrally bored through the spring seat (12) and has a cross sectional area less than the cross sectional area of the valve disc (8a), the spring device (10) concentrically surrounds the axially directed nozzle (8b, 12b),

characterized in that

the valve closure member (4) is provided with an auxiliary check valve (40) comprising a cylindrical plug (41), which in its circumference is provided with axis parallel grooves (41a).

2. The valve according to claim 1,

characterized in that

the spring seat (12) in its circumference is provided with a projection (12a), which acts together with an equivalent projection (1b) on the inner wall (1a) of the valve housing.

3. The valve according to claim 2,

characterized in that

the projection (12a, 1b) is formed as a thread.

4. The valve according to claim 2,

characterized in that

the projection (12a, 1b) is formed as a spring lock.

5. The valve according to claim 1,

characterized in that

the inlet section (11) is provided with a coupling device.

6. The valve according to claims 5,

characterized in that

the coupling device is in the form of a thread.

7. The use of a valve according to any one of the preceding claims as exit nozzle to an extruding apparatus.

Patentansprüche

1. Ventil mit zylindrischem Ventilgehäuse (1) und ununterbrochenem, geradlinigen Strömungsweg (2), einem konischen Ventilsitz (3) mit kreisförmiger Ventilöffnung (3a), die konzentrisch zum Strömungsweg (2) im Ventilgehäuse (1) vorhanden ist, und einem Ventilkörper (8), welcher eine Ventilscheibe (8a) und wenigstens einen an der Ventilscheibe (8a) vorhandenen und ein Ventilschließelement (4) tragenden Arm (6) aufweist, wobei der Ventilkörper (8) flüssigkeitsdicht und bewegbar im Gehäuse (1) angeordnet ist und mittels einer Federeinrichtung (10) betätigt wird, deren anderes Ende in Kontakt mit einem Federsitz (12) steht, der

Arm (6) axial zum Strömungsweg (2) versetzt am Ventilkörper (8) vorhanden ist, welcher eine Zentralbohrung (8c) und an der dem Arm (6) gegenüberliegenden Seite und konzentrisch zur Zentralbohrung (8c) eine axial verlaufende, zylindrische Düse (8b) aufweist, die konzentrisch und bewegbar sowie flüssigkeitsdicht eine zylindrische Düsenführung (12b) umgibt, die am Federsitz (12) vorhanden ist und konzentrisch zu einem Einlaßabschnitt (11) liegt, welcher durch eine Zentralbohrung im Federsitz (12) gebildet ist und eine Querschnittsfläche aufweist, die kleiner ist als die Querschnittsfläche der Ventilscheibe (8a), und wobei die Federeinrichtung (10) die axial verlaufende Düse (8b, 12b) konzentrisch umgibt, **dadurch gekennzeichnet**, daß das Ventilschließelement (4) mit einem Hilfsprüfventil (40) ausgestattet ist, das einen zylindrischen Bolzen (41) aufweist, der in seiner Umfangsrichtung gesehen achsparallele Furchen (41a) besitzt.

2. Ventil nach Anspruch 1, **dadurch gekennzeichnet**, daß der Federsitz (12) in seiner Umfangsrichtung mit einem Vorsprung (12a) versehen ist, der mit einem äquivalenten Vorsprung (1b) an der Inneren Wand (1a) des Ventilgehäuses zusammenarbeitet.

3. Ventil nach Anspruch 2, **dadurch gekennzeichnet**, daß der Vorsprung (12a, 1b) als Gewindestück ausgebildet ist.

4. Ventil nach Anspruch 2, **dadurch gekennzeichnet**, daß der Vorsprung (12a, 1b) als Federschloß ausgebildet ist.

5. Ventil nach Anspruch 1, **dadurch gekennzeichnet**, daß der Einlaßabschnitt (11) mit einer Kupplungseinrichtung ausgestattet ist.

6. Ventil nach Anspruch 5, **dadurch gekennzeichnet**, daß die Kupplungseinrichtung in Form eines Gewindestücks vorliegt.

7. Verwendung eines Ventils nach irgendeinem der vorhergehenden Ansprüche als Ausgangsdüse einer Extrudiereinrichtung.

Revendications

1. Une valve du genre comprenant un boîtier de valve cylindrique (1), présentant un trajet d'écoulement continu rectiligne (2), un siège de valve conique (3) muni d'une ouverture de valve circulaire (3a) et disposé concentriquement au trajet d'écoulement (2) sur le boîtier

de valve (1), et un corps de valve (8) comprenant un disque de valve (8a), et agencée sur le disque de valve (8a), au moins une tige (6) et, lié à la tige (6), un clapet de fermeture de valve (4), ledit corps de valve (8) étant agencé étanche au fluide et mobile dans la boîte (1) et étant actionné par un dispositif de ressort (10), l'autre extrémité du dispositif de ressort (10) étant en contact avec un siège de ressort (12), dans laquelle la tige (6) est disposée en étant axialement déplacée par rapport au trajet d'écoulement (2) sur le corps de valve (8) muni d'un alésage central (8c) et, du côté opposé à la tige (6) et concentriquement à l'alésage central (8c), d'une buse cylindrique dirigée axialement (8b), dans laquelle la buse (8b) entoure concentriquement et mobile de façon étanche au fluide un guide de buse cylindrique (12b) disposé sur le siège de ressort (12) concentriquement à une section d'entrée (11), dans laquelle la section d'entrée (11) est réalisée par un alésage central à travers le siège de ressort (12) et présente une surface de section transversale inférieure à la surface de section transversale du disque de valve (8a), dans laquelle le dispositif de ressort (10) entoure concentriquement la buse dirigée axialement (8b, 12b) caractérisée en ce que le clapet de fermeture de valve (4) est muni d'un clapet anti-retour auxiliaire (40) comprenant un bouchon cylindrique (41), qui est muni sur sa circonférence de rainures parallèles à l'axe (41a),

2. La valve selon la revendication 1, caractérisée en ce que le siège de ressort (12) est muni sur sa circonférence d'une partie en saillie (12a) qui coopère avec une partie en saillie correspondante (1b) sur la paroi intérieure (1a) du boîtier de valve.

3. La valve selon la revendication 2, caractérisée en ce que la partie en saillie (12a, 1b) est réalisée sous la forme d'un filetage.

4. La valve selon la revendication 2, caractérisée en ce que la partie en saillie (12a, 1b) constitue un verrou de ressort.

5. La valve selon la revendication 1, caractérisée en ce que la section d'entrée (11) est munie d'un dispositif d'accouplement.

6. La valve selon la revendication 5, caractérisée en ce que le dispositif d'accouplement est réalisé sous la forme d'un filetage.

7. L'utilisation d'une valve selon l'une quelconque des revendications précédentes, pour servir de buse de sortie pour un appareil d'extrusion.

5

10

15

20

25

30

35

40

45

50

55

6

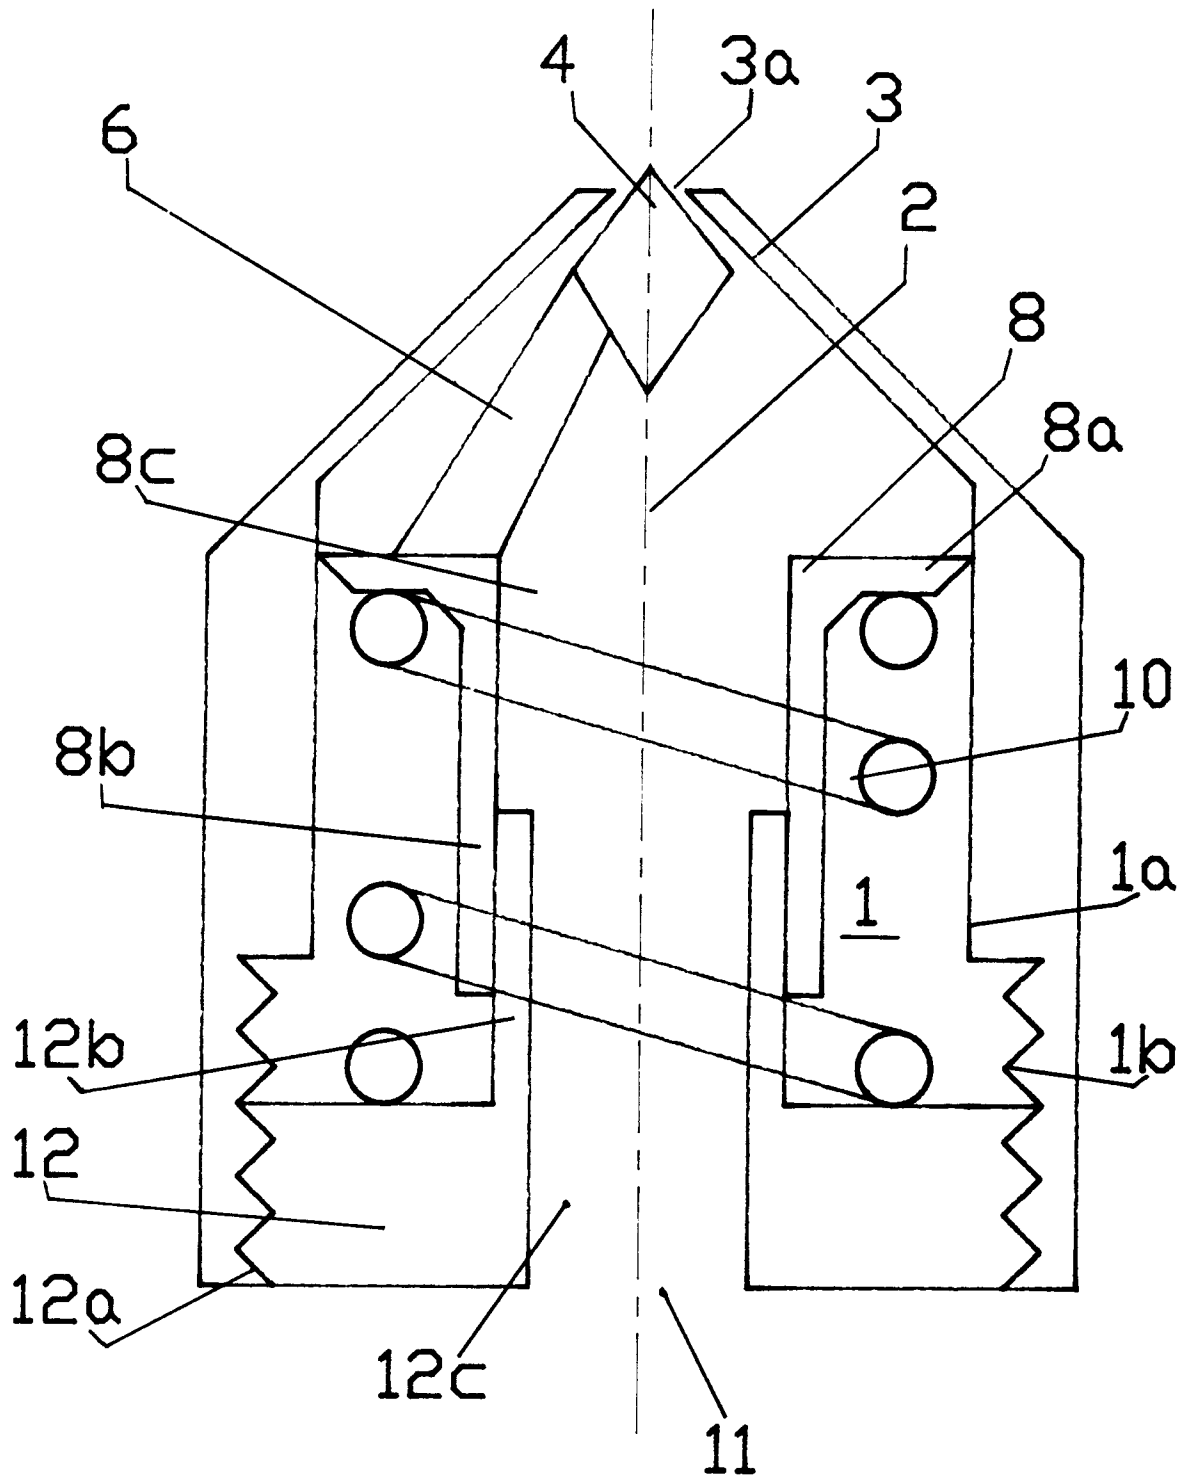


Fig. 1

