



- (51) **International Patent Classification:**
H01H 3/60 (2006.01) *H01H 9/00* (2006.01)
- (21) **International Application Number:**
PCT/EP2013/068825
- (22) **International Filing Date:**
11 September 2013 (11.09.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
12185957.3 25 September 2012 (25.09.2012) EP
- (71) **Applicant:** ABB TECHNOLOGY LTD [CH/CH]; Affolternstrasse 44, CH-8050 Zürich (CH).
- (72) **Inventors:** KRAINER, Per; Dianavägen 26C, SE-771 42 Ludvika (SE). HEDSTEN, Harald; Ljungbacken 6, SE-772 50 Grängesberg (SE).
- (74) **Agent:** SVELA, Reino; ABB AB, Intellectual Property, Ingenjör Bååths Gata 11, S-721 83 Västerås (SE).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

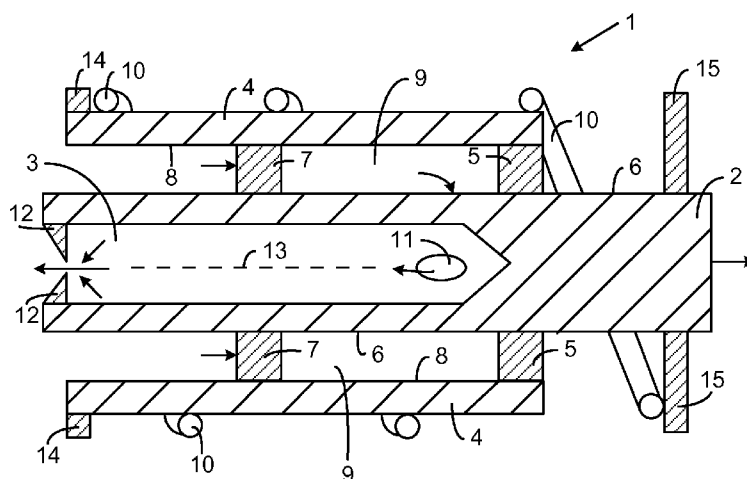
(54) **Title:** ACTUATOR FOR A TAP CHANGER

Fig. 2

(57) **Abstract:** The invention relates to an actuator 1 for a tap changer of an electrical transformer, the actuator comprising: a piston 2, said piston being hollow to define a piston space 3; a cylinder 4 arranged around the piston such that the piston is arranged to be movable axially into and out of the cylinder; a piston ring 7 fixed to the outside surface of the piston such that a cylinder space 9 is formed between the piston and the cylinder and delimited by the piston ring, the cylinder space having a variable volume which is configured to vary with axial movement of the piston; and a spring 10 engaging both the piston and the cylinder such that the spring is able to be compressed and elongated, respectively, with axial movement of the piston; wherein the piston space is connected to the cylinder space via at least one hole 11 through the hollow piston; and wherein the piston space is connected to an outside of the piston via a sharp edged throttle 12.



ACTUATOR FOR A TAP CHANGER

TECHNICAL FIELD

The invention relates to an actuator for a tap changer of an electrical transformer, the actuator comprising a piston and a cylinder, and being
5 actuated by a spring which is loaded by axial movement of the piston relative to the cylinder and induces axial movement of the piston in the opposite direction when the spring is released.

BACKGROUND

A transformer tap is a connection point along a transformer winding that
10 allows a certain number of turns to be selected. This means, a transformer with a variable turns ratio is produced, enabling voltage regulation of the output. The tap selection is made via a tap changer mechanism. The tap changer is a mechanical device which obtains its power from a spring loaded actuator. The spring is loaded (charged) with energy to then be released
15 (discharged) to provide a fast movement of a diverter switch which moves between different contacts, where diverter resistors are used to mitigate the transition state when the switch moves between different contacts when the tap changer is on-load (without halting the operation of the transformer). A diverter is a resistor used to divert part of an electric current, as one
20 connected in shunt with the series winding or with the commutating-pole winding of a machine.

GB 980,677 discloses a mechanism capable of producing repeated rotation of an output shaft in alternate senses between two latching positions as a result of continued rotation of an input shaft, including resilient driving means
25 connected to drive the output shaft, charging means for said resilient driving means and operated by the input shaft, first and second latching means for holding the output shaft in said two latching positions, and means operated by the input shaft for releasing first said latching means when the shaft is in one said latching position and the resilient driving means is charged, the
30 arrangement being such that the resilient driving means then drives the output shaft to the other latching position, where it engages with second said

latching means. One embodiment of the document discloses a mechanism for driving an output shaft, which in turn operates the diverter switches of an on-load transformer tap-changer.

US 6,347,615 discloses a tap-changer vacuum switch having an actuating rod
5 which is extending and displaceable along an axis and which is provided with a damper having a damper housing offset from and fixed relative to the vacuum switch, and a rod piston fixed on the valve-actuating rod, in the damper housing. The damper housing is formed with a pair of radially open ports opening into the compartment. An in-only check valve fitted to one of
10 the ports only permits fluid flow into the compartment, and an out-only check valve fitted to the other port only permits fluid flow out of the compartment. The opening and closing pressures for these valves are largely determined by the constants of their springs. Since the spring constant is much less susceptible to change as its temperature changes, this means that
15 the valves will perform uniformly whether hot or cold. The document is concerned with preventing bouncing of a vacuum switch by applying a constant pressure independent of the oil viscosity.

The time it takes the diverter switch to disconnect from a contact and to connect to another contact is important to achieve good operation of the tap
20 changer. However, the velocity of the switch is dependent on the viscosity of transformer oil in which the tap changer operates, which viscosity is dependent on the temperature of the oil which can vary greatly over an operation cycle of the transformer. The velocity, and thus the switching time, is also dependent on the power of the actuator spring and on mechanical
25 friction within the tap changer, parameters which may also vary over time due to general wear of the tap changer.

SUMMARY

It is an objective of the present invention to at least alleviate problems in the prior art related to varying switching speed of a tap changer over time.

30 According to an aspect of the present invention, there is provided

An actuator (1) for a tap changer (31) of an electrical transformer, the actuator comprising: a movable piston (2) having a longitudinal axis (13); an energy storing device (10), configured for storing energy during axial movement of the piston (2) in a direction and for inducing axial movement of the piston (2) in an opposite direction when the energy stored in the energy storing device (10) is released; wherein a space (9) is defined within the actuator (1), the space having a volume which varies with the axial movements of the piston (2); and at least one choke valve (12) arranged for controlling a flow of a fluid passing through the choke valve between the variable volume space (9) and an outside of the actuator as a result of said axial movement of the piston (2) when the energy stored in the energy storing device (10) is released.

According to another aspect of the present invention, there is provided a use of an embodiment of an actuator of the present invention, for moving a switch of a tap changer in a liquid-filled transformer.

According to another aspect of the present invention, there is provided a method of controlling a velocity of an actuator (1) for a tap changer (31) of an electrical transformer, the actuator being immersed in a liquid and having a central longitudinal axis (13), the method comprising: storing energy in an energy storing device (10) by a first axial movement, in a first direction, of a piston (2) extending along said axis (13), by which axial movement the liquid is forced to flow between a space (9) defined in the actuator and an outside of the actuator (1), the volume of the space (9) being variable with the axial movement of the piston (2); and releasing the energy storing device (10) to induce a second axial movement of the piston (2), by which second axial movement the liquid is pressed through a choke valve (12) as a result of the volume of the space (9) changing with the second axial movement of the piston (2) in a second direction, opposite to the first direction, whereby the axial speed of the second axial movement of the piston is controlled by means of the choke valve.

It is advantageous to, in accordance with the present invention, use a choke valve in the actuator of the tap changer. The choke valve produces a pressure drop in the fluid in which the actuator operates, which pressure drop brakes the discharge movement of the actuator. The use of a choke valve, e.g. a sharp
5 edged throttle, makes the pressure drop essentially independent of the viscosity of the fluid. Thus, by means of the choke valve, the speed of the movement provided by the actuator is made dependent primarily on this pressure drop in relation to the power of the energy storing means, and not on the viscosity of the fluid and/or on the mechanical friction in the tap
10 changer. A stronger energy storing means, e.g. a spring, may be used, whereby the resistance relating to viscosity and friction is negligible in relation to the resistance provided by the choke valve. This implies that the velocity, and thus the switching time, of the tap changer will not change over time due to varying temperature and/or wear of the tap changer. Further, if a
15 more powerful energy storing means is used, as made possible by the choke valve, there is a safety margin in case the mechanics are sluggish for some reason, e.g. due to particles in the fluid getting stuck and hindering the mechanics. Generally, a more powerful energy storing means provides better conditions for performing the switching.

20 In some embodiments, the variable volume space is a piston space formed within the piston, and the choke valve is arranged in a fluid flow path between the piston space and the outside of the actuator. In this case a hollow piston is used for defining the variable space.

In some embodiments, the actuator further comprises a cylinder arranged
25 around the piston such that the piston is arranged to be movable axially inside the cylinder, the cylinder comprising a fixed annular sealing portion extending in a plane transverse to the longitudinal axis and sealingly abutting to and around an outside surface of the piston; and a piston ring fixed to the outside surface of the piston and extending around the piston in a plane
30 transverse to the longitudinal axis, the piston ring forming a seal between the outside surface of the piston and an inside surface of the cylinder such that a cylinder space is formed between the piston and the cylinder and delimited

by the piston ring and the sealing portion of the cylinder; wherein the variable volume space is the cylinder space having a variable volume which is configured to vary with axial movement of the piston in relation to the cylinder; and wherein the choke valve is arranged in a fluid flow path
5 between the cylinder space and the outside of the actuator.

In some embodiments, the choke valve is arranged in the annular sealing portion or in the piston ring.

In some embodiments, the piston is hollow to define a piston space having an invariable volume. In this case, the piston space is connected to the cylinder
10 space via at least one hole through the hollow piston, between the piston space and the cylinder space. Further, the piston space is connected to the outside of the actuator via the choke valve.

In some embodiments, the actuator is configured to operate in liquid, whereby the invariable piston space as well as the variable cylinder space are
15 liquid-filled. Examples of environments where the actuator may conveniently be used include liquid fluid, e.g. oil, filled transformers or the like.

In some embodiments, the actuator is arranged to move a diverter switch in a liquid-filled transformer. Such a switch in the tap changer is particularly dependent on a uniform controlled velocity and switching time. In some
20 embodiments, a switch (e.g. a diverter switch) actuated by the actuator, in a first position, connects an electrical line to a first tap circuitry, and, in a second position, connects the electrical line to a second tap circuitry. Thus, the actuator is used for a switch arranged to switch between two different circuitries, e.g. taps, and not e.g. between an open and a closed position of a
25 circuit breaker.

In some embodiments, the piston ring is made of a metallic material. The metallic material may be harder than the material of the inside surface of the cylinder. A metallic material, in contrast to a softer material such as a plastic material, may be advantageous since the ring may shear down any
30 unevenness in the inside surface of the cylinder, thus improving the sealing

properties of the piston ring against the inside surface of the cylinder, and also reducing the friction in the actuator and preventing the actuator velocity from being dependent on this friction.

Generally, all terms used in the claims are to be interpreted according to
5 their ordinary meaning in the technical field, unless explicitly defined
otherwise herein. All references to "a/an/the element, apparatus, component,
means, step, etc." are to be interpreted openly as referring to at least one
instance of the element, apparatus, component, means, step, etc., unless
10 explicitly stated otherwise. The steps of any method disclosed herein do not
have to be performed in the exact order disclosed, unless explicitly stated.
The use of "first", "second" etc. for different features/components of the
present disclosure are only intended to distinguish the features/components
from other similar features/components and not to impart any order or
hierarchy to the features/components.

15 **BRIEF DESCRIPTION OF THE DRAWINGS**

The invention is now described, by way of example, with reference to the
accompanying drawings, in which:

Fig 1 is a schematic view in longitudinal section of an embodiment of the
actuator of the present invention, illustrating a spring being loaded.

20 Fig 2 is a schematic view in longitudinal section of the embodiment of fig 1 of
the actuator of the present invention, illustrating the spring being released.

Fig 3 is a schematic view in longitudinal section of another embodiment of
the actuator of the present invention, illustrated when the energy storing
device is loaded/in tension.

25 Fig 4 is a schematic view in longitudinal section of the embodiment of the
actuator of figure 3 of the present invention, illustrating when the stored
energy of the energy storing device is released.

Fig 5 is a schematic view in longitudinal section of another embodiment of the actuator of the present invention.

Fig 6 is a schematic view in longitudinal section of another embodiment of the actuator of the present invention.

- 5 Fig 7 is a schematic view in longitudinal section of another embodiment of the actuator of the present invention.

Fig 8 is a graph illustrating the relationship between the force exerted by the energy storing device and the velocity of the piston of the actuator.

- 10 Fig 9 is a schematic circuit diagram of an embodiment of a tap changer of the present invention.

DETAILED DESCRIPTION

- The invention will now be described more fully hereinafter with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different
15 forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided by way of example so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout the description.

- 20 The energy storing device discussed herein may be any such means able to store energy and then release it to induce an axial movement of the piston of the actuator. Examples of an energy storing device include any type of spring such as a spring of a flexible material e.g. a metal, a gas pressure spring, a hydraulic spring, a magnetic spring etc., or a combination thereof.

- 25 The term “spring” used herein should be interpreted broadly relating to any elastic object used to store mechanical energy. The spring may e.g. be a tension/extension spring, configured to operate with a tension load, so the spring stretches as the load is applied to it; a compression spring, configured

to operate with a compression load, so the spring gets shorter as the load is applied to it, a torsion spring, configured to take a load where the load is not an axial force but a torque or twisting force, and the end of the spring rotates through an angle as the load is applied. The spring may be a constant spring
5 where the supported load will remain the same throughout deflection cycle; or a variable spring where the resistance of the spring to load varies. The spring may e.g. be a coil spring or a flat spring.

The choke valve may be any type of choke valve, e.g. a sharp edged throttle as described as an example herein.

10 That the piston space is connected to the cylinder space and the outside of the actuator implies that the piston space is in fluid communication both with the cylinder space and with the outside (surroundings) of the actuator, such that the ambient fluid, e.g. oil, can be pressed into and out of, respectively, the cylinder space via the piston space and the throttle when the piston moves
15 into and out of the cylinder. That the piston moves out of the cylinder means that the piston moves in a direction such that it extends further and further out of the cylinder, but without actually being removed completely from the cylinder.

Figure 1 is a schematic illustration in longitudinal section of an embodiment
20 of the actuator 1 of the present invention. A piston 2 is arranged extending into a cylinder 4. The piston has a central longitudinal axis 13 and at least the part of the piston configured to extend into the cylinder 4 may have an essentially circular cross section. The cylinder, at least the part configured for receiving the piston 2, may correspondingly have an essentially circular cross
25 section. An energy storing device 10 in the form of a coil spring is arranged around, on the outside of, the cylinder 4. The spring 10 engages (or is in mesh with) the cylinder by means of the cylinder flange 14 against which an end of the spring rests, and engages (or is in mesh with) the piston by means of the piston flange 15 against which an opposite end of the spring rests. Thus, the
30 spring 10 is compressed (being loaded/charged) when the piston 2 moves into the cylinder 4, as indicated by the arrow furthest to the right in the

figure, and extended (released/discharged) when the piston moves out of the cylinder, i.e. moves to the right in the figure. A compression coil spring is only one of many alternatives of springs that can be used. Also, in some embodiments, the spring may be loaded when extended, and compress when released.

A piston ring 7 is fixed to the outside of piston 2 to form a seal between the piston and the cylinder, while maintaining a concentric annular space between the piston 2 and the cylinder 4. The cylinder 4 comprises a fixed annular sealing portion 5 extending in a plane transverse to the longitudinal axis 13 and sealingly abutting to and around an outside surface 6 of the piston 2. The sealing portion 5 of this exemplary embodiment marks the end of the cylinder 4, through which an outer end of the piston 2 extends, the inner end of the piston extending into the cylinder. In the annular space between the piston and the cylinder, a cylinder space 9 is formed between the sealing portion 5 and the piston ring 7 between the outer surface 6 of the piston and the inner surface 8 of the cylinder. This cylinder space 9 has a variable volume since the piston ring 7 moves with the piston, as indicated by arrows in the figure, increasing the volume of the cylinder space 9 when the piston is pushed into the cylinder, and reducing said space 9 when the piston is pushed out of the cylinder.

The piston 2 is hollow, defining a piston space or cavity 3 inside the piston. The piston space 3 may be concentric in relation to the piston and the cylinder, and be rotation symmetrical around the central longitudinal axis 13 of the piston. The piston space 3 is in fluid communication with the cylinder space 9 via a through hole 11 between the two spaces or cavities, such that a fluid can flow between said two cavities 3 and 9 via the hole 11. The piston space 3 is also in fluid communication with the ambient fluid outside of the actuator 1, via a choke valve 12 in the form of a sharp-edged throttle. The throttle 12 may be positioned at an end of the piston 2. The throttle allows ambient fluid (as indicated by the arrows) to flow into the piston space 3, and further into the cylinder space 9, via the throttle 12 and the hole 11, when the piston is pushed to the leftwards in the figure. The throttle 12 can have an

essentially triangular cross section. The throttle 12 can be rotation symmetrical around an axis, e.g. the central longitudinal axis of the piston. A central angle at the opening of the throttle and formed by the throttle material, forms a sharp edge in order to reduce the influence of viscosity. For example, if a cross section of the throttle 12 is triangular, the central angle of the triangle forms the sharp edge and may be an acute angle of less than 45°, less than 30°, less than 20° or less than 10°.

Figure 2 is a schematic illustration in longitudinal section of the same embodiment of the actuator 1 of the present invention as in figure 1.

However, in figure 2, the arrows illustrates how the piston is pushed rightwards in the figure as the spring 10 is released. As also illustrated by arrows, fluid is then pressed out from the cylinder space 9 into the piston space 3 via the hole 11 and into the surroundings from the piston space 3 via the throttle 12.

Figures 3 and 4 schematically illustrates an embodiment of the actuator 1 of the present invention, in longitudinal section (cf. figures 1 and 2). The embodiment is more general, and the figures more schematic, but includes the more detailed embodiment of figures 1 and 2. For the sake of clarity, the energy storing device 10 is not shown. Figure 3 illustrates the situation when the energy storing device is loaded and the actuator thus is in tension. The variable space 9 is defined between the hollow piston 2, the cylinder 4, the annular sealing portion 5 and the piston ring 7. The choke valve 12 is, as in figures 1 and 2, positioned at an end of the piston 2, allowing a non-variable space formed in the hollow piston to communicate with the outside of the piston and actuator 1. Figure 4 illustrates what happens when the energy storing device is released and the piston 2 and the piston ring 7 thus move axially as indicated by the big arrow at the right end of the piston 2. The variable space 9 is reduced with the axial movement whereby the fluid therein, e.g. oil, is pressed from the variable space 9 into the hollow piston 2 and out through the choke valve 12, as illustrated by the solid arrow. As discussed above, the choke valve controls the fluid flow thereby braking the axial movement of the piston 2, making the velocity of the axial movement

independent of the viscosity of the fluid and, to some extent, of the force exerted by the energy storing device.

Figure 5 schematically illustrates another embodiment of the actuator 1 of the present invention, in longitudinal section. For the sake of clarity, the energy storing device 10 is not shown. As in figures 3 and 4, the variable space 9 is defined between the hollow piston 2, the cylinder 4, the annular sealing portion 5 and the piston ring 7. A choke valve 12 is in this embodiment positioned through the cylinder 4 in the variable space 9, allowing the variable space 9 to communicate with the outside of the cylinder 4 and actuator 1, as illustrated by the solid arrows. A plurality of radially positioned choke valves 12 can be used (two are shown in figure 5), providing redundancy if a choke valve 12 is blocked or such. In this embodiment, the fluid does not have to flow via a space formed in the piston 2, why a solid piston may be used. Also, no hole 11 between the variable space 9 and a space formed in the piston 2 is needed, making the embodiment of figure 5 less complex than the embodiments of figures 1-4.

Figure 6 schematically illustrates another embodiment of the actuator 1 of the present invention, in longitudinal section. For the sake of clarity, the energy storing device 10 is not shown. As in figures 3 to 5, the variable space 9 is defined between the hollow piston 2, the cylinder 4, the annular sealing portion 5 and the piston ring 7. A choke valve 12 is in this embodiment positioned through the annular sealing portion 5 in the variable space 9, allowing the variable space 9 to communicate with the outside of the cylinder 4 and actuator 1, as illustrated by the solid arrows. A plurality of radially positioned choke valves 12 can be used (two are shown in figure 6), providing redundancy if a choke valve 12 is blocked or such. Again, in this embodiment, the fluid does not have to flow via a space formed in the piston 2, why a solid piston may be used. Also, no hole 11 between the variable space 9 and a space formed in the piston 2 is needed, making the embodiment of figure 5 less complex than the embodiments of figures 1-4.

Figure 7 schematically illustrates another embodiment of the actuator 1 of the present invention, in longitudinal section. For the sake of clarity, the energy storing device 10 is not shown. In contrast to the embodiments of figures 1-6, in the embodiment of figure 7, the variable space 9 is formed in a hollow piston 2. The volume of the variable space 9 is varied by a rod inserted into the variable space 9, reducing said space 9 when said rod is pressed further into the variable space. A choke valve 12 is in this embodiment positioned through a wall of the variable space 9 in the piston 2, e.g. radially, allowing the variable space 9 to communicate with the outside of the piston 2 and actuator 1, as illustrated by the solid arrows. A plurality of radially positioned choke valves 12 can be used (two are shown in figure 7), providing redundancy if a choke valve 12 is blocked or such. When the piston 2 moves axially (in the figure indicated by an arrow at the left end of the piston and pointing to the right, indicating that the piston is moving to the right in the figure), the rod, e.g. a stationary rod, is pressed further into the variable space, forcing the fluid therein to exit the variable space via the choke valves 12.

In the embodiments of figures 1-7, the fluid is pressed through the choke valve as the energy storing device is released when the variable space 9 is reduced. However, it is also contemplated that the variable space 9 may be increased when the energy storing device is released, and that thus fluid is sucked into the variable space 9 via the choke valve 12. It may however be more convenient to press the fluid through the choke valve rather than sucking it past said choke valve, why it is currently preferred that the fluid is pressed through the choke valve as the energy storing device is released when the variable space 9 is reduced. There is e.g. a risk of cavitation with suction instead of pressing.

Figure 8 is a graph illustrating the relationship between the force exerted by the energy storing device and the velocity of the piston of the actuator. The area of the choke valve 12 opening is proportional to the slop of the curve and the force of the energy storing device is related to the intersection of the curve with the Y-axis.

Figure 9 schematically illustrates an embodiment of a tap changer 31 in which an actuator 1 of the present invention can be used. A winding 37 of an electrical transformer is shown. The voltage of the current provided by the winding 37 can be controlled by switching between different taps connected to the winding, whereby a different number of turns of the winding can be utilized. A first circuitry 38 is connected to a first contact 33 and can connect to a first tap via a first on/off switch 35. A second circuitry 39 is connected to a second contact 34 and can connect to a second tap via a second on/off switch 36. Each of the contacts 33 and 34 comprises a diverter resistor. A diverter switch 32 connects an electrical line 40 to either the first contact 33 or the second contact 34, and switches between the contacts by means of a rotating movement as indicated by the double-headed arrow in figure 3. This rotating switching between the two contacts can be performed while the transformer is operation and the tap switch 31 is on-load. Thus, it is advantageous that the switching time is low (the velocity of the switch is high) and constant over time. The diverter resistors of the contacts 33 and 34 are used to handle the current from the transformer when the switch is in a position between the two contacts and moves there between. The diverter switch 32 is actuated by an embodiment of the actuator 1 of the present invention, i.e. the movement of the piston when the spring is released induces the rotating movement of the diverter switch 32.

A switching cycle may be as follows:

1. Tap switch 36 is closed and the diverter switch 32 is in contact with contact 33, connecting the line 40 with the winding 37 via the tap switch 35.
2. Tap switch 36 closes while off-load.
3. The diverter switch 32 rotates left in the figure, breaking one connection with the contact 33 and supplying load current through the diverter resistor of contact 33.

4. The diverter switch 32 continues to turn, connecting to both contacts 33 and 34 via their respective resistors. Load is now supplied via the diverter resistors.
5. The diverter switch 32 continues to turn, breaking also the second
5 connection with contact 33. Load is now supplied only via the resistor of contact 34, winding turns no longer bridged.
6. The diverter switch 32 continues to turn, shorting contact 34, connecting to both sides of the resistor. Load is now supplied directly via circuitry 39 and contact 34. Contact 33 is unused.
- 10 7. Tap switch 35 opens while off-load.

Example: Piston ring material

It is important that the piston ring 7 of a tap changer actuator 1 is durable and does not leak, regardless of whether a throttle 12 is used or not. If the
15 ring 7 breaks or is otherwise worn down, the function of the actuator will be inhibited. Often a soft material, e.g. a rubber or other plastic material, is used for the ring 7. There is then a risk of ageing of the material, and the material may also be sensitive to unevenness of the inner cylinder surface 8 as well as to dirt and particles in the fluid. There is thus a large maintenance
20 requirement.

The inventors have realised that a metallic piston ring may instead be used in a tap changer actuator (with or without a sharp-edged throttle). The metallic ring will not age like a soft material. Preferably, the material of the metallic ring 7 is harder than the material of the inside cylinder surface 8 such that it
25 can make this surface 8 even and reduce friction. The material of the ring may e.g. have a hardness of at least 600 Hv. Further, a metallic piston ring 7 does not affect the sealing ability depending on temperature, and there may even be improved sealing after the hard ring having reduced unevenness of

the opposing surface 8. The metallic ring is also less affected by particles and dirt. A metallic ring 7 reduces the need for maintenance of the tap changer.

According to an embodiment of the present invention, there is provided an
5 actuator 1 for a tap changer of an electrical transformer, the actuator
comprising: a piston 2, said piston being hollow to define a piston space 3; a
cylinder 4 arranged around the piston such that the piston is arranged to be
movable axially into and out of the cylinder; a piston ring 7 fixed to the
outside surface of the piston such that a cylinder space 9 is formed between
10 the piston and the cylinder and delimited by the piston ring, the cylinder
space having a variable volume which is configured to vary with axial
movement of the piston; and a spring 10 engaging both the piston and the
cylinder such that the spring is able to be compressed and elongated,
respectively, with axial movement of the piston; wherein the piston space is
15 connected to the cylinder space via at least one hole 11 through the hollow
piston; and wherein the piston space is connected to an outside of the piston
via a sharp edged throttle 12.

The invention has mainly been described above with reference to a few
embodiments. However, as is readily appreciated by a person skilled in the
20 art, other embodiments than the ones disclosed above are equally possible
within the scope of the invention, as defined by the appended patent claims.

CLAIMS

1. A tap changer (31) for an electrical transformer, comprising a liquid-filled actuator (1), the actuator comprising:

a movable piston (2) having a longitudinal axis (13);

5 an energy storing device (10), configured for storing energy during axial movement of the piston (2) in a direction and for inducing axial movement of the piston (2) in an opposite direction when the energy stored in the energy storing device (10) is released;

10 wherein a space (9) is defined within the actuator (1), the space having a volume which varies with the axial movements of the piston (2); and

at least one choke valve (12) arranged for controlling a flow of the liquid, with which the actuator is filled, passing through the choke valve between the variable volume space (9) and an outside of the actuator as a result of said axial movement of the piston (2) when the energy stored in the energy storing
15 device (10) is released.

2. The actuator of claim 1, wherein the variable volume space (9) is a piston space formed within the piston (2), and wherein the choke valve is arranged in a fluid flow path between the piston space and the outside of the actuator.

20 3. The actuator of claim 1, further comprising:

a cylinder (4) arranged around the piston (2) such that the piston is arranged to be movable axially inside the cylinder (4), the cylinder comprising a fixed annular sealing portion (5) extending in a plane transverse to the longitudinal axis (13) and sealingly abutting to and around an outside surface (6) of the
25 piston (2); and

a piston ring (7) fixed to the outside surface (6) of the piston (2) and extending around the piston in a plane transverse to the longitudinal axis

(13), the piston ring (7) forming a seal between the outside surface (6) of the piston and an inside surface (8) of the cylinder such that a cylinder space is formed between the piston (2) and the cylinder (4) and delimited by the piston ring (7) and the sealing portion (5) of the cylinder;

- 5 wherein the variable volume space (9) is the cylinder space (9) having a variable volume which is configured to vary with axial movement of the piston (2) in relation to the cylinder (4); and

wherein the choke valve (12) is arranged in a fluid flow path between the cylinder space and the outside of the actuator.

- 10 4. The actuator of claim 3, wherein the choke valve is arranged in the annular sealing portion (5) or in the piston ring (7).

5. The actuator of claim 3, wherein:

the piston (2) is hollow to define a piston space (3) having an invariable volume;

- 15 the piston space (3) is connected to the cylinder space (9) via at least one hole (11) through the hollow piston (2), between the piston space (3) and the cylinder space (9); and

wherein the piston space (3) is connected to the outside of the actuator (1) via the choke valve (12).

- 20 6. The actuator of any previous claim, wherein the actuator is configured to operate in liquid, whereby the variable volume space (9) are liquid-filled.

7. The actuator of any previous claim, wherein the actuator is arranged to move a diverter switch (32) in a liquid-filled transformer.

- 25 8. The actuator of any claim 3-7, wherein the piston ring (7) is made of a metallic material.

9. The actuator of claim 8, wherein the metallic material is harder than the material of the inside surface (8) of the cylinder.

10. Use of an actuator (1) of any preceding claim, for moving a switch (32) of a tap changer (31) in a liquid-filled transformer.

5 11. The use of claim 10, wherein the switch (32), in a first position, connects an electrical line (40) to a first tap circuitry (38), and, in a second position, connects the electrical line (40) to a second tap circuitry (39).

12. A method of controlling a velocity of an actuator (1) in a tap changer (31) for an electrical transformer, the actuator being filled with a liquid and
10 having a central longitudinal axis (13), the method comprising:

storing energy in an energy storing device (10) by a first axial movement, in a first direction, of a piston (2) extending along said axis (13), by which axial movement the liquid is forced to flow between a space (9) defined in the actuator and an outside of the actuator (1), the volume of the space (9) being
15 variable with the axial movement of the piston (2); and

releasing the energy storing device (10) to induce a second axial movement of the piston (2), by which second axial movement the liquid is pressed through a choke valve (12) as a result of the volume of the space (9) changing with the second axial movement of the piston (2) in a second direction, opposite to the
20 first direction, whereby the axial speed of the second axial movement of the piston is controlled by means of the choke valve.

1/5

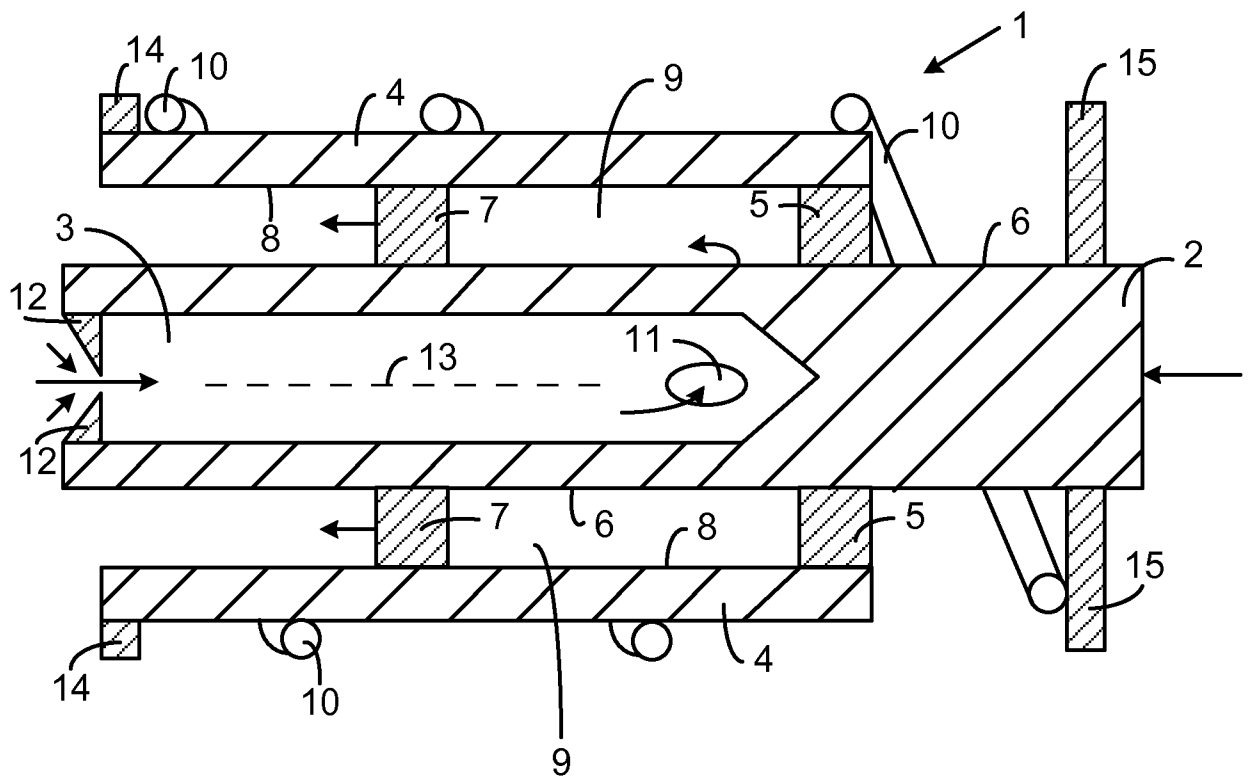


Fig. 1

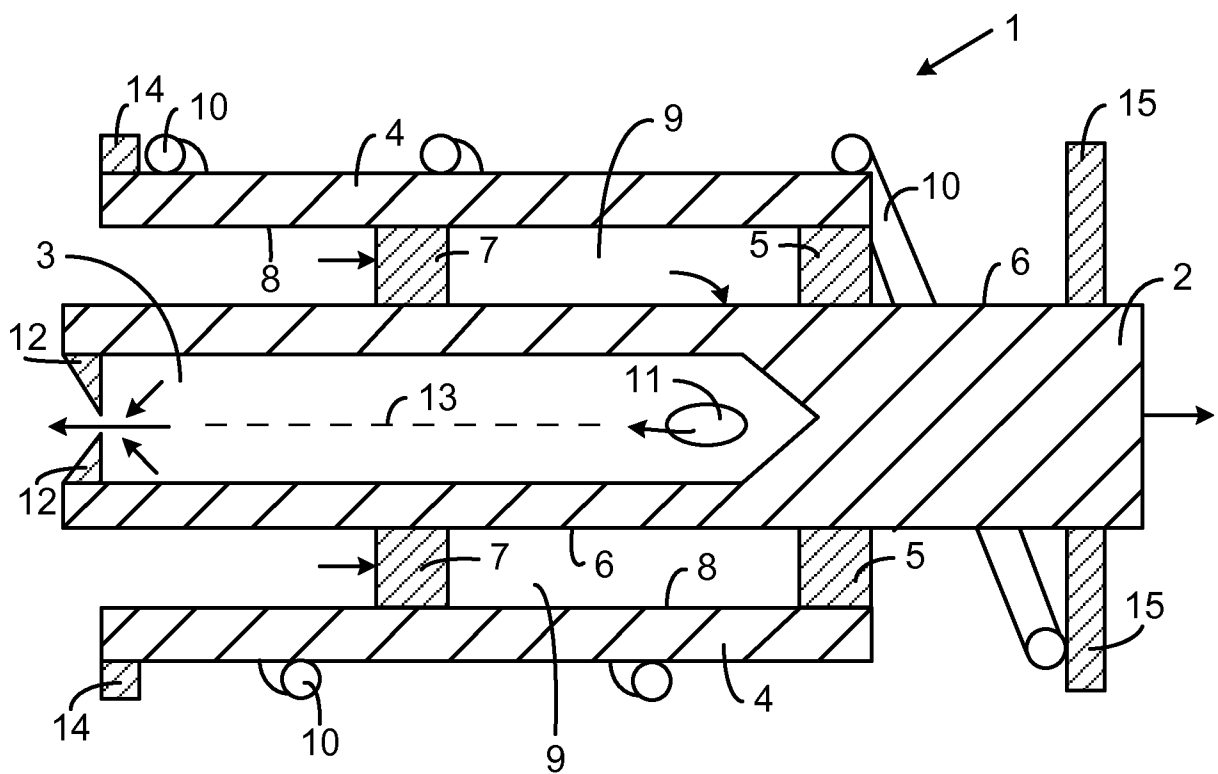


Fig. 2

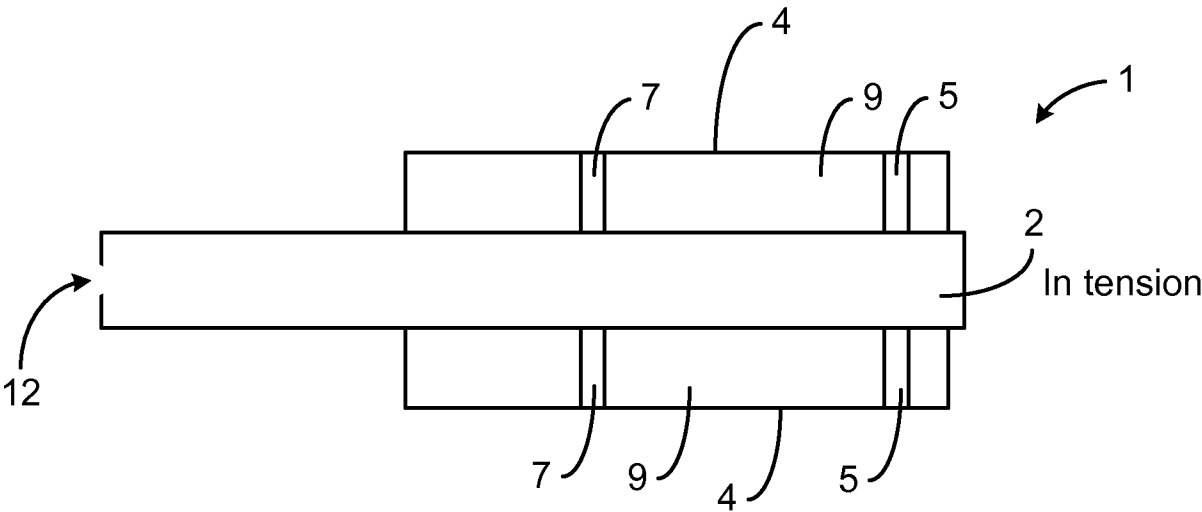


Fig. 3

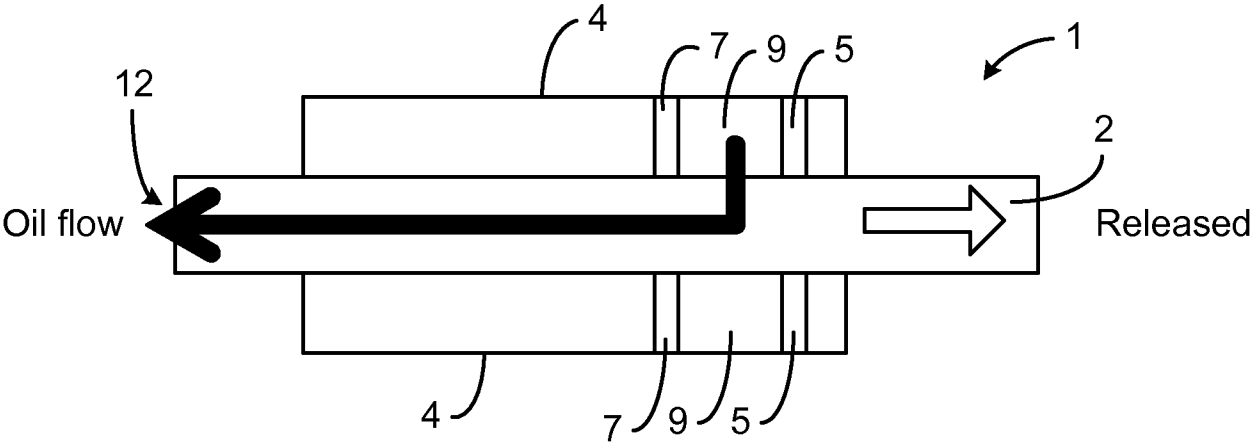


Fig. 4

3/5

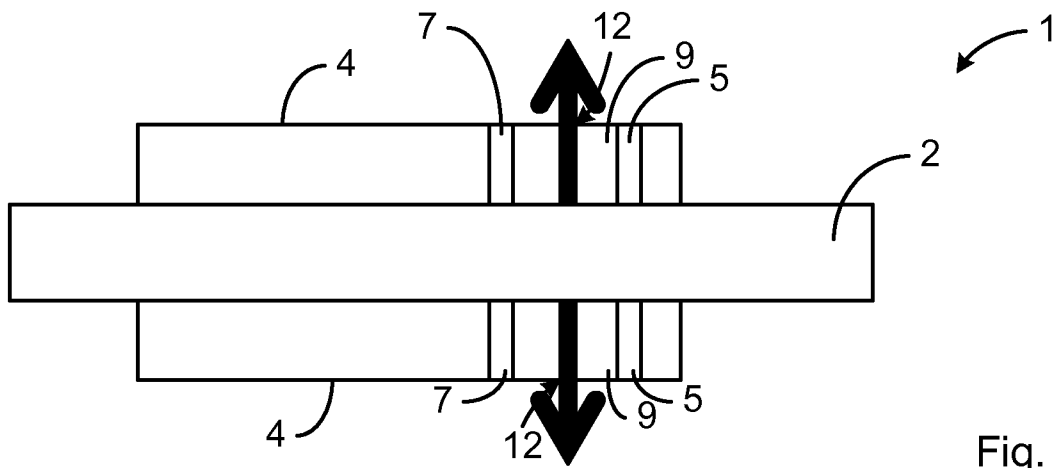


Fig. 5

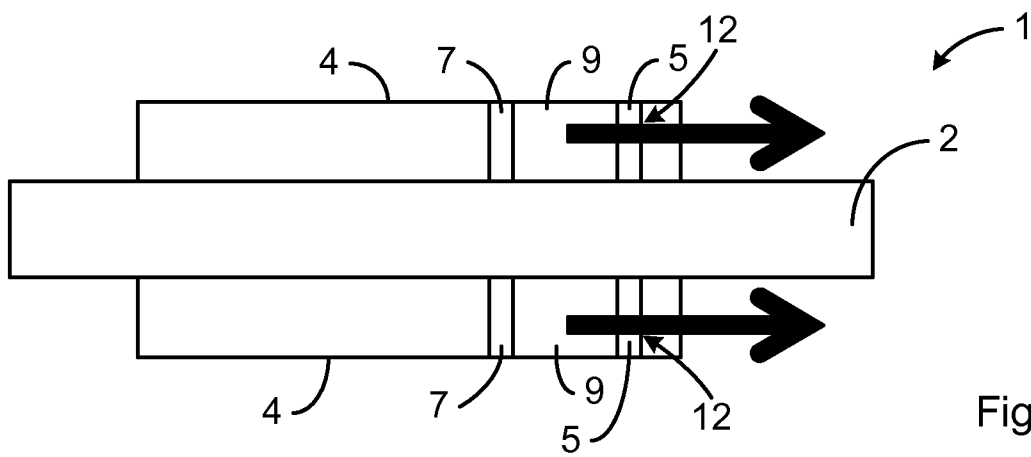


Fig. 6

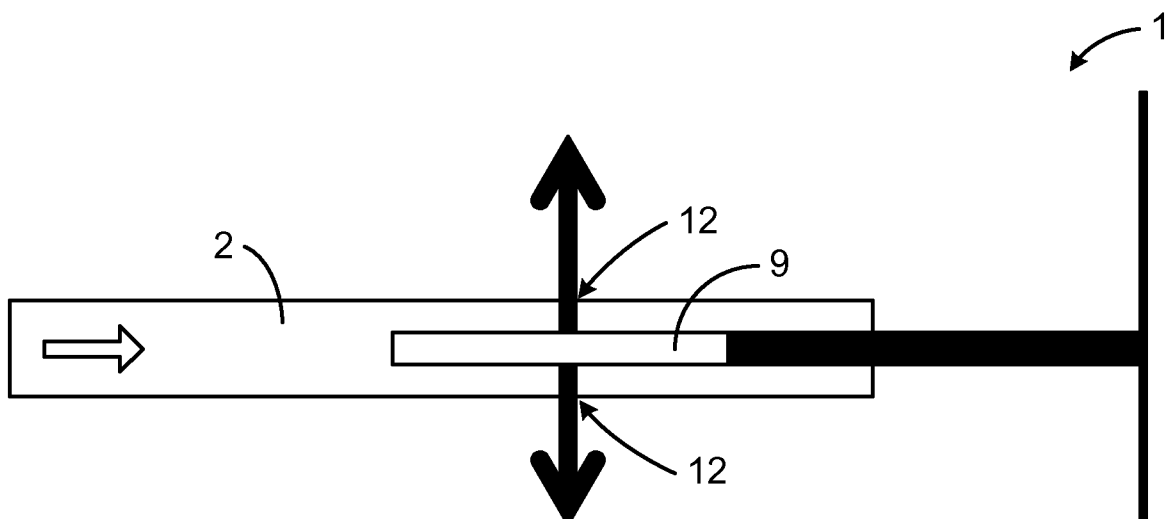


Fig. 7

4/5

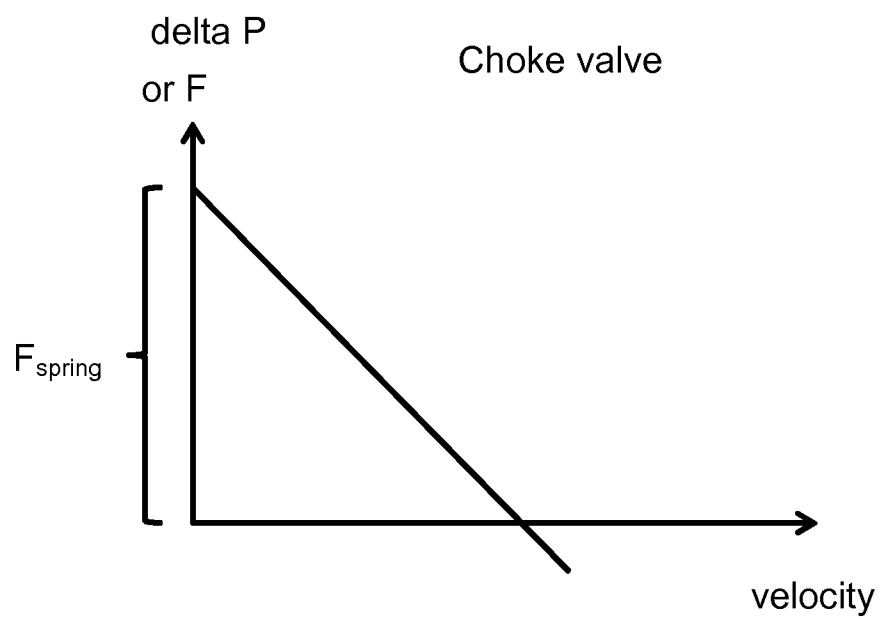


Fig. 8

5/5

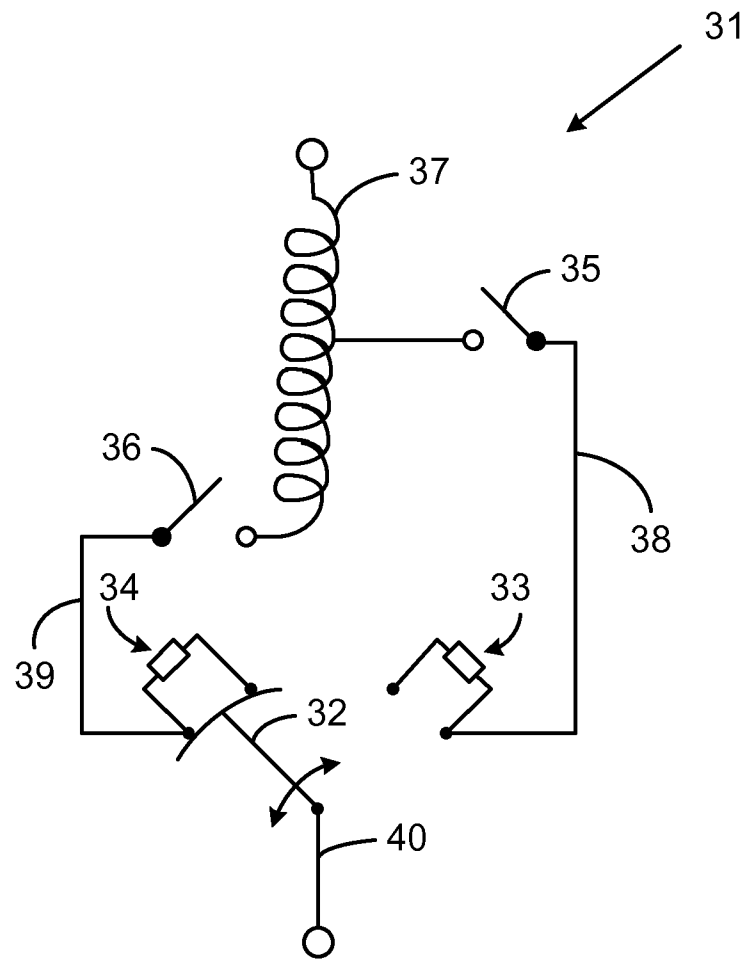


Fig. 9

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2013/068825

A. CLASSIFICATION OF SUBJECT MATTER
INV. H01H3/60 H01H9/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 671 698 A (KRAMER WILHELM) 20 June 1972 (1972-06-20) column 1, line 56 - column 2, line 36; figure 1	1-12
X	----- US 4 430 535 A (BERG SAMUEL [SE] ET AL) 7 February 1984 (1984-02-07) column 2, line 59 - column 3, line 22; figure 1	1
A	----- US 6 347 615 B1 (HOEPFL KLAUS [DE] ET AL) 19 February 2002 (2002-02-19) cited in the application abstract; figure 1 -----	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

4 December 2013

Date of mailing of the international search report

16/12/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Simonini, Stefano

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/068825

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 3671698	A	20-06-1972	CH	501991 A		15-01-1971
			DE	1935298 A1		14-01-1971
			FR	2054324 A5		16-04-1971
			GB	1272388 A		26-04-1972
			US	3671698 A		20-06-1972

US 4430535	A	07-02-1984	SE	424483 B		19-07-1982
			US	4430535 A		07-02-1984

US 6347615	B1	19-02-2002	DE	19934383 A1		08-02-2001
			US	6347615 B1		19-02-2002
