



(43) International Publication Date
30 August 2012 (30.08.2012)

(10) International Publication Number
WO 2012/115749 A2

(51) International Patent Classification:

E21B 34/16 (2006.01) *E21B 21/08* (2006.01)
E21B 44/00 (2006.01) *E21B 34/02* (2006.01)

(21) International Application Number:

PCT/US2012/023321

(22) International Filing Date:

31 January 2012 (31.01.2012)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

13/031,551 21 February 2011 (21.02.2011) US

(71) Applicant (for all designated States except US): **HAL-LIBURTON ENERGY SERVICES, INC.** [US/US]; 10200 Bellaire Boulevard, Houston, TX 77072 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **WILLIAMSON, Jimmie, R., Jr.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US). **VICK, James, D., Jr.** [US/US]; 2601 Beltline Road, Carrollton, TX 75006 (US).

(74) Agent: **SMITH, Marlin, R.**; Smith IP Services, P.C., P.O. Box 997, Rockwall, TX 75087 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

— without international search report and to be republished upon receipt of that report (Rule 48.2(g))

(54) Title: REMOTELY OPERATED PRODUCTION VALVE AND METHOD

(57) Abstract: A method of actuating multiple valves in a well can include applying a pressure cycle to the valves without causing actuation of any of the valves, and then simultaneously reducing pressure applied to the valves, thereby actuating the valves. Another method can include releasing a locking device of each valve which prevents actuation, and then reducing pressure applied to the valves, thereby actuating the valves. A valve can include a port which provides for fluid communication between an exterior and an interior of the valve, a closure member which selectively permits and prevents fluid flow through the port, the closure member permits flow through the port in response to a decrease in a pressure differential from the interior to the exterior of the valve, and a locking device which prevents displacement of the closure member, the locking device being released in response to mechanical force applied to the locking device.



WO 2012/115749 A2

5

REMOTELY OPERATED PRODUCTION VALVE AND METHOD

TECHNICAL FIELD

10 This disclosure relates generally to equipment utilized and procedures performed in conjunction with a subterranean well and, in an example described below, more particularly provides a remotely operated production valve.

15

BACKGROUND

 Pressure-operated valves used in downhole environments have an advantage, in that they can be operated remotely, that is, without intervention into a well with a wireline, slickline, coiled tubing, etc. However, a conventional
20 pressure-operated valve can also respond to applications of pressure which are not intended for operation of the valve, and so it is possible that the valve can be operated inadvertently.

 Therefore, it will be appreciated that it would be
25 desirable to prevent inadvertent operation of a remotely operated valve.

- 2 -

SUMMARY

In the disclosure below, a well system, method and valve are provided which bring improvements to the art of operating valves in well environments. One example is
5 described below in which the valve can be actuated remotely after any number of pressure cycles have been applied to the valve. Another example is described below in which multiple valves can be opened in response to reducing pressure applied to the valves.

10 In one aspect, a method of actuating multiple valves in a well is described below. The method can include applying at least one pressure cycle to the valves without causing actuation of any of the valves, and then simultaneously reducing pressure applied to the valves, thereby actuating
15 the valves.

In another aspect, a method of actuating multiple valves in a well can include applying at least one pressure cycle to the valves without causing actuation of any of the valves; then releasing a locking device of each valve which
20 prevents actuation of each valve; and then reducing pressure applied to the valves, thereby actuating the valves.

A remotely operated valve for use with a subterranean well is also described below. The valve can include a port which provides for fluid communication between an exterior
25 and an interior of the valve; a closure member which selectively permits and prevents fluid flow through the port, the closure member permits flow through the port in response to a decrease in a pressure differential from the interior to the exterior of the valve; and a locking device
30 which prevents displacement of the closure member, the locking device being released in response to mechanical force applied to the locking device.

- 3 -

These and other features, advantages and benefits will become apparent to one of ordinary skill in the art upon careful consideration of the detailed description of representative examples below and the accompanying drawings, in which similar elements are indicated in the various figures using the same reference numbers.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a representative partially cross-sectional view of a well system and associated method which can embody principles of the present disclosure.

FIGS. 2-6 are representative cross-sectional views of a section of a completion string which may be used in the well system and method of FIG. 1.

FIG. 7 is a representative cross-sectional view of the completion string, taken along line 7-7 of FIG. 3.

FIG. 8 is a representative side view of a section of the completion string.

FIG. 9 is a representative partially cross-sectional view of another section of the completion string having a work string disposed therein.

DETAILED DESCRIPTION

Representatively illustrated in FIG. 1 is a well system and associated method which can embody principles of this disclosure. In this example, a wellbore 12 has a generally vertical section 14, and a generally horizontal section 18 extending through an earth formation 20.

A tubular string 22 (such as a production tubing string, or upper completion string) is installed in the

- 4 -

wellbore 12. The tubular string 22 is stabbed into a gravel packing packer 26a.

The packer 26a is part of a generally tubular completion string 23 which also includes multiple well
5 screens 24, valves 25, isolation packers 26b-e, and a sump packer 26f. Valves 27 are also interconnected in the completion string 23.

The packers 26a-f seal off an annulus 28 formed radially between the tubular string 22 and the wellbore
10 section 18. In this manner, fluids 30 may be produced from multiple intervals or zones of the formation 20 via isolated portions of the annulus 28 between adjacent pairs of the packers 26a-f.

Positioned between each adjacent pair of the packers
15 26a-f, at least one well screen 24 and the valves 25, 27 are interconnected in the tubular string 22. The well screen 24 filters the fluids 30 flowing into the tubular string 22 from the annulus 28.

At this point, it should be noted that the well system
20 10 is illustrated in the drawings and is described herein as merely one example of a wide variety of well systems in which the principles of this disclosure can be utilized. It should be clearly understood that the principles of this disclosure are not limited at all to any of the details of
25 the well system 10, or components thereof, depicted in the drawings or described herein.

For example, it is not necessary in keeping with the principles of this disclosure for the wellbore 12 to include a generally vertical wellbore section 14 or a generally
30 horizontal wellbore section 18. It is not necessary for fluids 30 to be only produced from the formation 20 since, in other examples, fluids could be injected into a

- 5 -

formation, fluids could be both injected into and produced from a formation, etc.

It is not necessary for one each of the well screen 24 and valves 25, 27 to be positioned between each adjacent
5 pair of the packers 26a-f. It is not necessary for a single valve 25 or 27 to be used in conjunction with a single well screen 24. Any number, arrangement and/or combination of these components may be used.

It is not necessary for the well screens 24, valves 25,
10 27, packers 26a-f or any other components of the tubular string 22 to be positioned in cased sections 14, 18 of the wellbore 12. Any section of the wellbore 12 may be cased or uncased, and any portion of the tubular string 22 or completion string 23 may be positioned in an uncased or
15 cased section of the wellbore, in keeping with the principles of this disclosure.

It is not necessary for the tubular string 22 to be used for producing the fluid 30 from the formation 20. Fluid 30 could be produced by other means, if desired.

20 It should be clearly understood, therefore, that this disclosure describes how to make and use certain examples, but the principles of the disclosure are not limited to any details of those examples. Instead, those principles can be applied to a variety of other examples using the knowledge
25 obtained from this disclosure.

The well system 10 and associated method can have components, procedures, etc., which are similar to those used in the ESTMZ(TM) completion system marketed by Halliburton Energy Services, Inc. of Houston, Texas USA. In
30 the ESTMZ(TM) system, the casing 16 is perforated, the formation 20 is fractured and the annulus 28 about the completion string 23 is gravel packed as follows:

- 6 -

a) The sump packer 26f is installed and set.

b) The casing 16 is perforated (e.g., using un-illustrated wireline or tubing conveyed perforating guns).

5 c) The completion string 23 is installed (e.g., conveyed into the wellbore 12 on a work string 21 (see FIG. 9) and service tool).

d) Internal pressure is applied to the work string 21 to set the upper gravel packing packer 26a. A suitable gravel packing packer is the VERSA-TRIEVE(TM) packer
10 marketed by Halliburton Energy Services, Inc., although other types of packers may be used, if desired.

e) The service tool is released from the packer 26a.

f) Pressure is applied to the annulus above the packer 26a to set all of the isolation packers 26b-e.

15 g) The service tool is displaced using the work string 21 to open the lowest valve 27.

h) The service tool is displaced to open the next higher valve 25.

i) The service tool is displaced to a fracturing/gravel
20 packing position.

j) Fracturing/gravel packing fluids/slurries are flowed through the work string 21 and service tool, exiting the open valve 25. The fluids/slurries can enter the open valve 27 and flow through the service tool to the annulus 28 above
25 the packer 26a.

k) The formation 20 is fractured, due to increased pressure applied while flowing the fluids/slurries.

l) The fluids/slurries are pumped until sand out, thereby gravel packing the annulus 28 about the well screen
30 24 between the open valves 25, 27.

- 7 -

m) The service tool is displaced to close the open valve 27, and excess proppant/sand/gravel is reversed out by applying pressure to the annulus above the packer 26a.

5 n) The service tool is displaced to close the open valve 25.

o) Steps g-n are repeated for each zone, with the work string 21 and service tool progressing in sequence from the lowermost zone to the uppermost zone.

10 After the uppermost zone has been stimulated and gravel packed, it would be advantageous to be able to open multiple valves 36 to thereby permit the fluid 30 to flow through the screens 24 and into the interior of the tubular string 22 for production to the surface. It would also be
15 advantageous to be able to do so remotely, and without the need for a physical intervention into the well with, for example, a wireline, slickline or coiled tubing to shift the valves 36.

In keeping with the principles of this disclosure, the valves 36 can remain closed during the installation and
20 fracturing/gravel packing operations, thereby preventing flow through the well screens 24 during these operations. Then, after the fracturing/gravel packing is completed, the work string 21 has been retrieved from the well and the tubular string 22 has been installed, all of the valves 36
25 can be opened substantially simultaneously using certain pressure manipulations described below.

It will, however, be appreciated that a number of pressure manipulations will possibly occur prior to the conclusion of the tubular string 22 installation, with the
30 valves 36 being exposed to those pressure manipulations, and so it would be advantageous for the valves 36 to remain closed during those pressure manipulations. It is one

- 8 -

particular benefit of the well system 10 and method of FIG. 1 that the valves 36 can remain closed while the fracturing/gravel packing and installation operations are performed, and then all of the valves 36 can be opened
5 substantially simultaneously in response to a predefined pressure sequence.

Referring additionally now to FIGS. 2-6, a section of the completion string 23, including one example of the valve 36 which may be used in the well system 10 and method, is
10 representatively illustrated. Of course, the completion string 23 and/or the valve 36 may be used in other well systems and methods, in keeping with the principles of this disclosure.

In this example, the valve 36 is interconnected between
15 two of the well screens 24. Fluid 30 filtered by the screens 24 is available in respective annuli 38 at either end of the valve 36, but flow of the fluid into an interior flow passage 40 of the valve and completion string 23 is prevented by a closure member 42 in FIG. 2.

20 As depicted in FIG. 2, the closure member 42 is in the form of a sleeve reciprocally disposed in an outer housing assembly 44, although other types of closure members (plugs, flappers, balls, etc.) could be used, if desired. The closure member 42 blocks flow through ports 46, thereby
25 preventing communication between the annuli 38 and the flow passage 40 during the installation and fracturing/gravel packing procedures described above.

An annular piston 48 is formed integrally on the closure member 42. As viewed in FIG. 2, on its left-hand
30 side the piston 48 is exposed to pressure in the annulus 28 external to the valve 36. On its right-hand side the piston 48 is exposed to pressure in the flow passage 40.

- 9 -

Thus, a pressure increase in the flow passage 40 (e.g., resulting in a pressure differential from the interior to the exterior of the valve 36) will bias the piston 48 leftward as viewed in FIG. 2. The piston 48 is biased rightward by a biasing device 54 (for example, a spring, compressed gas chamber, etc.).

A locking device 50 initially prevents any displacement of the closure device 42 relative to the ports 46. In this example, the locking device 50 includes a sleeve 52 which radially outwardly supports dogs or lugs 58 in engagement with an internal profile 60 in the housing assembly 44. Such engagement between the lugs 58 and the profile 60 prevents displacement of the closure device 42 during the installation and fracturing/gravel packing procedures described above.

Shear screws 62 prevent displacement of the sleeve 52 relative to the lugs 58. If, however, a shifting tool 64 (see FIG. 9) is engaged with a profile 56 formed internally on the sleeve 52 and a sufficient mechanical force is applied from the shifting tool to the sleeve via the profile, the shear screws 62 will shear, and the sleeve 52 will displace to the right as viewed in FIG. 2, with the sleeve thereby no longer supporting the lugs 58.

The closure device 42 is also prevented from displacing by another set of shear screws 66. After the sleeve 52 has been shifted to the right and no longer supports the lugs 58, pressure in the passage 40 can be increased to thereby shear the shear screws 66.

When a leftward biasing force on the piston 48 due to the pressure increase in the flow passage 40 increases enough to overcome the rightward biasing force exerted by the biasing device 54, plus friction and the force necessary

- 10 -

to shear the shear screws 66, the piston 48 and closure member 42 will displace leftward from their FIG. 2 position. A subsequent decrease in the pressure in the flow passage 40 will result in the closure member 42 and piston 48
5 displacing to the right as viewed in FIG. 2, thereby opening the ports 46 to fluid flow.

In this description of the valve 36, a pressure increase is applied as a pressure differential from the interior of the valve (e.g., in the flow passage 40) to the
10 exterior of the valve (e.g., in the annulus 28 surrounding the valve), for example, by increasing pressure in the tubular string 22. However, such a pressure differential could alternatively be applied by reducing pressure in the annulus 28.

15 Thus, a "pressure increase" and similar terms should be understood as a pressure differential increase, whether pressure is reduced or increased on the interior or exterior of the valve 36. A "pressure reduction" and similar terms should be understood as a pressure differential reduction,
20 whether pressure is reduced or increased on the interior or exterior of the valve 36.

The valve 36 is depicted in FIG. 2 configured as installed in the well system 10 of FIG. 1. A number of pressure differential cycles can be applied to the valve 36,
25 for example, during installation, fracturing/gravel packing and/or other operations, without causing actuation of the valve.

At the conclusion of these operations, the valve 36 can be opened by shifting the sleeve 52, increasing the pressure
30 differential from the interior to the exterior of the valve, and then decreasing the pressure differential. Multiple valves 36 can be actuated simultaneously.

- 11 -

In FIG. 3, the valve 36 is depicted after the locking device 50 has been released by shifting the sleeve 52 rightward as viewed in the drawings. In this example, the sleeve 52 is displaced rightward, shearing the shear screws 62, by engaging the profile 56 with the shifting tool 64 and applying a sufficient mechanical force from the shifting tool to the sleeve via the profile 56.

When the sleeve 52 is displaced to the right as viewed in FIG. 3, the lugs 58 are no longer radially outwardly supported by the sleeve, and the lugs can disengage from the profile 60 (see FIG. 7). This allows the piston 48 to displace the closure member 42 in response to a pressure differential from the passage 40 to the annulus 28, thereby shearing the shear screws 66.

In FIG. 4, the valve 36 is depicted after the shear screws 66 have been sheared in response to a predetermined pressure differential being applied from the interior to the exterior of the valve. The closure member 42 is now displaced to the left somewhat, as viewed in FIG. 4, but the closure member still prevents fluid flow through the ports 46.

In FIG. 5, the valve 36 is depicted after the pressure differential from the interior to the exterior of the valve is reduced, for example, by reducing pressure in the flow passage 40. The closure member 42 is now displaced to the right as viewed in FIG. 5, due to the biasing force exerted by the biasing device 54 and a pressure differential from the annulus 28 to the flow passage 40 acting on the piston 48.

Due to the displacement of the closure member 42 by the piston 48, the ports 46 are no longer blocked, and the fluid 30 can now flow inwardly through the ports into the passage

- 12 -

40. If multiple valves 36 are installed in the completion string 23 as depicted in FIG. 1, all of the valves can be opened simultaneously in response to the pressure reduction, as described above.

5 Note that multiple valves 36 can be actuated simultaneously using the procedure described above. Preferably, all of the valves 36 in the well system 10 are opened when the pressure differential is reduced, so that the fluid 30 is received into the completion string 23 from
10 all of the desired production zones of the formation 20.

It may, however, at a subsequent time be desirable to close one or more of the valves 36, for example, to prevent or mitigate gas coning 32 or water coning 34 (see FIG. 1). To close a particular valve 36, another sleeve 68 having a
15 profile 70 formed therein can be engaged by a conventional shifting tool (not shown) and displaced to block flow through the ports 46.

In FIG. 6, the valve 36 is depicted after the sleeve 68 has been displaced to the right, so that it now prevents
20 flow through the ports 46. The sleeve 68 can be shifted in either direction after the closure member 42 no longer blocks flow through the ports 46, so that the sleeve can selectively permit and prevent flow through the ports as desired. The sleeve 68 can be shifted to its FIGS. 5 & 6
25 positions to thereby allow or block flow, respectively, through the ports 46 using, e.g., a conventional wireline, slickline or coiled tubing-conveyed shifting tool (not shown).

In FIG. 7, a cross-sectional view of the valve 36 is
30 representatively illustrated, taken along line 7-7 of FIG. 3. This view depicts the lugs 58 being disengaged from the

- 13 -

profile 60 upon displacement of the sleeve 52 to its unlocked position.

In FIG. 8, the valve 36 is depicted as being interconnected between two well screens 24 as in the examples of FIGS. 2-6 described above. However, in other examples, the valve 36 is not necessarily connected between two well screens 24, and the valve can control flow through any other number of well screens, or can otherwise control flow between the interior and the exterior of the completion string 23, in keeping with the principles of this disclosure.

In FIG. 9, the work string 21 is representatively illustrated in a portion of the completion string 23. In this view it may be seen that the work string 21 includes the shifting tool 64 which engages an internal profile 72 in the completion string 23.

In this example, the profile 72 is interconnected in the completion string 23 between the upper packer 26a and the uppermost valve 25. The work string 21 and shifting tool 64 are brought to this position after completion of the fracturing/gravel packing procedure described above in relation to the well system 10 of FIG. 1.

Thus, after all of the desired zones have been fractured and/or gravel packed, the work string 21 is positioned as depicted in FIG. 9. Engagement between the shifting tool 64 and the profile 72 results from a set of shifting keys 74 on the shifting tool complementarily engaging the profile.

Mechanical force applied to the shifting tool 64 after such engagement between the keys 74 and the profile 72 causes another set of shifting keys 76 to retract, and causes yet another set of shifting keys 78 to extend

- 14 -

outward. The keys 76 were previously used to operate the valves 25, 27 during the fracturing/gravel packing procedure, and are no longer needed after that procedure.

5 The keys 78 are to be used to shift the sleeves 52 to their unlocked positions as depicted in FIG. 3. After the keys 78 have been extended outward as described above, the work string 21 is lowered through the completion string 23, with the keys 78 engaging the profiles 56 and mechanically shifting the sleeves 52 to their unlocked positions in
10 succession as the shifting tool 64 passes through each valve 36.

The work string 21 can then be retrieved from the well, the tubular string 22 can be installed, and the valves 36 can be actuated remotely by increasing a pressure
15 differential applied to the valves (e.g., by increasing pressure applied to the tubular string, or reducing pressure in the annulus 28) sufficiently to shear the shear screws 66 as depicted in FIG. 4, and then decreasing the pressure differential applied to the valves so that the pistons 48
20 shift the closure members 42 to their open positions as depicted in FIG. 5.

It may now be fully appreciated that this disclosure provides a number of improvements to the art. The valve 36 can be exposed to any number of pressure cycles without
25 actuating. However, after releasing the locking device 50 (e.g., by shifting the sleeve 52 to its unlocked position), the valve 36 can be conveniently actuated by increasing an applied pressure differential, and then decreasing the applied pressure differential. Multiple valves 36 can be
30 substantially simultaneously actuated in this manner.

The above disclosure provides to the art a method of actuating multiple valves 36 in a well. The method can

- 15 -

include applying at least one pressure cycle to the valves 36 without causing actuation of any of the valves 36, and then simultaneously reducing pressure applied to the valves 36, thereby actuating the valves 36.

5 Actuating the valves 36 can include opening the valves 36. Actuating the valves 36 may include permitting fluid flow between an interior and an exterior of a completion string 23.

10 The method may include, between the applying and pressure reducing steps, increasing pressure applied to the valves 36. Increasing pressure can include releasing a closure member 42, thereby permitting the closure member 42 to displace relative to a port 46.

15 Applying at least one pressure cycle may include varying pressure in an internal flow passage 40 of the valves 36.

Reducing pressure may include increasing a pressure differential from an exterior to an interior of each valve 36.

20 The method can include, prior to reducing pressure, releasing a locking device 50 of each valve 36 which prevents actuation of the valve 36. Releasing the locking device 50 may include engaging a shifting tool 64 with a profile 56 formed internally on the locking device 50 of
25 each valve 36.

The shifting tool 64 may comprise multiple sets of shifting keys, a first set 74 which, when engaged, is operative to retract a second set 76 and extend a third set 78 which engages the profile 56.

30 Another method of actuating multiple valves 36 in a well is described above, with the method comprising:

- 16 -

applying at least one pressure cycle to the valves 36 without causing actuation of any of the valves 36, then releasing a locking device 50 of each valve 36 which prevents actuation of each valve 36, and then reducing
5 pressure applied to the valves 36, thereby actuating the valves 36.

Also described above is a remotely operated valve 36 for use with a subterranean well. The valve 36 can include a port 46 which provides for fluid communication between an
10 exterior and an interior of the valve 36, a closure member 42 which selectively permits and prevents fluid flow through the port 46, the closure member 42 permits flow through the port 46 in response to a decrease in a pressure differential from the interior to the exterior of the valve 36, and a
15 locking device 50 which prevents displacement of the closure member 42, the locking device 50 being released in response to mechanical force applied to the locking device 50.

The locking device 50 may comprise a sleeve 52 having an internal profile 56 formed thereon. The internal profile
20 56 may be engaged by a shifting tool 64 which comprises multiple sets of shifting keys, a first set 74 which, when engaged, is operative to retract a second set 76 and extend a third set 78 which engages the profile 56.

The closure member 42 may be released for displacement
25 relative to the port 46 in response to, following release of the locking device 50, an increase in the pressure differential prior to the decrease in the pressure differential.

The valve 36 may receive the fluid 30 from a well
30 screen 24.

It is to be understood that the various examples described above may be utilized in various orientations,

- 17 -

such as inclined, inverted, horizontal, vertical, etc., and in various configurations, without departing from the principles of the present disclosure. The embodiments illustrated in the drawings are depicted and described
5 merely as examples of useful applications of the principles of the disclosure, which are not limited to any specific details of these embodiments.

In the above description of the representative examples of the disclosure, directional terms, such as "above,"
10 "below," "upper," "lower," etc., are used for convenience in referring to the accompanying drawings. In general, "above," "upper," "upward" and similar terms refer to a direction toward the earth's surface along a wellbore, and "below," "lower," "downward" and similar terms refer to a
15 direction away from the earth's surface along the wellbore.

Of course, a person skilled in the art would, upon a careful consideration of the above description of representative embodiments, readily appreciate that many modifications, additions, substitutions, deletions, and
20 other changes may be made to these specific embodiments, and such changes are within the scope of the principles of the present disclosure. Accordingly, the foregoing detailed description is to be clearly understood as being given by way of illustration and example only, the spirit and scope
25 of the present invention being limited solely by the appended claims and their equivalents.

- 18 -

WHAT IS CLAIMED IS:

1. A method of actuating multiple valves in a well,
the method comprising:

5 applying at least one pressure cycle to the valves
without causing actuation of any of the valves; and

 then simultaneously reducing pressure applied to the
valves, thereby actuating the valves.

10 2. The method of claim 1, wherein actuating the
valves further comprises opening the valves.

3. The method of claim 1, wherein actuating the
valves further comprises permitting fluid flow between an
15 interior and an exterior of a completion string.

4. The method of claim 1, further comprising, between
the applying and pressure reducing steps, increasing
pressure applied to the valves.

20

5. The method of claim 4, wherein increasing pressure
further comprises releasing a closure member, thereby
permitting the closure member to displace relative to a
port.

25

6. The method of claim 1, wherein applying at least
one pressure cycle further comprises varying pressure in an
internal flow passage of the valves.

- 19 -

7. The method of claim 1, wherein reducing pressure further comprises increasing a pressure differential from an exterior to an interior of each valve.

5 8. The method of claim 1, further comprising, prior to reducing pressure, releasing a locking device of each valve which prevents actuation of the valve.

9. The method of claim 8, wherein releasing the
10 locking device further comprises engaging a shifting tool with a profile formed internally on the locking device of each valve.

10. The method of claim 9, wherein the shifting tool
15 comprises multiple sets of shifting keys, a first set which, when engaged, is operative to retract a second set and extend a third set which engages the profile.

11. A method of actuating multiple valves in a well,
20 the method comprising:

applying at least one pressure cycle to the valves without causing actuation of any of the valves;

then releasing a locking device of each valve which prevents actuation of each valve; and

25 then reducing pressure applied to the valves, thereby actuating the valves.

- 20 -

12. The method of claim 11, wherein reducing pressure further comprises simultaneously reducing pressure applied to the valves.

5 13. The method of claim 11, wherein actuating the valves further comprises opening the valves.

14. The method of claim 11, wherein actuating the valves further comprises permitting fluid flow between an
10 interior and an exterior of a completion string.

15 15. The method of claim 11, further comprising, between the applying and pressure reducing steps, increasing pressure applied to the valves.

16. The method of claim 15, wherein increasing pressure further comprises releasing a closure member, thereby permitting displacement of the closure member relative to a port.

20 17. The method of claim 11, wherein applying at least one pressure cycle further comprises varying pressure in an internal flow passage of the valves.

25 18. The method of claim 11, wherein reducing pressure further comprises increasing a pressure differential from an exterior to an interior of each valve.

- 21 -

19. The method of claim 11, wherein releasing the locking device further comprises engaging a shifting tool with a profile formed internally on the locking device of each valve.

5

20. The method of claim 19, wherein the shifting tool comprises multiple sets of shifting keys, a first set which, when engaged, is operative to retract a second set and extend a third set which engages the profile.

10

21. A remotely operated valve for use with a subterranean well, the valve comprising:

a port which provides for fluid communication between an exterior and an interior of the valve;

15 a closure member which selectively permits and prevents fluid flow through the port, the closure member permits flow through the port in response to a decrease in a pressure differential from the interior to the exterior of the valve; and

20 a locking device which prevents displacement of the closure member, the locking device being releasable in response to mechanical force applied to the locking device.

22. The valve of claim 21, wherein the locking device
25 comprises a sleeve having an internal profile formed thereon.


23. The valve of claim 22, wherein the internal profile is engaged by a shifting tool which comprises
30 multiple sets of shifting keys, a first set which, when

- 22 -

engaged, is operative to retract a second set and extend a third set which engages the profile.

24. The valve of claim 21, wherein the closure member
5 is released for displacement relative to the port in
response to, following release of the locking device, an
increase in the pressure differential prior to the decrease
in the pressure differential.

10 25. The valve of claim 21, wherein the valve receives
the fluid from a well screen.

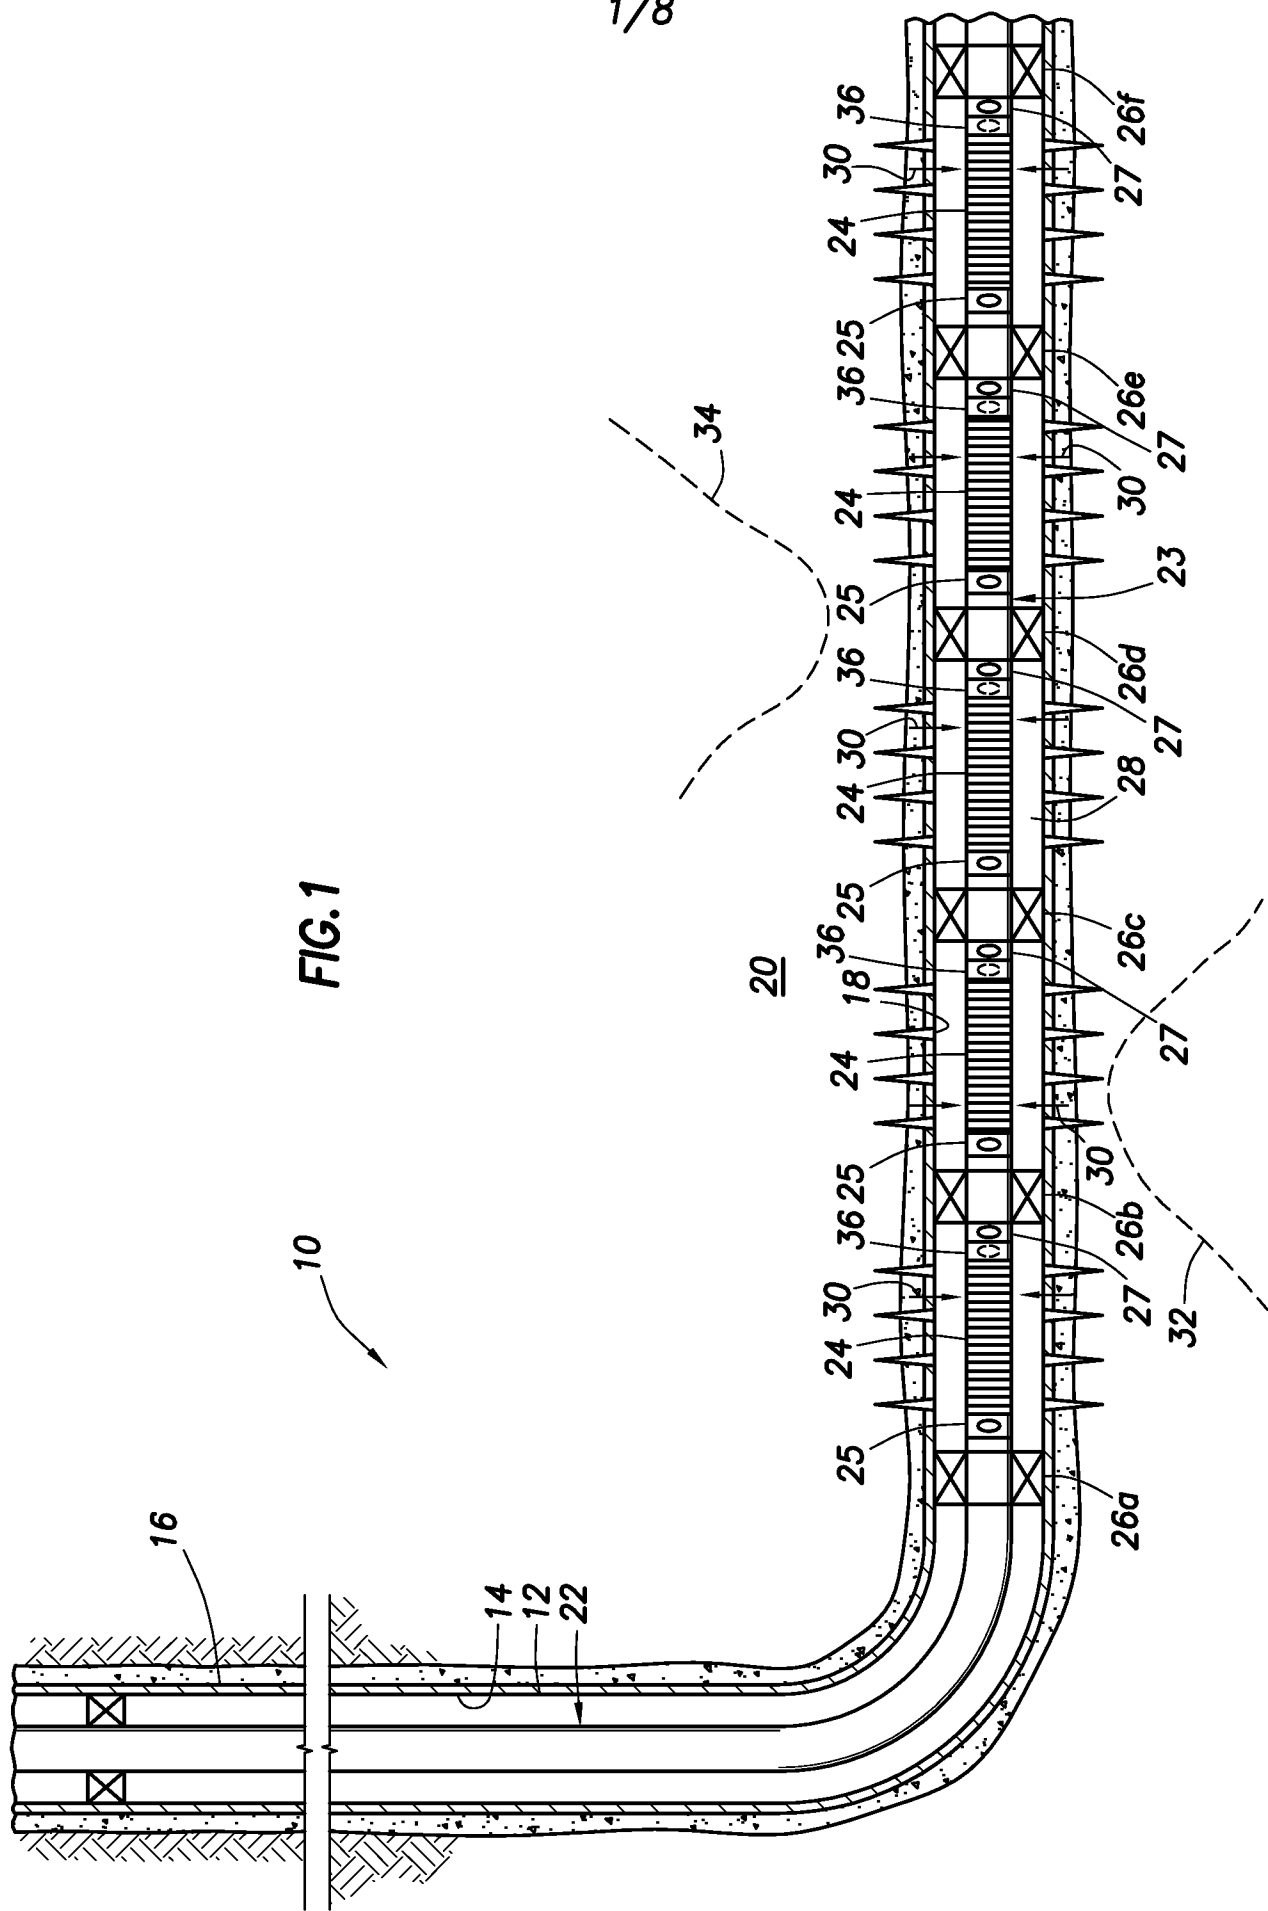

2/8

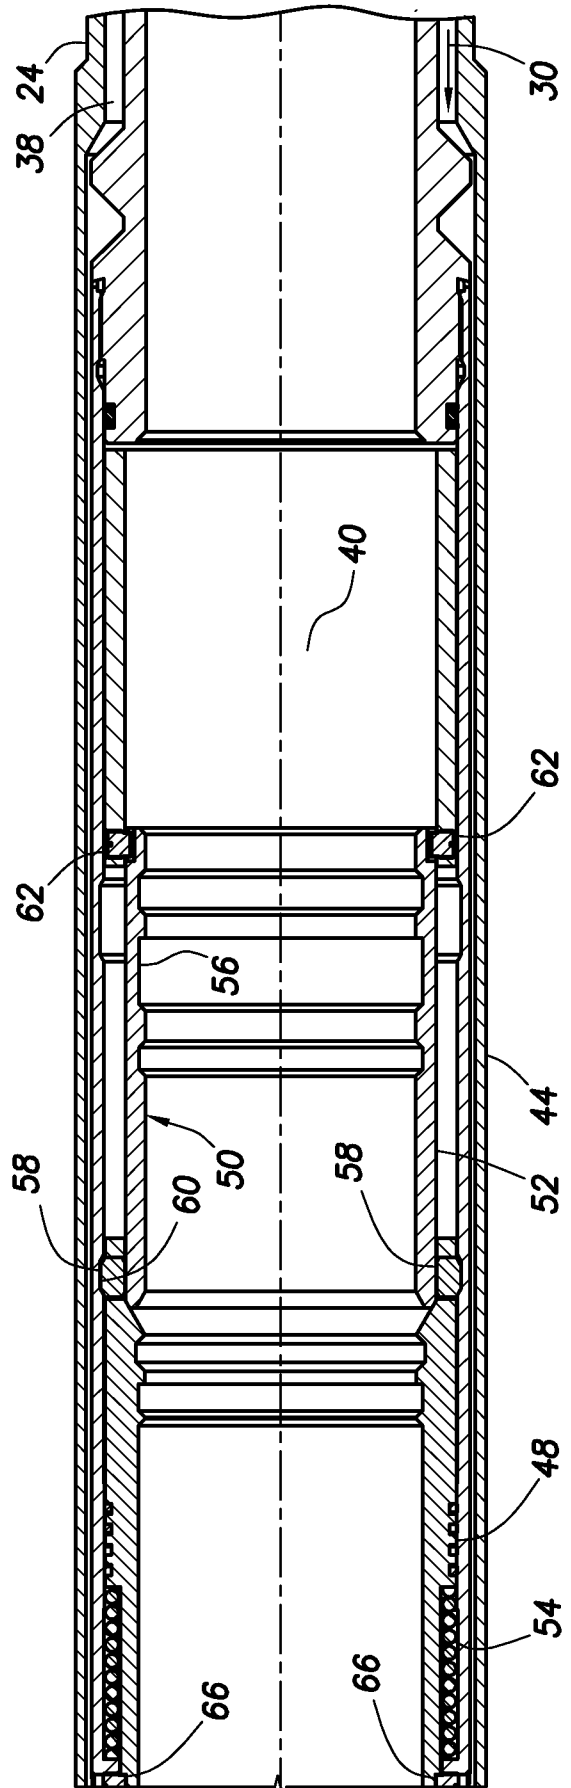
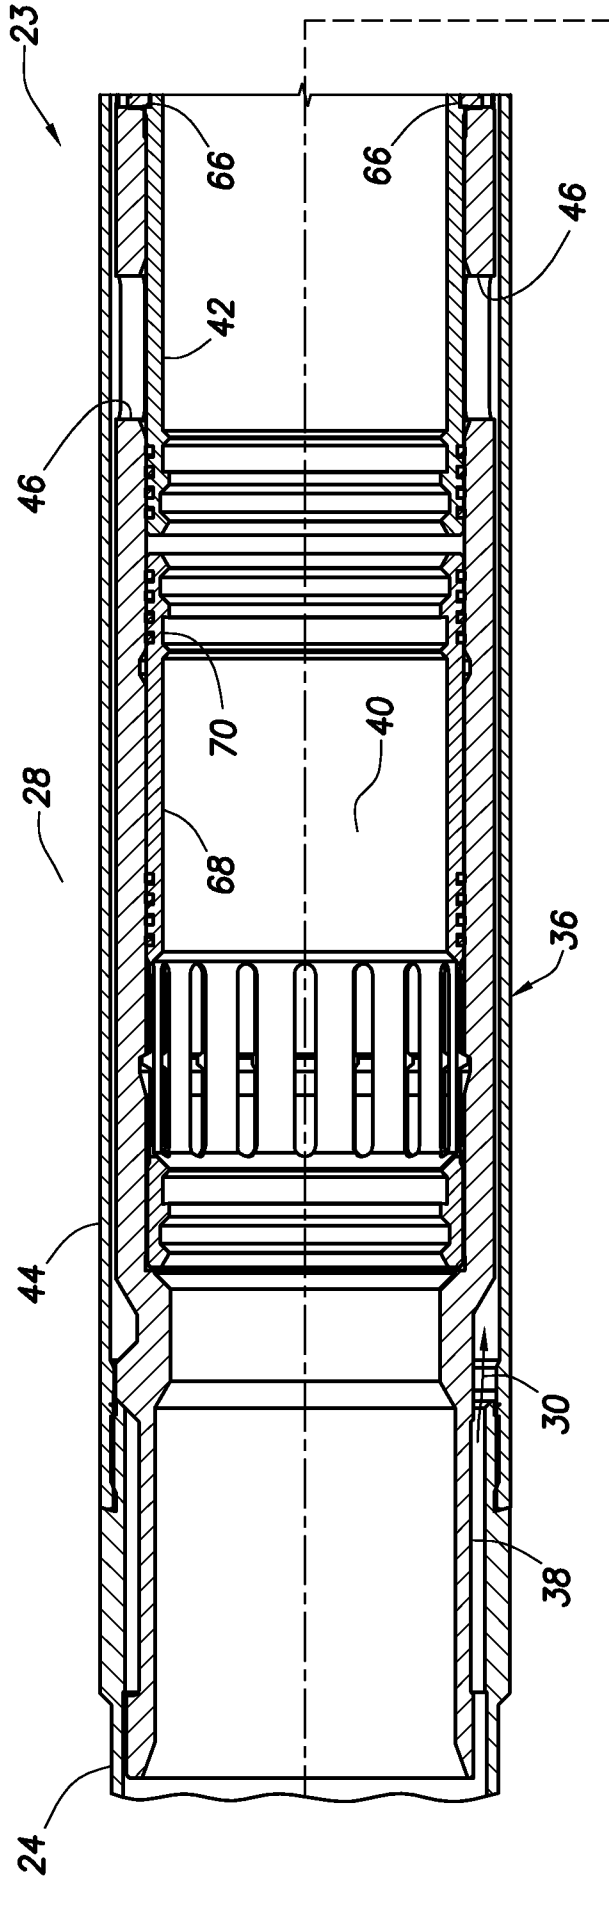


FIG.2

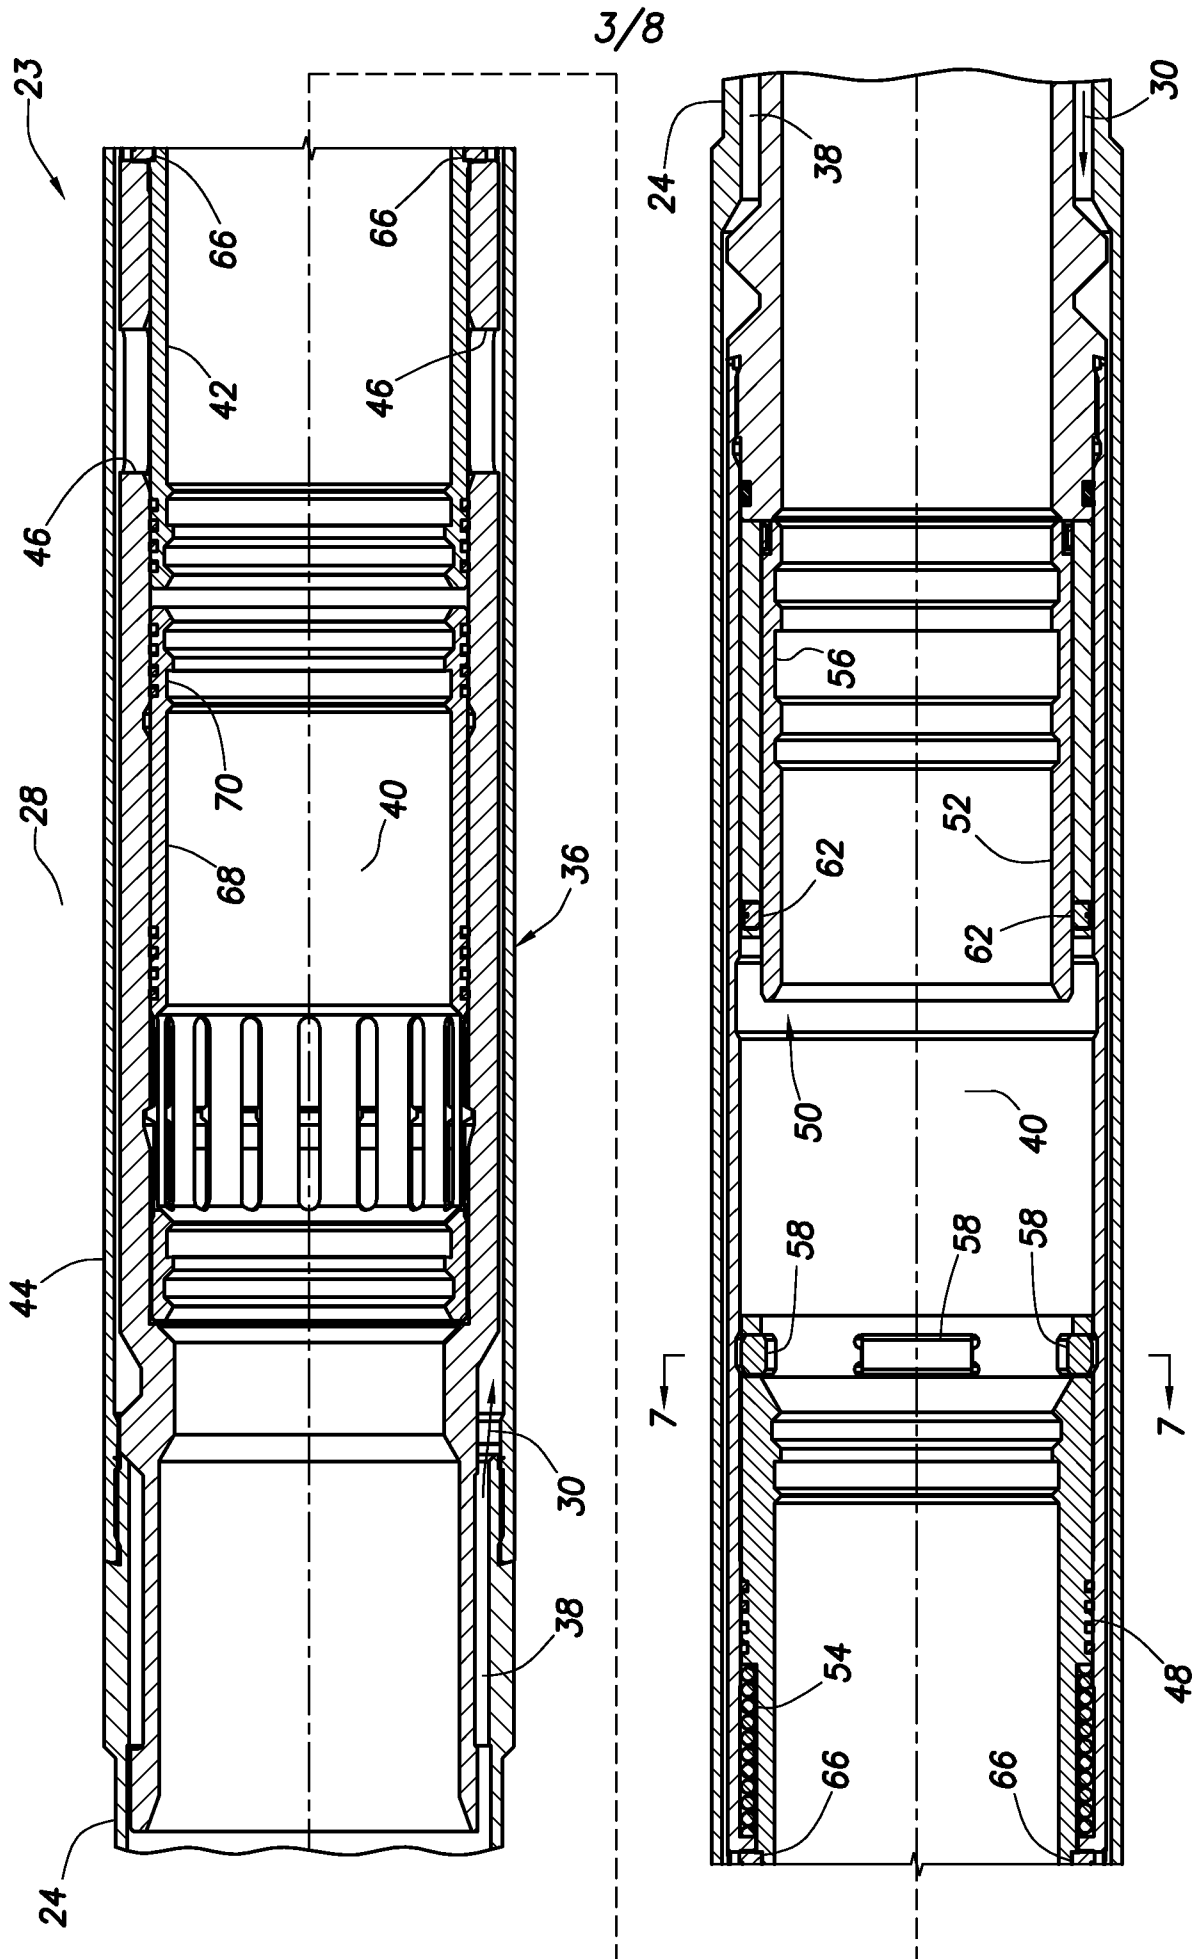


FIG. 3

4/8

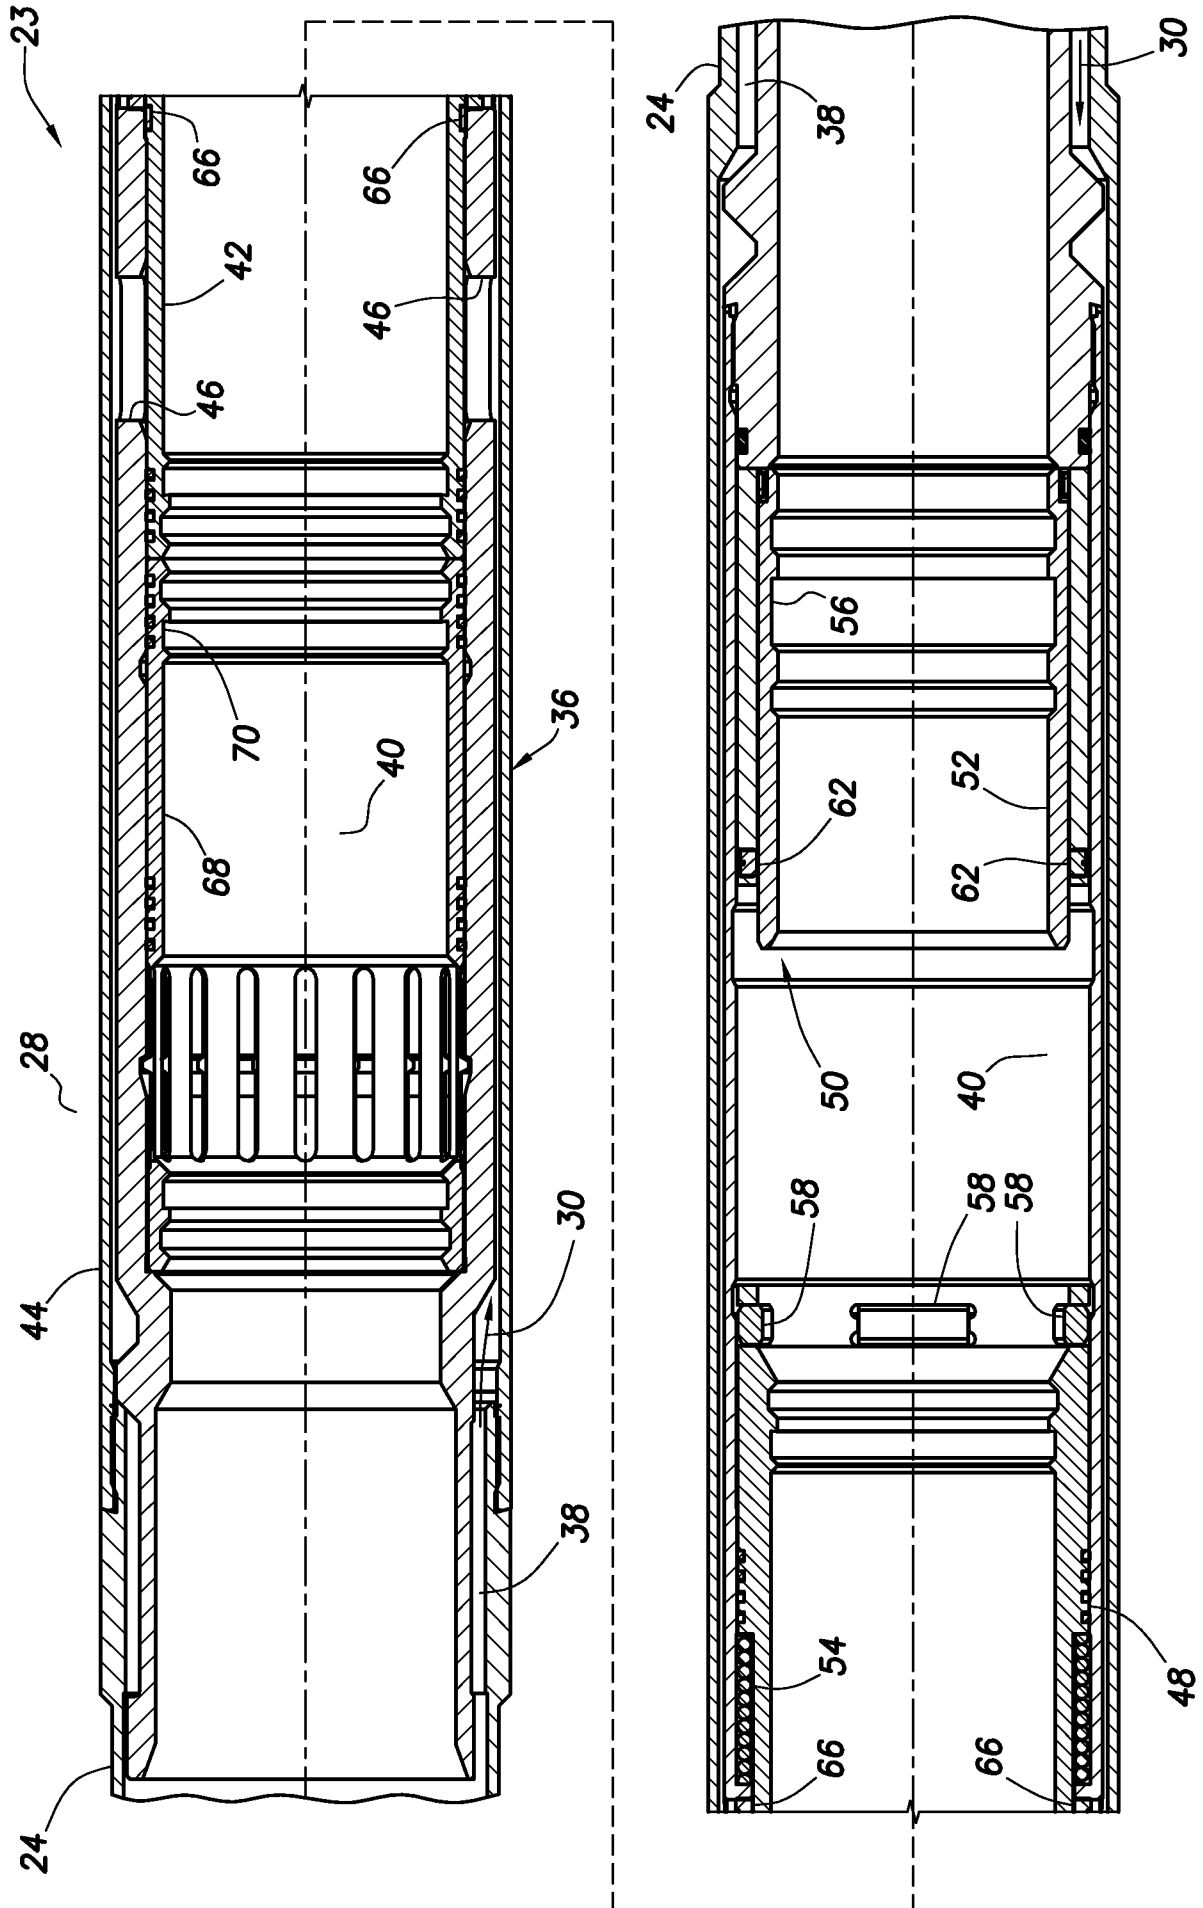


FIG. 4

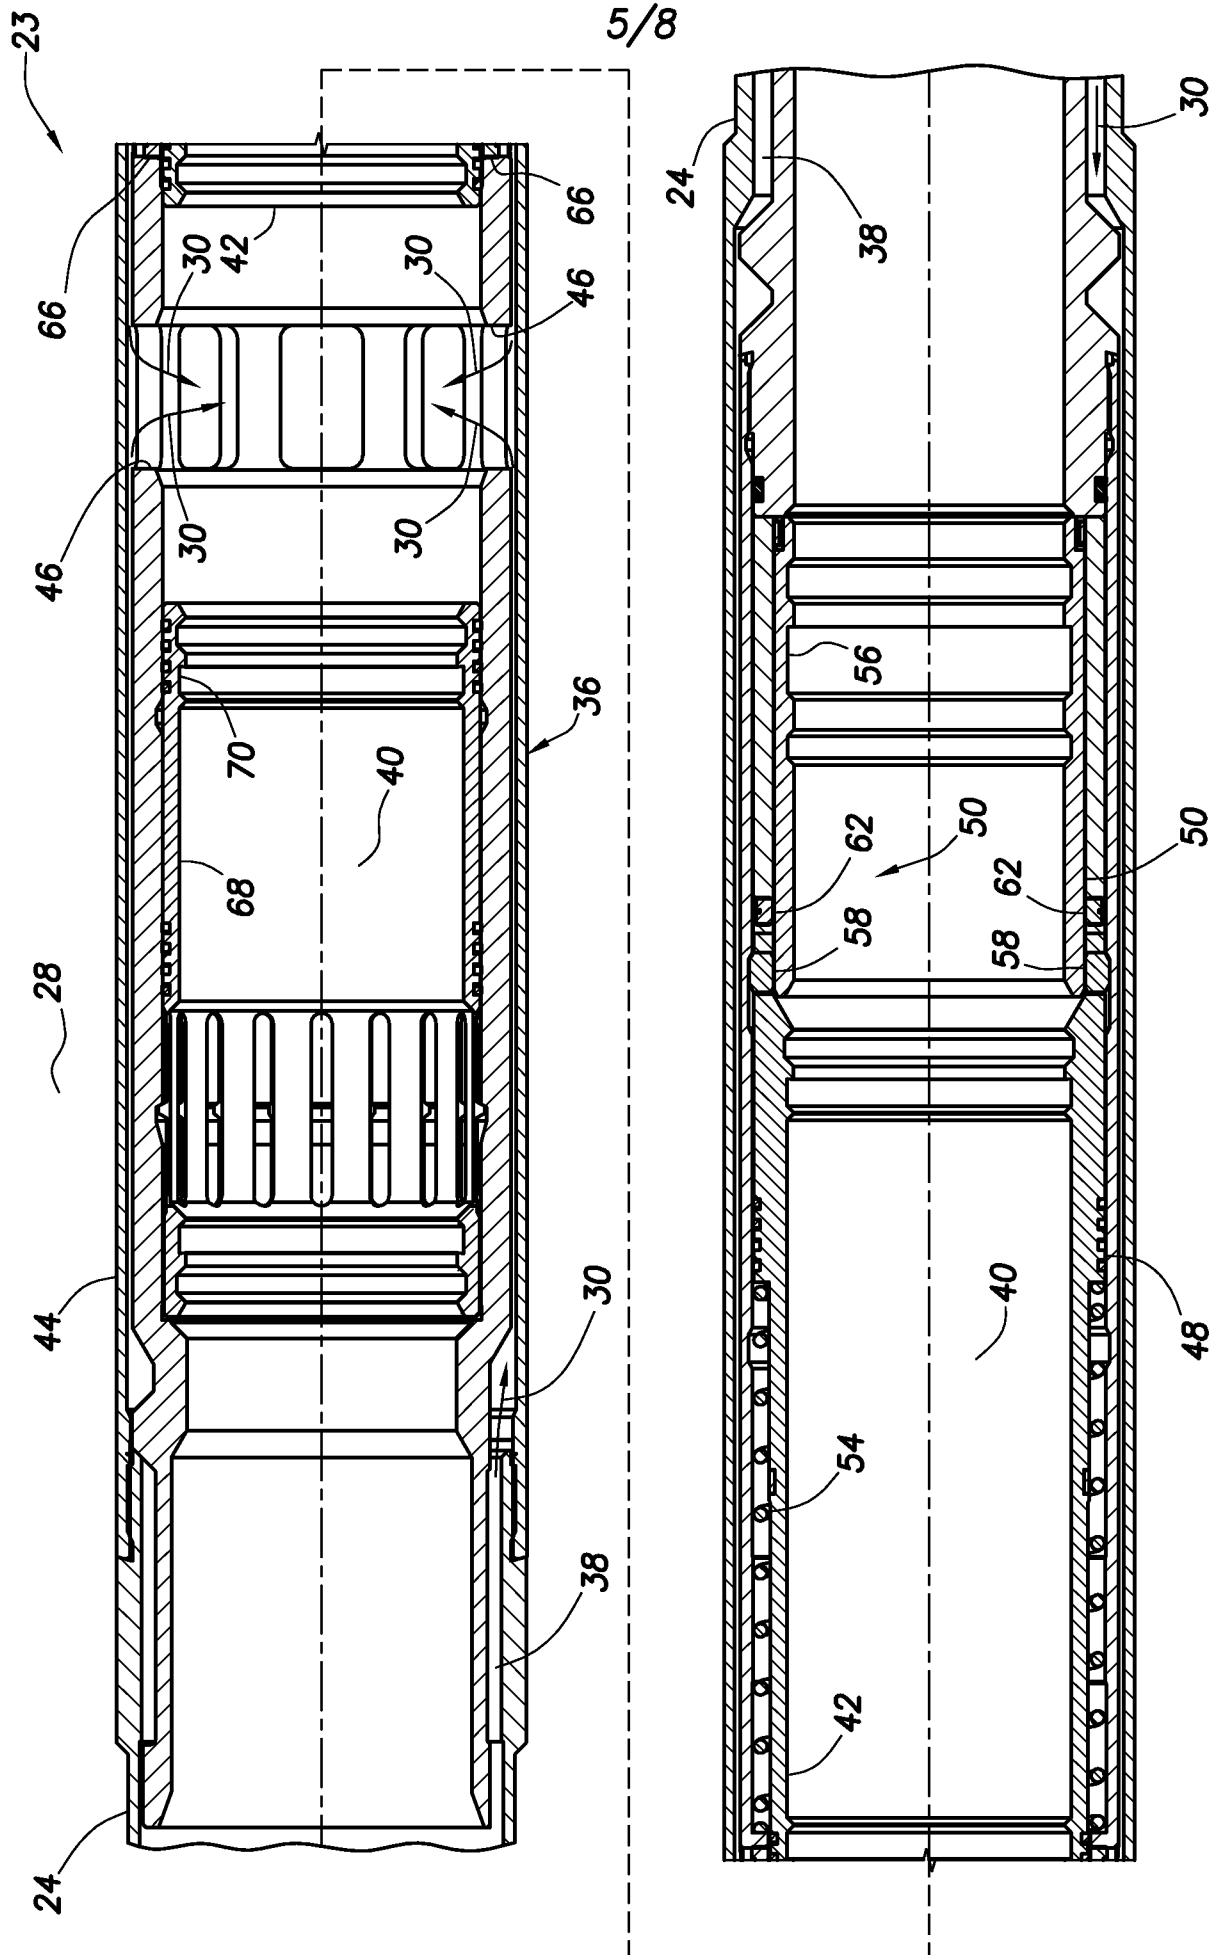


FIG. 5

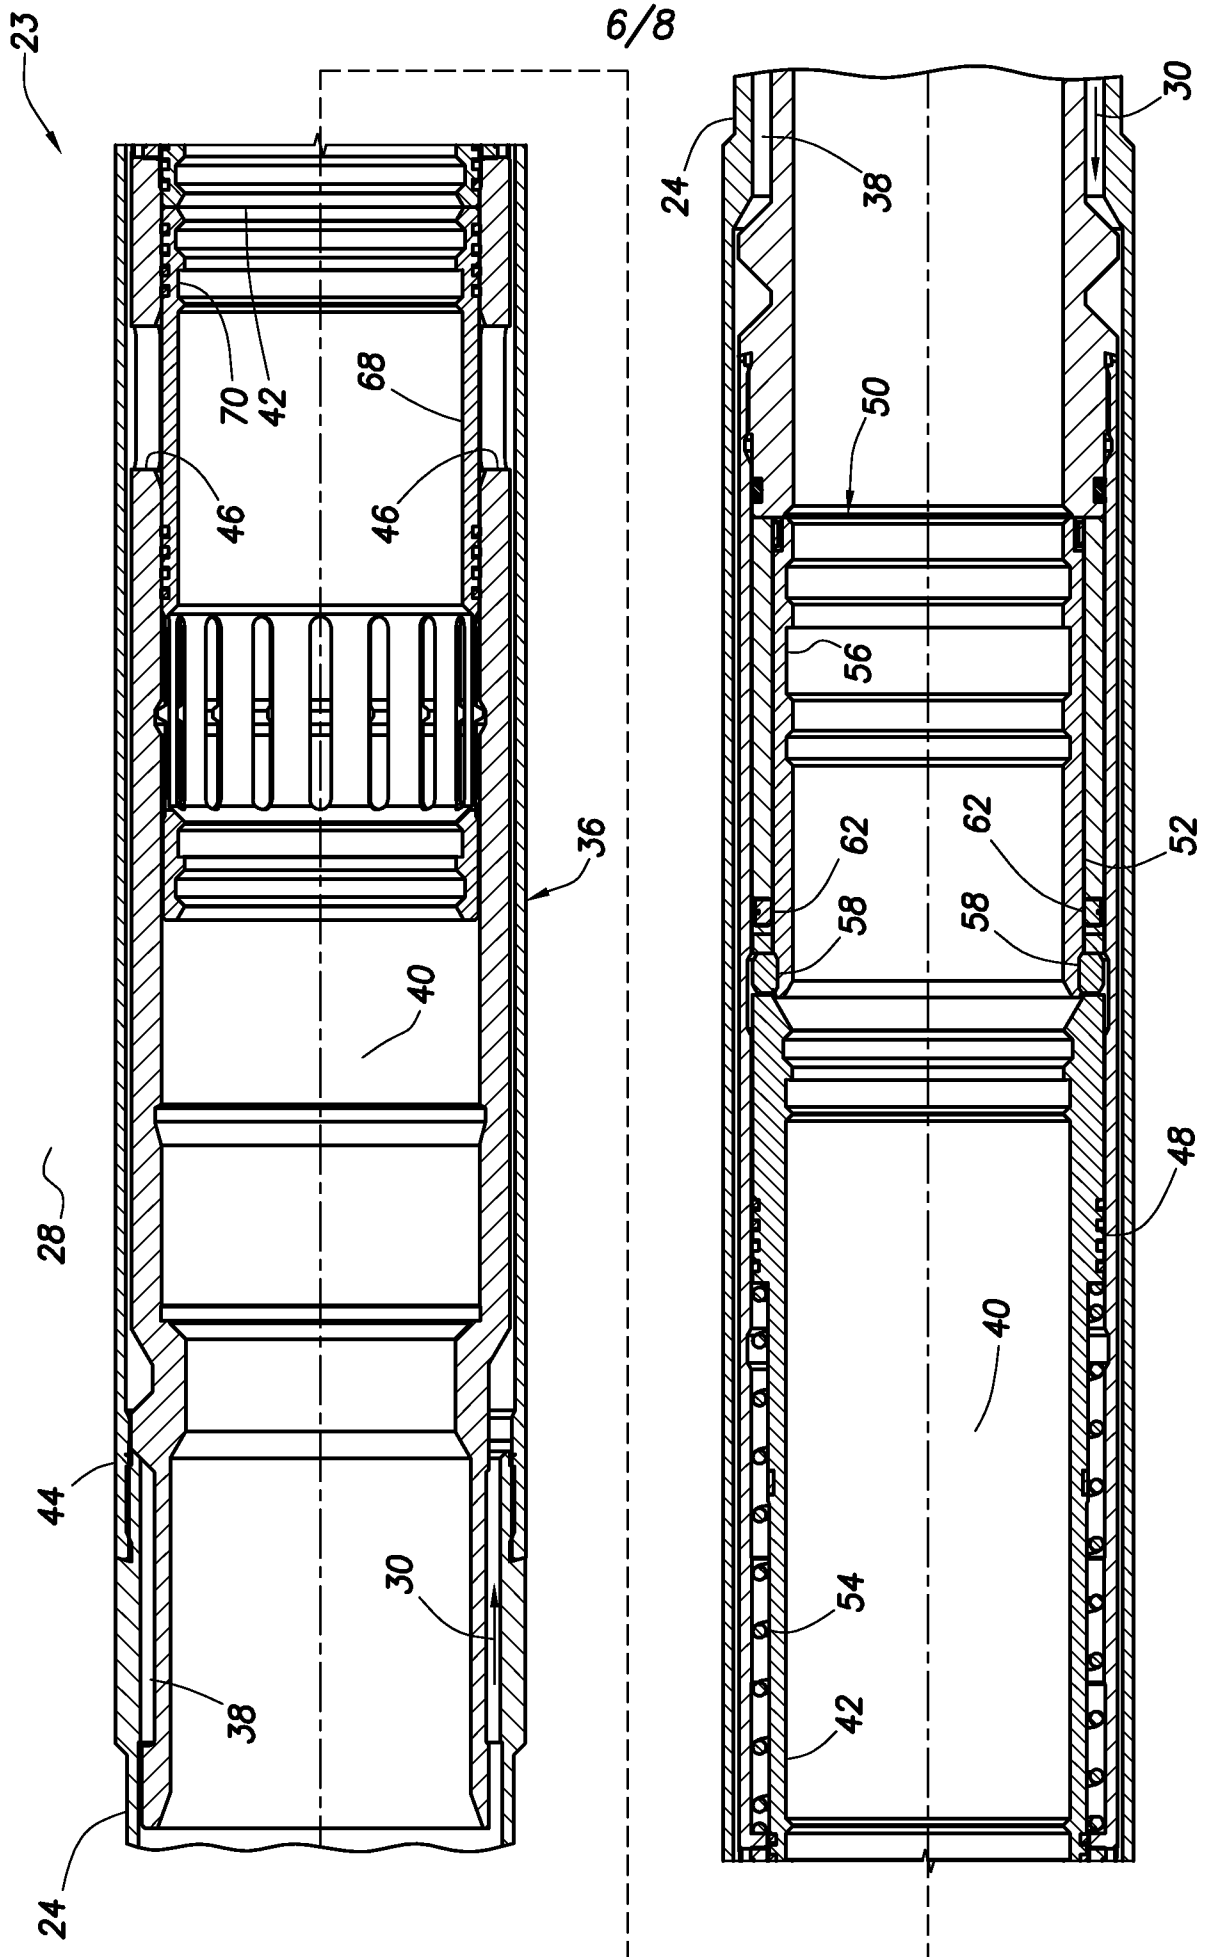


FIG. 6

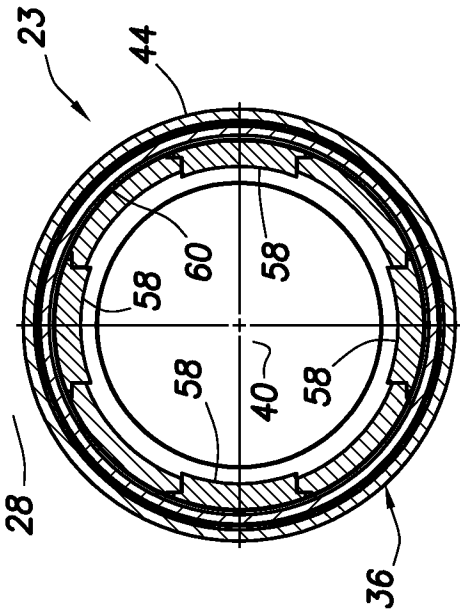


FIG. 7

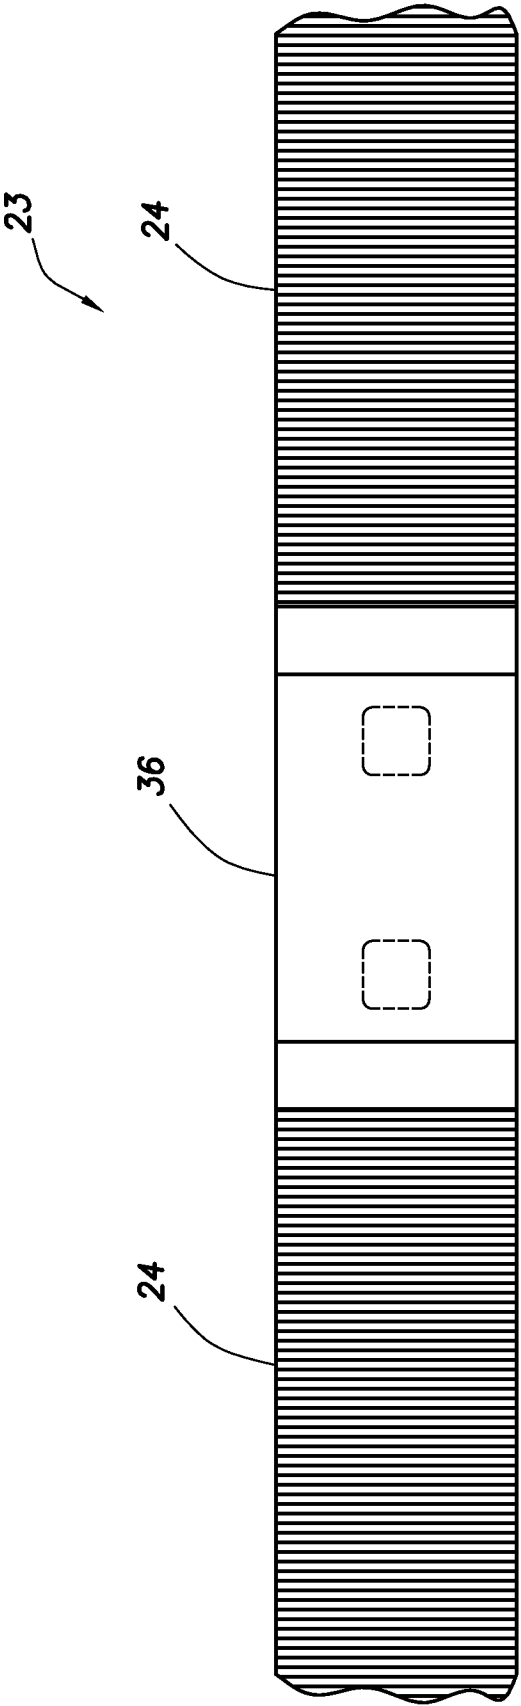


FIG. 8

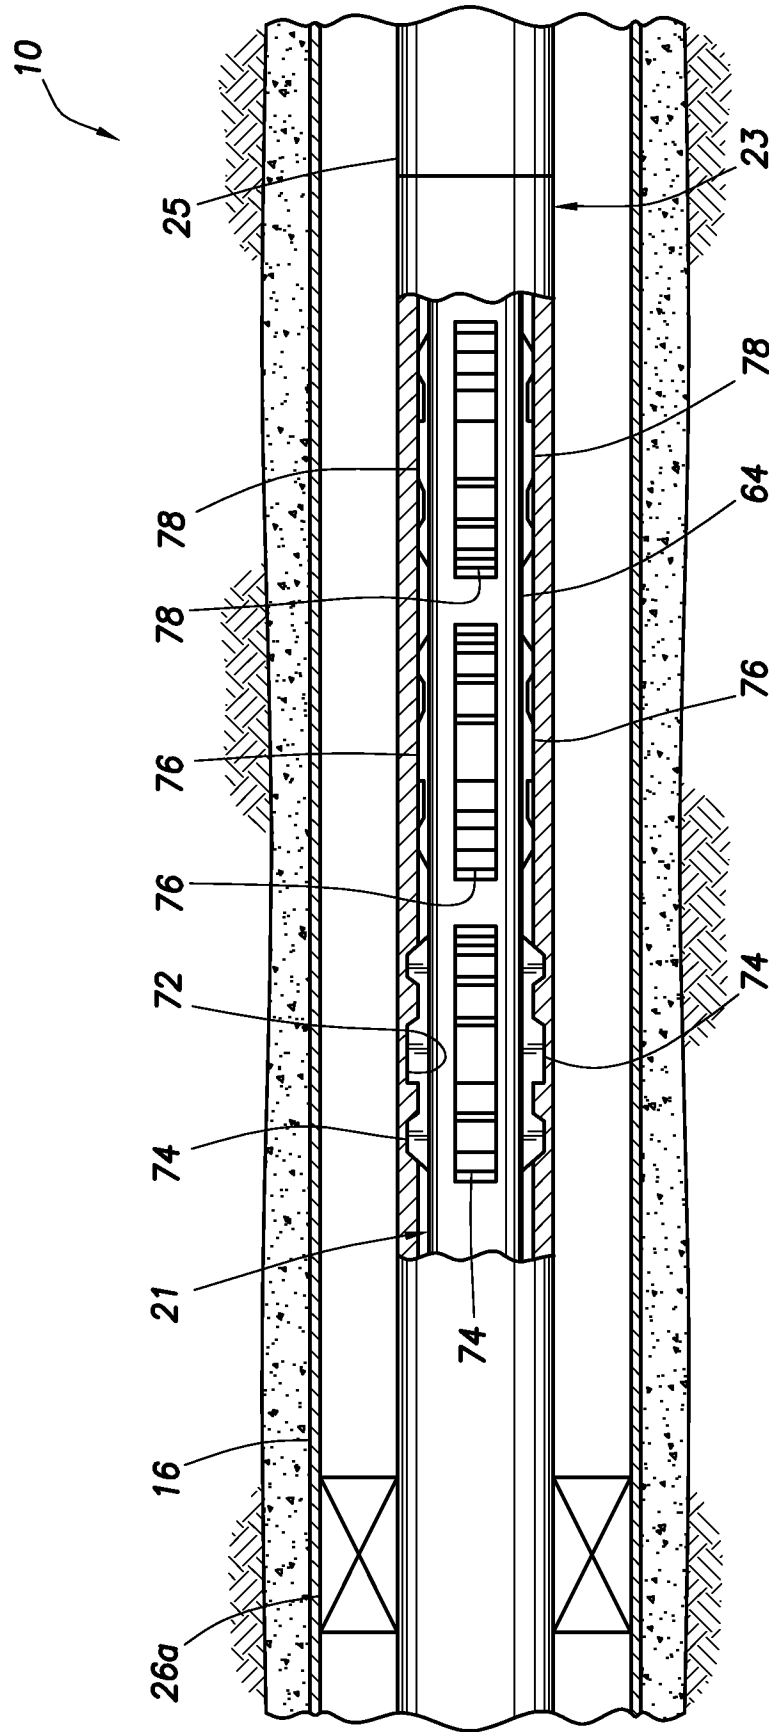


FIG.9